

**⚠ DANGER**  
 TO PREVENT DEATH OR SERIOUS INJURY, READ AND UNDERSTAND ALL WARNINGS, CAUTIONS AND INSTRUCTIONS.  
 ONLY TRAINED OR TRAINING PERSONNEL SHALL BE ALLOWED TO PERFORM MAINTENANCE ON THIS EQUIPMENT.  
 1. LOCK OFF AND TAG OUT POWER SOURCE.  
 2. DISCONNECT AND LABEL ALL PHASES.  
 3. VERIFY THE MOTOR IS COMPLETELY STOPPED.  
 4. VERIFY THE MOTOR IS COMPLETELY STOPPED.  
 5. VERIFY THE MOTOR IS COMPLETELY STOPPED.  
 6. VERIFY THE MOTOR IS COMPLETELY STOPPED.  
 7. VERIFY THE MOTOR IS COMPLETELY STOPPED.  
 8. VERIFY THE MOTOR IS COMPLETELY STOPPED.  
 9. VERIFY THE MOTOR IS COMPLETELY STOPPED.  
 10. VERIFY THE MOTOR IS COMPLETELY STOPPED.

- NOTES:  
 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS  
 2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.  
 3. KEY DIMENSIONS EQUAL 0.188" x 0.188" x 1.38" (MOTOR SUPPLIED WITH KEY)

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

**140T TEXP FRAME  
 F1 ASSEMBLY**

MDSL800-01

**TOSHIBA**

TOSHIBA INTERNATIONAL CORPORATION

TOLERANCES

.X	.1
.XX	.03
.XXX	.005
.XXXX	.0005

MAXIMUM MOTOR WEIGHT

77 lbs.
35 kgs.

NO	REVISION	DRAWN BY	DATE	CHECK
1	CHANGE LOGO TO XP	MO	03/14/14	JR
0	FIRST ISSUE (OVERRIDE D, R, & S DIMS.)	MO	02/27/14	JR
NO				



DRAWN BY: M. O'DOWD  
 CHECK BY: J. RUSSELL  
 APPROVED BY: \_\_\_\_\_  
 www.toshiba.com/ind

**TYPICAL MOTOR PERFORMANCE DATA**

Model: 0014XPEC41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1	0.75	4	1760	143T	575	60	3	1.3
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	56	F	1.15	CONT	85.5	B		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	1.00	0.7	1.3	85.6	69.8
¾ Load	0.75	0.6	1.1	83.8	61.5
½ Load	0.50	0.4	1.0	79.2	48.9
¼ Load	0.25	0.2	0.9	66.0	30.1
No Load			0.8		8.9
Locked Rotor			12		57.8

Torque				Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> )
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	
2.98	330	285	485	0.11

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
35	31	-	6305ZZC3	6305ZZC3	75

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Product Family:EQP Global Explosion Proof  
Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**


Engineering	jhock	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	6/11/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

**SPEED TORQUE/CURRENT CURVE**

Model: 0014XPEC41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1	0.75	4	1760	143T	575	60	3	1.3
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	56	F	1.15	CONT	85.5	B		40 C
Locked Rotor Amps	Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> )	Torque						
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)	Break Down (%)			
12	0.11	2.98	330	285	485			

**Design Values**

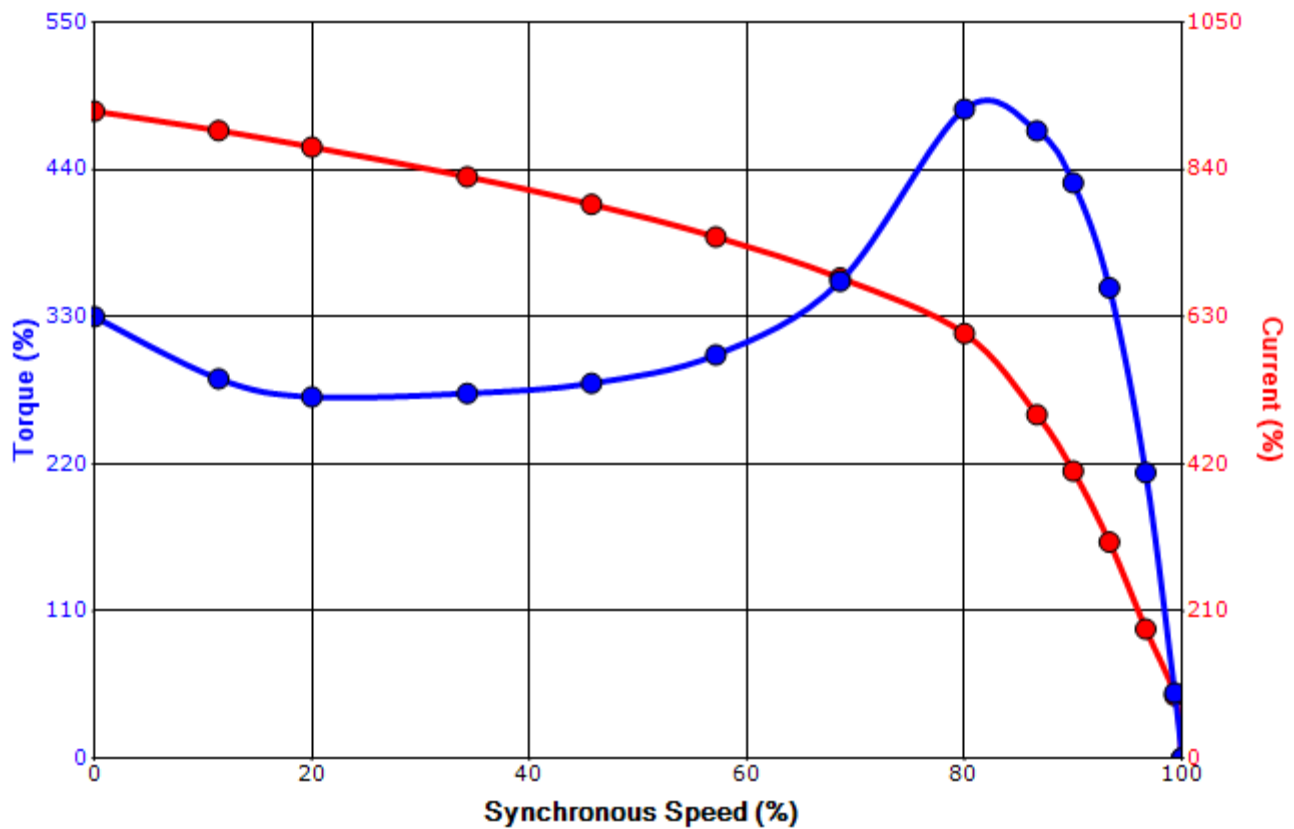

Customer		wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> )	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.


**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**

Engineering	jhock	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	6/11/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

# Motor Connection Diagram

## 3 Leads - Wye Connection

### Single Voltage

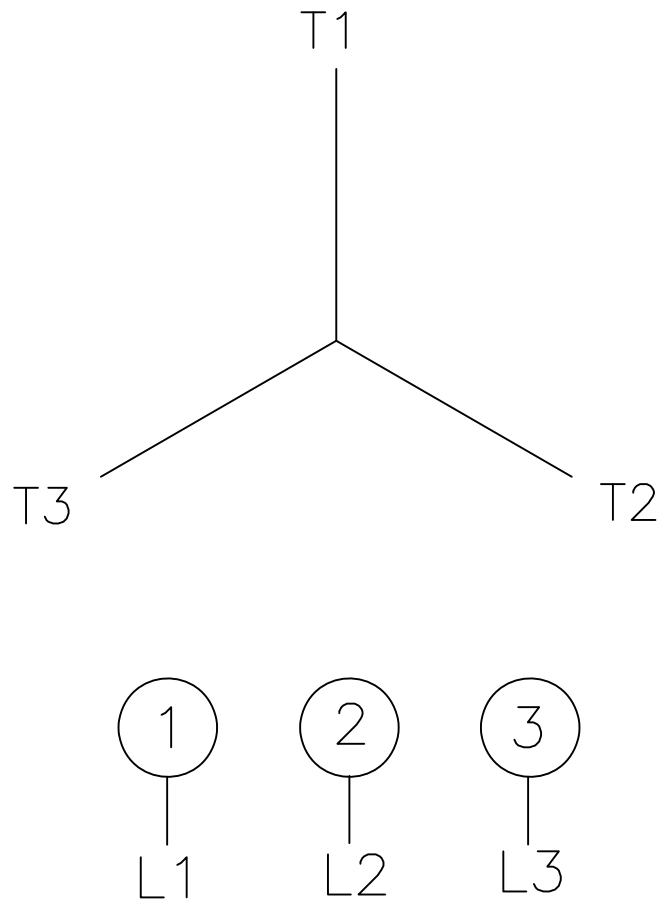

Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.