



| | | | | Issued Date | 9/24/201 | | Transmit # | |
|--|------------------|----------------------------|------------|---------------------------------|-------------------|-----------|----------------------------|----------------------------|
| - | | | | Issued By | dschoec | k | Issued Rev | |
| | SHIE | 5A | | | | | | |
| | | TYP | PICAL MOTO | R PERFORM | MANCE DATA | | | |
| | | | | | | | | |
| Model: | 0404QDAC41 | A-P | | | | | | |
| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps |
| 40 | 30 | 4 | 1780 | 324T | 575 | 60 | 3 | 39 |
| -10 | 00 | | 1100 | 0241 | NEMA | NEMA | - | Ambient |
| Enclosure | IP | Ins. Class | S.F. | Duty | Nom. Eff. | Design | kVA Code | (°C) |
| TEFC | 55 | F | | CONT | 94.1 | A | J | 40 C |
| | | | | | | | L | |
| | | | | | | | | |
| | | | | | | | | |
| Load | HP | kW | Amperes | | Efficiency (%) | | Power Factor (%) | |
| Full Load | 40 | 29.8 | 38 | | 94.4 | | 81.6 | |
| ³ ⁄ ₄ Load | 30.00 | 22.4 | 31 | | 93.7 | | 76.9 | |
| 1/2 Load 1/4 Load | 20.00 10.00 | 14.9 7.5 | 24 19 | | 91.8 | | 66.7 | |
| ¼ Load No Load | 10.00 | 1.0 | 19 | | 85.6 | | 44.3 6.3 | |
| Locked Rotor | - | | 308 | | | | 6.3 30.7 | |
| LOCKEU ROIOI | | | 500 | J. 4 | | | | .1 |
| | | | | | | | | |
| | | | | | | | | |
| | | | Torqu | e | | | | Rotor wk ² |
| Full L | oad | Locke | d Rotor | Pu | III Up | Bre | ak Down | Inertia |
| (lb-f | ft) | (% | FLT) | (% | FLT) | (% | % FLT) | (lb-ft²) |
| 118 | 3 | 2 | 20 | 1 | 165 | | 235 | 9.80 |
| | | - | | - | | - | | |
| | | | | | | | | |
| 0.4.04.1 | T ime () | | | | | | | |
| Safe Stall | Time(s) | Sound Pressure | | Bearin | ngs* | | Approx. Motor Weight | |
| Cold | Hot | dB(A) @ 1M | D | F | NDE | | (Ibs) | |
| | | · | | | | | (15 | S) |
| 47 | 10 | | 0040 | 700 | 0040700 | ` | | |
| 17 | 10 | | 6312 | ZC3 | 6312ZC3 | 3 | | |
| 17 | 10 | | 6312 | ZC3 | 6312ZC3 | 3 | | |
| 17 *Bearings are the only r | | e part(s). | 6312 | ZC3 | 6312ZC3 | 3 | | |
| *Bearings are the only r | | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: | recommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC3 | 3 | | |
| *Bearings are the only r Motor Options: | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC3 | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC3 | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC3 | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order Project # | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order Project # | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order Project # | ecommended spar | e part(s). | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order Project # Tag: | ecommended spar | | 6312 | ZC3 | 6312ZC: | 3 | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order Project # | ecommended spar | alues. | | | | | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order Project # Tag: All characteristics are an | ecommended spar | alues. | | PRPORATION - | HOUSTON, TEXA | AS U.S.A. | | |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order Project # Tag: All characteristics are an Engineering | recommended spar | Ilues. TOSHIBA INTEF ammen | | PRPORATION - Doc. Written By | HOUSTON, TEXA | AS U.S.A. | Doc.# / Rev | MPCF-1119/1 |
| *Bearings are the only r Motor Options: Mounting:Footed,S Motor Specification Customer Customer PO Sales Order Project # Tag: All characteristics are an | ecommended spar | alues. TOSHIBA INTER | | PRPORATION - | HOUSTON, TEXA | AS U.S.A. | Doc.# / Rev Doc. Issued | MPCF-1119 / 1 9/20/2019 |


| | | | | Issued Date | 9/24/20 | 19 | Transmit # | | |
|----------------------|-----------------------|------------|--------------|-------------|-------------------|----------------|------------|-----------------|--|
| | | _ | | Issued By | dschoeck | | Issued Rev | | |
| TOS | SHIB | A SI | PEED TORQ | UE/CURREN | T CURVE | | | | |
| Model: | 0404QDAC41A- | Р | | | | | | | |
| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps | |
| 40 | 30 | 4 | 1780 | 324T | 575 | 60 | 3 | 39 | |
| Enclosure | IP | Ins. Class | S.F. | Duty | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) | |
| TEFC | 55 | F | | CONT | 94.1 | A | J | 40 C | |
| | Rotor wk ² | Torque | | | | | | | |
| Locked Rotor Amps | Inertia | Full Load | Locked Rotor | | Pull Up | | Break Down | | |
| | (lb-ft²) | (lb-ft) | (% | 5) | (%) | | (%) | | |
| 308.4 | 9.80 | 118 | 220 | 220 | | 165 | | 235 | |
| | | | De | sign Valu | es | | | | |

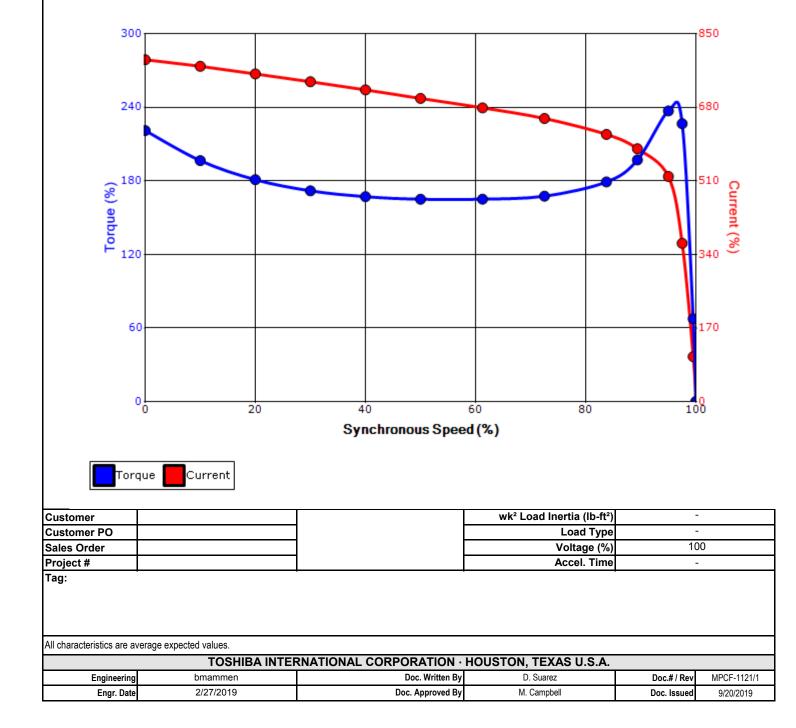

3SVD

Motor Connection Diagram 3 Leads - Delta Connection





Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable. If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.