


UNITS: INCHES		NOTES:	
ROTATION FROM NDE		1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° IN	ICREMENTS
		2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOS AVAILABLE ONLY BY CONNECTION CHANGE.	ITE ROTATION
		3. KEY DIMENSIONS EQUAL 0.75x0.75x5.62	(MOTOR SUPPLIED WITH KEY)
TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECH	NICAL IMPROVEMENT AND THE DATA MAY CHANGE W	/ITHOUT NOTICE	PRELIMINARY
DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICAT	ION PURPOSES UNLESS THE DRAWING IS MARKED AS	CERTIFIED	X CERTIFIED
	TOTALLY ENCLOSED FAN COOLED	DRAWING #: MDSLV041-08	
	HORIZONTAL FOOT MOUNT	REV. DATE: 8/17/17 REV. #: 3	PER.: J. HOCK
www.toshiba.com/tic Lex relogal 840	3 PHASE INDUCTION MOTOR	REV. DESCRIP.: CHANGED DRAWING TA	BLE FORMAT
TOSHIBA INTERNATIONAL CORPORATION	404T/405T F1 ASSEMBLY		

				Issued Date	9/24/2019		Transmit #	
				Issued By	dschoeck		Issued Rev	
TOS	SHIB							
		TYI	PICAL MOTO	R PERFORM	IANCE DATA			
Model:	0756XSSC41A-P							
	1.34/	Dala		Блата	Valtara	11-	Dhasa	
HP 75	kW 55	Pole 6	FL RPM 1180	Frame 405T	Voltage 575	Hz 60	Phase 3	FL Amps 72
15		0	1100	4001	NEMA	NEMA	-	Ambient
Enclosure	IP	Ins. Class	S.F.	Duty	Nom. Eff.	Design	kVA Code	(°C)
TEFC	56	F	1.15	CONT	94.5	B	F	40 C
0		·			0.10	2	·	10 0
Load	HP	kW	Amperes		Efficiency (%)		Power Factor (%)	
Full Load	75	55.9	72.		94.5		82.0	
³ ⁄ ₄ Load	56.25	41.9	56.		94.2		78.	
1/2 Load	37.50	28.0	42.		93.0		70.4	
1/4 Load	18.75	14.0	32.		88.4		49.4	
No Load			22. 406				4.0 31.4	
Locked Rotor			400	.0			31.4	+
			Torqu	9				Rotor wk ²
Full Lo	bad	Locke	a Rotor Pull Up		ll Up	Break Dow		Inertia
(lb-f	t)	(%	FLT)	(%	FLT)	(%	% FLT)	(lb-ft²)
334		1	60	14	145		220 36.18	
Cofe Ctall	Time(a)							
Safe Stall	Time(s)	Sound		Bearing	gs*		Approx. Mo	tor Weight
Safe Stall	Time(s) Hot	Pressure	DI					-
Cold	Hot	Pressure dB(A) @ 1M	Di	E	NDE		Approx. Mo (Ib	-
	• •	Pressure	DI 63170	E				-
Cold	Hot	Pressure dB(A) @ 1M		E	NDE			-
Cold	Hot 19	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re	Hot 19	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer PO	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer Customer PO Sales Order	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer Customer PO Sales Order Project #	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer Customer PO Sales Order	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer Customer PO Sales Order Project #	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer Customer PO Sales Order Project #	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer Customer PO Sales Order Project # Tag:	Hot 19 ecommended spare	Pressure dB(A) @ 1M 70		E	NDE			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer Customer PO Sales Order Project #	Hot 19 ecommended spare T Shaft	Pressure dB(A) @ 1M 70 e part(s).	63170	E	NDE 6313C3			-
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer PO Sales Order Project # Tag: All characteristics are av	Hot 19 ecommended spare T Shaft	Pressure dB(A) @ 1M 70 e part(s).	63170	E CIANCE CONTRACTOR - H	NDE 6313C3		(lb	s)
Cold 32 *Bearings are the only re Motor Options: Mounting:Footed,Shaft: Customer Customer Customer PO Sales Order Project # Tag:	Hot 19 ecommended spare T Shaft rerage expected val bmai	Pressure dB(A) @ 1M 70 e part(s).	63170	E	NDE 6313C3			-

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
75	55	6	1180	405T	575	60	3	72
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	56	F	1.15	CONT	94.5	В	F	40 C
Locked Rotor	Rotor wk ²	Torque						
	Inertia	Full Load	Locked Rotor		Pull Up		Break Down	
Allpa	(lb-ft²)	(lb-ft)	(%)		(%)		(%)	
406.8	36.18	334	160		145		220	
406.8	36.18	334		sign Valu			22	.600

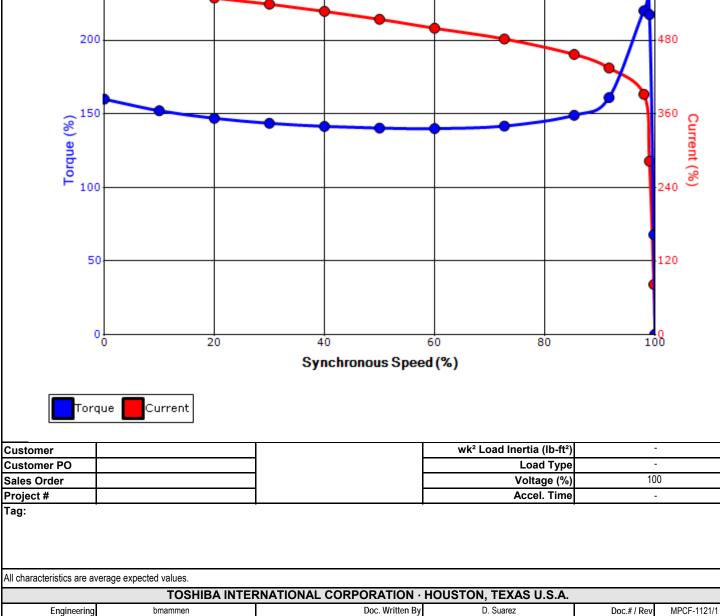

Doc. Approved By

M. Campbell

Doc. Issued

9/20/2019


10/18/2018

Engr. Date

3SVD

Motor Connection Diagram 3 Leads - Delta Connection





Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable. If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.