



GE INDUSTRIAL MOTORS
a **WOLONG** company

Product Technical Information

November 26, 2020

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	5KS284DAE6062A
Catalog Number:	V4016
Instruction Manual:	GEK-95353
Connection Diagram:	GEM2034E-FIG9
Outline Drawing:	4002B5828NSP5217

Accessory Connection Diagrams

Bearing Thermocouple:	None	Heater:	3027JE-1C
RTD:	None	Thermistor:	None
Thermostat:	None	Winding Thermocouple:	None
Bearing RTD:	None		

Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

MODEL NUMBER:	5KS284DAE6062A
Outline Drawing:	4002B5828NSP5217
Connection Diagram:	GEM2034E-FIG9
Instruction Book:	GEK-95353
Design Code:	28BD1161A
Type:	KS
Frame:	L284TP16
Phases:	3
Poles:	4
Output Power:	25HP 18.5KW
RPM:	1780
Voltage:	230/460
Hertz:	60
Amps - FL:	58.8/29.4
Service Factor:	1.15
Alt Service Factor:	--

Estimated Weight:	420 Lbs
Time Rating:	CONT
Enclosure:	WPI
Encl Construction:	OPEN
Ambient Max(°C):	40
Alt Ambient Max(°C):	--
Insulation Class:	H
NEMA Design:	B
Nominal Efficiency:	93.6 %
Guaranteed Efficiency:	92.4 %
3/4 Load Efficiency:	--
KVA Code:	G
Max KVAR:	7.4
Power Factor:	85.0
Bearing - DE:	7310
Bearing - ODE:	6210-2ZC3

Enclosure is Weather Protected One

Stamped Nameplate Notes:

PREMIUM EFFICIENT MOTOR
 NEMA ENCL WPI AND CSA ENCL DP
 ROT CCW FACING ODE LEAD/PH SEQUENCE 1-2-3/1-2-3
 HTR LDS HE1-HE2 115V 60W
 INVERTER DUTY PER NEMA MG1 PART 31
 ALTERNATE RATING FOR PWM CONTROL:
 1.0 SF VAR TORQUE RANGE 5-60 HZ
 SUITABLE FOR 20HP, 190/380V,
 50 HZ WITH 57/28.5AMPS AND 1480 RPM AT 1.0 SF



Additional Information:

4P - TP EXTN
C/BOX 137 CU IN-1.50 NPT
AUX LEADS EXIT WITH MOTOR LEADS
RCF 5000 CPM, STATIC DEFLECTION .0014 INCHES &
CENTER OF GRAVITY 12.00 INCHES
HOLLOW SHAFT HIGH THRUST
NON REV CPLG W/BX=1.00" KW=0.25"
OIL RESISTANT SLEEVING ON LEADS
BEARING LIFE 8760 HOURS AT 2960 LB THRUST



Performance Characteristics

1st Winding 1st Connection

Design: 28BD1161A

Marks:


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	92.66	93.04	93.72	94.02	93.8	91.15	0.00
% PF	86.44	86.13	85.2	81.66	72.97	51.21	4.61
AMPS	36.52	33.58	29.29	22.86	17.09	12.53	10.34

TORQ(FL)#FT	73.74	TORQ(LR)%FL	183.54	TORQ(BD)%FL	289.2
AMPS(LR)	182.84	PF AT START	0.39		

This motor is capable of two cold or one hot start with a maximum connected load inertia of 873 Lb-Ft Sq (36.75 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 54 seconds. Safe stall time at 100% voltage is 95 seconds cold, 80 seconds hot. Rotor inertia is 4.55 Lb-Ft Sq (0.19 Kg-meter Sq).



Open Circuit A-C:	0.664	Short Circuit D-C:	0.016
Short Circuit A-C:	0.03	X/R Ratio:	5.967
Stator Slots:	48	Rotor Slots:	40

Speed Torque Current Curve (First Connection, First Speed)

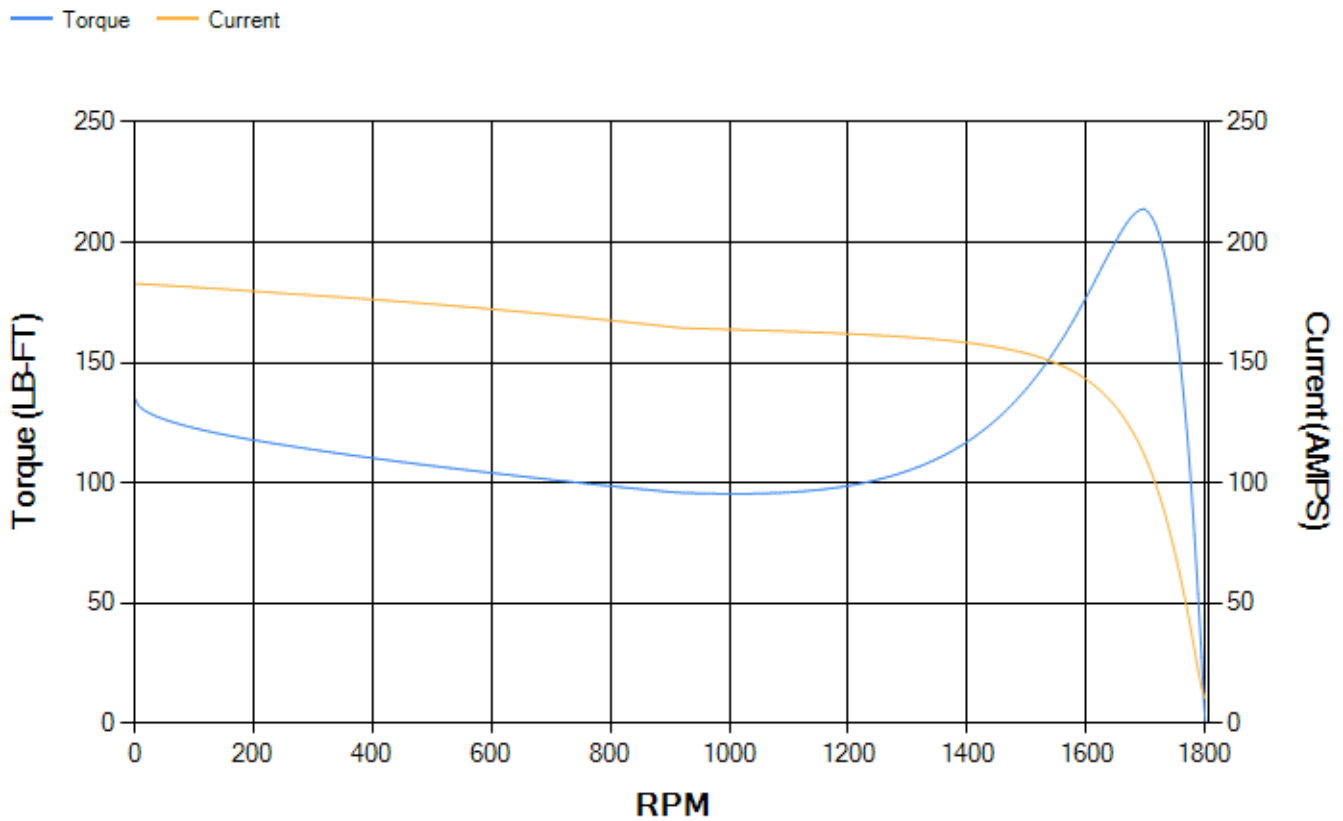

Marks:

SOLID MODEL: 4002B5828NSP5217

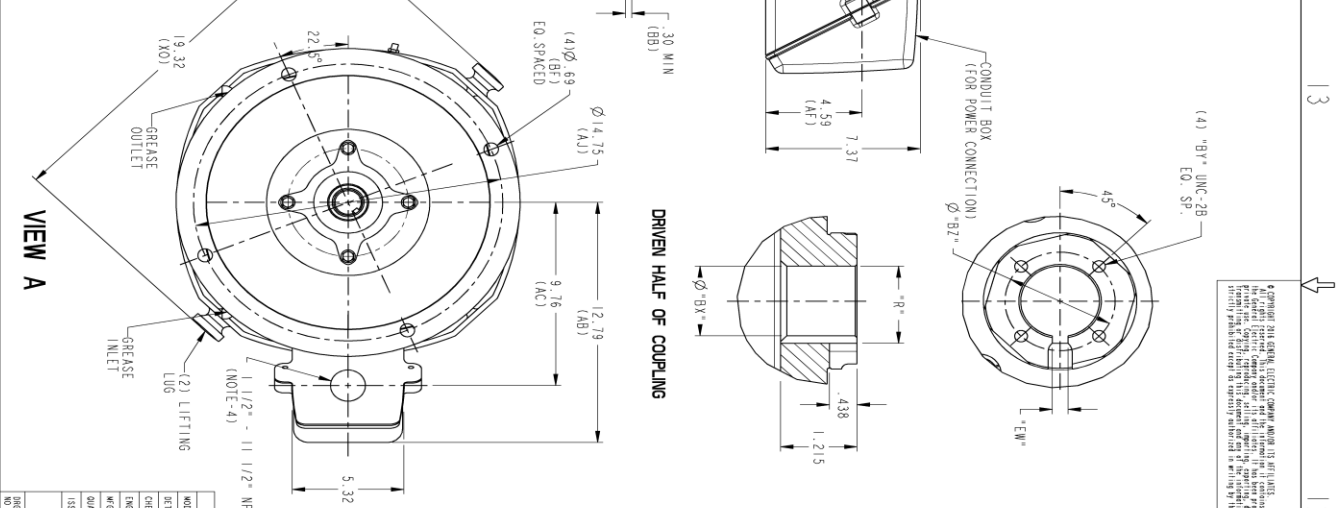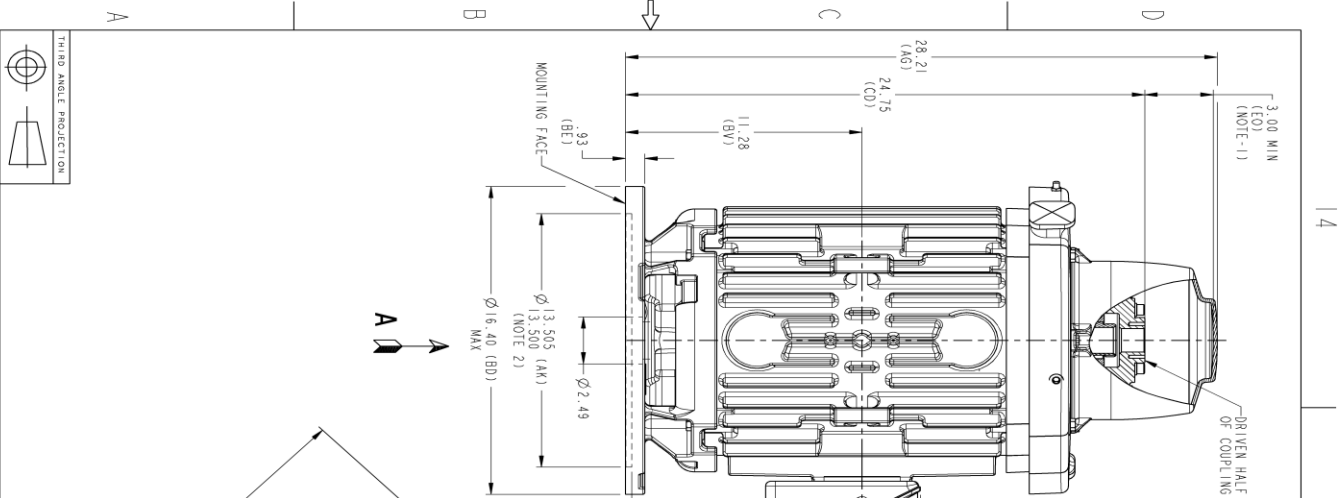

- NOTES:
1. THE TOTAL HEIGHT OF PUMP SHAFT AND LOCKING NUT ABOVE COUPLING MUST NOT EXCEED THIS DIMENSION.
 2. TOLERANCE ON FACE RUNOUT AND PERMISSIBLE ECCENTRICITY OF MOUNTING RABBIT ARE .007 T.I.R.
 3. CENTRE OF MOUNTING BOLT HOLES SHOULD BE WITHIN .025 OF ANGULAR & DIAMETRICAL LOCATION WITH REFERENCE TO THE CENTERLINE OF MOUNTING RABBIT.
 4. PROVIDED MOUNTING CONDITIONS PERMIT, CONDUIT BOX MAY BE TURNED SO THAT ENTRANCE CAN BE MADE UPWARD, DOWNWARD OR FROM EITHER SIDE.
 5. FOR ESTIMATING ONLY UNLESS ENDORSED FOR CONSTRUCTION.
 6. MAINTAIN MINIMUM CLEARANCE FOR SHAFT SLINGER.

BORE DIA.	"B"	"B2"	KEYWAY	
			DIM "EW"	DIM "R"
1.252			1.377	
1.231			1.367	
1.189			1.314	
1.188			1.304	
1.066	1/4-20	1.750	1.191	1.181
1.065			1.181	
1.127			1.252	
1.126			1.242	
1.002			1.124	
1.001			1.114	
.938			1.061	1.051
.877	#10-32	1.315	.997	.987
.876			.987	
.752			.847	
.751			.837	
1.032			1.139	
1.031			1.129	

MODEL	MGRJAU	12/01/16	DATE	12/01/16
DRAWN	RAVI	12/01/16	DATE	12/01/16
CHECKED	RAVI	12/01/16	DATE	12/01/16
ENGR	RAVI	12/01/16	DATE	12/01/16
QUALITY	RAVI	12/01/16	DATE	12/01/16
ISSUED	RAVI	12/01/16	DATE	12/01/16

GE POWER CONVERSION

NEMA 280 OUTLINE, WPI

6550 BD, 137 CU IN BOX

4002B5828NSP5217

SCALE: 0.250

REV: 001

SHEET 1 OF 1

A WARNING THAT ELECTRICAL EQUIPMENT SHOULD NOT BE REFINISHED. ALL PARTS CONTACTING THE SHAFT AND THE HOUSING IN CONTACT WITH THE SHAFT AND THE HOUSING SHOULD BE REFINISHED. REFINISHING SHOULD BE DONE IN ACCORDANCE WITH THE REFINISHING INSTRUCTIONS PROVIDED IN THE REFINISHING INSTRUCTIONS. REFINISHING SHOULD BE DONE BY THE SUPPLIER OF THE PARTS. THE SUPPLIER OF THE PARTS IS RESPONSIBLE FOR THE REFINISHING OF THE PARTS.

REV.	DESCRIPTION	DATE	APPROVED
1	FIRST RELEASE FORM TC	MGRJAU 01/24/17	RAVI

Marks:

Connection Diagram
GEM2034E-FIG9



Heater Connection
3027JE-1C



End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	128D6235AA1	128D6228PA1
Bearing	235A2508ET01	235A2508AK01
Slinger/Inproseal	235A2300FL2	

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	
Fan Cover	

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	4002B5728PA-G01

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

