PRODUCT INFORMATION PACKET

Model No: 114638.00 Catalog No: 114638.00

General Purpose Motor, 1 HP, 3 Ph, 60 Hz, 230/460 V, 1800 RPM, 56C Frame, TEFC



Regal and are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E




Nameplate Specifications


Output HP	1 Hp	Output KW	0.75 kW
Frequency	60 Hz	Voltage	230/460 V
Current	3.2/1.6 A	Speed	1760 rpm
Service Factor	1.15	Phase	3
Efficiency	85.5 %	Power Factor	68.5
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	N
Frame	56C	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	Thermostat	Ambient Temperature	40 °C
Drive End Bearing Size	6203	Opp Drive End Bearing Size	6203
UL	Recognized	CSA	Υ
CE	Υ	IP Code	54
Number of Speeds	1		
	·	·	<u> </u>

Technical Specifications


Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	12.96 Ohms	Mounting	Round
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	NEMA 56	Overall Length	12.48 in
Frame Length	7.00 in	Shaft Diameter	0.625 in
Shaft Extension	1.88 in	Assembly/Box Mounting	F1 ONLY
Inverter Load	CONSTANT 10:1		
Connection Drawing	005010.20	Outline Drawing	029091-700

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:09/15/2022

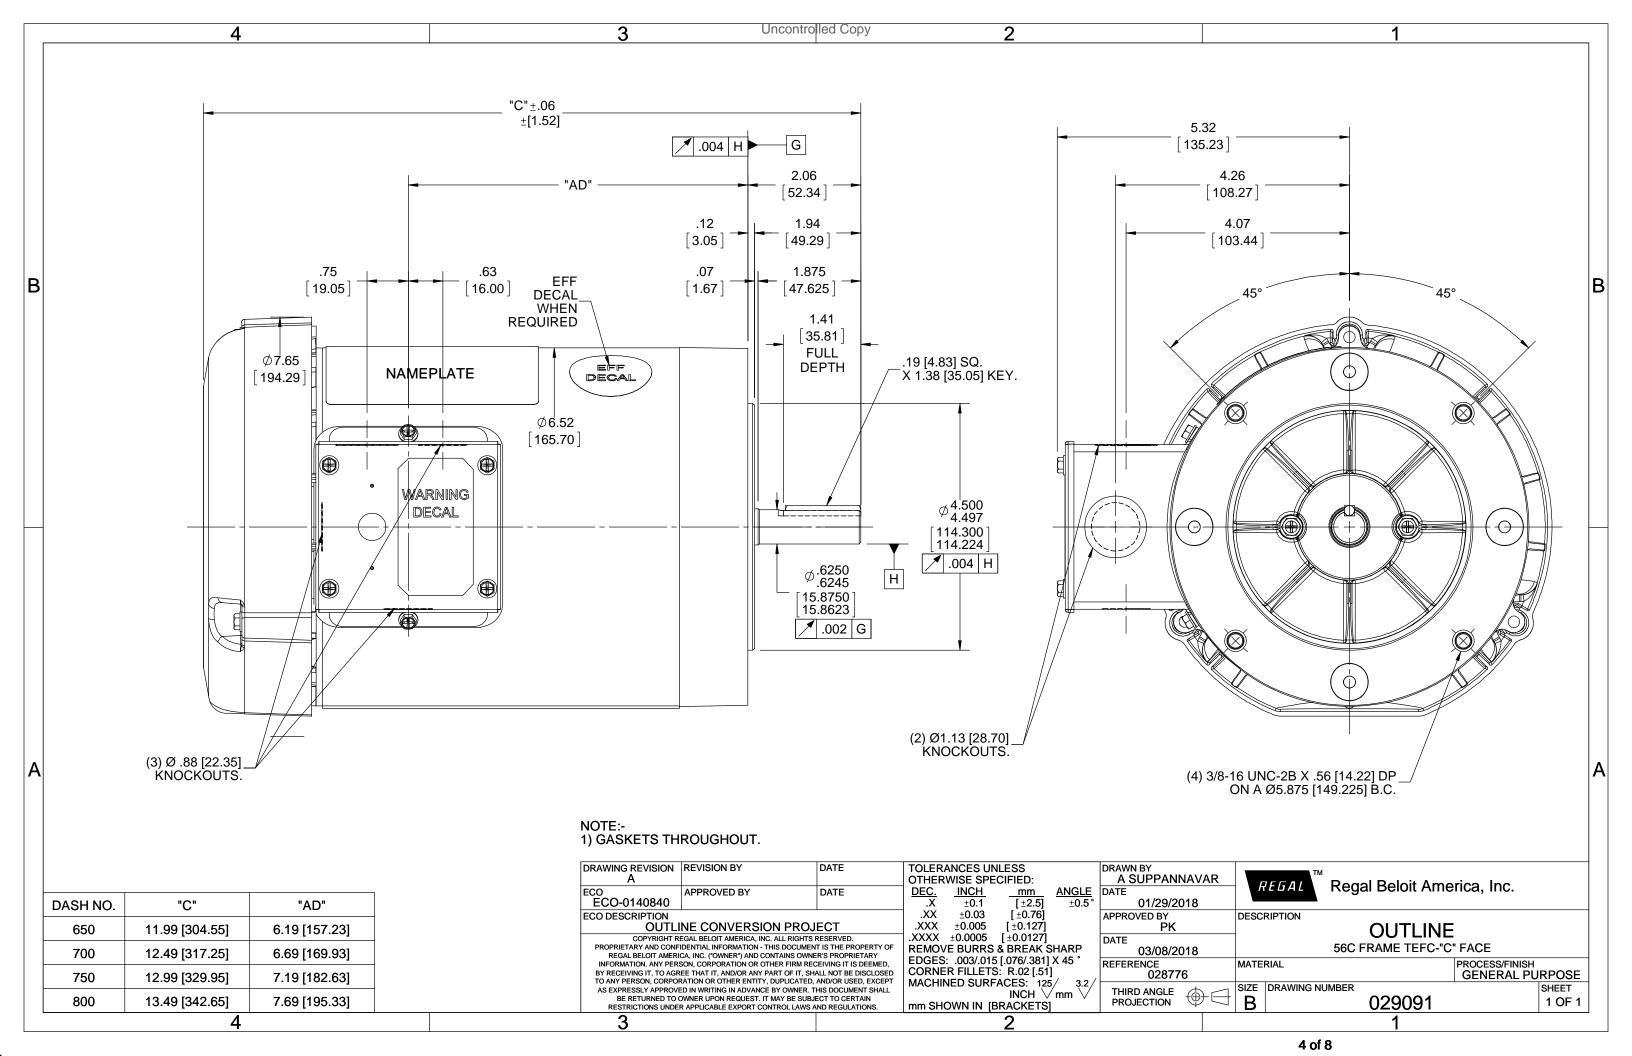

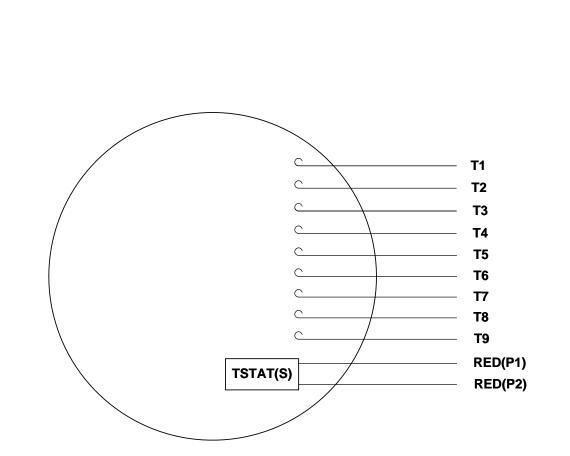

VIEW FROM OUTSIDE OF MOTOR AT SWITCH END. Uncontrolled Copy

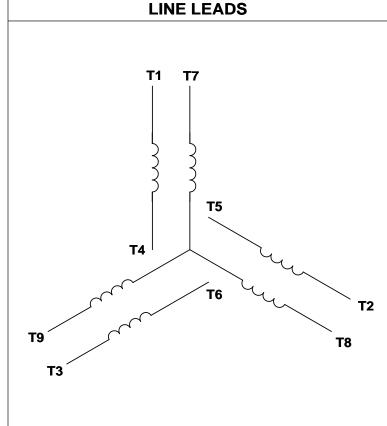

VOLTAGE	L1	L2	L3	JOIN & INSULATE
HIGH	T1	T2	Т3	(T4,T7) (T5,T8) (T6,T9)
LOW	T1,T7	T2,T8	T3,T9	T4,T5,T6

DRAWING REVISION G	REVISION BY MVG	DATE 04/05/2017
ECO	APPROVED BY	DATE
ECO-0121253	SM	04/05/2017
ECO DESCRIPTION		-

ADDED P1 & P2 FOR TSTAT

PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

TOLERANG			
	NCH_	mm	ANGLE
	±0.1	[±2.5]	±0.5°
.XX	±0.01	[±0.25]	
.XXX ±	0.005	[±0.127]	
.XXXX ±0	.0005	[±0.0127]	
REMOVE E	BURRS 8	BREAK S	HARP
EDGES: .0			
CORNER F	FILLETS	R.02 [.51]
MACHINED	SURF/		
		INCH 🗸	′mm∨
mm SHOW	NIN [B	RACKETS]	

DRAWN BY DBT 12/16/97	
DATE	RED
APPROVED BY KH 12/17/97	DESCRIPT
DATE	•
REFERENCE	MATERIAL

PROJECTION

Regal Beloit America, Inc.

1 OF 1

CONN DIAGRAM-EXTERNAL
3 PHASE WITH PROTECTOR

EFERENCE MATERIAL DECAL - 004014 (TSTAT) - 080582 PROCESS/FINISH STOCK

THIRD ANGLE SIZE DRAWING NUMBER SHEET

00501020




P.O. BOX 8003 WAUSAU, WI 54401-8003 PH. 715-675-3311

DATA VOLTS: 460

CERTIFICATION DATA SHEET CONN. DIAGRAM: 005010.20 CAT #: 114638.00 OUTLINE: 028776-700 WINDING: T634342 FR **TYPICAL MOTOR PERFORMANCE DATA** ΗP ΚW SYNC RPM FL RPM FRAME **ENCLOSURE** TYPE **KVA CODE** DESIGN 0.75 1760 **TEFC** TFR 1800 56C Ν В PH ΗZ VOLTS AMPS START TYPE DUTY INSL AMB ELEV. S.F. 60/50 230/460#190/380 3.1/1.55&3.5/1.75 LINE OR INVERTER CONT F 1.15 40 3300 F.L. EFF 85.5 3/4 LD EFF 85.4 1/2 LD EFF 79.6 GTD EFF **ELECT. TYPE** F.L. PF 3/4 LD PF 1/2 LD PF SQ CAGE INV RATED 68.5 61.5 51.5 0.0 F.L. TORQUE **LR AMPS** @ 460 V L.R. TORQUE **B.D. TORQUE** F.L. RISE (°C) LB-FT 527% 14.0 12.0 LB-FT 400% 15.8 LB-FT 3.0 38 STARTS/HOUR MOTOR WGT PRESSURE @ 3 **POWER ROTOR WK²** MAX. LOAD WK² SAFE STALL TIME 65 dBA 74 dBA 0.12 LB-FT² LB-FT² 10 SEC. 0 **LB**. 0 *** SUPPLEMENTAL INFORMATION *** DE BRACKET MOUNT MOTOR SEVERE **HAZARDOUS** DRIP **SCREENS** ODE BRACKET TYPE **TYPE** ORIENTATION DUTY LOCATION COVER **TYPE** PAINT C-FACE STANDARD ROUND HORIZONTAL NONE NONE N - LEESON WATTS NO NO BEARINGS **GREASE** SHAFT TYPE SPECIAL DE SPECIAL ODE SHAFT **MATERIAL** FRAME MATERIAL DE ODE BALL BALL POLYREX EM STANDARD 56 NONE NONE 1144 STRESSPROOF (C-223) **ROLLED STEEL** 6203 6203 SPACE **HEATERS** THERMOSTATS **PROTECTORS** WDG RTD's **BRG RTD's THERMISTORS** CONTROL AUTOMATIC NONE NA TSTATS (N/C) NONE NONE FALSE VIBRATION (in/sec) R1 (ohms/ph) R2 (ohms/ph) X1 (ohms/ph) X2 (ohms/ph) Xm (ohms/ph) FLOAT ODE O 0 0 0.150 0 0 **INVERTER TORQUE: CONSTANT 10:1** Ν 0 INV. HP SPEED RANGE: 1.5 X BASE SPEED Т **ENCODER:** NONE Ε s NONE NONE NONE PPR **BRAKE: NONE** NONE NONE DATE: 1/18/2018 FT-LB: NA VOLTAGE: NONE HZ:

UL: Y-(LEESON UL REC)

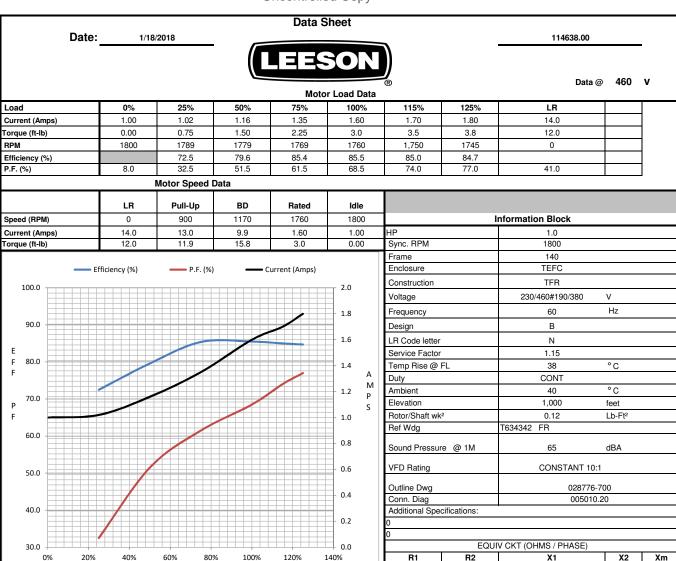





EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 114638.00

(Model No. may contain prefix and/or suffix characters)

Catalog No : 114638.00

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A. Logsdon

Vice President, Technology

Created on 09/01/2022

Authorized Representative in the Community:

J. cerse

Julian Clark
Marketing Engineer

C€ 22