

Data sheet for three-phase Squirrel-Cage-Motors SIMOTICS

Motor type: **GP100A** FS: **182T - 6p - 1.5 hp -**

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

Electrical data

U [V]	Δ/Y	f [Hz]	P [HP]	P [kW]	n [rpm]	I Load [Amps]					LRC	Nom. Eff Load [%]			Pwr. Factor Load [%]			Torque [lb-ft]	T _A /T _N LRT [%]	T _k /T _N BDT [%]
						4/4	3/4	1/2	0	4/4		3/4	2/4	4/4	3/4	2/4				
460	Y	60	1.50	1.00	1,200	2.40	2.10	1.70	1.40	15.0	87.5	87.6	85.3	66.9	58.4	48.4	6.8	206	331	
230	YY	60	1.50	1.00	1,200	4.80	4.12	3.40	2.80	30.0	87.5	87.6	85.3	66.9	58.4	48.4	6.8	206	331	
400	Y	50	1.00		976	2.16	1.91	1.72	1.50	14.4	78.9	77.9	74.9	57.6	49.4	38.2	5.4	299	518	
200	YY	50	1.00		976	4.32	3.82	3.44	3.00	28.7	78.9	77.9	74.9	57.6	49.4	38.2	5.4	299	518	

without

Mechanical data

Sound level (SPL / SWL) at 60 Hz	54.0 dB(A) / 63.0 dB(A)	Thickener	Polyurea
Octave Band Center Frequencies Hertz		Safe Stall Time Hot	34 s
250	500	1000	2000
4000	8000	Hz	
SPL@3	36.0	46.0	52.0
	47.0	41.0	31.0
Moment of inertia	0.2 Lb-ft ²	Safe Stall Time Cold	46 s
Ext Load Inertia Capability:	23.0 Lb ft ²	Frame material	aluminum
Bearings		Color, paint shade	Standard Paint - RAL7030
Bearing DE NDE	6206 ZZ C3 S0	Coating (paint finish)	Standard Alkyed + Epoxy (C2)
Bearing_Type	Ball Bearing	Ventilation Type	
AFBMA:	30BC02JPP30	Method of cooling	TEFC
Grease		Direction of rotation	Bidirectional
Capacity	0.2 oz	Fan Material	Polypropylen
Grease Type:	Exxon Mobile EM	VFD	CT: 4:1 VT: 20:1
		Space heaters	without
		Brake:	without


Terminal box

Lead Wire Connection	9 LEAD - WYE	Terminal box position	(3) F-1, Standard Floor Mount, T. Box LHS
Voltage	L1 L1 L1 Connected together	Material of terminal box	Aluminium
LOW	T1 T7 T2 T8 T3 T9 T4 T5 T6	Cable entry	.75" NPT
HIGH	T1 T2 T3 T4 T7-T5 T8-T6 T9		

Notes:

I_L/I_N = locked rotor current / current nominal
M_L/M_N = locked rotor torque / torque nominal
M_k/M_N = break down torque / nominal torque


3) Value is valid only for DOL operation with motor design IC411
2) at rated power / at full load

responsible dep. DI MC LVM	technical reference	created by DT Configurator	approved by	<i>Technical data are subject to change! There may be discrepancies between software and hardware versions.</i>
	document type datasheet	document status released	customer	
	title 1LE2121-1CC11-4EA3	document number		
© Siemens AG 2022	rev. 01	creation date 2022-04-08 17:05	language en	Page 1/1

SIEMENS INDUSTRY, INC.

HP 1.5 VOLTS < 600V RPM 1200 TYPE GP100A
HZ 60 PHASE 3 FRAME 182T NEMA B


TORQUE & CURRENT VS. SPEED

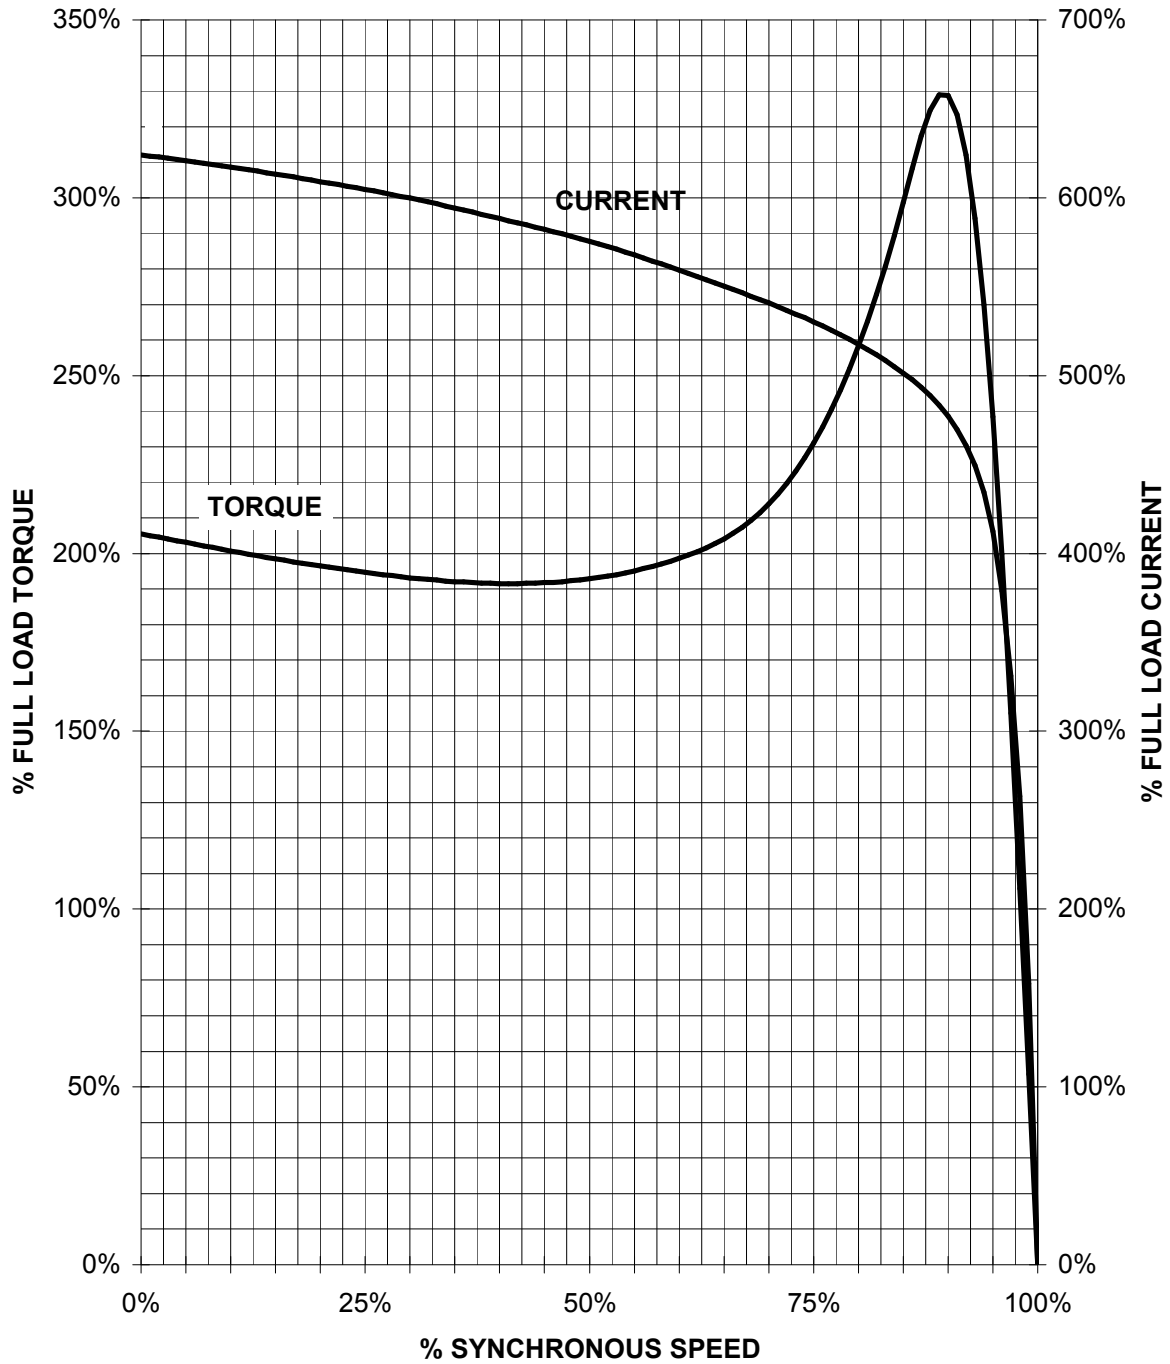

CUSTOMER: _____ ORDER#: _____

1.5 HP 1200 RPM 182 FRAME 460 VOLTS 3 PHASE NEMA DESIGN B

SIEMENS INDUSTRY, INC.
PERFORMANCE CURVE
GP100A NP

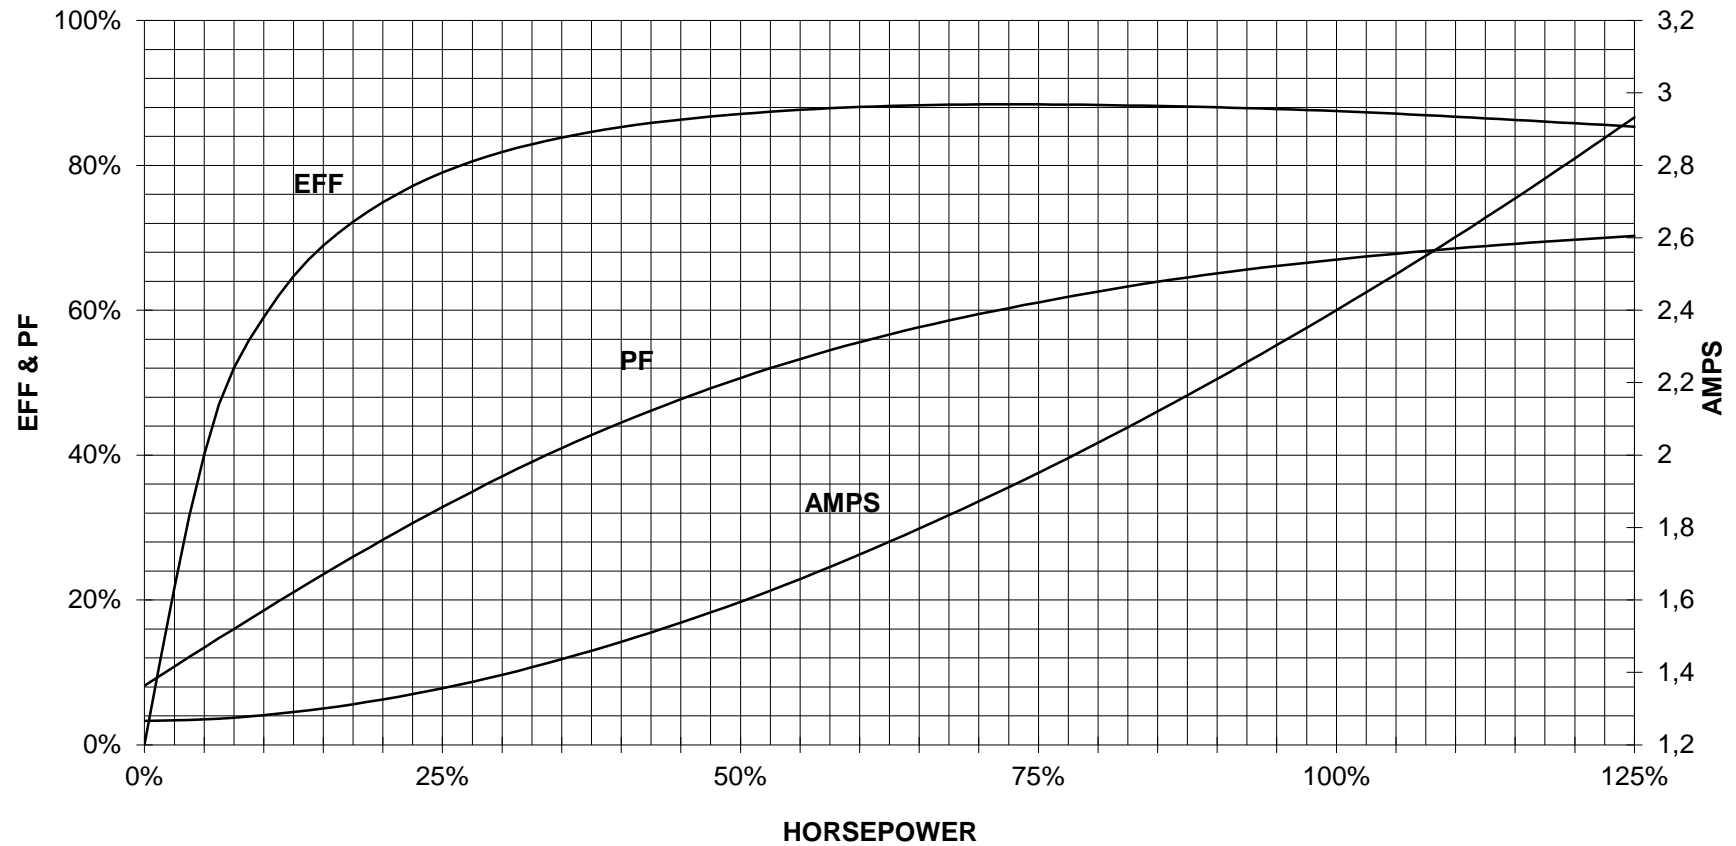

CUSTOMER _____ ORDER # _____ PO # _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.

REV. 1

Main terminal diagram



9 LEAD WYE						
Volts	LINES			CONNECTED TOGETHER	CONN.	
	L1	L2	L3			
LOW	T1 T7	T2 T6	T3 T9	T4 T5 T6	YY	
HIGH	T1	T2	T3	T4 T7-T5 T8-T6 T9	Y	

responsible dep. DI MC LVM	technical reference	created by	approved by	Project
SIEMENS	document type Wiring Diagram	document status free		customer
	title 1LE2121-1CC11-4EA3	document number		
© Siemens AG 2019	rev. 01	creation date 12/03/2019	language en	Page 1/1