

# Data sheet for three-phase Squirrel-Cage-Motors SIMOTICS

Motor type: **SD100 IEEE** FS: **184T - 6p - 2 hp -**

|                  |                 |           |
|------------------|-----------------|-----------|
| Client order no. | Item-No.        | Offer no. |
| Order no.        | Consignment no. | Project   |
| Remarks          |                 |           |

## Electrical data

Class I Division 2 Gr. A, B, C or D, T3

| U [V]            | $\Delta/Y$ | f [Hz]   | P [HP] | P [kW] | n [rpm] | I Load [Amps]                         |      |                                     |      |      | LRC          | Nom. Eff Load [%] |            |      | Pwr. Factor Load [%] |      |     | Torque [lb-ft] | T <sub>A</sub> /T <sub>N</sub> LRT [%] | T <sub>k</sub> /T <sub>N</sub> BDT [%] |
|------------------|------------|--|--------|--------|---------|---------------------------------------|------|-------------------------------------|------|------|--------------|-------------------|------------|------|----------------------|------|-----|----------------|--|--|
|                  |            |  |        |        |         | 4/4                                   | 3/4  | 1/2                                 | 0    | 4/4  |              | 3/4               | 2/4        | 4/4  | 3/4                  | 2/4  |     |                |  |  |
| 460              | Y          | 60   | 2.00   | 1.50   | 1,200   | 3.20                                  | 2.70 | 2.30                                | 1.90 | 20.0 | 88.5         | 88.7              | 87.5       | 66.1 | 58.8                 | 46.5 | 9.1 | 242            | 308                                    |  |
| Frame Type: 184T |            | Type of constr.: (A) Foot mounted - End shield |        |        |         | Ins. Cl.: Standard Class F Insulation |      | Motor Prot.: (A) Without Protection |      |      | NEMA Des.: B |                   | S.F.: 1.15 |      |                      |      |     |                |  |  |
| Mtr. WT: 133     |            |  |        |        |         | Temp. Rise Cl.: B                     |      | Amb. Temp.: + 40 to -20 °C @1000 m  |      |      | kVA: J       |                   | IP 55      |      |                      |      |     |                |  |  |

## Mechanical data

|                                      |                         |      |                         |                              |                  |      |       |                      |           |
|--------------------------------------|-------------------------|------|-------------------------|------------------------------|------------------|------|-------|----------------------|-----------|
| Sound level (SPL / SWL) at 60 Hz     | 54.0 dB(A) / 63.0 dB(A) |      | Thickener               | Polyurea                     |                  |      |       |                      |           |
| Octave Band Center Frequencies Hertz |                         |      | Safe Stall Time Hot     | 23 s                         |                  |      |       |                      |           |
|                                      | 250                     | 500  | 1000                    | 2000                         | 4000             | 8000 | Hz    | Safe Stall Time Cold | 32 s      |
| SPL@3                                | 36.0                    | 46.0 | 52.0                    | 47.0                         | 41.0             | 31.0 | dB(A) | Frame material       | cast iron |
| Moment of inertia                    | 0.3 Lb-ft <sup>2</sup>  |      | Color, paint shade      | Standard Paint - RAL7030     |                  |      |       |                      |           |
| Ext Load Inertia Capability:         | 30.0 Lb ft <sup>2</sup> |      | Coating (paint finish)  | Standard Alkyed + Epoxy (C2) |                  |      |       |                      |           |
| <b>Bearings</b>                      |                         |      | <b>Ventilation Type</b> |                              |                  |      |       |                      |           |
| Bearing DE   NDE                     | 6206 Z C3 S0            |      | 6206 Z C3 S0            | Method of cooling            | TEFC             |      |       |                      |           |
| Bearing_Type                         | Ball Bearing            |      | Ball Bearing            | Direction of rotation        | Bidirectional    |      |       |                      |           |
| AFBMA:                               | 30BC02JP30              |      | 30BC02JP30              | Fan Material                 | Polypropylen ESD |      |       |                      |           |
| <b>Grease</b>                        |                         |      | VFD                     | CT: 4:1 VT: 20:1             |                  |      |       |                      |           |
| Capacity                             | 0.2 oz                  |      | 0.2 oz                  | Space heaters                | without          |      |       |                      |           |
| Grease Type:                         | Exxon Mobile EM         |      | Brake:                  | without                      |                  |      |       |                      |           |


## Terminal box


|                      |      |              |      |                    |                          |   |
|----------------------|------|--------------|------|--------------------|--------------------------|---|
| Lead Wire Connection |      | 3 LEAD - WYE |      |                    | Terminal box position    | (3) F-1, Standard Floor Mount, T. Box LHS |
| Voltage              | L1   | L1           | L1   | Connected together | Material of terminal box | Cast Iron                                 |
| ----                 | ---- | ----         | ---- | ----               | Cable entry              | .75" NPT                                  |
| ----                 | T1   | T2           | T3   | ----               |                          |   |

### Notes:


I<sub>L</sub>/I<sub>N</sub> = locked rotor current / current nominal  
M<sub>L</sub>/M<sub>N</sub> = locked rotor torque / torque nominal  
M<sub>B</sub>/M<sub>N</sub> = break down torque / nominal torque

3) Value is valid only for DOL operation with motor design IC411  
2) at rated power / at full load

|  |                             |                                   |                |  |  |
|--|-----------------------------|-----------------------------------|----------------|--|--|
| responsible dep.<br>DI MC LVM  | technical reference         | created by<br>DT Configurator     | approved by    | <i>Technical data are subject to change! There may be discrepancies between datasheet and customer's surface</i> |  |
|  | document type<br>datasheet  | document status<br>released       | customer       |  |  |
|  | title<br>1LE2421-1CC31-2AA3 | document number                   |                |  |  |
| © Siemens AG 2022  | rev.<br>01                  | creation date<br>2022-04-08 17:37 | language<br>en | Page<br>1/1  |  |

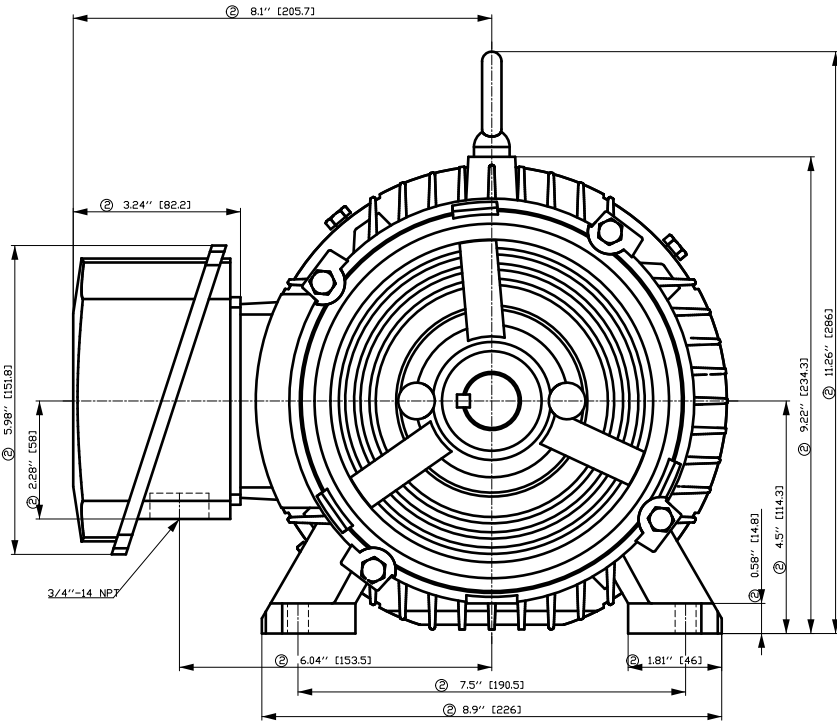

- ① Tolerances according to NEMA std.
- ② All these dimensions corresponding to assemblies and castings shall have a tolerance as per DIN standard 1686-GTB 19.
- ③ Not according to NEMA std.

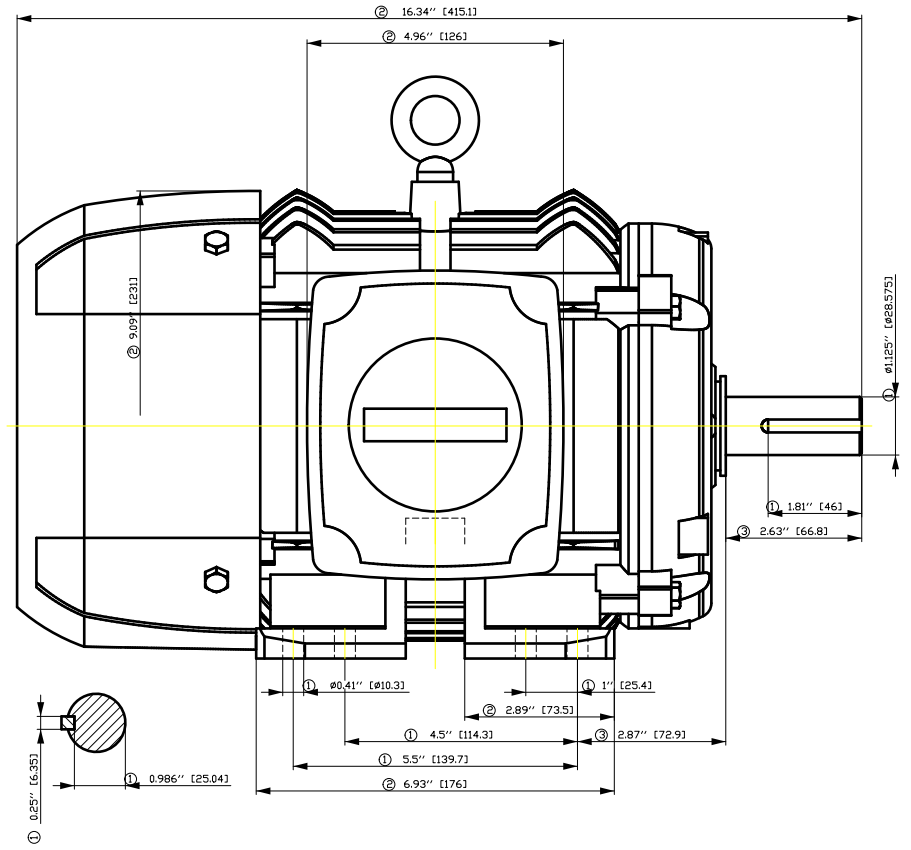


| Tolerance                    | Surface   | Material               | Weight   | Scale                             |
|------------------------------|---|------------------------|----------|-----------------------------------|
| F50G GF-E00-FE00H<br>E       | Author<br>Creator<br>Approval<br>Department<br>Change Order | ÖVS<br>T æ : ^ æ @ } * | E        | { {                               |
| SIEMENS<br>© Siemens AG 2018 | Doc. State  | I ð BGG                | MFB      | Doc Type                          |
|                              | Revision  | Index RS               | Item No  | Paper Size CH                     |
|                              | Project No  | E                      | Doc No   | 1st Language ^<br>2nd Language â^ |
|                              |   |                        | Ref No E | Sheet F of F                      |

# SIEMENS INDUSTRY, INC.

HP 2 VOLTS < 600V RPM 1200 TYPE SD100 IEEE841  
HZ 60 PHASE 3 FRAME 184T NEMA B


## TORQUE & CURRENT VS. SPEED

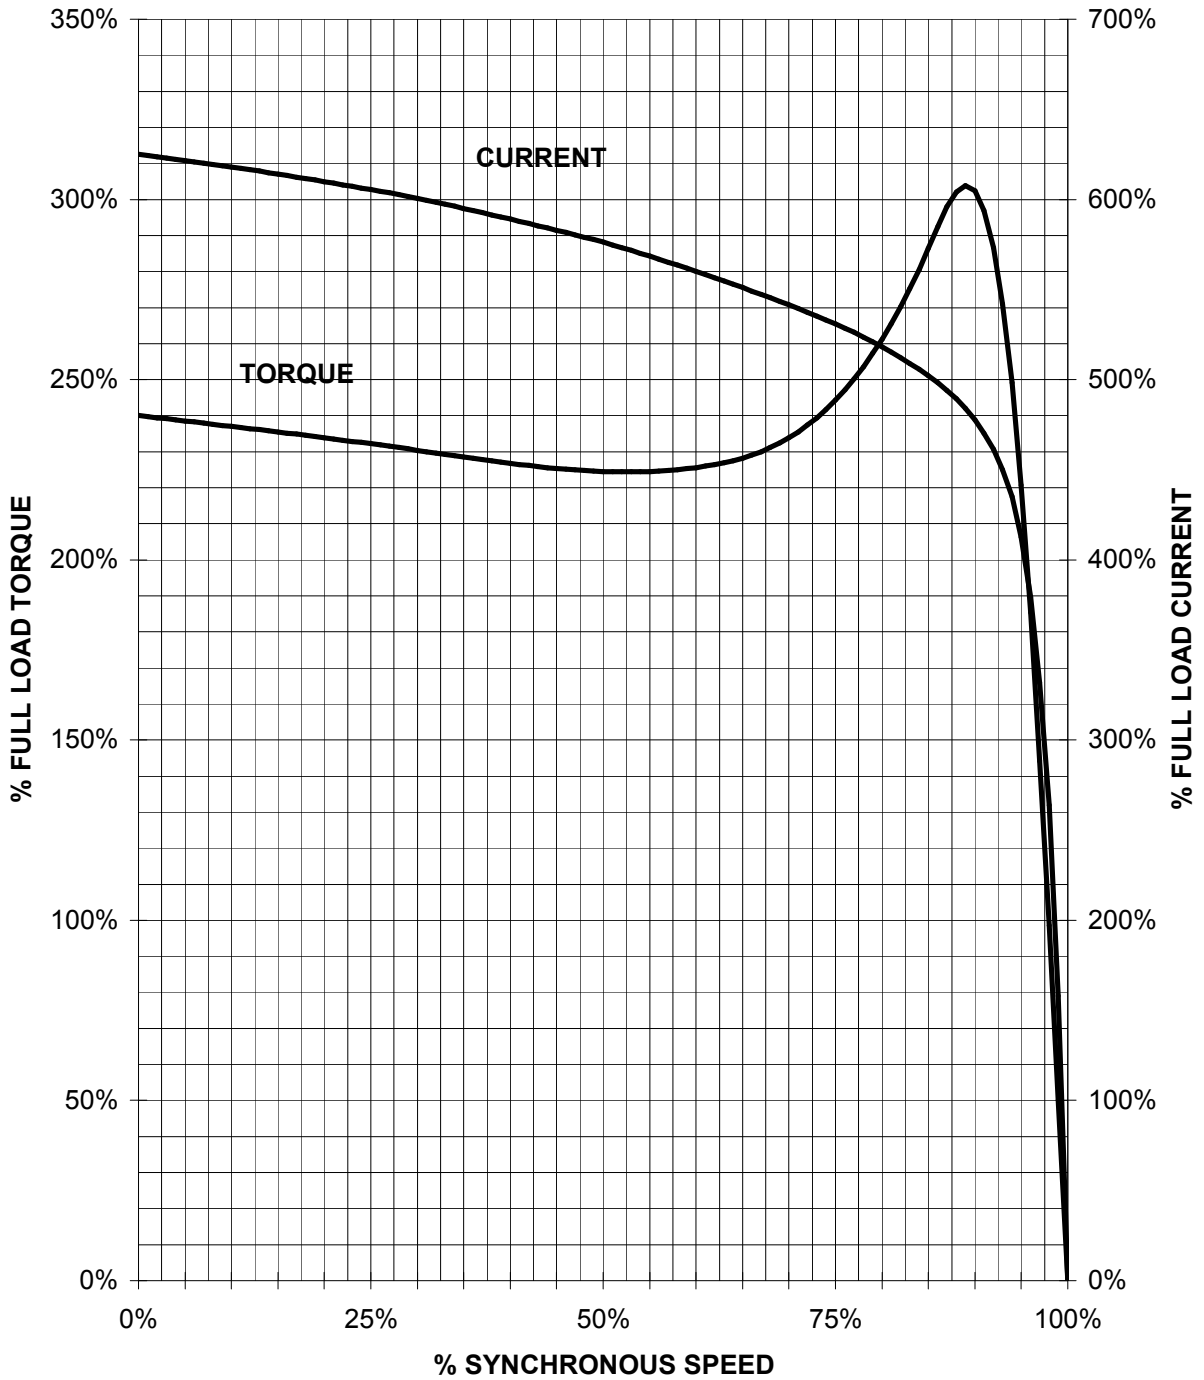

CUSTOMER: \_\_\_\_\_ ORDER#: \_\_\_\_\_

2 HP 1200 RPM 184T FRAME 460 VOLTS 3 PHASE NEMA DESIGN B

**SIEMENS INDUSTRY, INC.**  
**PERFORMANCE CURVE**  
**SD100 IEEE841**

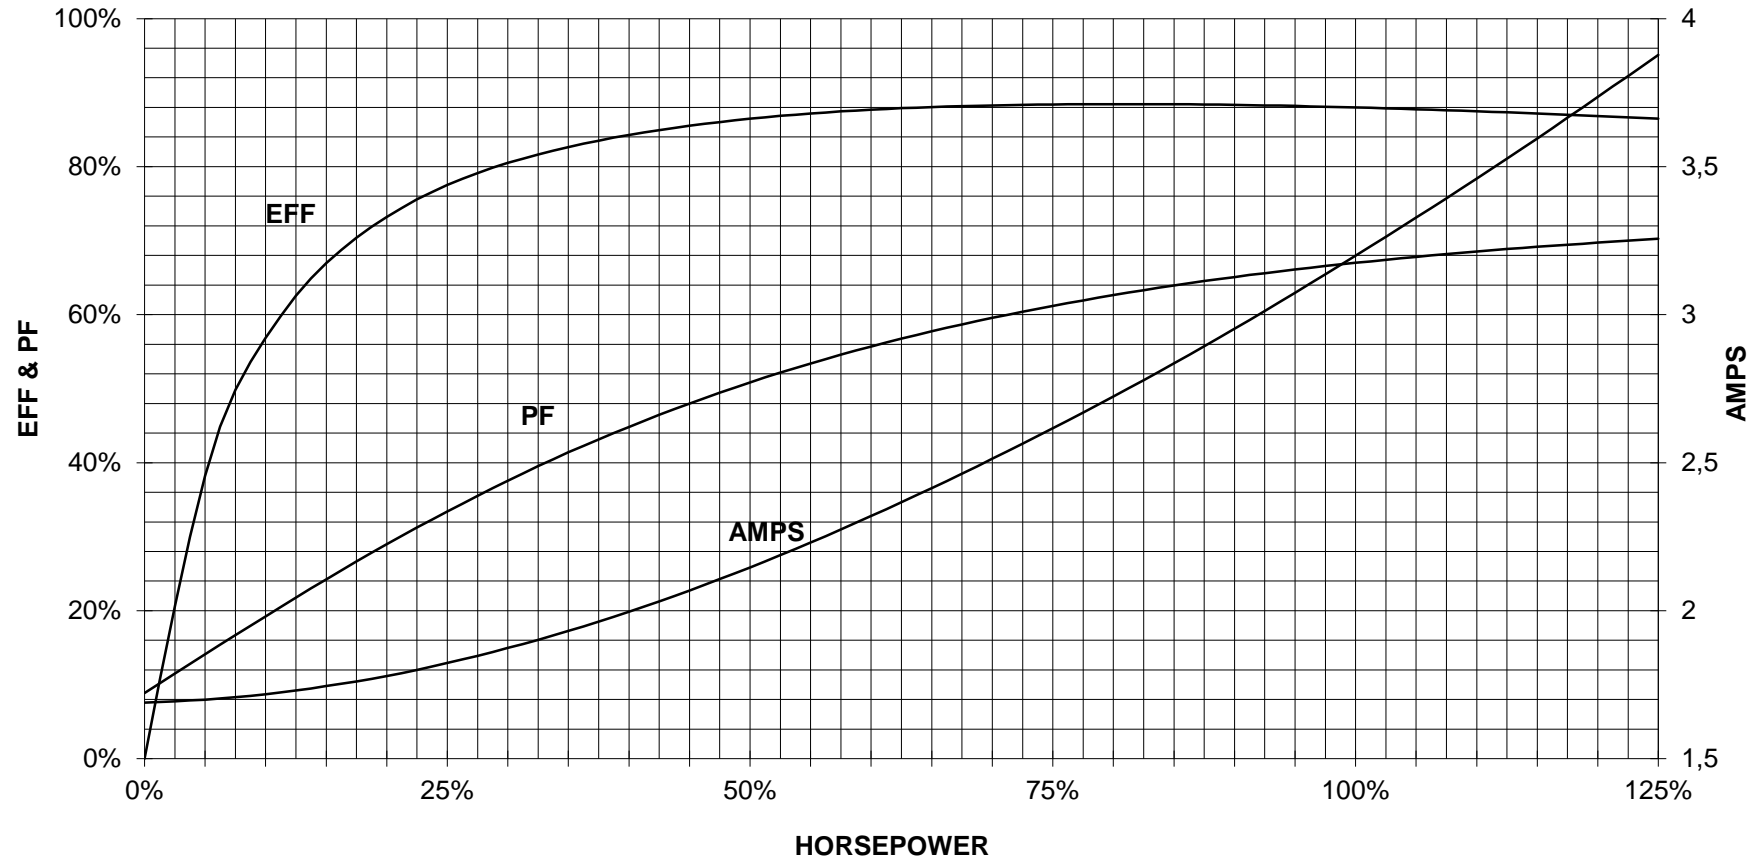

CUSTOMER \_\_\_\_\_ ORDER # \_\_\_\_\_ PO # \_\_\_\_\_

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.

REV. 1

Main terminal diagram



| 3 LEAD WYE |    |    |       |
|------------|----|----|-------|
| LINES      |    |    | CONN. |
| L1         | L2 | L3 |       |
| T1         | T2 | T3 |       |

responsible dep.  
DI MC LVM

technical reference

created by

approved by

Project

**SIEMENS**

document type  
Wiring Diagram

title  
1LE2421-1CC31-2AA3

document status  
free

document number

customer