

Data sheet for three-phase Squirrel-Cage-Motors SIMOTICS

Motor type: SD100 IE3E **FS: 215T - 2p - 10 hp -**

Client order no.	Item-No.	Offer no.
Order no.	Consignment no.	Project
Remarks		

Electrical data

Class I Division 2 Gr. A, B, C or D, T3

U [V]	Δ/Y	f [Hz]	P [HP]	P [kW]	n [rpm]	I Load [Amps]					LRC	Nom. Eff Load [%]			Pwr. Factor Load [%]			Torque [lb-ft]	T _A /T _N LRT [%]	T _k /T _N BDT [%]
						4/4	3/4	1/2	0	4/4		3/4	2/4	4/4	3/4	2/4				
575	Y	60	10.00	7.50	3,600	9.20	6.90	5.10	2.80	64.8	90.2	91.1	91.0	90.3	88.8	81.5	15.0	180	440	
Frame Type: 215T		Type of constr.: (G) Round body - C-Face				Ins. Cl.: Standard Class F Insulation		Motor Prot.: (A) Without Protection			NEMA Des.: B		S.F.: 1.15							
Mtr. WT: 218						Temp. Rise Cl.: B		Amb. Temp.: + 40 to -20 °C @1000 m			kVA: H		IP 55							

Mechanical data

Sound level (SPL / SWL) at 60 Hz	66.0 dB(A) / 78.0 dB(A)		Thickener	Polyurea					
Octave Band Center Frequencies Hertz			Safe Stall Time Hot	14 s					
250	500	1000	2000	4000	8000	Hz	Safe Stall Time Cold	28 s	
SPL@3	53.0	55.0	63.0	62.0	58.0	47.0	dB(A)	Frame material	cast iron
Moment of inertia	0.5 Lb-ft ²		Color, paint shade	Standard Paint - RAL7030					
Ext Load Inertia Capability:	11.0 Lb ft ²		Coating (paint finish)	Standard Alkyed + Epoxy (C2)					
Bearings			Ventilation Type						
Bearing DE NDE	6208 Z C3 S0		6208 Z C3 S0						
Bearing_Type	Ball Bearing		Ball Bearing						
AFBMA:	40BC02JP30		40BC02JP30						
Grease			Method of cooling						
Capacity	0.3 oz		0.3 oz						
Grease Type:	Exxon Mobile EM		VFD						
			Space heaters						
			Brake:						
			CT: 4:1 VT: 20:1						
			without						
			without						


Terminal box




Lead Wire Connection		3 LEAD - WYE			Terminal box position	(3) F-1, Standard Floor Mount, T. Box LHS
Voltage	L1	L1	L1	Connected together	Material of terminal box	Cast Iron
----	----	----	----	----	Cable entry	1" NPT
----	T1	T2	T3	----		

Notes:

I_L/I_N = locked rotor current / current nominal
M_L/M_N = locked rotor torque / torque nominal
M_B/M_N = break down torque / nominal torque

3) Value is valid only for DOL operation with motor design IC411
2) at rated power / at full load

responsible dep. DI MC LVM	technical reference	created by DT Configurator	approved by	<i>Technical data are subject to change! There may be discrepancies between software and hardware versions</i>	
	document type datasheet	document status released	customer		
	title 1LE2421-2AA21-3GA3	document number			
© Siemens AG 2022	rev. 01	creation date 2022-04-08 18:39	language en	Page 1/1	

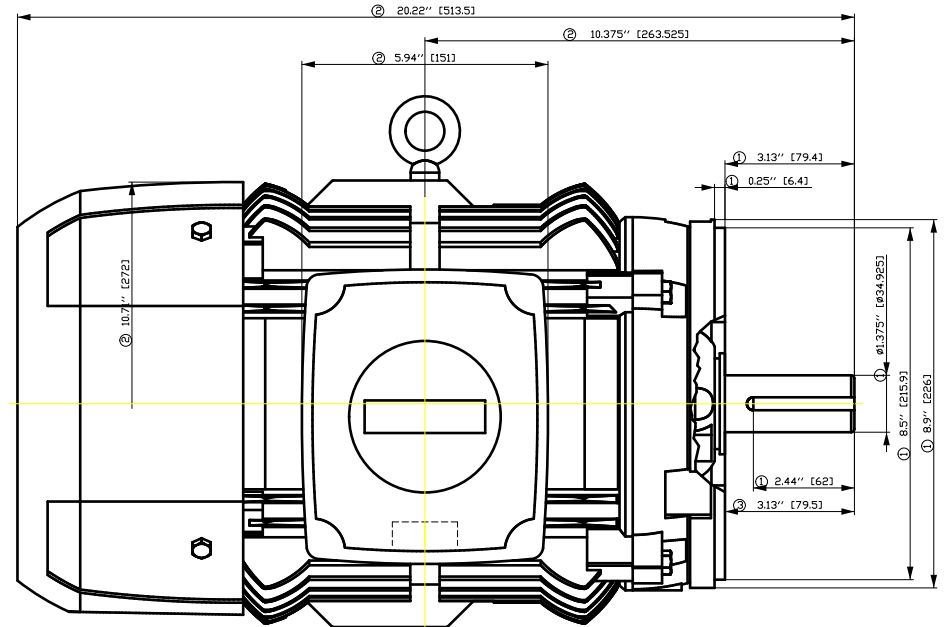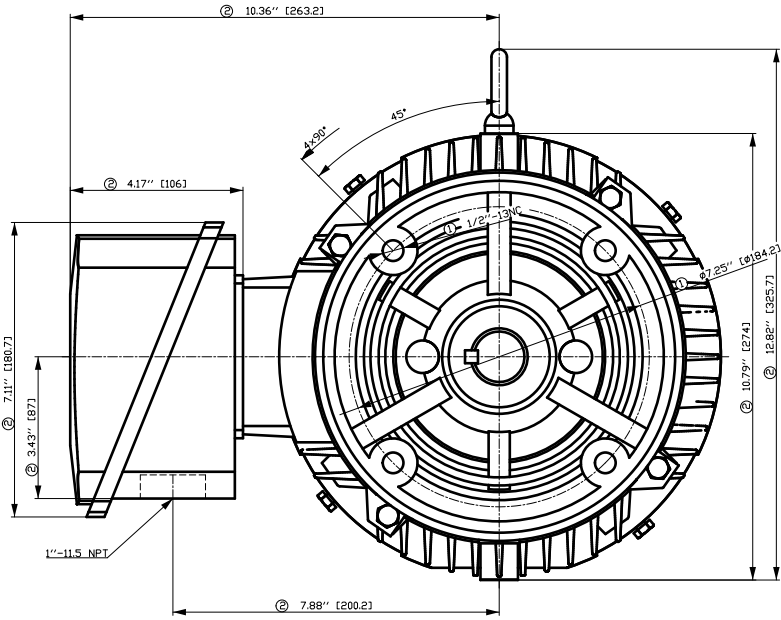

- ① Tolerances according to NEMA std.
- ② All these dimensions corresponding to assemblies and castings shall have a tolerance as per DIN standard 1686-GTB 19.
- ③ Not according to NEMA std.


Tolerance	Surface	Material	Weight	Scale
F50G GF00GFH00H E	Author Creator Approval Department Change Order	ÖS T a : ^ z @ } *	E	{ {
	Doc. State	Item No	Doc Type	
	Revision	Index	Doc No	Paper Size
	Project No	RS	Ref No	1st Language 2nd Language
	© Siemens AG	2018	E	F of F

刀痕等
用转文
全图
积
 01) 审批
02) 审批
03) 审批
04) 审批
05) 审批
06) 审批
07) 审批
08) 审批
09) 审批
10) 审批
11) 审批
12) 审批
13) 审批
14) 审批
15) 审批
16) 审批
17) 审批
18) 审批
19) 审批
20) 审批
21) 审批
22) 审批
23) 审批
24) 审批
25) 审批
26) 审批
27) 审批
28) 审批
29) 审批
30) 审批
31) 审批
32) 审批
33) 审批
34) 审批
35) 审批
36) 审批
37) 审批
38) 审批
39) 审批
40) 审批
41) 审批
42) 审批
43) 审批
44) 审批
45) 审批
46) 审批
47) 审批
48) 审批
49) 审批
50) 审批
51) 审批
52) 审批
53) 审批
54) 审批
55) 审批
56) 审批
57) 审批
58) 审批
59) 审批
60) 审批
61) 审批
62) 审批
63) 审批
64) 审批
65) 审批
66) 审批
67) 审批
68) 审批
69) 审批
70) 审批
71) 审批
72) 审批
73) 审批
74) 审批
75) 审批
76) 审批
77) 审批
78) 审批
79) 审批
80) 审批
81) 审批
82) 审批
83) 审批
84) 审批
85) 审批
86) 审批
87) 审批
88) 审批
89) 审批
90) 审批
91) 审批
92) 审批
93) 审批
94) 审批
95) 审批
96) 审批
97) 审批
98) 审批
99) 审批
100) 审批

SIEMENS INDUSTRY, INC.

HP 10 VOLTS < 600V RPM 3600 TYPE SD100 IEEE841
HZ 60 PHASE 3 FRAME 215T NEMA B


TORQUE & CURRENT VS. SPEED

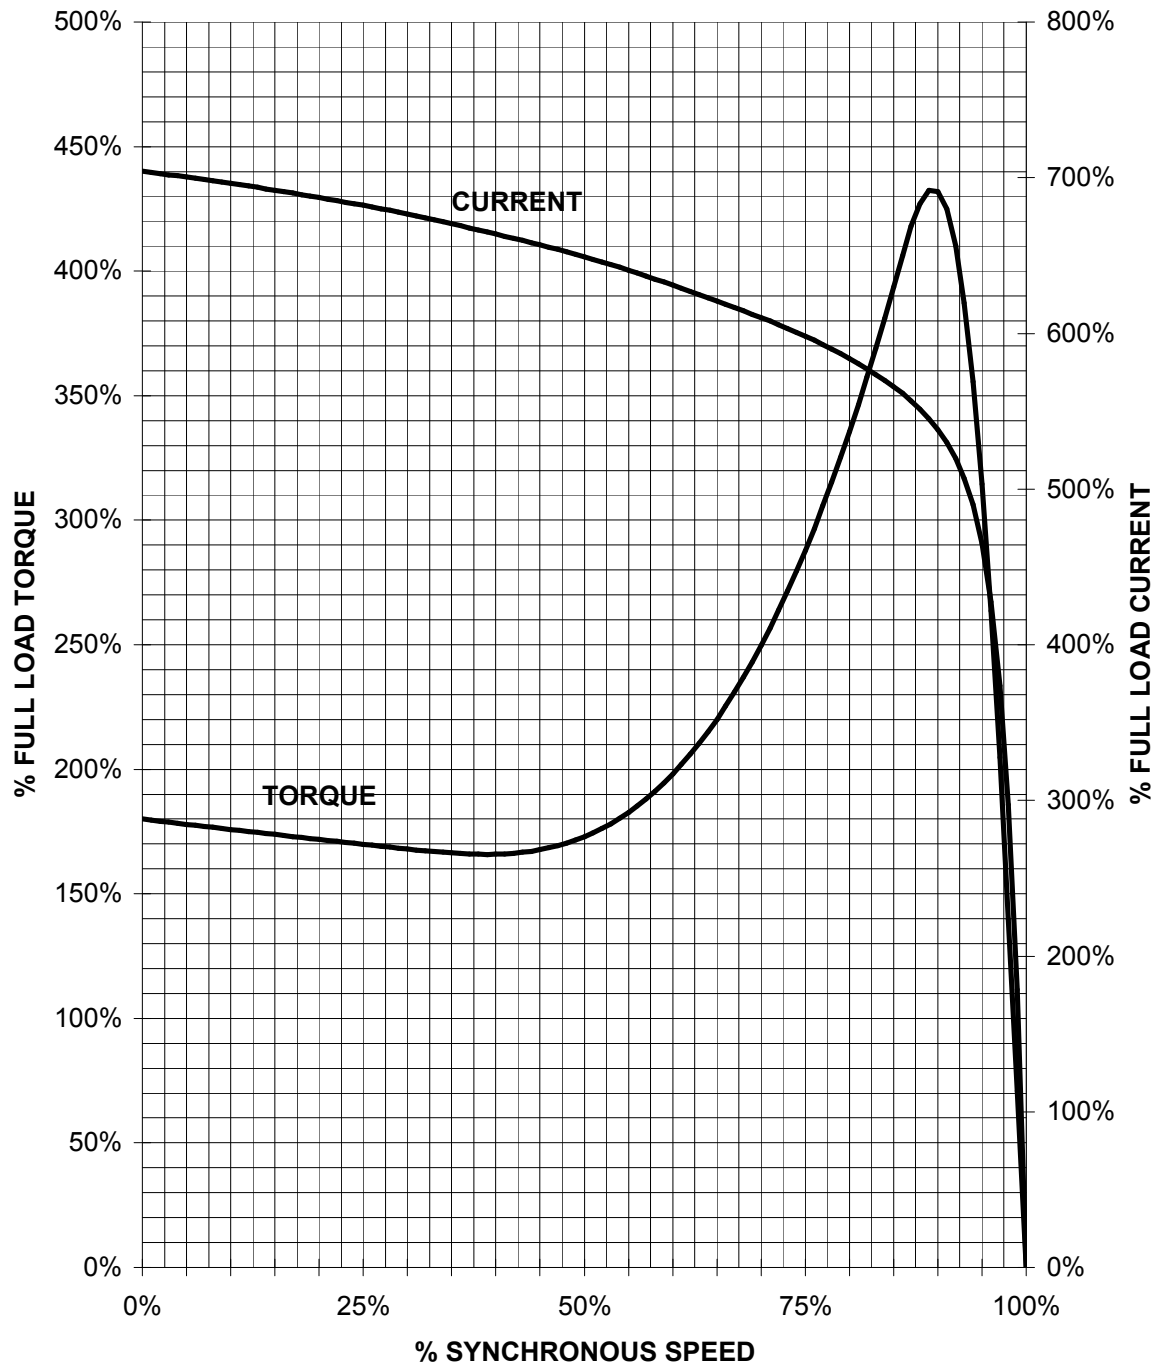

CUSTOMER: _____ ORDER#: _____

10 HP 3600 RPM 215T FRAME 575 VOLTS 3 PHASE NEMA DESIGN B

SIEMENS INDUSTRY, INC.
PERFORMANCE CURVE
SD100 IEEE

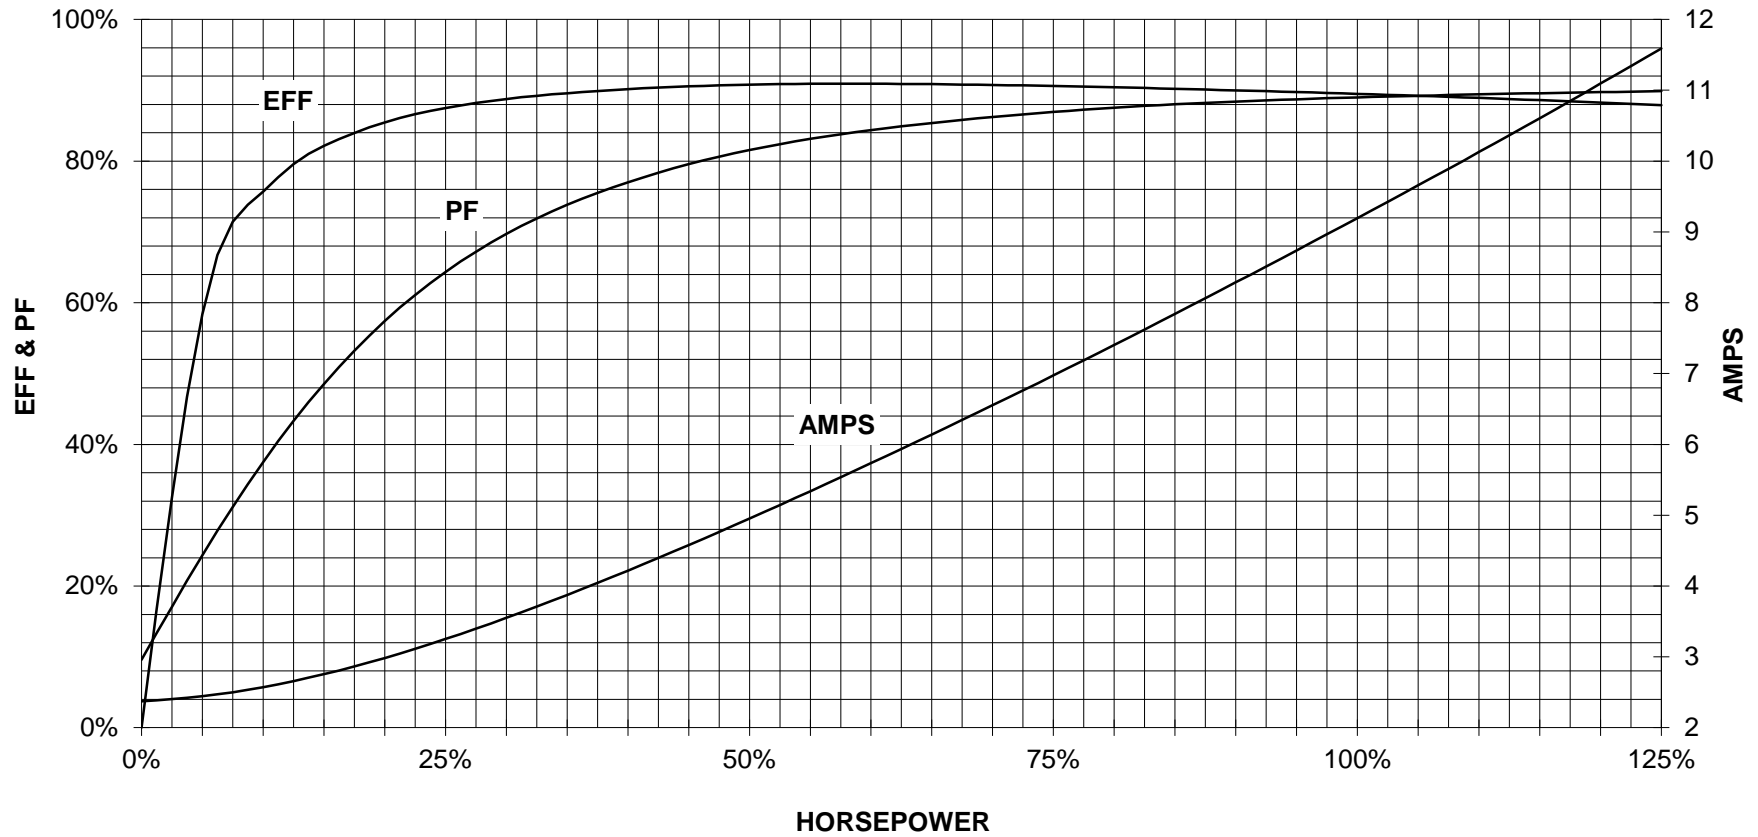

CUSTOMER _____ ORDER # _____ PO # _____

PERFORMANCE BASED ON DESIGN CALCULATIONS. SUBJECT TO CHANGE WITHOUT NOTICE.

REV. 1

Main terminal diagram



3 LEAD WYE			
LINES			CONN.
L1	L2	L3	
T1	T2	T3	Y

responsible dep.
DI MC LVM

technical reference

created by

approved by

Project

SIEMENS

document type
Wiring Diagram

title
1LE2421-2AA21-3GA3

document status
free

document number

customer