

# Product Information Packet

February 13, 2024

**Data shown is for the current revision model #. Ensure your nameplate model # matches.**

<b>Model Number:</b>	<b>WPN-DA143TSK-4D</b>
<b>Catalog Number:</b>	<b>BA4N001V3D</b>
<b>Connection Diagram:</b>	<b>See Page 4</b>
<b>Outline Drawing:</b>	<b>See Page 3</b>

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04

**Marks:**

<b>MODEL NUMBER:</b>	BA4N001V3D	<b>Estimated Weight:</b>	50 Lbs
<b>Outline Drawing:</b>	See Page 3	<b>Time Rating:</b>	S1
<b>Connection Diagram:</b>	See Page 4	<b>Enclosure:</b>	TEFC
<b>Design Code:</b>	B	<b>Encl Construction:</b>	<b>GP</b>
<b>Type:</b>	KS	<b>Ambient Max(°C):</b>	40
<b>Frame:</b>	143TD	<b>Alt Ambient Max(°C):</b>	40
<b>Phases:</b>	3	<b>Insulation Class:</b>	F
<b>Poles:</b>	4	<b>NEMA Design:</b>	B
<b>Output Power:</b>	1HP	<b>Nominal Efficiency:</b>	85.5 %
<b>RPM:</b>	1750	<b>Guaranteed Efficiency:</b>	82.5 %
<b>Voltage:</b>	208/416	<b>3/4 Load Efficiency:</b>	85.1 %
<b>Hertz:</b>	60	<b>KVA Code:</b>	K
<b>Amps - FL:</b>	3.16/1.58	<b>Max KVAR:</b>	9
<b>Service Factor:</b>	1.25@60Hz	<b>Power Factor:</b>	77%
<b>Alt Service Factor:</b>	1.15	<b>Bearing - DE:</b>	6205-ZZC3
		<b>Bearing - ODE:</b>	6203-ZZC3

**Enclosure is Totally Enclosed Fan-Cooled**

---

**Stamped Nameplate Notes:**

12-60HZ CONSTANT TORQUE, 6-60Hz VARIABLE TORQUE

50HZ DATA:

RPM 1455

SF 1.0

CSA APPROVED FOR CLASS I;DIVISION 2; GROUPS A, B, C & D,ZONE 2; GROUPS IIA & IIB T3 WITH VFD

**Additional Information:**

F1/F2/F3/ROUND BODY MOUNTING USING REMOVABLE/REPOSITIONABLE FEET

INVERTER DUTY: CT5:1(12Hz~60Hz)@100%TN, CT15:1(4Hz~60Hz)@66.7%TN, VT20:1

**Performance Characteristics**


**Marks:**

LOAD %	150.0	125.0	100.0	75.0	50.0	25.0
% EFF	84.40	85.19	85.51	85.11	83.11	75.80
% PF	83.11	81.42	77.16	70.26	57.18	36.83
AMPS(460V)	2.02	1.70	1.43	1.19	0.99	0.85

TORQUE(FL) LB-FT      4.09    TORQUE(LR)%FL      275    TORQUE(BD)%FL      300  
 AMPS(LR 460V)      11.04    PF AT START      19

**Other Useful Information for Application:**

Rotor Inertia: Lb-Ft <sup>2</sup> (Kg-m <sup>2</sup> ):	0.065(0.003)
Max load inertia: Lb-Ft <sup>2</sup> (Kg-m <sup>2</sup> ):	
Load Type:	Square Torque/Speed Characteristic
Voltage:	100%
Number of starts per hour:	2 Cold or 1 Hot
Acceleration Time with maximum inertia (sec):	5.7
Safe stall time (sec): Cold/Hot	61/25

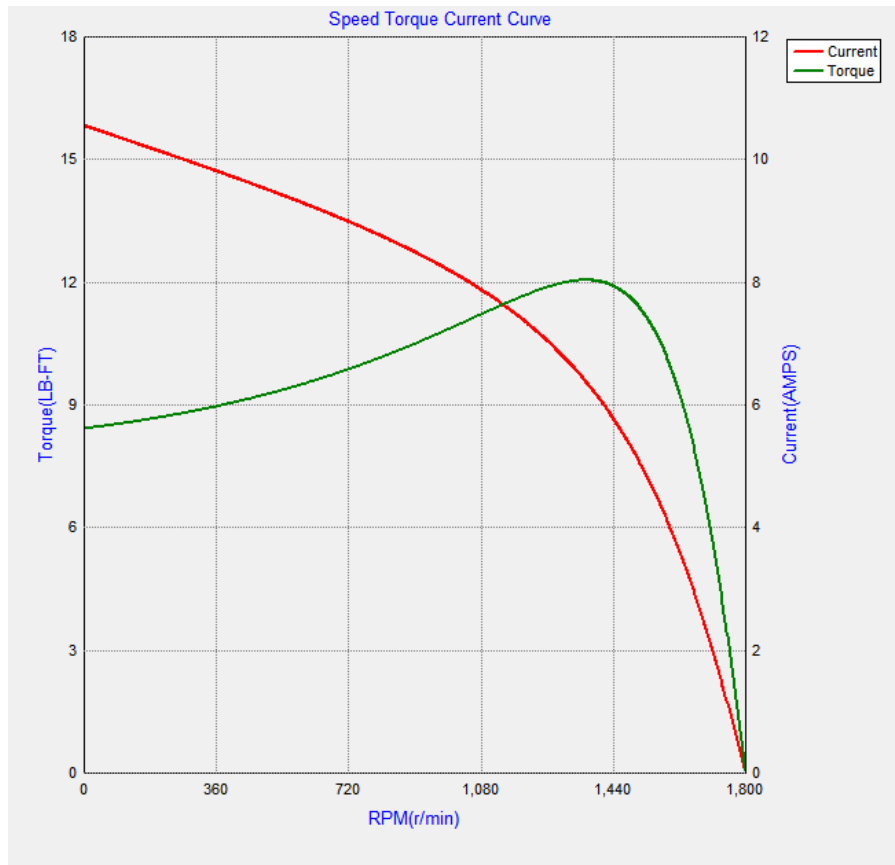

**Please contact Brook Crompton for drawings.**

Marks:

---

### Connection Diagram

