

60HZ TECHNICAL DATA SHEET

CATALOG No: **BC2N003-5D**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
3	2.20	2	3600	182TD	575 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	A	-15 to 40 C*	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
86.5	85.8	82.5	0.91	0.85	0.78

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		575 V	575 V	
410	560	2.80	33.30	3520

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62062Z	62052Z	30 x 42 x 7	25 x 37 x 7	64

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcrompton.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF182.4TD.pdf>

Click Link Below For Connection Diagram

<http://www.brookcrompton.com/Connections/Connection%20Diagram%203%20Lead%20575%20NEMA.pdf>

Notes:



50HZ TECHNICAL DATA SHEET

CATALOG No: **BC2N003-5D**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
3	2.20	2	-	182TD	-	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	-	S1	A	-15 to 40 C°	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
85.5	87.0	87.0	0.92	0.91	0.85

LRT %	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		-	-	
410	560	-	-	-

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62062Z	62052Z	30 x 42 x 7	25 x 37 x 7	64

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF182,4TD.pdf>

Click Link Below For Connection Diagram


<http://www.brookcromptonna.com/Connections/Connection%20Diagram%203%20Lead%20575%20NEMA.pdf>

Notes:

Motor: BC2N003-5D

	Frame:	182TD	3 HP	575 V	
	Pole no.:	2	4.5 ft.lbs.	60 Hz	3520 rpm

Speed	0	720	1440	2160	2880	3492	3520	3600
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	0.978	1
Mot. torque ratios	4.1	3.5	2.6	2.5	2.5	5.6	1	0
Motor torque / ft.lbs.	18	16	12	11	11	25	4	0

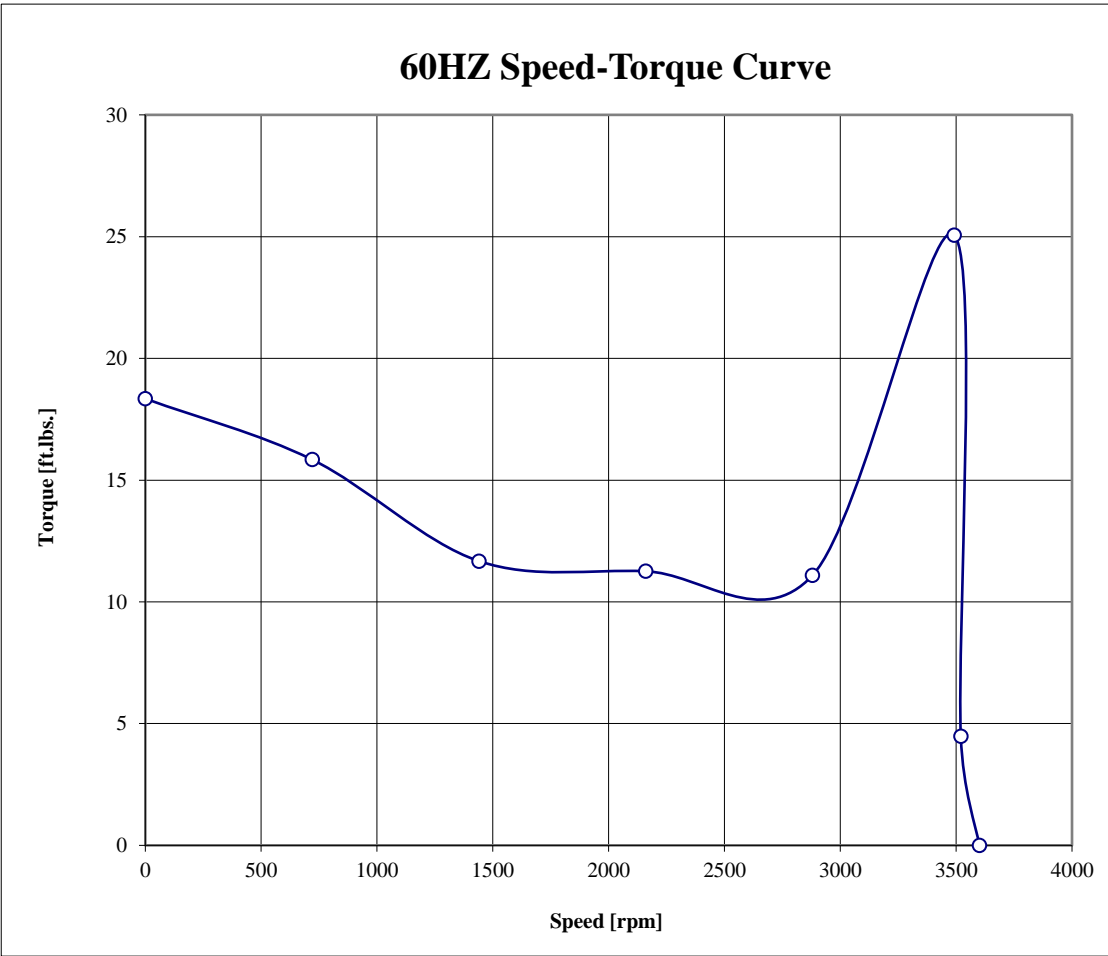

*Curve base on calculated values

50HZ Speed-Torque Curve not available for this motor

				Motor: BC2N003-5D	
	Frame:	182TD	3 HP	400 V	
	Pole no.:	2	- ft.lbs.	50 Hz	- rpm

Speed	0	600	1200	1800	2400	2910	-	3000
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	-	1
Mot. torque ratios	4.1	3.5	2.6	2.5	2.5	5.6	1	0
Motor torque / ft.lbs.	-	-	-	-	-	-	-	-



*Curve base on calculated values