

**60HZ TECHNICAL DATA SHEET**

CATALOG No: **BC2N030-4D**

ISSUED: 28-Apr-22

**GENERAL INFORMATION**

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
30	22.00	2	3600	286TSD	230/460 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

**TYPICAL PERFORMANCE**

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
91.7	92.0	91.7	0.93	0.88	0.85

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		460 V	460 V	
150	200	32.40	185.00	3525

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
E	63102Z	63082Z	50 x 65 x 8	40 x 52 x 7	65

\*Weights shown are estimated and based on standard foot mounted motor designs

**VFD DUTY INFORMATION**

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

**Click Link Below For Drawing**

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF284.6TSD.pdf>

**Click Link Below For Connection Diagram**

<http://www.brookcromptonna.com/Connections/Connection%20Diagram%2012%20Lead%20X4%20NEMA.pdf>

Notes:

CATALOG No: **BC2N030-4D**

ISSUED: 28-Apr-22

**GENERAL INFORMATION**

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
30	22.00	2	3000	286TSD	400 V	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.00	S1	B	-15 to 40 C°	<3300 ft

**TYPICAL PERFORMANCE**

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
91.0	91.7	91.0	0.91	0.90	0.90

LRT %	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		400 V	400 V	
150	200	37.26	212.75	2925

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
E	63102Z	63082Z	50 x 65 x 8	40 x 52 x 7	65

\*Weights shown are estimated and based on standard foot mounted motor designs

**VFD DUTY INFORMATION**

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

**Click Link Below For Drawing**

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF284.6TSD.pdf>

**Click Link Below For Connection Diagram**


<http://www.brookcromptonna.com/Connections/Connection%20Diagram%2012%20Lead%202X4%20NEMA.pdf>

Notes:

**Motor: BC2N030-4D**

	<b>Frame:</b>	286TSD	30 HP	460 V	
	<b>Pole no.:</b>	2	44.7 ft.lbs.	60 Hz	3525 rpm

<b>Speed</b>	0	720	1440	2160	2880	3492	3525	3600
<b>Speed ratios</b>	0	0.2	0.4	0.6	0.8	0.97	0.979	1
<b>Mot. torque ratios</b>	1.5	1.3	1.0	0.9	0.9	2	1	0
<b>Motor torque / ft.lbs.</b>	67	58	43	41	41	89	45	0

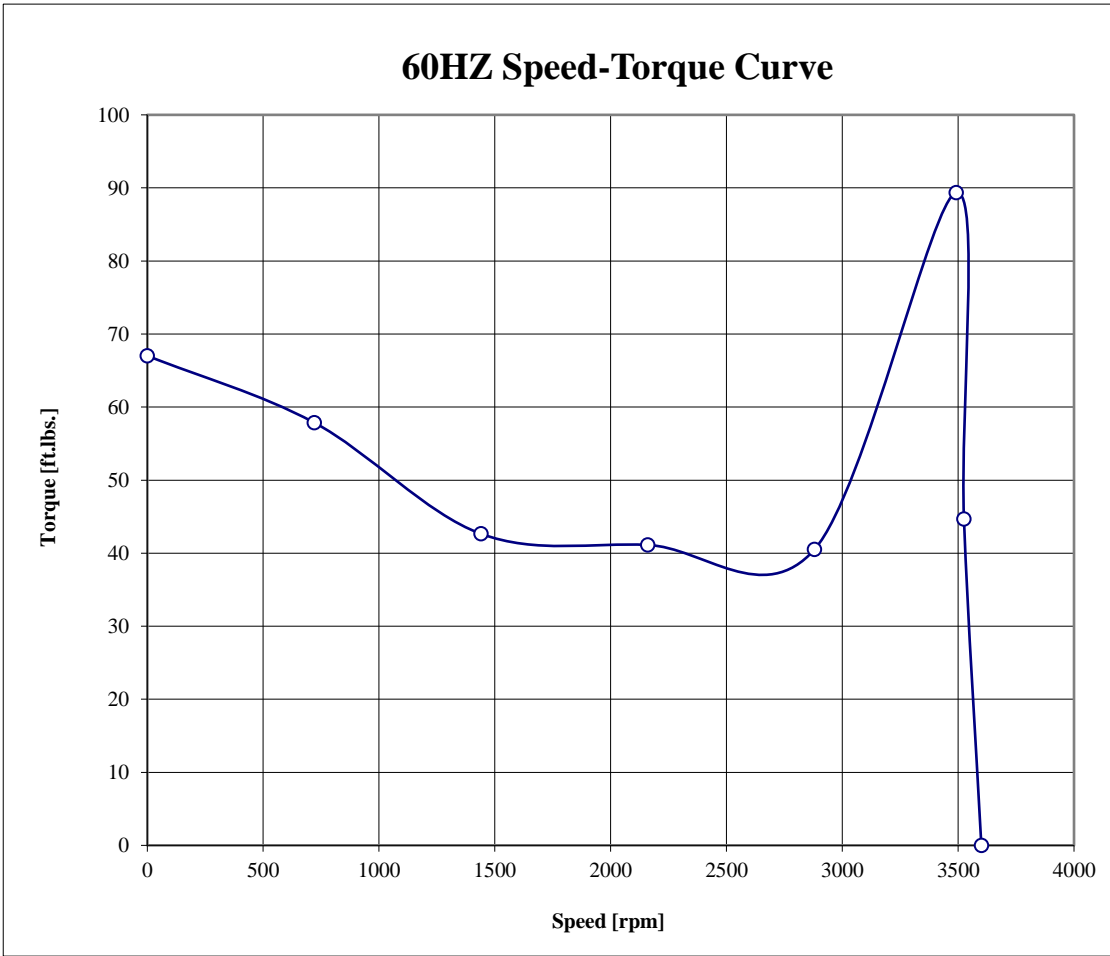


\*Curve base on calculated values

**Motor: BC2N030-4D**

	<b>Frame:</b>	286TSD	30 HP	400 V	
	<b>Pole no.:</b>	2	53.8 ft.lbs.	50 Hz	2925 rpm

<b>Speed</b>	0	600	1200	1800	2400	2910	2925	3000
<b>Speed ratios</b>	0	0.2	0.4	0.6	0.8	0.97	0.975	1
<b>Mot. torque ratios</b>	1.5	1.3	1.0	0.9	0.9	2	1	0
<b>Motor torque / ft.lbs.</b>	81	70	51	50	49	108	54	0

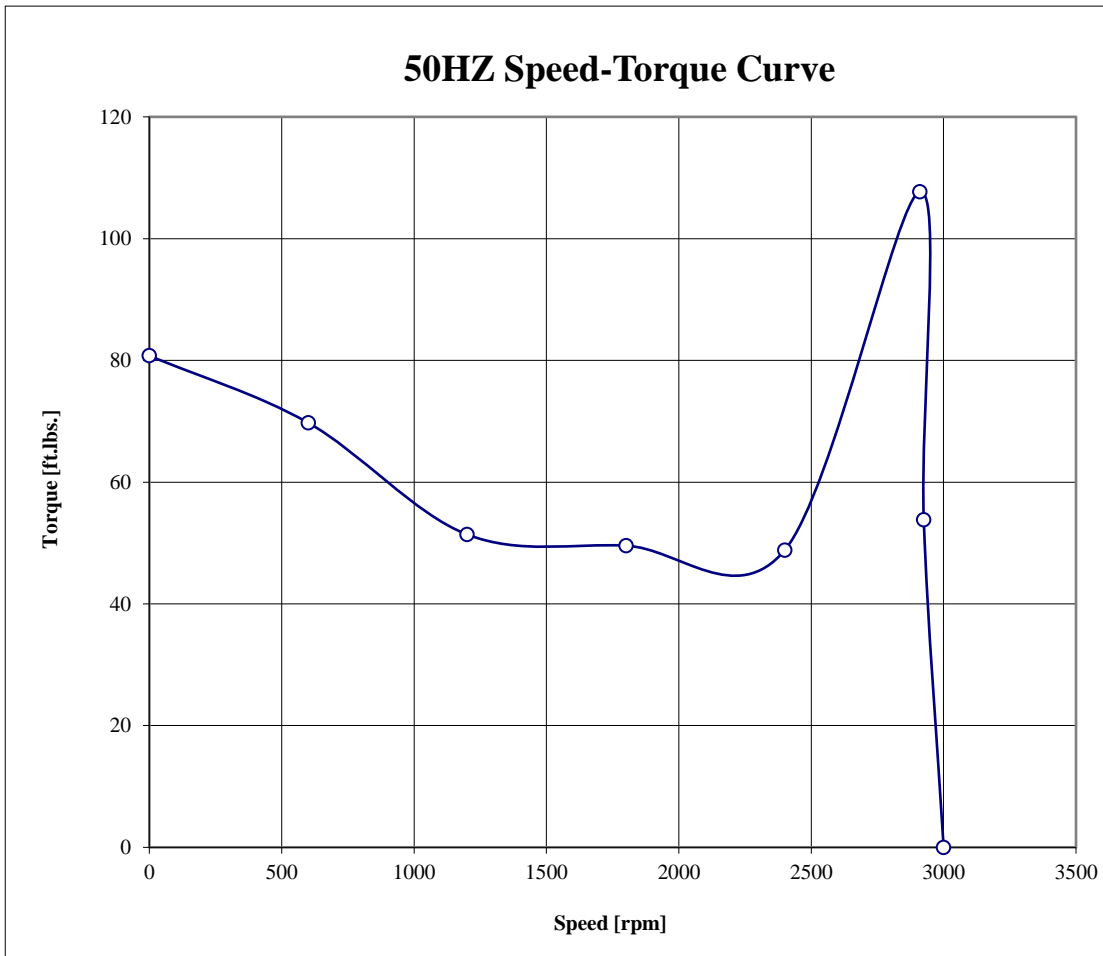

\*Curve base on calculated values