

CATALOG No: **BC4N002-5D**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
2	1.50	4	1800	145TD	575 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
86.5	86.0	84.5	0.74	0.65	0.52

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		575 V	575 V	
280	300	2.30	15.20	1740

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62052Z	62032Z	25 x 35 x 7	17 x 28 x 6	57

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcrompton.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF143.5TD.pdf>

Click Link Below For Connection Diagram

<http://www.brookcrompton.com/Connections/Connection%20Diagram%203%20Lead%20575%20NEMA.pdf>

Notes:



50HZ TECHNICAL DATA SHEET

CATALOG No: **BC4N002-5D**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
2	1.50	4	-	145TD	-	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	-	S1	B	-15 to 40 C°	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
80.0	82.5	82.5	0.82	0.75	0.63

LRT %	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		-	-	
280	300	-	-	-

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62052Z	62032Z	25 x 35 x 7	17 x 28 x 6	57

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF143.5TD.pdf>

Click Link Below For Connection Diagram


<http://www.brookcromptonna.com/Connections/Connection%20Diagram%203%20Lead%20575%20NEMA.pdf>

Notes:

Motor: BC4N002-5D

	Frame:	145TD	2 HP	575 V	
	Pole no.:	4	6.0 ft.lbs.	60 Hz	1740 rpm

Speed	0	360	720	1080	1440	1746	1740	1800
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	0.967	1
Mot. torque ratios	2.8	2.4	1.8	1.7	1.7	3	1	0
Motor torque / ft.lbs.	17	15	11	10	10	18	6	0

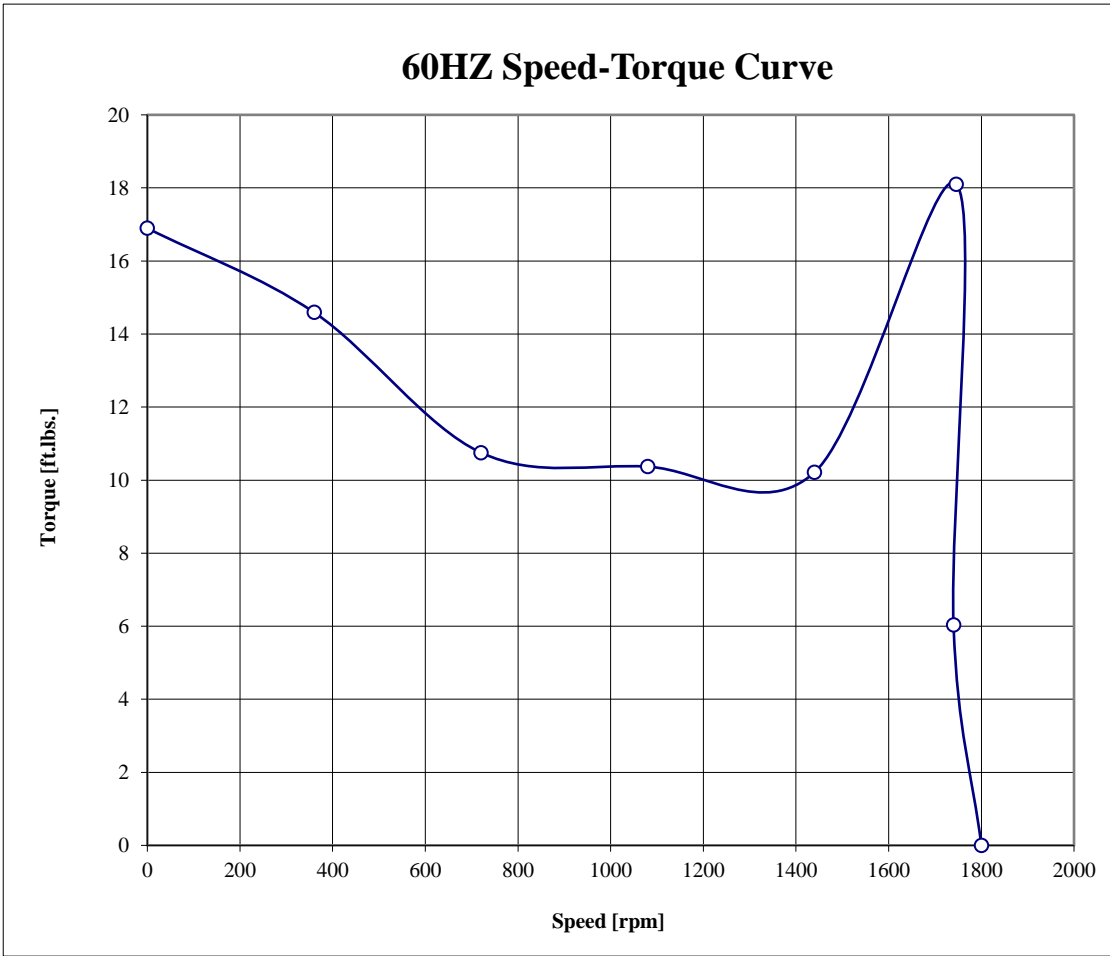

*Curve base on calculated values

50HZ Speed-Torque Curve not available for this motor

				Motor: BC4N002-5D	
	Frame:	145TD	2 HP	400 V	
	Pole no.:	4	- ft.lbs.	50 Hz	- rpm

Speed	0	300	600	900	1200	1455	-	1500
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	-	1
Mot. torque ratios	2.8	2.4	1.8	1.7	1.7	3	1	0
Motor torque / ft.lbs.	-	-	-	-	-	-	-	-



*Curve base on calculated values