

60HZ TECHNICAL DATA SHEET

CATALOG No: **BC4N010-5C**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
10	7.50	4	1800	215TC	575 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
91.7	91.8	90.7	0.78	0.75	0.65

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		575 V	575 V	
270	380	10.50	73.60	1750

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62082Z	63052Z	40 x 52 x 7	25 x 37 x 7	58

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcrompton.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF213.5TC.pdf>

Click Link Below For Connection Diagram

<http://www.brookcrompton.com/Connections/Connection%20Diagram%203%20Lead%20575%20NEMA.pdf>

Notes:



50HZ TECHNICAL DATA SHEET

CATALOG No: **BC4N010-5C**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
10	7.50	4	-	215TC	-	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	-	S1	B	-15 to 40 C°	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
87.5	89.5	89.5	0.89	0.87	0.81

LRT %	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		-	-	
270	380	-	-	-

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62082Z	63052Z	40 x 52 x 7	25 x 37 x 7	58

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF213.5TC.pdf>

Click Link Below For Connection Diagram


<http://www.brookcromptonna.com/Connections/Connection%20Diagram%203%20Lead%20575%20NEMA.pdf>

Notes:

Motor: BC4N010-5C

	Frame:	215TC	10 HP	575 V	
	Pole no.:	4	30.0 ft.lbs.	60 Hz	1750 rpm

Speed	0	360	720	1080	1440	1746	1750	1800
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	0.972	1
Mot. torque ratios	2.7	2.3	1.7	1.7	1.6	3.8	1	0
Motor torque / ft.lbs.	81	70	52	50	49	114	30	0

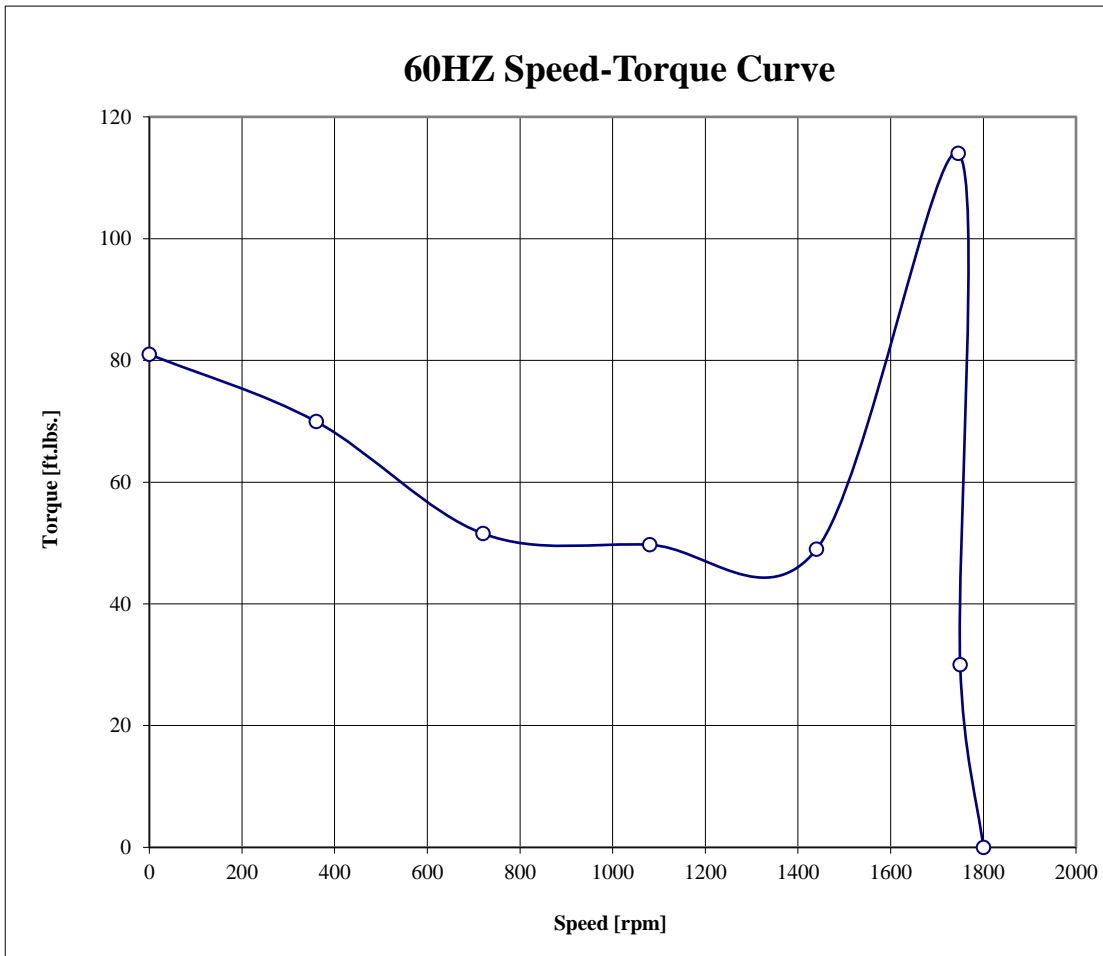


*Curve base on calculated values

50HZ Speed-Torque Curve not available for this motor

				Motor: BC4N010-5C	
	Frame:	215TC	10 HP	400 V	
	Pole no.:	4	- ft.lbs.	50 Hz	- rpm

Speed	0	300	600	900	1200	1455	-	1500
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	-	1
Mot. torque ratios	2.7	2.3	1.7	1.7	1.6	3.8	1	0
Motor torque / ft.lbs.	-	-	-	-	-	-	-	-

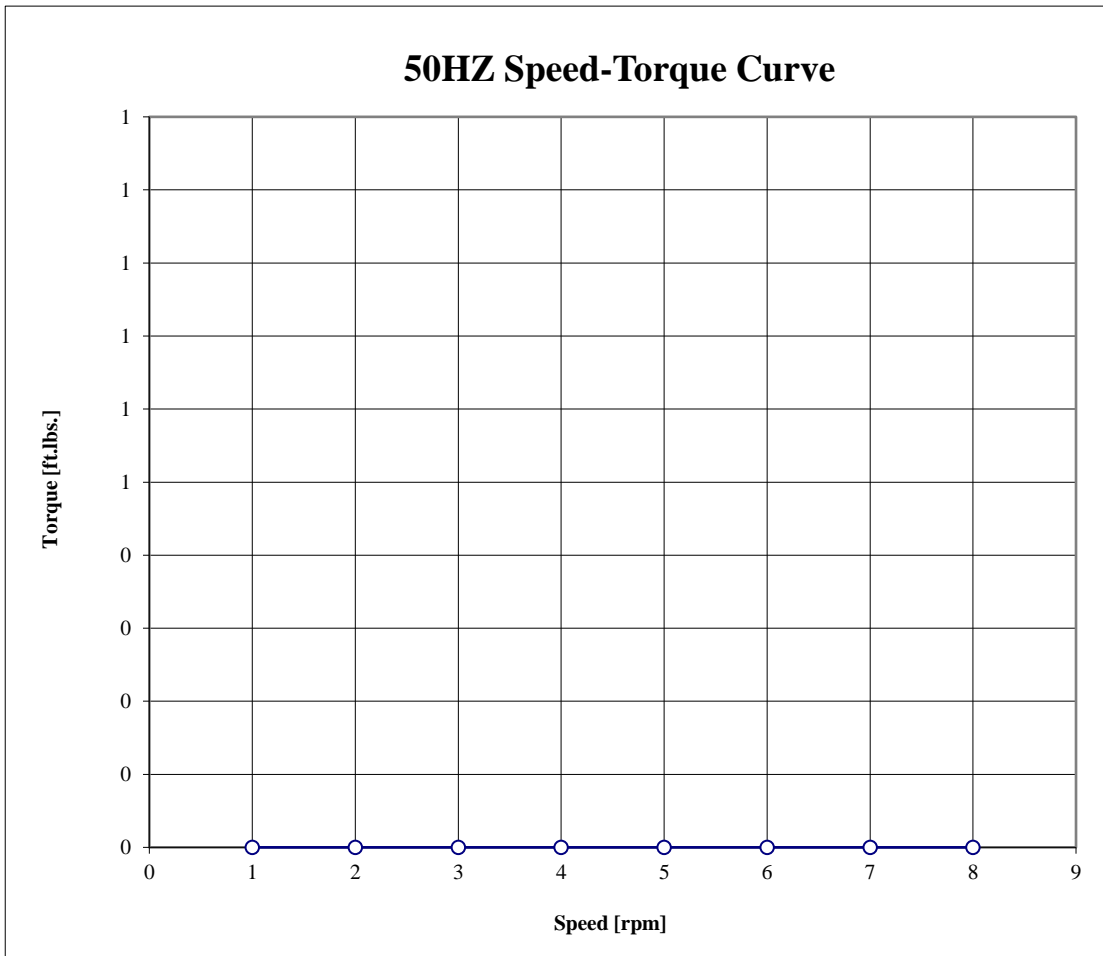

*Curve base on calculated values