

CATALOG No: **BC4N020-5C**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
20	15.00	4	1800	256TC	575 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
93.0	93.5	93.0	0.87	0.84	0.77

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		575 V	575 V	
210	250	18.60	121.60	1765

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
H	63092Z	63072Z	45 x 60 x 8	35 x 47 x 7	56

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcrompton.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF254.6TC.pdf>

Click Link Below For Connection Diagram

<http://www.brookcrompton.com/Connections/Connection%20Diagram%206%20Lead%20575%20NEMA.pdf>

Notes:



50HZ TECHNICAL DATA SHEET

CATALOG No: **BC4N020-5C**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
20	15.00	4	-	256TC	-	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	-	S1	B	-15 to 40 C°	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
90.2	91.5	92.5	0.89	0.88	0.83

LRT %	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		-	-	
210	250	-	-	-

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
H	63092Z	63072Z	45 x 60 x 8	35 x 47 x 7	56

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF254.6TC.pdf>

Click Link Below For Connection Diagram


<http://www.brookcromptonna.com/Connections/Connection%20Diagram%206%20Lead%20575%20NEMA.pdf>

Notes:

Motor: BC4N020-5C

	Frame:	256TC	20 HP	575 V	
	Pole no.:	4	59.5 ft.lbs.	60 Hz	1765 rpm

Speed	0	360	720	1080	1440	1746	1765	1800
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	0.981	1
Mot. torque ratios	2.1	1.8	1.3	1.3	1.3	2.5	1	0
Motor torque / ft.lbs.	125	108	80	77	76	149	59	0

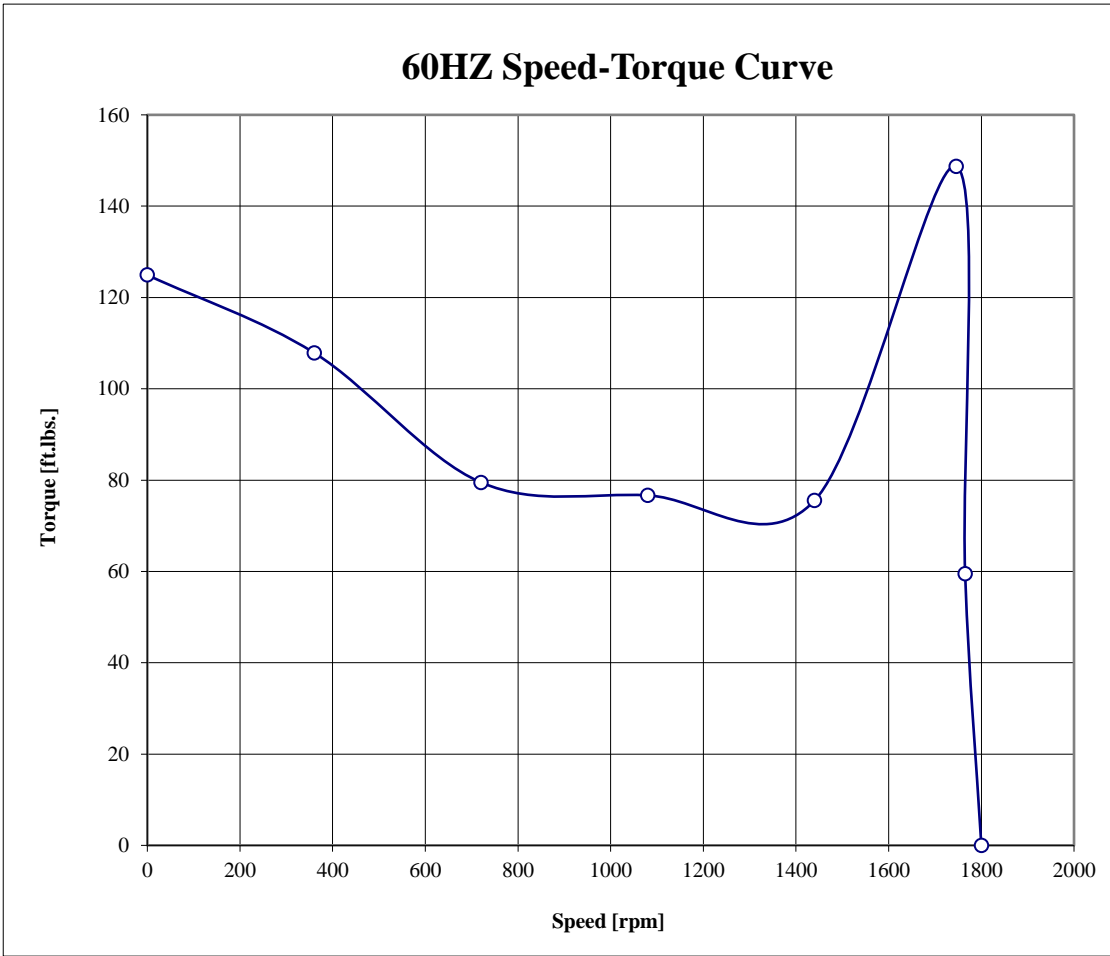


*Curve base on calculated values

50HZ Speed-Torque Curve not available for this motor

				Motor: BC4N020-5C	
	Frame:	256TC	20 HP	400 V	
	Pole no.:	4	- ft.lbs.	50 Hz	- rpm

Speed	0	300	600	900	1200	1455	-	1500
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	-	1
Mot. torque ratios	2.1	1.8	1.3	1.3	1.3	2.5	1	0
Motor torque / ft.lbs.	-	-	-	-	-	-	-	-

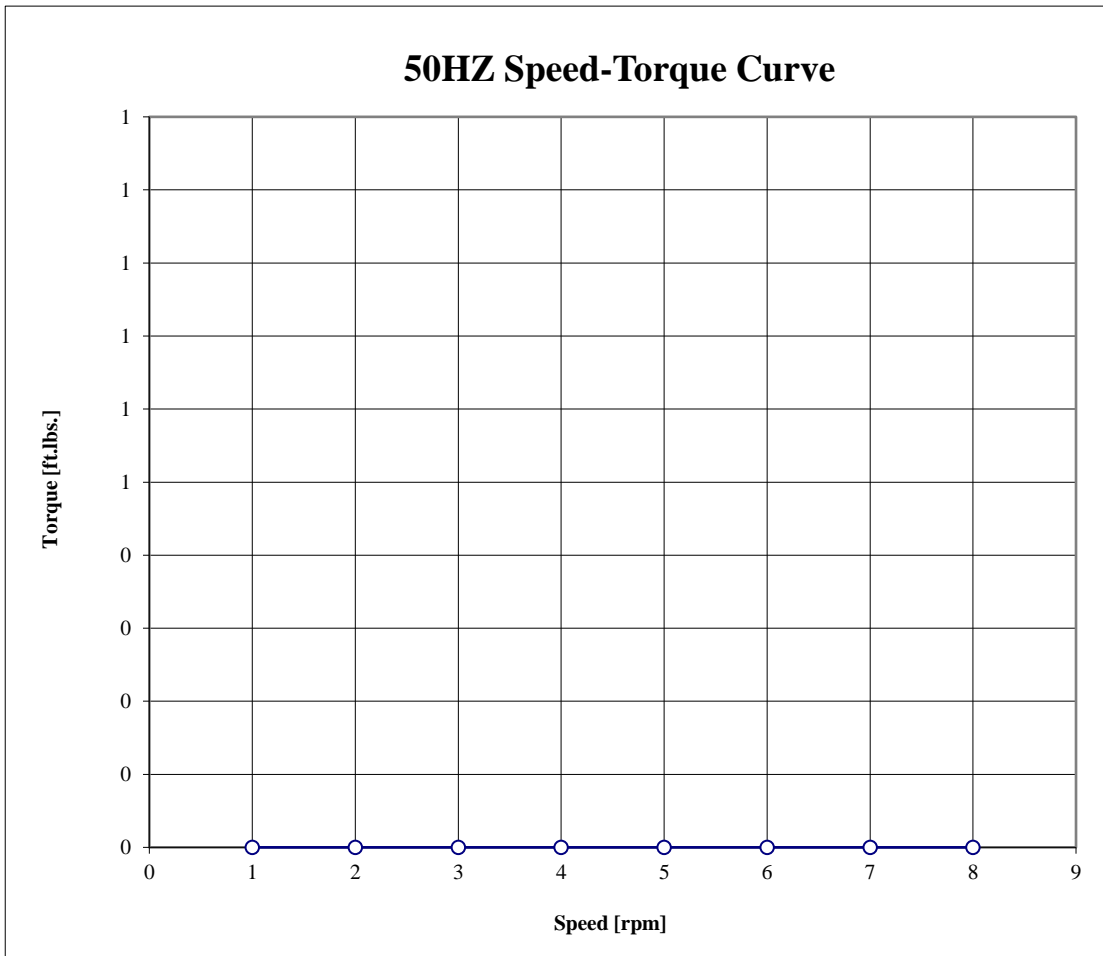

*Curve base on calculated values