

CATALOG No: **BC6N001-4D**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
1	0.75	6	1200	145TD	230/460 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
82.5	85.4	83.5	0.66	0.71	0.59

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		460 V	460 V	
340	270	1.70	10.50	1150

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
K	62052Z	62032Z	25 x 35 x 7	17 x 28 x 6	59

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcrompton.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF143.5TD.pdf>

Click Link Below For Connection Diagram

<http://www.brookcrompton.com/Connections/Connection%20Diagram%209%20Lead%202X4%20NEMA.pdf>

Notes:

CATALOG No: **BC6N001-4D**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
1	0.75	6	1000	145TD	400 V	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.00	S1	B	-15 to 40 C°	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
80.0	81.0	79.5	0.74	0.65	0.52

LRT %	BDT %	Full Load Amps		Locked Rotor Amps		Full Load RPM
		400 V		400 V		
340	270	1.96		12.08		930

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
K	62052Z	62032Z	25 x 35 x 7	17 x 28 x 6	59

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF143.5TD.pdf>


Click Link Below For Connection Diagram

<http://www.brookcromptonna.com/Connections/Connection%20Diagram%209%20Lead%20X4%20NEMA.pdf>

Notes:

Motor: BC6N001-4D				
	Frame:	145TD	1 HP	460 V
	Pole no.:	6	4.6 ft.lbs.	60 Hz
				1150 rpm

Speed	0	240	480	720	960	1164	1150	1200
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	0.958	1
Mot. torque ratios	3.4	2.9	2.2	2.1	2.1	2.7	1	0
Motor torque / ft.lbs.	16	13	10	10	9	12	5	0

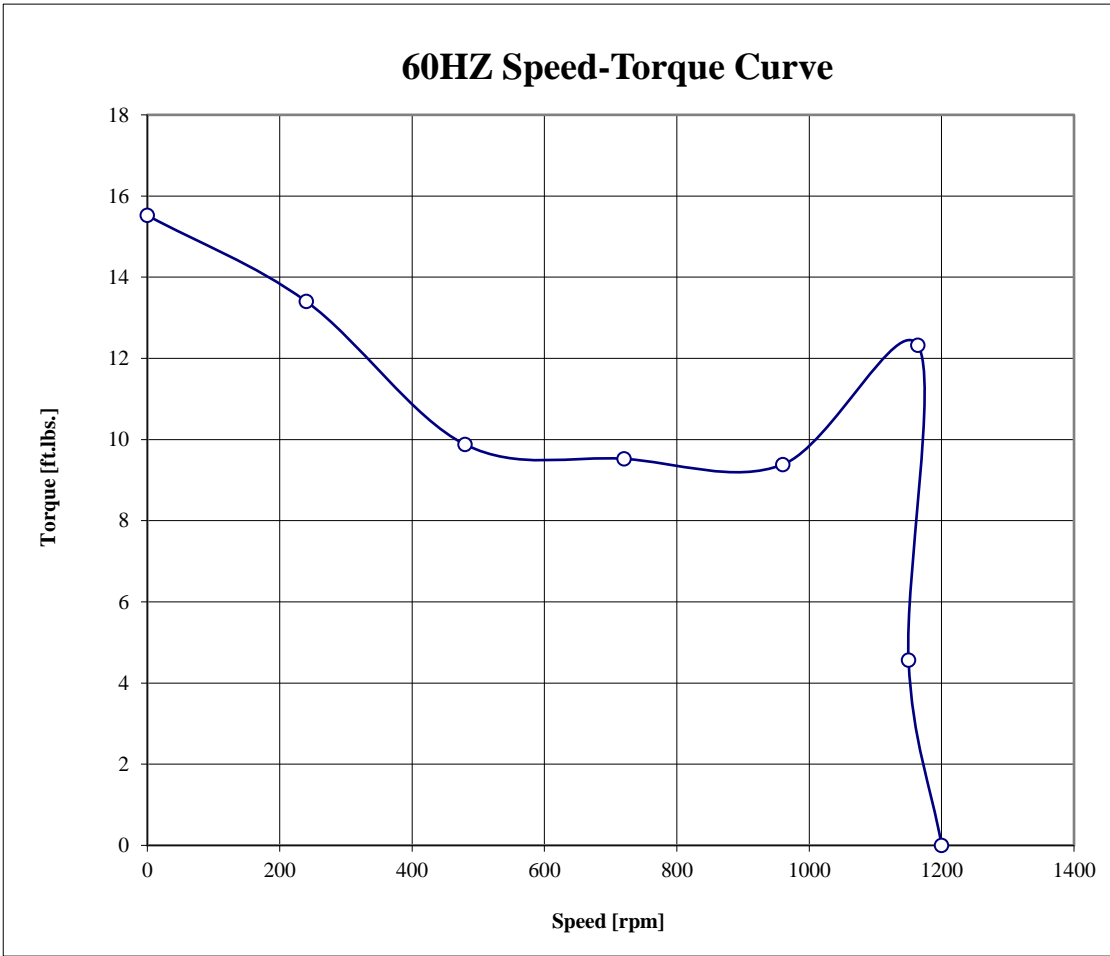


*Curve base on calculated values

Motor: BC6N001-4D

	Frame:	145TD	1 HP	400 V	
	Pole no.:	6	5.6 ft.lbs.	50 Hz	930 rpm

Speed	0	200	400	600	800	970	930	1000
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	0.930	1
Mot. torque ratios	3.4	2.9	2.2	2.1	2.1	2.7	1	0
Motor torque / ft.lbs.	19	17	12	12	12	15	6	0

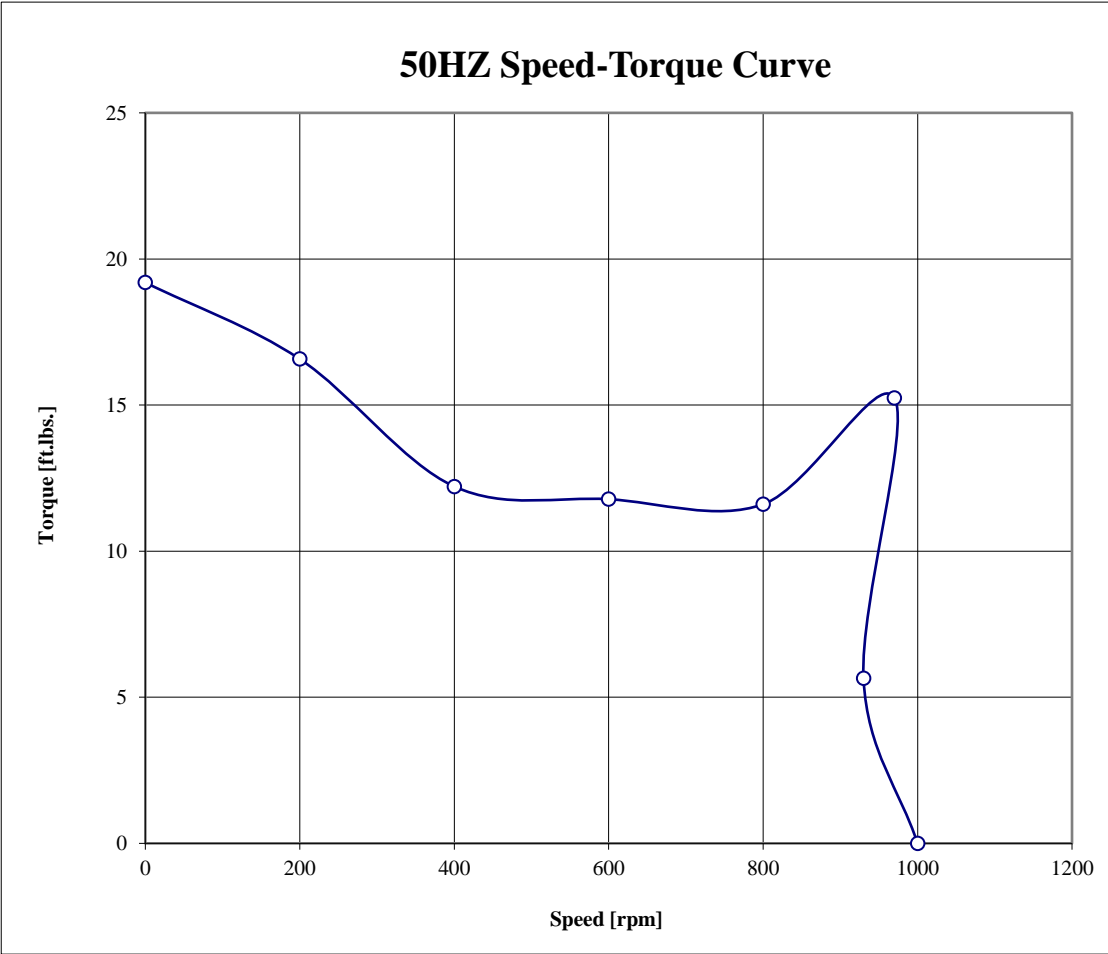

*Curve base on calculated values