

CATALOG No: **BC6N010-4D**

ISSUED: 28-Apr-22

**GENERAL INFORMATION**

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
10	7.50	6	1200	256TD	230/460 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

**TYPICAL PERFORMANCE**

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
91.0	92.3	92.0	0.75	0.83	0.75

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		460 V	460 V	
270	200	13.70	93.20	1170

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	63092Z	63072Z	45 x 60 x 8	35 x 47 x 7	56

\*Weights shown are estimated and based on standard foot mounted motor designs

**VFD DUTY INFORMATION**

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

**Click Link Below For Drawing**

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF254.6TD.pdf>

**Click Link Below For Connection Diagram**

<http://www.brookcromptonna.com/Connections/Connection%20Diagram%2012%20Lead%20X4%20NEMA.pdf>

Notes:

**50HZ TECHNICAL DATA SHEET**

CATALOG No: **BC6N010-4D**

ISSUED: 28-Apr-22

**GENERAL INFORMATION**

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
10	7.50	6	1000	256TD	400 V	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.00	S1	B	-15 to 40 C°	<3300 ft

**TYPICAL PERFORMANCE**

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
90.2	91.0	91.0	0.84	0.81	0.72

LRT %	BDT %	Full Load Amps		Locked Rotor Amps		Full Load RPM
		400 V		400 V		
270	200	15.76		107.18		965

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	63092Z	63072Z	45 x 60 x 8	35 x 47 x 7	56

\*Weights shown are estimated and based on standard foot mounted motor designs

**VFD DUTY INFORMATION**

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

**Click Link Below For Drawing**

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF254.6TD.pdf>


**Click Link Below For Connection Diagram**

<http://www.brookcromptonna.com/Connections/Connection%20Diagram%2012%20Lead%202X4%20NEMA.pdf>

Notes:

<b>Motor: BC6N010-4D</b>				
<b>Frame:</b>	256TD	10 HP	460 V	
<b>Pole no.:</b>	6	44.9 ft.lbs.	60 Hz	1170 rpm


<b>Speed</b>	0	240	480	720	960	1164	1170	1200
<b>Speed ratios</b>	0	0.2	0.4	0.6	0.8	0.97	0.975	1
<b>Mot. torque ratios</b>	2.7	2.3	1.7	1.7	1.6	2	1	0
<b>Motor torque / ft.lbs.</b>	121	105	77	74	73	90	45	0

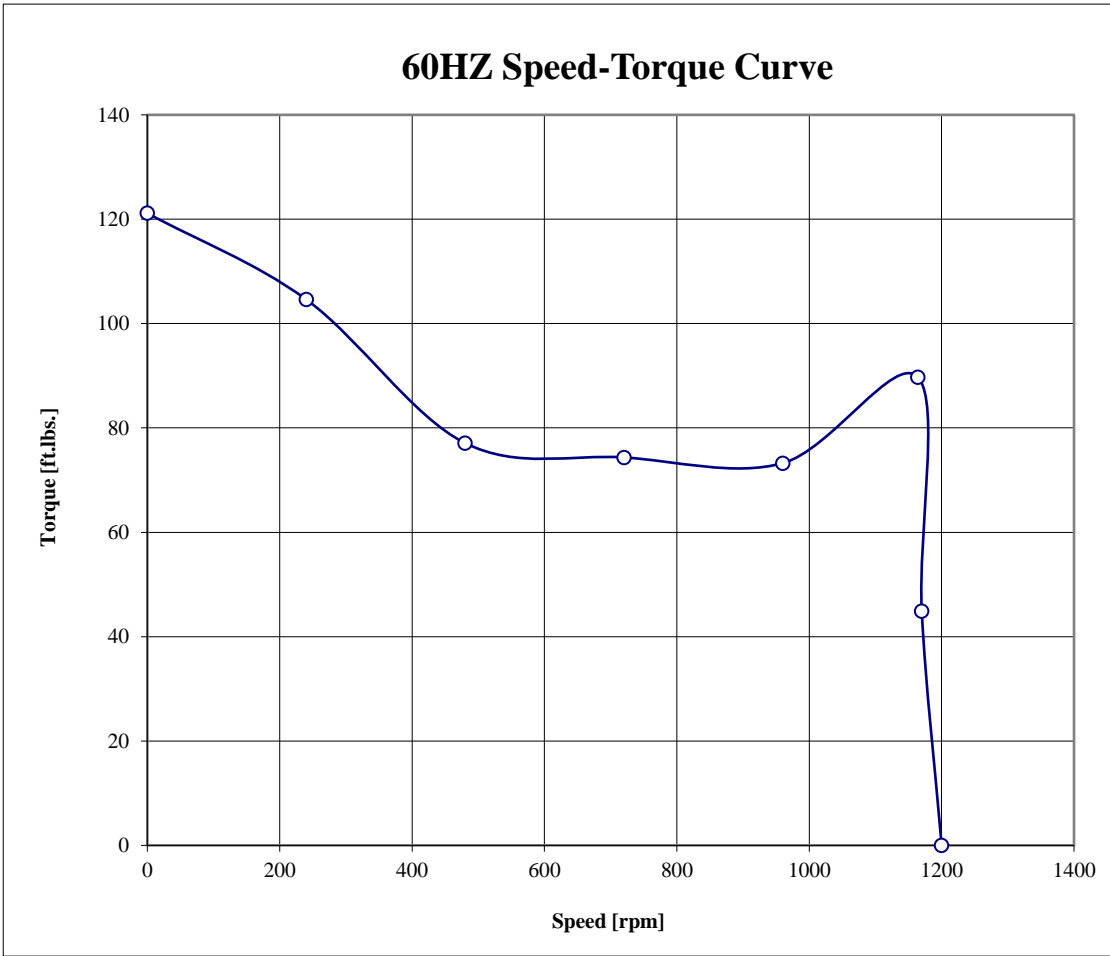

\*Curve base on calculated values

<b>Motor: BC6N010-4D</b>				
<b>Frame:</b>	256TD	10 HP	400 V	
<b>Pole no.:</b>	6	54.4 ft.lbs.	50 Hz	965 rpm

<b>Speed</b>	0	200	400	600	800	970	965	1000
<b>Speed ratios</b>	0	0.2	0.4	0.6	0.8	0.97	0.965	1
<b>Mot. torque ratios</b>	2.7	2.3	1.7	1.7	1.6	2	1	0
<b>Motor torque / ft.lbs.</b>	147	127	93	90	89	109	54	0

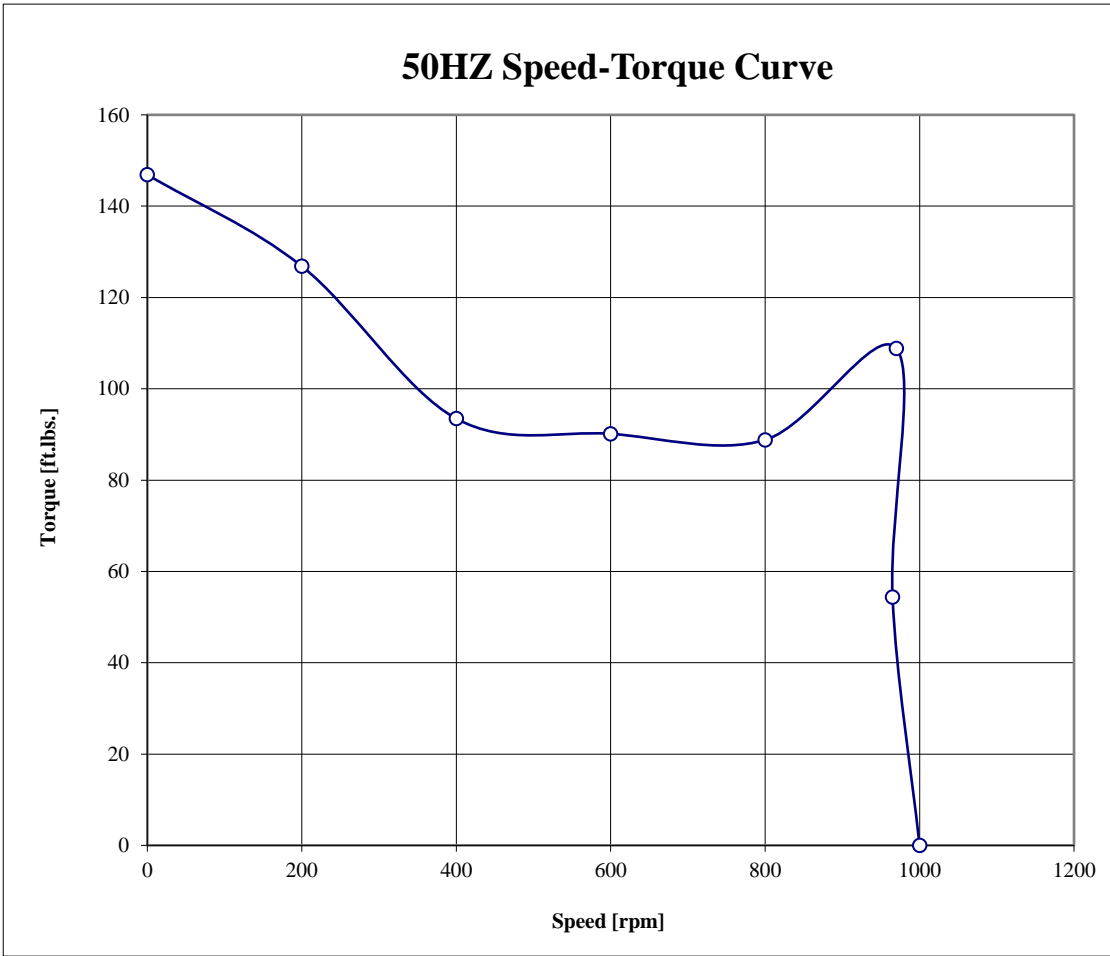

\*Curve base on calculated values