

60HZ TECHNICAL DATA SHEET

CATALOG No: **BC6N010-5D**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
10	7.50	6	1200	256TD	575 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
91.0	92.3	92.0	0.75	0.83	0.75

LRT%	BDT %	Full Load Amps		Locked Rotor Amps		Full Load RPM
		575 V		575 V		
270	200	11.00		74.80		1170

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	63092Z	63072Z	45 x 60 x 8	35 x 47 x 7	56

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF254.6TD.pdf>

Click Link Below For Connection Diagram

<http://www.brookcromptonna.com/Connections/Connection%20Diagram%206%20Lead%20575%20NEMA.pdf>

Notes:

CATALOG No: **BC6N010-5D**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
10	7.50	6	-	256TD	-	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	-	S1	B	-15 to 40 C°	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
90.2	91.0	91.0	0.84	0.81	0.72

LRT %	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		-	-	
270	200	-	-	-

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	63092Z	63072Z	45 x 60 x 8	35 x 47 x 7	56

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF254.6TD.pdf>


Click Link Below For Connection Diagram

<http://www.brookcromptonna.com/Connections/Connection%20Diagram%206%20Lead%20575%20NEMA.pdf>

Notes:

Motor: BC6N010-5D				
	Frame:	256TD	10 HP	575 V
	Pole no.:	6	44.9 ft.lbs.	60 Hz
				1170 rpm

Speed	0	240	480	720	960	1164	1170	1200
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	0.975	1
Mot. torque ratios	2.7	2.3	1.7	1.7	1.6	2	1	0
Motor torque / ft.lbs.	121	105	77	74	73	90	45	0

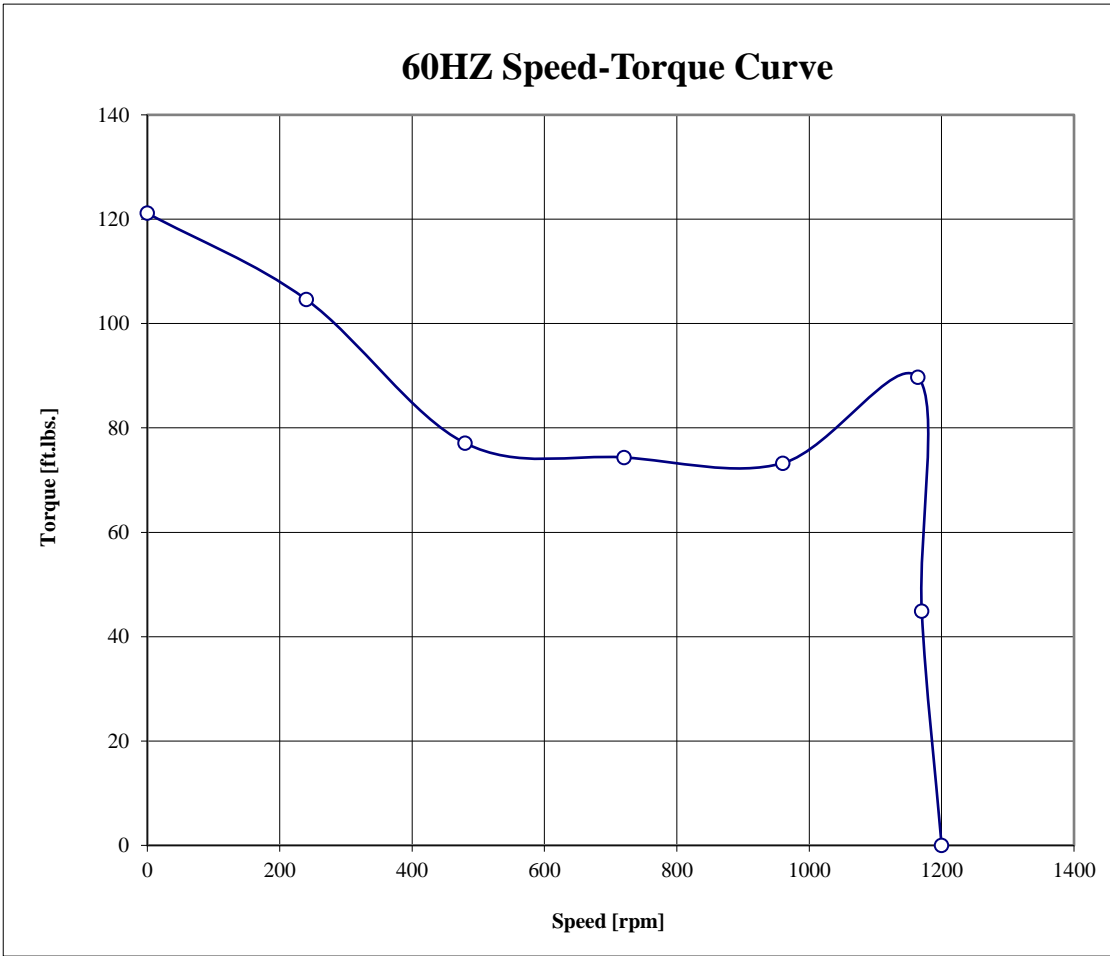


*Curve base on calculated values

50HZ Speed-Torque Curve not available for this motor

				Motor: BC6N010-5D	
	Frame:	256TD	10 HP	400 V	
	Pole no.:	6	- ft.lbs.	50 Hz	- rpm

Speed	0	200	400	600	800	970	-	1000
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	-	1
Mot. torque ratios	2.7	2.3	1.7	1.7	1.6	2	1	0
Motor torque / ft.lbs.	-	-	-	-	-	-	-	-

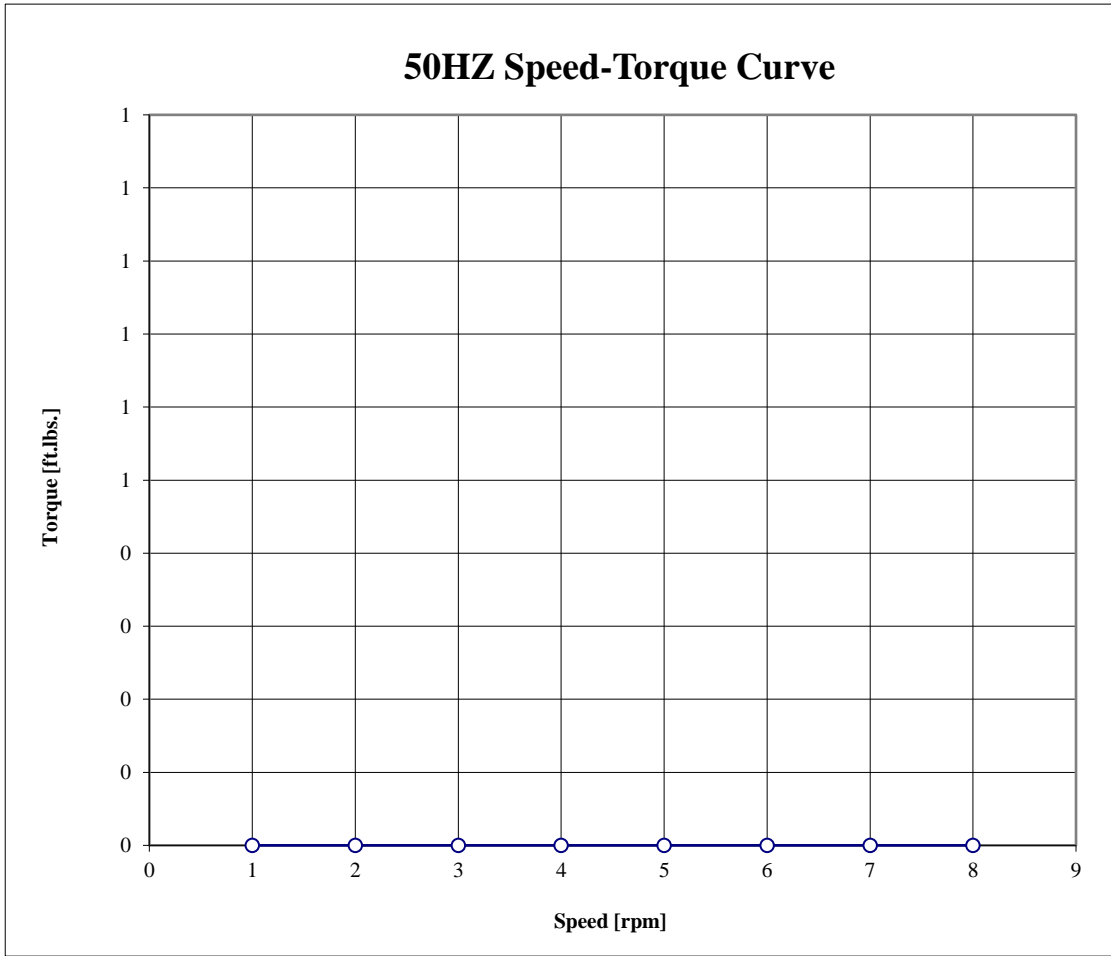

*Curve base on calculated values