

60HZ TECHNICAL DATA SHEET

CATALOG No: **BC6N015-5C**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
15	11.00	6	1200	284TC	575 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
91.7	92.6	91.8	0.80	0.86	0.78

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		575 V	575 V	
350	250	15.40	107.80	1175

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	63102Z	63082Z	50 x 65 x 8	40 x 52 x 7	58

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF284.6TC.pdf>

Click Link Below For Connection Diagram

<http://www.brookcromptonna.com/Connections/Connection%20Diagram%206%20Lead%20575%20NEMA.pdf>

Notes:

CATALOG No: **BC6N015-5C**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
15	11.00	6	-	284TC	-	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	-	S1	B	-15 to 40 C°	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
89.5	90.5	91.5	0.85	0.84	0.77

LRT %	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		-	-	
350	250	-	-	-

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	63102Z	63082Z	50 x 65 x 8	40 x 52 x 7	58

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF284.6TC.pdf>

Click Link Below For Connection Diagram


<http://www.brookcromptonna.com/Connections/Connection%20Diagram%206%20Lead%20575%20NEMA.pdf>

Notes:

Motor: BC6N015-5C

	Frame:	284TC	15 HP	575 V	
	Pole no.:	6	67.0 ft.lbs.	60 Hz	1175 rpm

Speed	0	240	480	720	960	1164	1175	1200
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	0.979	1
Mot. torque ratios	3.5	3.0	2.2	2.1	2.1	2.5	1	0
Motor torque / ft.lbs.	235	203	149	144	142	168	67	0

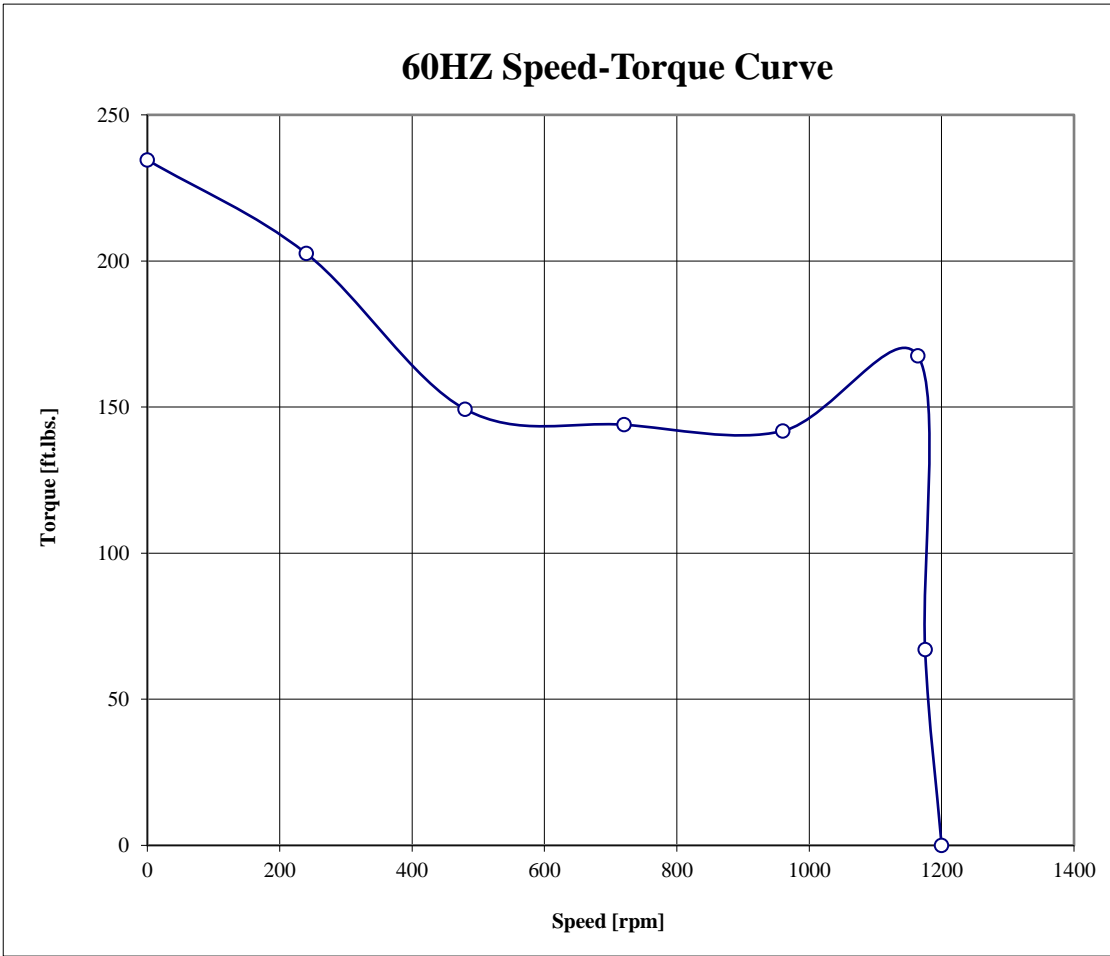

*Curve base on calculated values

50HZ Speed-Torque Curve not available for this motor

				Motor: BC6N015-5C	
	Frame:	284TC	15 HP	400 V	
	Pole no.:	6	- ft.lbs.	50 Hz	- rpm

Speed	0	200	400	600	800	970	-	1000
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	-	1
Mot. torque ratios	3.5	3.0	2.2	2.1	2.1	2.5	1	0
Motor torque / ft.lbs.	-	-	-	-	-	-	-	-



*Curve base on calculated values