

BALDOR® • RELIANCE 

Product Information Packet

DRX282524T

25HP,3520//2930RPM,3PH,60HZ,284TS,XPFC,F

Part Detail							
Revision:	A	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Elec. Spec:	10WGY777	CD Diagram:	CD0180	Mfg Plant:	
Mech. Spec:		Layout:	10LYH638	Poles:	02	Created Date:	06-04-2019
Base:		Eff. Date:	03-13-2020	Leads:	9#10		

Specs			
Catalog Number:	DRX282524T	Duty Rating:	CONT
Enclosure:	XPFC	Electrically Isolated Bearing:	Not Electrically Isolated
Frame:	284TS	Feedback Device:	NO FEEDBACK
Frame Material:	Iron	Heater Indicator:	No Heater
Output @ Frequency:	20.000 HP @ 50 HZ	Insulation Class:	F
	25.000 HP @ 60 HZ	Inverter Code:	Inverter Duty
Synchronous Speed @ Frequency:	3600 RPM @ 60 HZ	IP Rating:	NONE
Voltage @ Frequency:	230.0 V @ 60 HZ	KVA Code:	G
	190.0 V @ 50 HZ	Lifting Lugs:	Standard Lifting Lugs
	380.0 V @ 50 HZ	Locked Bearing Indicator:	Locked Bearing
	460.0 V @ 60 HZ	Motor Lead Termination:	Flying Leads
XP Class and Group:	CLI GP C,D	Motor Type:	1038M
XP Division:	Division I	Mounting Arrangement:	F1
Agency Approvals:	UR	Power Factor:	89
	CSA EEV	Product Family:	Hazardous Location Motor
	CSA	Pulley Face Code:	Standard
Auxillary Box:	No Auxillary Box	Rodent Screen:	None
Auxillary Box Lead Termination:	None	RoHS Status:	ROHS NON-COMPLIANT

Base Indicator:	Rigid	Shaft Ground Indicator:	No Shaft Grounding
Bearing Grease Type:	Polyrex EM (-20F +300F)	Shaft Rotation:	Reversible
Blower:	None	Speed Code:	Single Speed
Constant Torque Speed Range:	6	Motor Standards:	NEMA
Current @ Voltage:	57.000 A @ 230.0 V	Starting Method:	Direct on line
	56.000 A @ 190.0 V	Thermal Device - Bearing:	None
	28.500 A @ 460.0 V	Thermal Device - Winding:	Normally Closed Thermostat
	28.000 A @ 380.0 V	Vibration Sensor Indicator:	No Vibration Sensor
Design Code:	B	Winding Thermal 1:	None
Drip Cover:	No Drip Cover	Winding Thermal 2:	None
		XP Temp Code:	T3C

Nameplate NP1401XPSLEV									
NO.					CC	010A			
S/N					TEMP CODE	T3C			
SPEC.	10-0000-0836				INV.TYPE	PWM			
CAT.NO.	DRX282524T				C HP FR	60	C HP TO	90	
HP	25//20				CT HZ FROM	6	CT HZ TO	60	
VOLTS	230/460//190/380				VT HZ FROM	6	VT HZ TO	60	
AMPS	57/28.5//56/28				MAG CUR				
RPM	3520//2930				MX RPM	5400			
HZ	60//50	PH	3	CL	F	NOM.EFF.	91.7		
SER.F.	1.00	DES	B	SL HZ	1.3	WK2	1.63		
FRAME	284TS	RATING	40C AMB-CONT						
	55C AMB @ 1.0 SF, 60C RISE								
	1.15SF ON SINEWAVE				NEMA MG-1 PT.5,IP55				

Parts List		
Part Number	Description	Quantity
SA370310	SA 10-0000-0836	1.000 EA
RA359955	RA 10-0000-0836	1.000 EA
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 EA
LB1119N	WARNING LABEL	1.000 EA
LC0181	CONNECTION LABEL	1.000 EA
LB1417	LABEL CARTON 6X4 PERFORATED BLANK ROLLS	1.000 EA
NP1401XPSLEV	SS XP INV UL CSA-EEV CC CL-I GP-C&D	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 EA
MN416A01	TAG-INSTAL-MAINT no wire (2100/bx) 4/22	1.000 EA
LB1081C	ALUM XP CAUTION LABEL (COL PLANT ONLY-	1.000 EA
10FH1008A05P	310 FAN HOUSING X-PROOF MACH. W/EPOXY PR	1.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	3.000 EA
10XN3118K12	5/16-18 X .75 GRADE 5, ZINC PLATED	3.000 EA
37FN3002C03	EXFN, PLASTIC, 6.00 OD, 1.690 ID	1.000 EA
HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 EA
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 EA
MJ1000A02	GREASE, MOBIL POLYREX EM - 124047	0.130 LB
10EP1701A57PP15	FR ENDPLATE, MACH PRIMED & PAINTED	1.000 EA
HA3050A03	3/8-16 X 2.25" GRADE 8 BOLT	4.000 EA
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 EA
HA2066A02	SLINGER, ALUM (AUTO)	1.000 EA
80XN1032A06	10-32 X 3/8 SET SC HEX SOCK	2.000 EA
HW5100A11	W3917-042 WVY WSHR (WB)	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HA4017A03	.125 X 1.75 GREASE EXT (F/S)	1.000 EA
HA4017A06	/125 X 3.00 GREASER EXT. (F/S)	1.000 EA
HW4019A01	PIPE COUPLING 1/8 NPT,STEEL,ZINC COATING	1.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
HW4500A21	1618BALEMITE FITTING 825 UNIVERSAL	1.000 EA
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 EA
HW4505A02	BREATHER/DRAIN-EXP PROOF-.250-18 PTF AIS	1.000 EA
HW3023E06	.125 X .625 SPIRAL SPRING PIN	1.000 EA
10EP1709A12P	PUEP, XP (CL.I,GP.D ONLY) AL SLNGR, HW45	1.000 EA
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 EA
HA3050A03	3/8-16 X 2.25" GRADE 8 BOLT	4.000 EA
HA2067A01	ALUM SLINGER (AUTO)	1.000 EA
80XN1032A06	10-32 X 3/8 SET SC HEX SOCK	2.000 EA
10XN2520K40	1/4-20 X 2-1/2 HEX HD CAPSCREW,GRADE 5,Z	4.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 EA
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 EA
HW4505A02	BREATHER/DRAIN-EXP PROOF-.250-18 PTF AIS	1.000 EA
HW3023E06	.125 X .625 SPIRAL SPRING PIN	1.000 EA
12CB1003A02P	KOBX, MACH 1.50 NPT GROUP C MTRS ,EPOXY	1.000 EA
10XN3118K24	5/16-18 X 1.50" HEX HD, GRADE 5	4.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 EA
WD1000B19	TERMINAL BURNDY L250HP	1.000 EA
10XN3816K12	3/8-16 X 3/4 HEX HD CAP GRADE 5	1.000 EA

Product Information Packet: DRX282524T - 25HP,3520//2930RPM,3PH,60HZ,284TS,XPFC,F

HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	1.000 EA
12CB1502A01P	CONDUIT BOX LID MACH. GROUP C MTRS	1.000 EA
84XN5013J32	SOCKET HD.CAP SCR,1/2-13 X 2"LG,ALLOY ST	10.000 EA
HW1001A50	LOCKWASHER 1/2, ZINC PLT, .879 OD, .509 I	10.000 EA
MG1025G29	WILKOFASST, 789.229, DARK CHARCOAL GRAY	0.125 GA
14PA1000	PACKAGING 314 GROUP COMBINED PRINT	1.000 EA
HW2501G17	KEY, 3/8 SQ X 1.875	1.000 EA
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 QT

AC Induction Motor Performance Data

Record # 31465

Typical performance - not guaranteed values

Winding: 10WGY777-R001		Type: 1038M	Enclosure: XPFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	25//20	Full Load Torque	37.4 LB-FT	
Volts	230/460//190/380	Start Configuration	direct on line	
Full Load Amps	57/28.5//56/28	Breakdown Torque	144 LB-FT	
R.P.M.	3520//2930	Pull-up Torque	50.1 LB-FT	
Hz	60//50 Phase	Locked-rotor Torque	64.7 LB-FT	
NEMA Design Code	B KVA Code	Starting Current	177 A	
Service Factor (S.F.)	1	No-load Current	8.07 A	
NEMA Nom. Eff.	91.7 Power Factor	Line-line Res. @ 25°C	0.294 Ω	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	57°C	
		Locked-rotor Power Factor	24.1	
		Rotor inertia	1.63 LB-FT ²	

Load Characteristics 460 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	61	80	87	89	90	90
Efficiency	87.5	91.5	91.7	91.9	91.1	90
Speed	3576	3561	3543	3522	3499	3474
Line amperes	10.6	15.7	21.7	28.6	35.6	43.1

Performance Graph at 460V, 60Hz, 25.0HP Typical performance - Not guaranteed values


BALDOR ELECTRIC COMPANY

WINDING # 10WGY777

Typical performance - not guaranteed values.

25 HP 3 PH 60 HZ 3522 RPM 460 V 1038M

TORQUES(LB-FT): PO=144 PU=50.1 LR=64.7 LRA=177

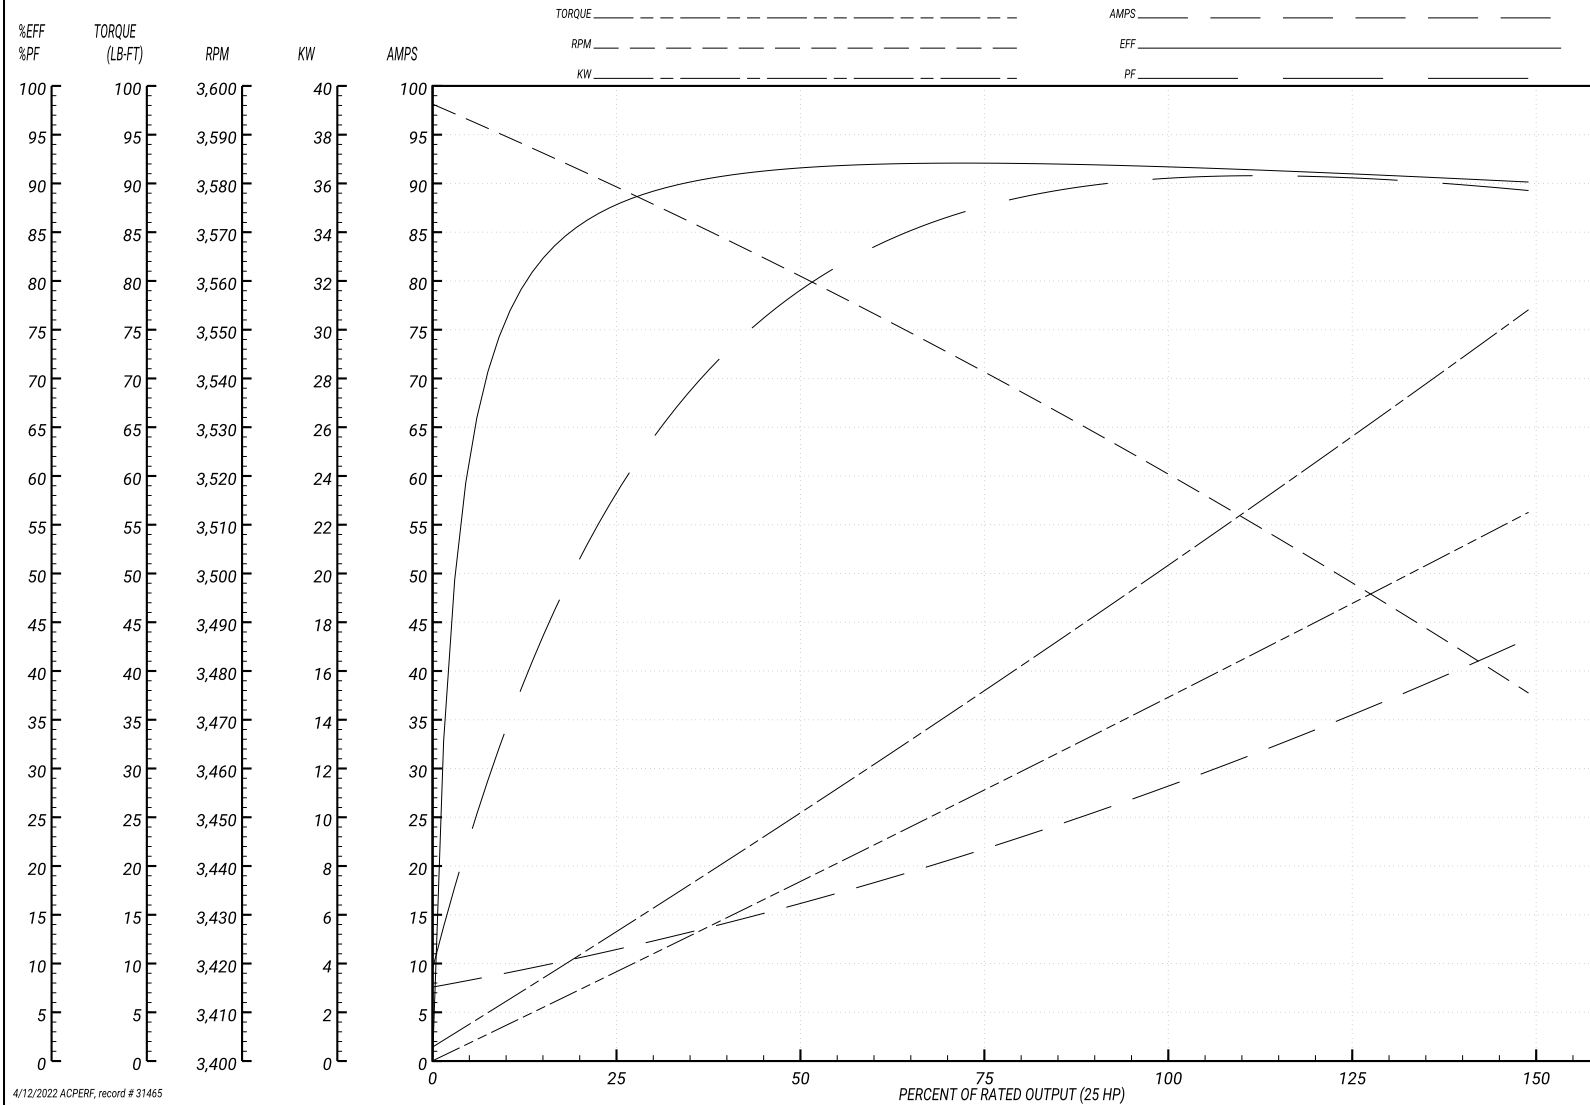

4/12/2022 ACPERF, record # 31465

AC Induction Motor Performance Data

Record # 31466


Typical performance - not guaranteed values


Winding: 10WGY777-R001		Type: 1038M		Enclosure: XPFC	
Nameplate Data			380 V, 50 Hz: High Voltage Connection		
Rated Output (HP)	25//20		Full Load Torque	36 LB-FT	
Volts	230/460//190/380		Start Configuration	direct on line	
Full Load Amps	57/28.5//56/28		Breakdown Torque	139 LB-FT	
R.P.M.	3520//2930		Pull-up Torque	53.4 LB-FT	
Hz	60//50	Phase	3	Locked-rotor Torque	69 LB-FT
NEMA Design Code	B KVA Code		G	Starting Current	173 A
Service Factor (S.F.)			1	No-load Current	7.96 A
NEMA Nom. Eff.	91.7	Power Factor	89	Line-line Res. @ 25°C	0.294 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	55°C
				Locked-rotor Power Factor	27.2
				Rotor inertia	1.63 LB-FT ²

Load Characteristics 380 V, 50 Hz, 20 HP


% of Rated Load	25	50	75	100	125	150
Power Factor	61	80	87	90	90	90
Efficiency	85.6	90.2	90.8	91	90	89
Speed	2978	2963	2946	2926	2905	2881
Line amperes	10.4	15.3	21.2	27.9	34.8	42.2

Performance Graph at 380V, 50Hz, 20.0HP Typical performance - Not guaranteed values

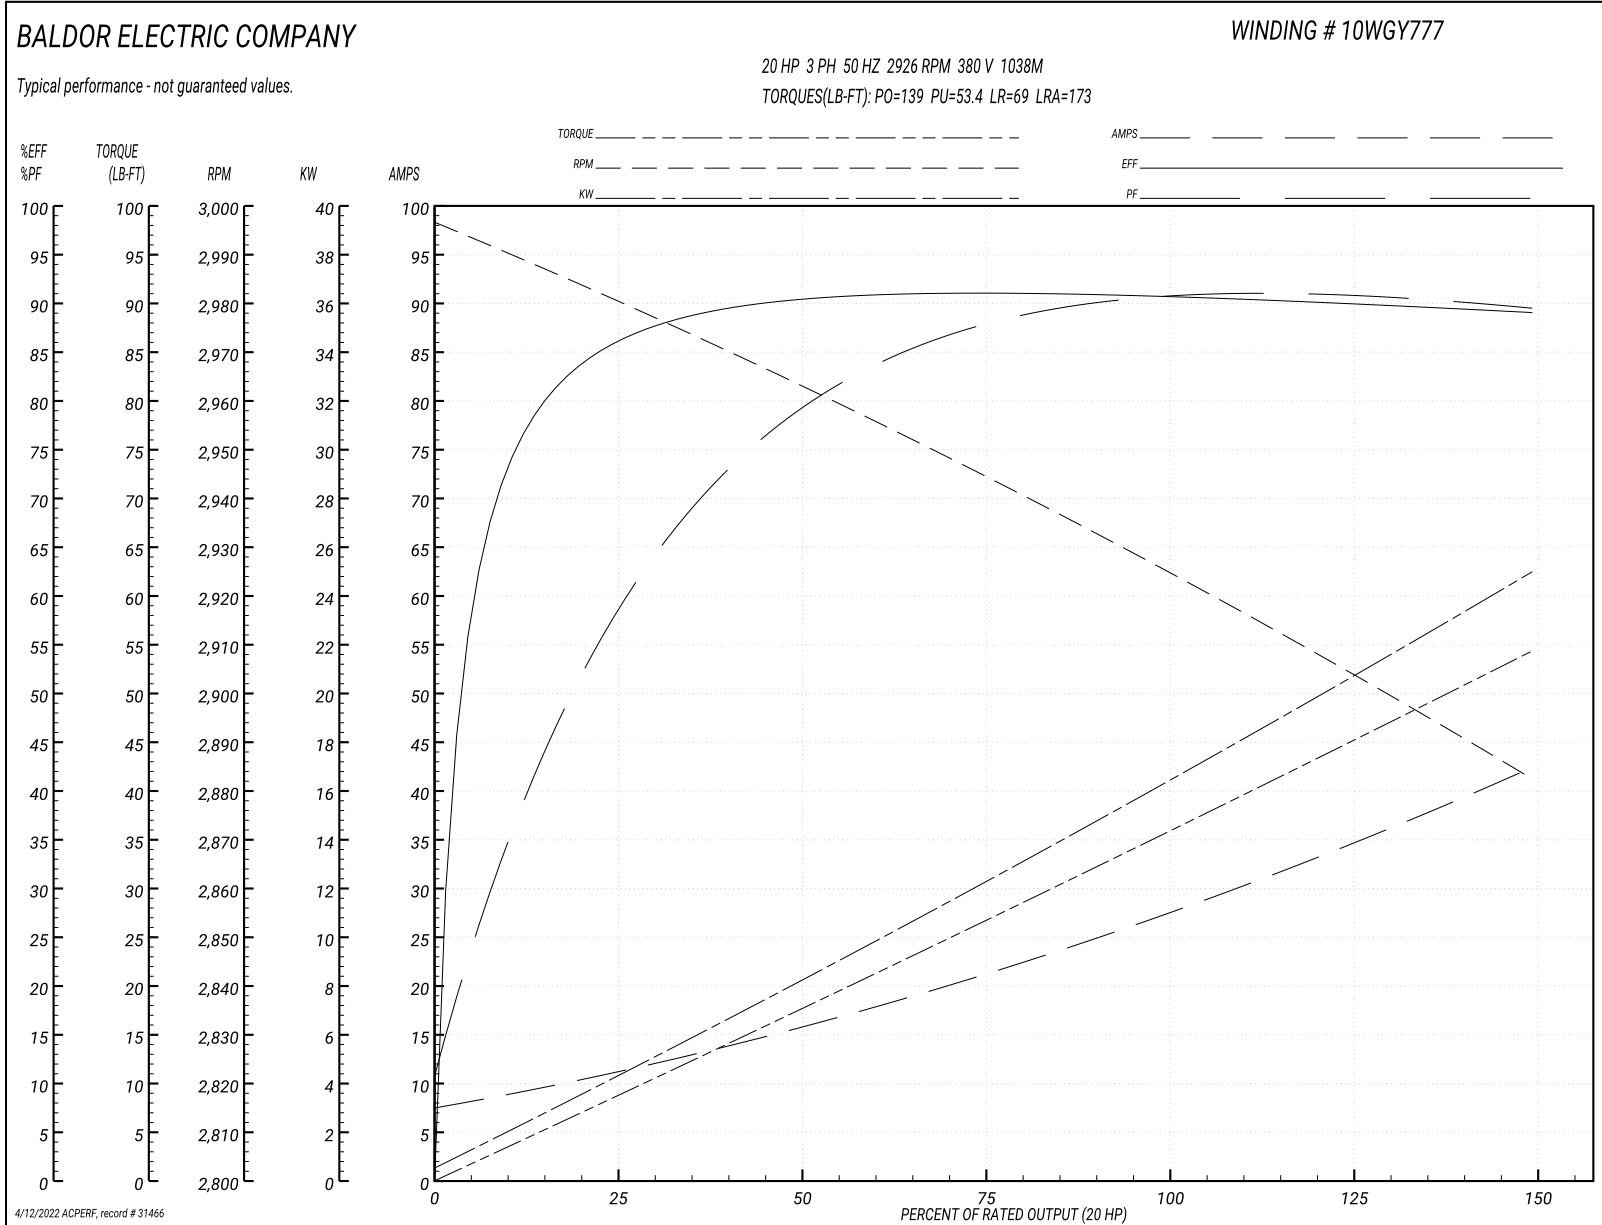


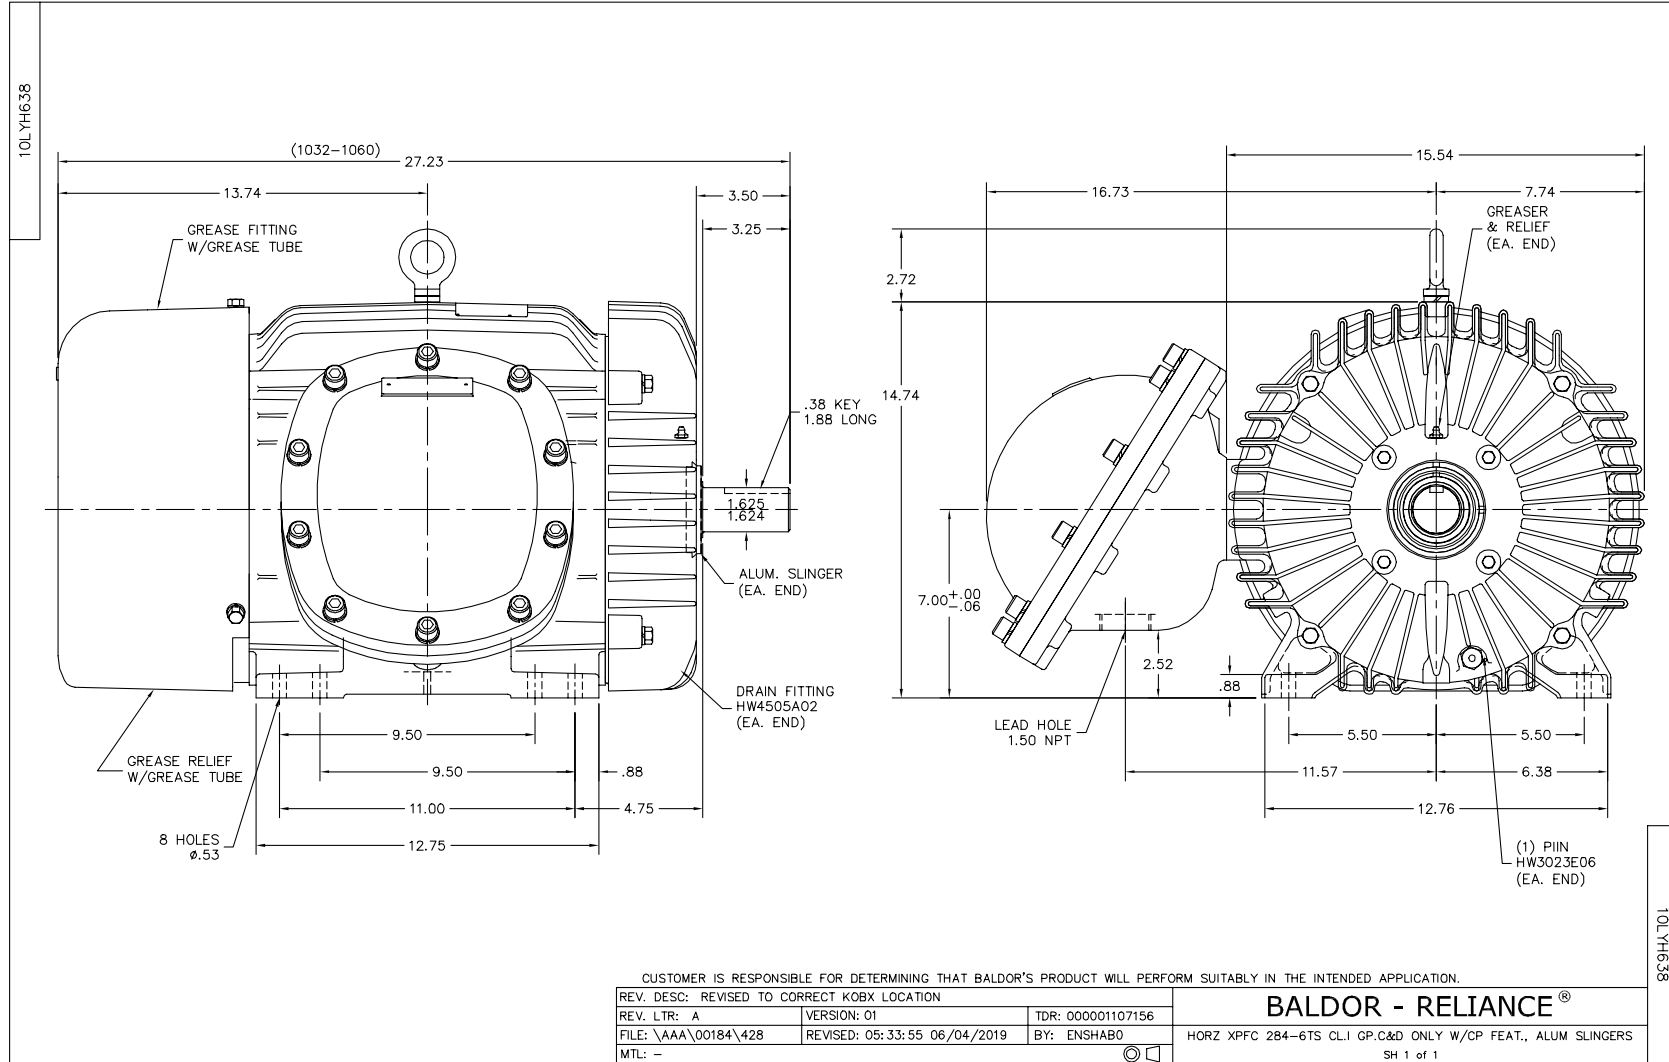


CD0180

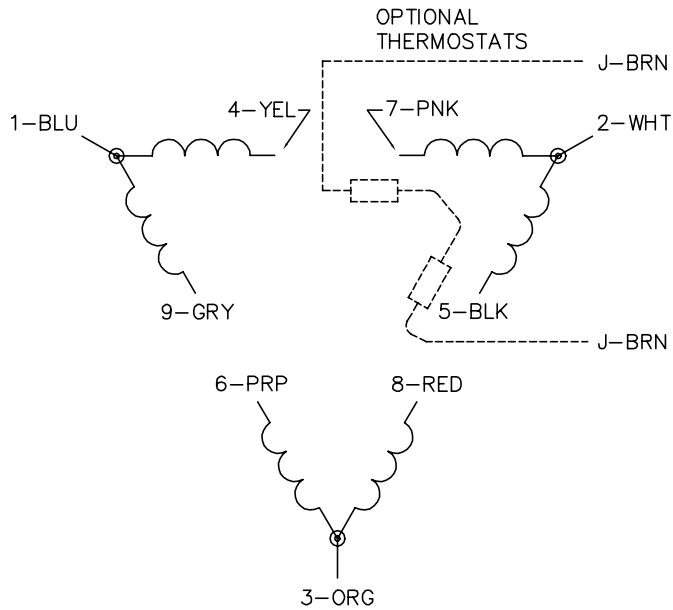

LOW VOLTAGE
(2D)



HIGH VOLTAGE
(1D)



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10:25:29 02/19/2019	BY: ENBRIRO
MTL: -	© □	

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1

Marketing maintained PDF of MN416:

<http://www.baldor.com/support/Literature/Load.ashx/MN416?ManNumber=MN416>