PRODUCT INFORMATION PACKET

Model No: 254TTFCD6540
Catalog No: E042
XRI®-SD Severe Duty Motor, 15 HP, 3 Ph, 60 Hz, 230/460 V, 1800 RPM, 254TC Frame, TEFC

Nameplate Specifications

Output HP	15 Hp	Output KW	11.2 kW
Frequency	60 Hz	Voltage	230/460 V
Current	37.5/18.8 A	Speed	1772 rpm
Service Factor	1.15	Phase	3
Efficiency	92.4 %	Power Factor	82
Duty	Continuous	Insulation Class	H
Design Code	B	KVA Code	G
Frame	254TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Ambient Temperature	40 °C
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6209
UL	Listed	CSA	Y
CE	Y	IP Code	55
Hazardous Location	DIVISION 2 T2B	Number of Speeds	1

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.61 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	T	Shaft Diameter	1.626 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	CONSTANT 10:1/VARIABLE 10:1
Connection Drawing	EE7308	Outline Drawing	SS208571-100

DASH NO.	B	C	E	2E	2F	2FF	AG	AH	BA	BV	MOUNTING	FRAME
100	9.60	24.65	5.00	10.00	---	8.25	20.90	3.75	4.75	9.14	F1 OR F2	254TC
200	11.34	26.39			8.25	10.00	22.64			10.00		254/256TC

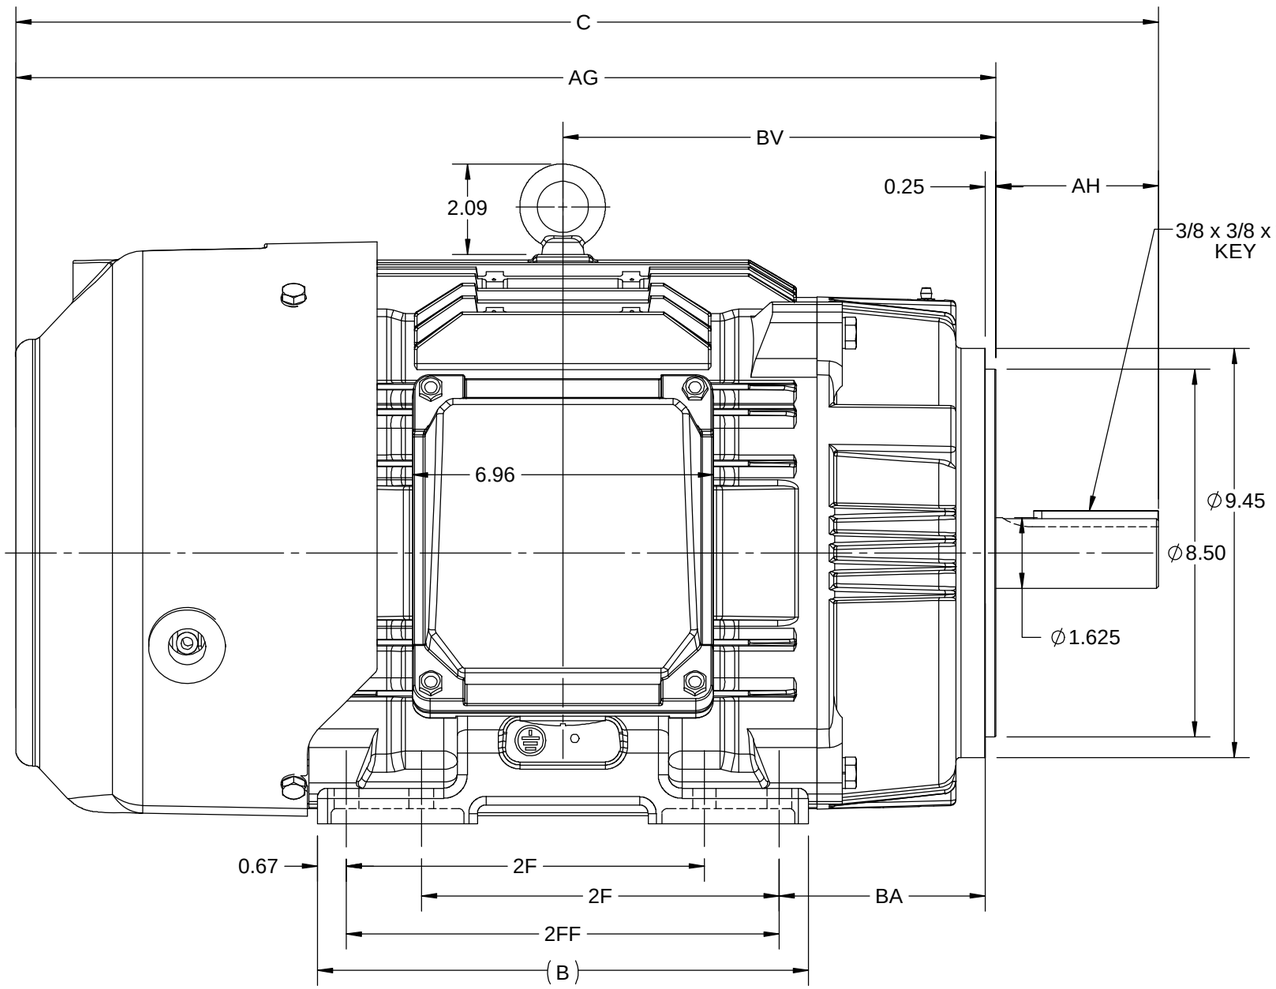

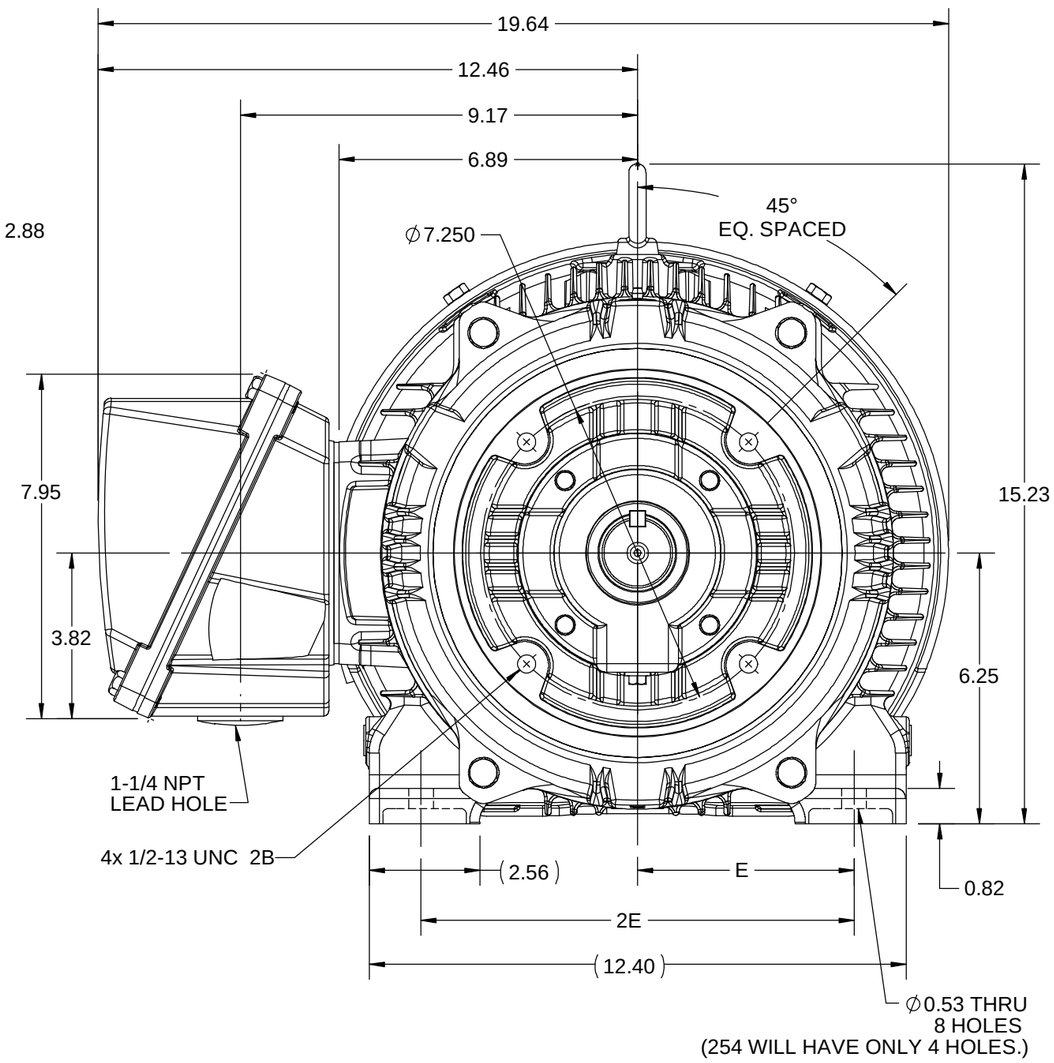

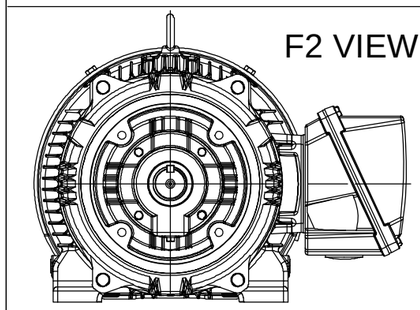

DRAWING REVISION	REVISION BY	REV DATE/© DATE
B	BISWA	2109/2020
ECO	APPROVED BY	DATE
ECO-0192056	SBD	2109/2020
ECO DESCRIPTION		
DRAWING UPDATED		

PRIMARY DIMENSIONS ARE INCH
mm DIMENSIONS IN [BRACKETS]
ARE FOR REFERENCE ONLY

DRAWN BY	BISWA
DATE	13/03/2019
APPROVED BY	SBD
DATE	13/03/2019
REFERENCE	
THIRD ANGLE PROJECTION	

REGAL® Regal Beloit America, Inc.

DESCRIPTION
OUTLINE
254/256TC FR-NEMA-SD & IEEE841

MATERIAL	PROCESS/FINISH

SIZE	DRAWING NUMBER	SHEET
B	SS208571	1 OF 1

EE7308

THREE PHASE
DUAL VOLTAGE MOTOR

HIGH VOLTAGE

(U1) T1 — L1
(V1) T2 — L2
(W1) T3 — L3
(U2) T4
(U3) T7
(V2) T5
(V3) T8
(W2) T6
(W3) T9

LOW VOLTAGE

(U1) T1
(U3) T7 — L1
(V1) T2
(V3) T8 — L2
(W1) T3
(W3) T9 — L3
(U2) T4
(V2) T5
(W2) T6

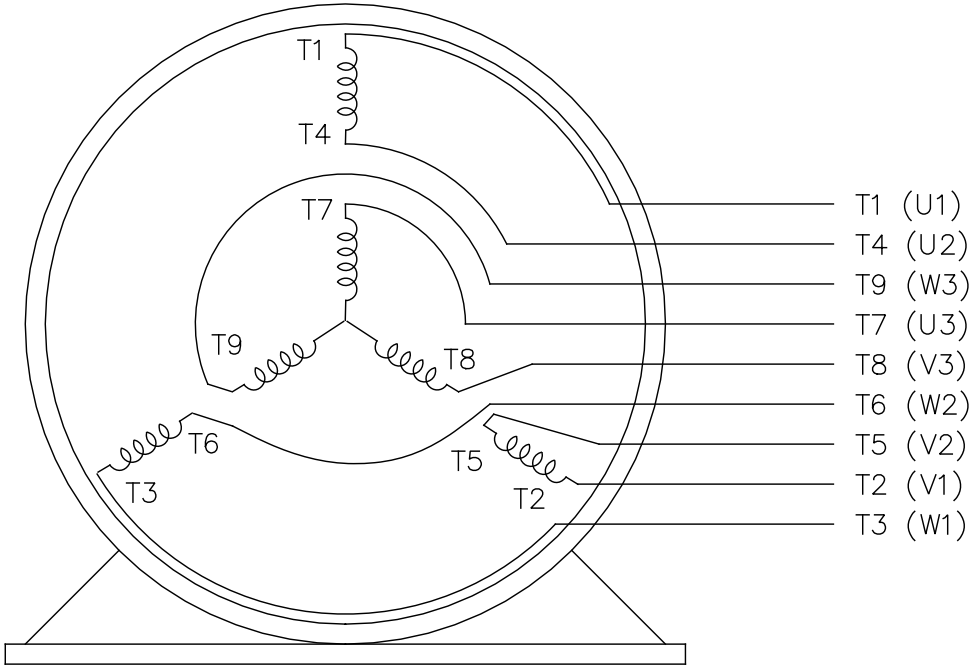

VIEW OF TERMINAL END

REF.
WINDING DIAGRAM

T8Y, T2Y, T2BL, T4BX, T2EC, T2G
T6BZ, T2B, T6BL, T4AV, T6B, T4B

OPTIONAL CORD CONNECTION

L1 — WHITE
L2 — RED
L3 — BLACK

NO.	REVISION	BY & DATE	CHK
5	CHG TO REGAL LOGO	SL 09/10/2015	AB
4	REVISED IEC NOTATIONS	MSG 11/15/2011	CMN
3	ADDED IEC NOTATIONS... (U1), (V1) ETC. MU95194	MSG 5/10/2010	MJS
2	ADDED THE OPTIONAL CORD CONNECTION MU46318	RDH 04/24/2003	DRS
1	REDRAWN	RM 11/20/1990	

TOLERANCES UNLESS SPECIFIED

ANG	DEC.	INCHES
	.X	±.1
	.XX	±.02
	.XXX	±.005
	.XXXX	±.0005
ANG		±7'30"

REGAL™ Regal Beloit America, Inc.

TITLE CONNECTION DIAGRAM
3ø – DUAL VOLTAGE MOTOR

MAT'L.
FINISH
CAD FILE ee7308
RFP
DIST WP

DRAWN RM	11/20/1990
CHK ML	11/21/1990
APPD SAS	04/24/2003
SCALE	1=1
REF	
FMF	
PREV	

SIZE A | DRAWING NO. EE7308 | PAGE OF | REV. 5