PRODUCT INFORMATION PACKET

Model No: 143TTDR16037 Catalog No: E912A XRI® General Purpose General Purpose Motor, 1 HP, 3 Ph, 60 Hz, 575 V, 1800 RPM, 143T Frame, DP



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



marathon[®]

Motors



Product Information Packet: Model No: 143TTDR16037, Catalog No:E912A XRI® General Purpose General Purpose Motor, 1 HP, 3 Ph, 60 Hz, 575 V, 1800 RPM, 143T Frame, DP

marathon®


Nameplate Specifications

| Output HP | 1 Нр | Output KW | 0.75 kW |
|------------------------|---------------|----------------------------|------------|
| Frequency | 60 Hz | Voltage | 575 V |
| Current | 1.2 A | Speed | 1760 rpm |
| Service Factor | 1.15 | Phase | 3 |
| Efficiency | 85.5 % | Power Factor | 71 |
| Duty | Continuous | Insulation Class | F |
| Design Code | В | KVA Code | N |
| Frame | 143T | Enclosure | Drip Proof |
| Thermal Protection | No Protection | Ambient Temperature | 40 °C |
| Drive End Bearing Size | 6205 | Opp Drive End Bearing Size | 6203 |
| UL | Recognized | CSA | Y |
| CE | Y | IP Code | 22 |
| Number of Speeds | 1 | | |

Technical Specifications

| Electrical Type | Squirrel Cage Inverter Rated | Starting Method | Line Or Inverter |
|-----------------------|------------------------------|-----------------------|------------------|
| Poles | 4 | Rotation | Reversible |
| Resistance Main | 13.6 Ohms | Mounting | Rigid Base |
| Motor Orientation | Horizontal | Drive End Bearing | Ball |
| Opp Drive End Bearing | Ball | Frame Material | Rolled Steel |
| Shaft Type | Т | Overall Length | 12.99 in |
| Frame Length | 9.06 in | Shaft Diameter | 0.875 in |
| Shaft Extension | 2.28 in | Assembly/Box Mounting | F1 ONLY |
| Inverter Load | CONSTANT 10:1 | | |
| Connection Drawing | A-EE7300 | Outline Drawing | A-100085-906 |


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:01/30/2023

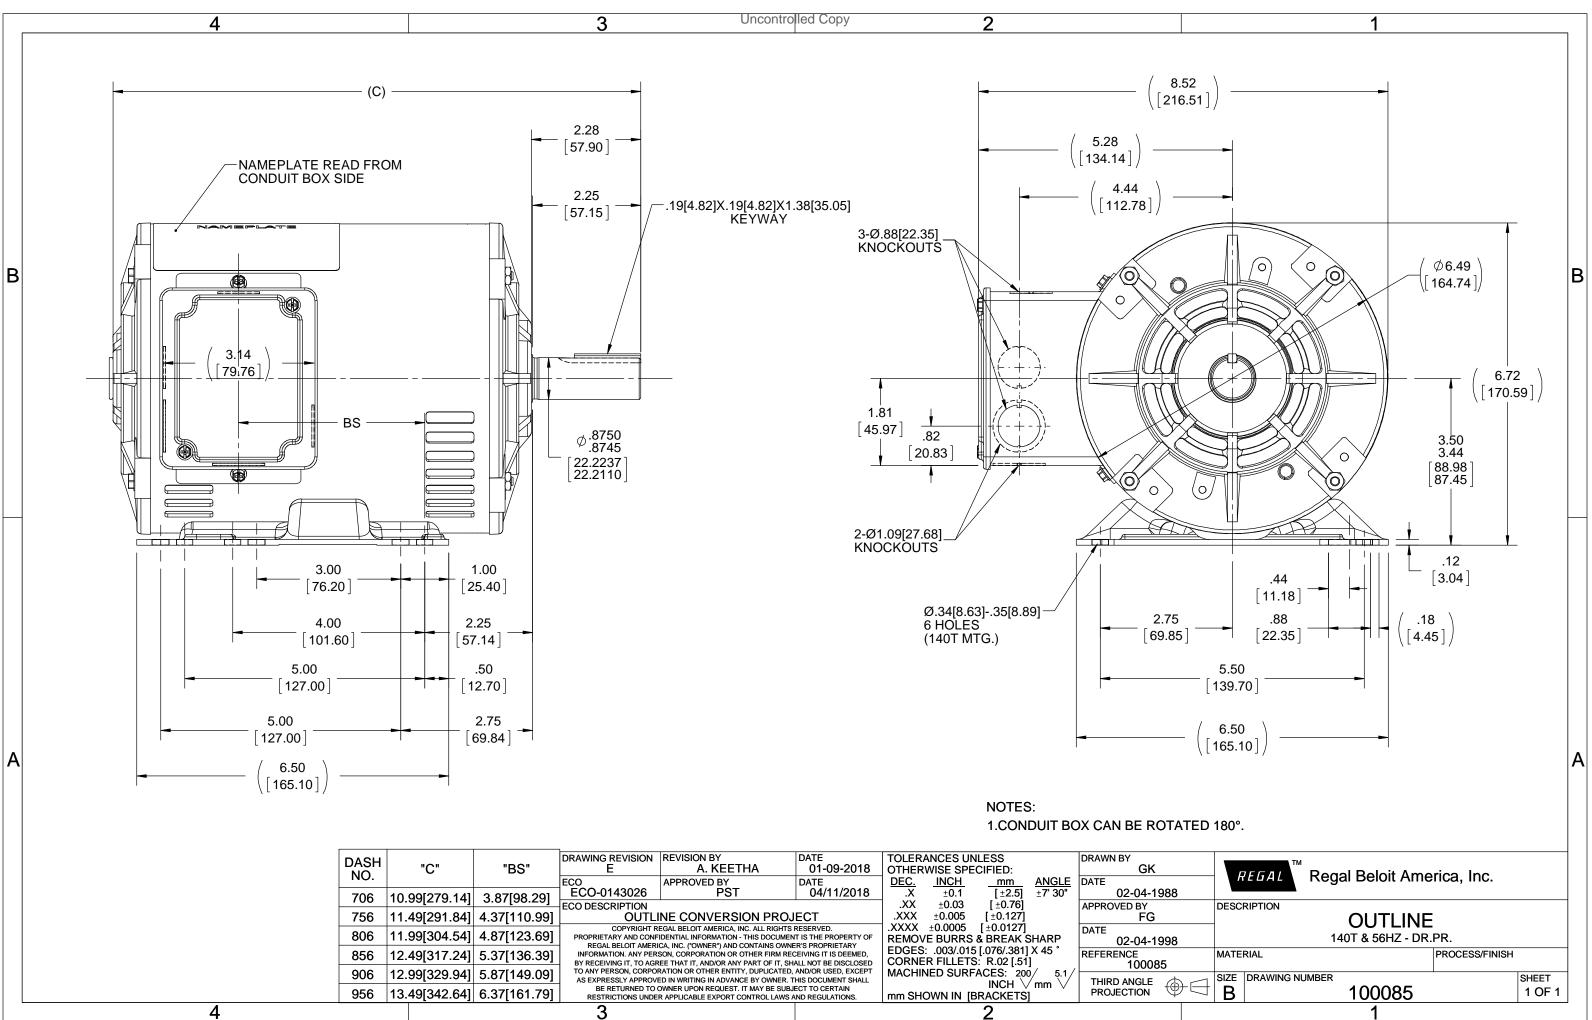

| | | | 3 | | | | 0 | 2 | 1 | <u>I</u> | | |
|------|---------------|--------------|--|---|-----------------------|------------------|---------------|-----------------------------|--------------|-------------|--------------|-----|
| 956 | 13.49[342.64] | 6.37[161.79] | BE RETURNED TO C RESTRICTIONS UNDER | mm SH | | ∣INCH RACKETS | ⁄mm ∨ 1 | | CTION | \oplus | | |
| 906 | 12.99[329.94] | 5.87[149.09] | | TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL | | | | | D/ 5.1/ | | ANGLE | - |
| 856 | 12.49[317.24] | 5.37[136.39] | INFORMATION. ANY PERS | SON, CORPORATION OR OTHER FIRM RE | CEIVING IT IS DEEMED, | | | [.076/.381] 5: R.02 [.51 | | REFERE | NCE 10008 | 5 |
| 806 | 11.99[304.54] | 4.87[123.69] | PROPRIETARY AND CONF | COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY | | | | | SHARP | DATE (| 02-04-1 | 998 |
| 756 | 11.49[291.84] | 4.37[110.99] | OUTLI | OUTLINE CONVERSION PROJECT | | | | | | | FG | |
| 706 | 10.99[279.14] | 3.87[98.29] | ECO-0143026 ECO DESCRIPTION | PST | 04/11/2018 | X. XX. | ±0.1 ±0.03 | [±2.5] [±0.76] | ±7' 30" | (APPROV | 02-04-1 | 988 |
| NO. | | | ECO | APPROVED BY | DATE | DEC. | INCH | <u></u> | <u>ANGLE</u> | DATE | | |
| DASH | "C" | "BS" | DRAWING REVISION E | REVISION BY A. KEETHA | DATE 01-09-2018 | - | ANCES UN | | | DRAWN | BY GK | |

4 of 8

Uncontrolled Copy

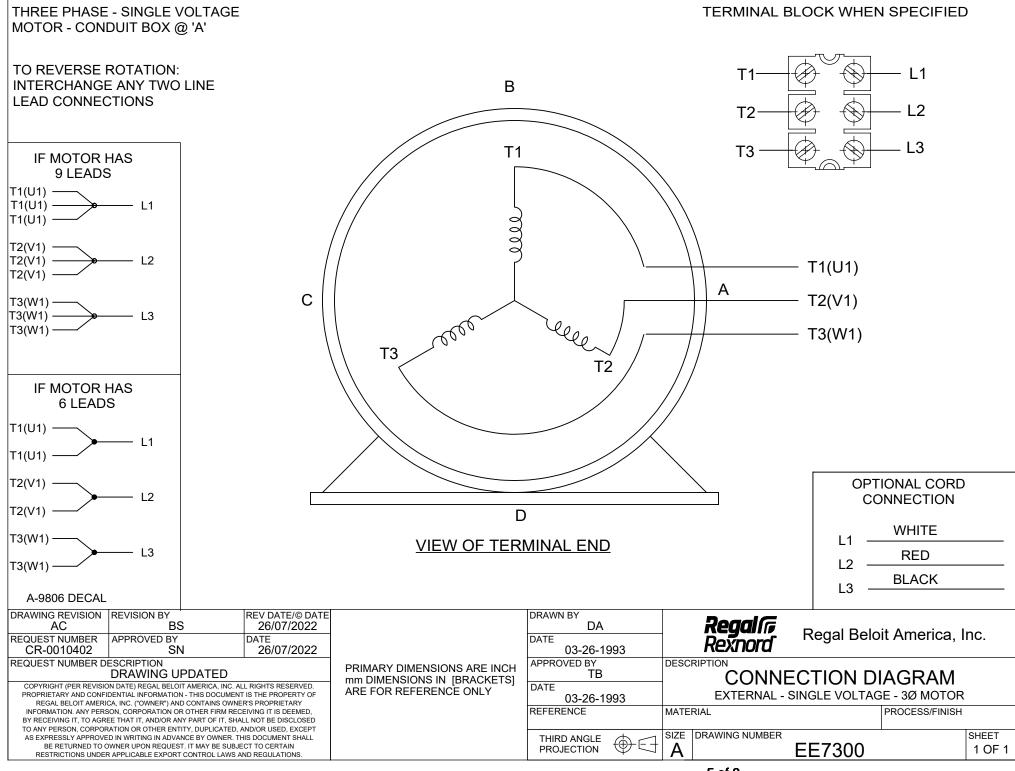

CERTIFICATION DATA SHEET

| Model#: | 143TTDR16037 AA | WINDING#: | ZT4259 NONE 5 |
|----------------|-----------------|-----------|---------------|
| CONN. DIAGRAM: | A-EE7300 | ASSEMBLY: | F1 ONLY |
| OUTLINE: | A-100085-906 | | |

TYPICAL MOTOR PERFORMANCE DATA

| НР | | ĸw | s | YNC. R | РМ | F.L | . RPM | FRAM | 1E | ENG | CLOSU | IRE | KVA | COL | DE | DESIGN |
|-----------------------------------|---------------------------------|-------|--------------------|---------------------|--------------------|---------|------------------|----------------|-------------|-------------|--------------|-----|----------------|-----|------|--------------------|
| 1 | 1.75 | | 1800 | 1800 1760 | | 760 | 143 | Γ | DP | | N | | Ν | | В | |
| РН | Hz | | VOLTS | FL | AMPS | STA | ART TYPE | DUTY |] | INSL | | S. | F | A | мв°с | ELEVATION |
| 3 | 60 | | 575 | | 1.2 | | INE OR VERTER | CONTINU | JU | F3 | F3 | | 15 | | 40 | 3300 |
| FULL LOAD EFF: 85.5 3/4 LOAD EFF: | | 84.6 | 1/2 LOAD EFF: 81.3 | | GTD. EFF | | | ELEC. TYPE | | | NO LOAD AMPS | | | | | |
| FULL LOAD P | FULL LOAD PF: 71 3/4 LOAD PF: 6 | | 62.6 | 6 1/2 LOAD PF: 49.8 | | 82.5SQ | | SQ C | AGE I | NV RAT | ED | .8 | | | | |
| F.L. TORQUE LOCKED R | | ROTOR | OTOR AMPS L.R. T | | DRQUE B.D. TOP | | DRQUE | | F.L. RISE°C | | | | | | | |
| 3 LB-F | 3 LB-FT 11 | | 11.6 | 5 11.2 LB | | 11.2 LB | -FT 373 15.4 L | | .4 LB-F | 4 LB-FT 513 | | | 21 | | | |
| SOUND PRESSU @ 3 FT. | JRE | SOUND | POWER | RO | TOR WK^ | 2 | MAX. | WK^2 | SAI | FE STALL | TIME | | START /HOUF | - | AF | PROX. MOTOR WGT |
| 56 dBA | | 66 | dBA | 0.1 | 0.117 LB-FT^2 10 L | | 10 LB- | 3-FT^2 20 SEC. | | 2 | | | 0 LBS. | | | |

*** SUPPLEMENTAL INFORMATION ***

| DE BRACKET TYPE | ODE BRACKET TYPE | MOUNT TYPE | ORIENTATION | SEVERE DUTY | HAZARDOUS LOCATION | DRIP COVER | SCREENS | PAINT |
|--------------------|---------------------|---------------|-------------|----------------|-----------------------|---------------|---------|------------------|
| STANDARD | STANDARD | RIGID | HORIZONTAL | FALSE | NONE | FALSE | NONE | BLUE (POWDER) |

| BEAF | BEARINGS | | SHAFT TYPE | SPECIAL DE | SPECIAL ODE | SHAFT | FRAME |
|------|----------|------------|------------|------------|-------------|-------------|--------------|
| DE | OPE | | | | | MATERIAL | MATERIAL |
| BALL | BALL | POLYREX EM | т | NONE | NONE | 1144 | ROLLED STEEL |
| 6205 | 6203 | | | | | STRESSPROOF | |
| 0200 | | | | | | (C-223) | |

| | THERMO-PF | OTECTORS | THERMISTORS | CONTROL | SPACE /n HEATERS | |
|-------------|-----------------------------|----------|-------------|---------|------------------|------------|
| THERMOSTATS | MOSTATS PROTECTORS WDG RTDs | | BRG RTDs | | | |
| NONE | NOT | NONE | NONE | NONE | FALSE | NONE VOLTS |

If Inverter equals NONE, contact factory for further


| | information | | | | |
|----------------------------------|---|---------|--|--|--|
| | INVERTER TORQUE: CONSTANT 10:1 INV. HP SPEED RANGE: NONE | | | | |
| ENCODER: NONE NON NONE NON | NE | | | | |
| BRAKE: NC NONE | ONE NONE P/N NONE NONE | NONE Hz | | | |

DATE: 06/22/2017 06:56:04 AM FORM 3531 REV.3 02/07/99

* NOTES

** Subject to change without notice.

Uncontrolled Copy

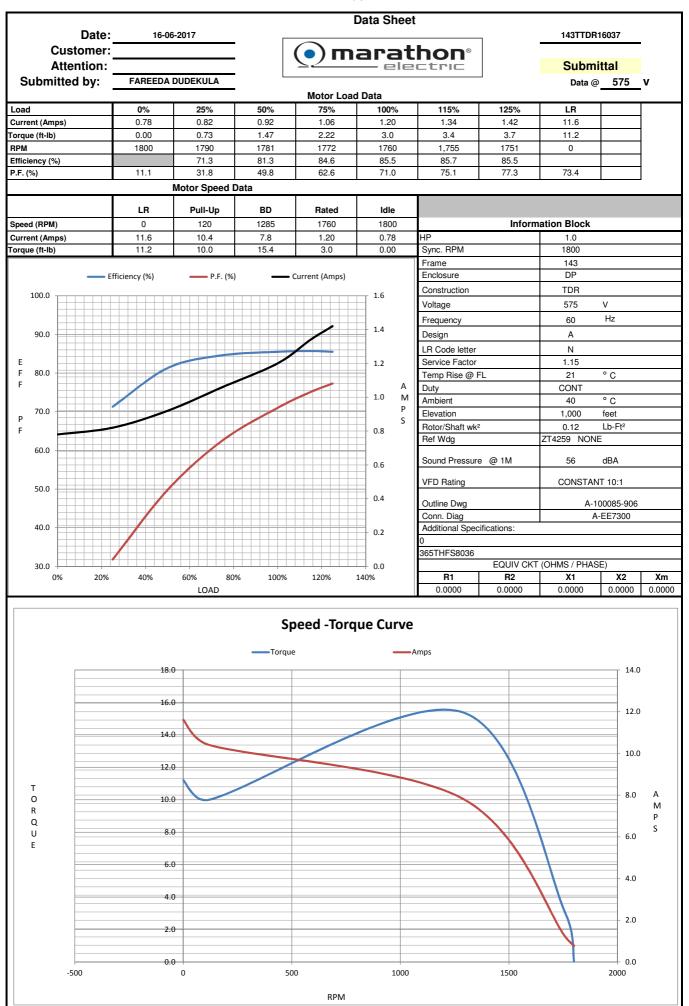



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 143TTDR16037

(Model No. may contain prefix and/or suffix characters)

Catalog No : E912A

Rework No : N/A

Directives :

Low Voltage Directive 2014/35/EU

Harmonized Standards Used :

EN 60034-1: 2010 (IEC 60034-1: 2010) EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A Logsdon

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

(€ 22

Authorized Representative in the Community:

Julian Clark Marketing Engineer