

BALDOR® • RELIANCE 

Product Information Packet

ERM3108

.5HP,1725RPM,3PH,60HZ,56,3424M,OPEN,F1,N

Part Detail							
Revision:	E	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Elec. Spec:	34WGX110	CD Diagram:	CD0005	Mfg Plant:	
Mech. Spec:	34-1237	Layout:	34LY1237	Poles:	04	Created Date:	10-06-2014
Base:	RS	Eff. Date:	04-22-2021	Leads:	9#18		

Specs			
Catalog Number:	ERM3108	Insulation Class:	B
Enclosure:	OPEN	Inverter Code:	Not Inverter
Frame:	56	KVA Code:	J
Frame Material:	Steel	Lifting Lugs:	No Lifting Lugs
Output @ Frequency:	.500 HP @ 60 HZ	Locked Bearing Indicator:	No Locked Bearing
Synchronous Speed @ Frequency:	1800 RPM @ 60 HZ	Motor Lead Quantity/Wire Size:	9 @ 18 AWG
Voltage @ Frequency:	230.0 V @ 60 HZ	Motor Lead Exit:	Terminal Panel Or Lead Hole
	460.0 V @ 60 HZ	Motor Lead Termination:	Flying Leads
XP Class and Group:	None	Motor Type:	3424M
XP Division:	Not Applicable	Mounting Arrangement:	F1
Agency Approvals:	C UR US ENERGY	Power Factor:	78
Auxillary Box:	No Auxillary Box	Product Family:	General Purpose
Auxillary Box Lead Termination:	None	Pulley End Bearing Type:	Ball
Base Indicator:	Resilient	Pulley Face Code:	Resilient Mount
Bearing Grease Type:	Polyrex EM (-20F +300F)	Pulley Shaft Indicator:	Standard
Blower:	None	Rodent Screen:	None
Current @ Voltage:	.800 A @ 460.0 V	Shaft Extension Location:	Pulley End
	1.600 A @ 230.0 V	Shaft Ground Indicator:	No Shaft Grounding

	2.100 A @ 208.0 V	Shaft Rotation:	Reversible
Design Code:	B	Shaft Slinger Indicator:	No Slinger
Drip Cover:	No Drip Cover	Speed Code:	Single Speed
Duty Rating:	CONT	Motor Standards:	NEMA
Electrically Isolated Bearing:	Not Electrically Isolated	Starting Method:	Direct on line
Feedback Device:	NO FEEDBACK	Thermal Device - Bearing:	None
Front Face Code:	Resilient Mount	Thermal Device - Winding:	None
Front Shaft Indicator:	None	Vibration Sensor Indicator:	No Vibration Sensor
Heater Indicator:	No Heater	Winding Thermal 1:	None
		Winding Thermal 2:	None

Nameplate NP3155L													
CAT.NO.	ERM3108												
SPEC.	34-1237X110G1												
HP	.5												
VOLTS	230/460												
AMP	1.6/8												
RPM	1725												
FRAME	56					HZ	60			PH	3		
SER.F.	1.25					CODE	J		DES	B		CL	B
F.L. AVG. EFF.	78.2					PF	78						
RATING	40C AMB-CONT												
CC										USABLE AT 208V	2.1		
DE	6203					ODE	6203						
ENCL	OPEN					SN							
	SFA 2/1												

Parts List		
Part Number	Description	Quantity
SA288638	SA 34-1237X110G1	1.000 EA
RA274826	RA 34-1237X110G1	1.000 EA
LD5000A52	LEAD ASSY W/INTERNAL STAR RING TERMINALS	1.000 EA
11XT1032A06	10-32 X 3/8 HX WSHR HD SLTD TYPE 23	2.000 EA
34EP3202A01	FR ENDPLATE, MACH	1.000 EA
WD4100A01	DP-875 HEYCO PLUG OR 62MP0875 MICRO PLAS	1.000 EA
11XW0832G06	#8-32 X 3/8, TAPTITE II, HEX WSHR SLTD	1.000 EA
SP1000A09	TERM BOARD, MODEL 34 SW, (RPL SP1000A01)	1.000 EA
RM1000A03	CUSHION RING, MDL 17-33-34	1.000 EA
HA6004A01A	CLAMP CUSHION RING ASSY	1.000 EA
HW5100A03	WAVY WASHER (W1543-017)	1.000 EA
34EP3203A01	PU ENDPLATE, MACH	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
RM1000A03	CUSHION RING, MDL 17-33-34	1.000 EA
HA6004A01A	CLAMP CUSHION RING ASSY	1.000 EA
34CB4501SP	TERMINAL BOX LID, STAMPED X (PLATED)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.014 GA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
34BA4003B01	RESILIENT BASE, 420-424	1.000 EA
HA3100A15	THRUBOLT 10-32 X 8.375	4.000 EA

Parts List (continued)		
Part Number	Description	Quantity
MN416A01	TAG-INSTAL-MAINT no wire (2100/bx) 4/22	1.000 EA
LB1119N	WARNING LABEL	1.000 EA
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 EA
NP3155L	ALUM SUPER-E UL CSA CC "SEMS"	1.000 EA
35PA1066	PKG GRP, PRINT PK1008A06	1.000 EA

AC Induction Motor Performance Data

Record # 47467


Typical performance - not guaranteed values

Winding: 34WGX110-R011		Type: 3424M		Enclosure: OPEN	
Nameplate Data			460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	.5	Full Load Torque	1.57 LB-FT		
Volts	230/460	Start Configuration	direct on line		
Full Load Amps	1.6/.8	Breakdown Torque	5.24 LB-FT		
R.P.M.	1725	Pull-up Torque	3.8 LB-FT		
Hz	60 Phase	Locked-rotor Torque	5.12 LB-FT		
NEMA Design Code	B	Starting Current	6.16 A		
Service Factor (S.F.)	1.25	No-load Current	0.474 A		
NEMA Nom. Eff.	78.2	Line-line Res. @ 25°C	30.994 Ω		
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	25°C		
S.F. Amps	2/1	Temp. Rise @ S.F. Load	34°C		
		Locked-rotor Power Factor	53		
		Rotor inertia	0.0572 LB-FT ²		

Load Characteristics 460 V, 60 Hz, 0.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	38	55	68	76	80	83	80
Efficiency	67.3	76.6	78.9	78.7	77.2	74.9	77.2
Speed	1782.6	1766.4	1749.5	1729.5	1707.4	1683.2	1707
Line amperes	0.509	0.586	0.687	0.815	0.971	1.14	0.971

Performance Graph at 460V, 60Hz, 0.5HP Typical performance - Not guaranteed values

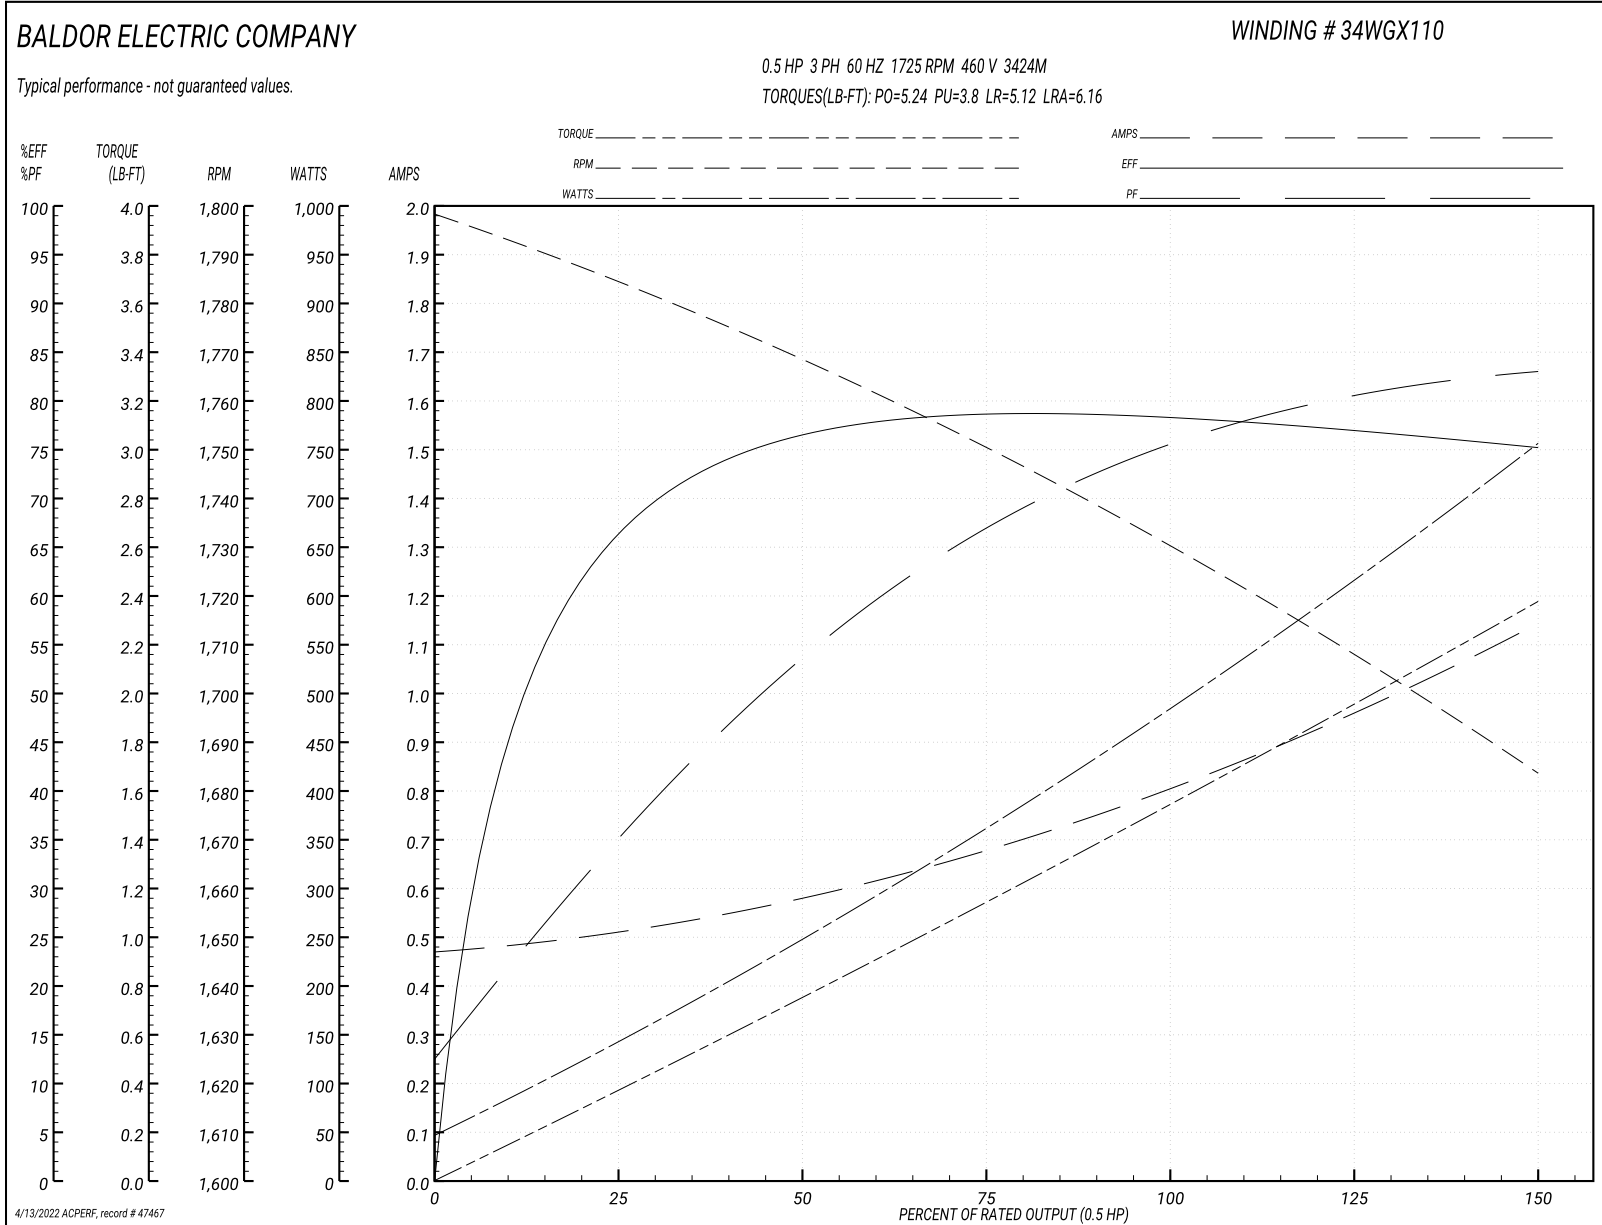

AC Induction Motor Performance Data

Record # 49381


Typical performance - not guaranteed values

Winding: 34WGX110-R011		Type: 3424M		Enclosure: OPEN	
Nameplate Data			230 V, 60 Hz: Low Voltage Connection		
Rated Output (HP)	.5	Full Load Torque	1.57 LB-FT		
Volts	230/460	Start Configuration	direct on line		
Full Load Amps	1.6/.8	Breakdown Torque	5.24 LB-FT		
R.P.M.	1725	Pull-up Torque	3.8 LB-FT		
Hz	60 Phase	Locked-rotor Torque	5.12 LB-FT		
NEMA Design Code	B	Starting Current	12.3 A		
Service Factor (S.F.)	1.25	No-load Current	0.948 A		
NEMA Nom. Eff.	78.2	Line-line Res. @ 25°C	7.28 Ω		
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	25°C		
S.F. Amps	2/1	Temp. Rise @ S.F. Load	31°C		
		Locked-rotor Power Factor	52.9		
		Rotor inertia	0.0572 LB-FT ²		



Load Characteristics 230 V, 60 Hz, 0.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	37	56	68	76	80	83	80
Efficiency	67.5	76.4	78.6	78.6	77.1	75.1	77.1
Speed	1783	1766	1750	1730	1707	1683	1707
Line amperes	1.02	1.17	1.37	1.63	1.94	2.28	1.94

Performance Graph at 230V, 60Hz, 0.5HP Typical performance - Not guaranteed values

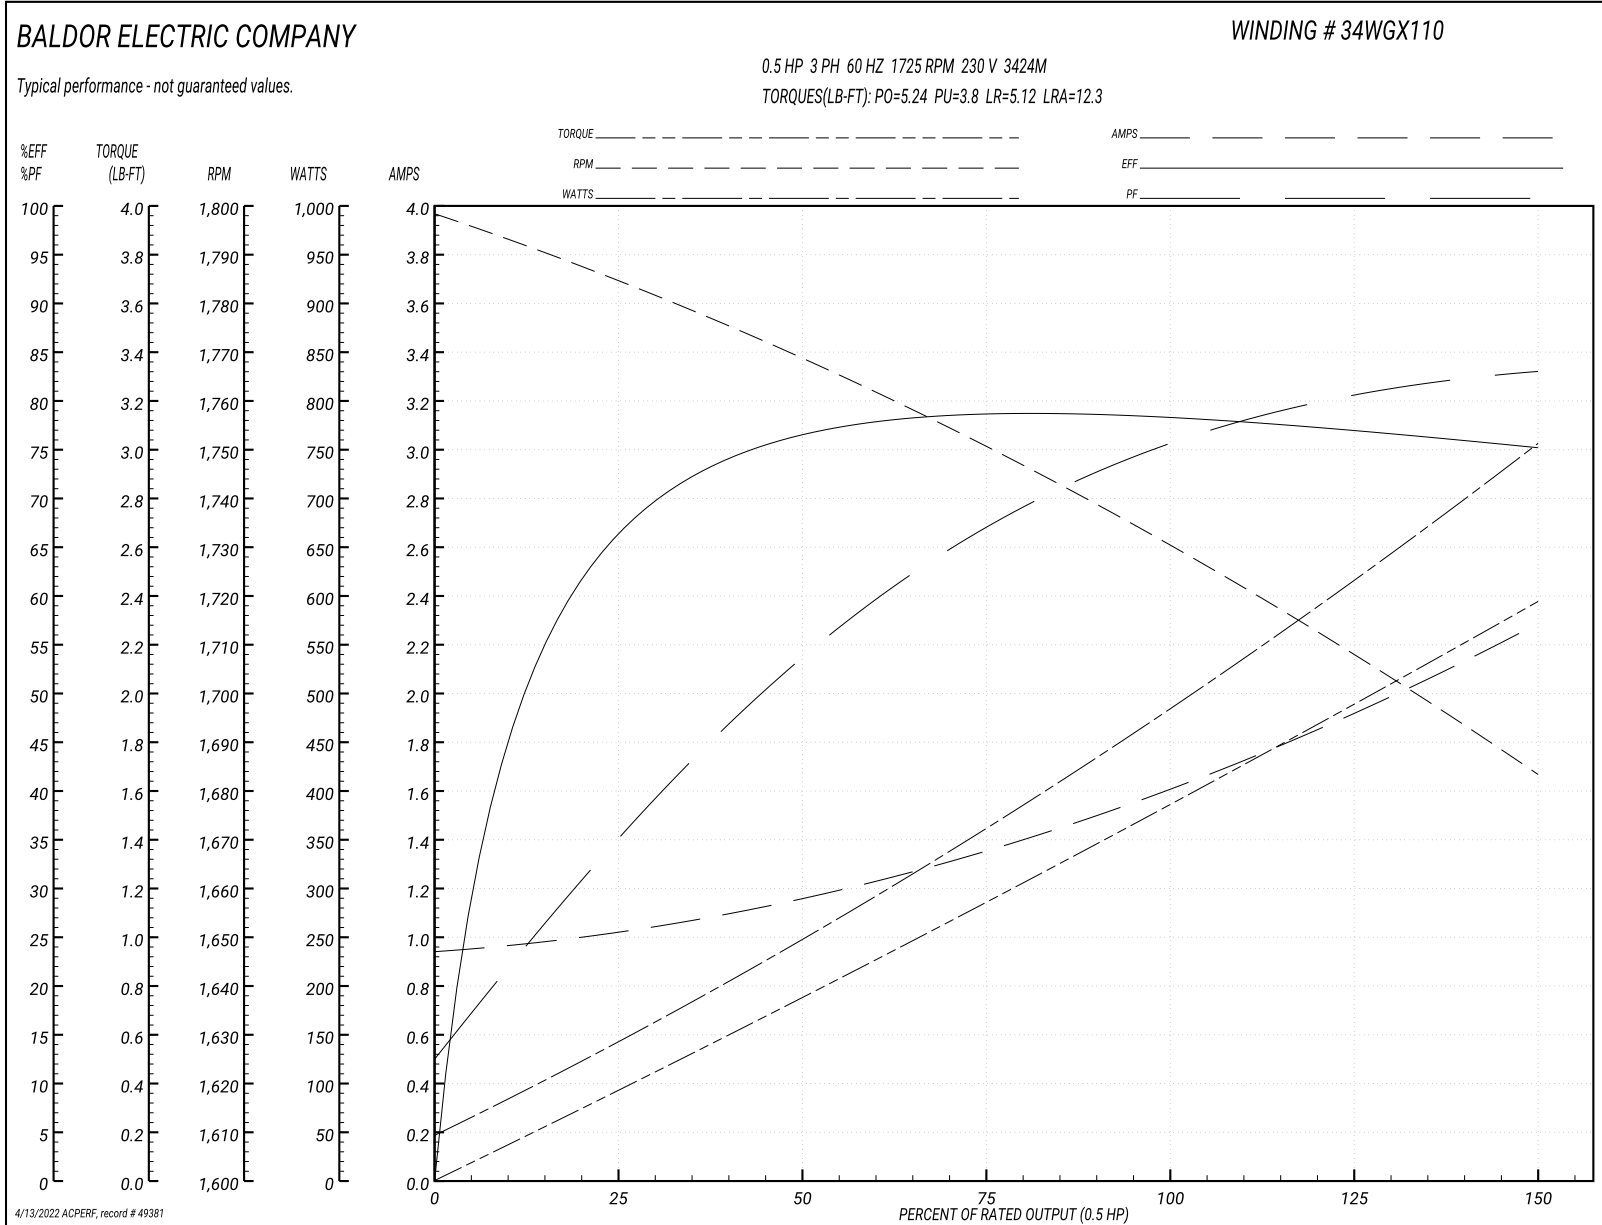

34LY1237

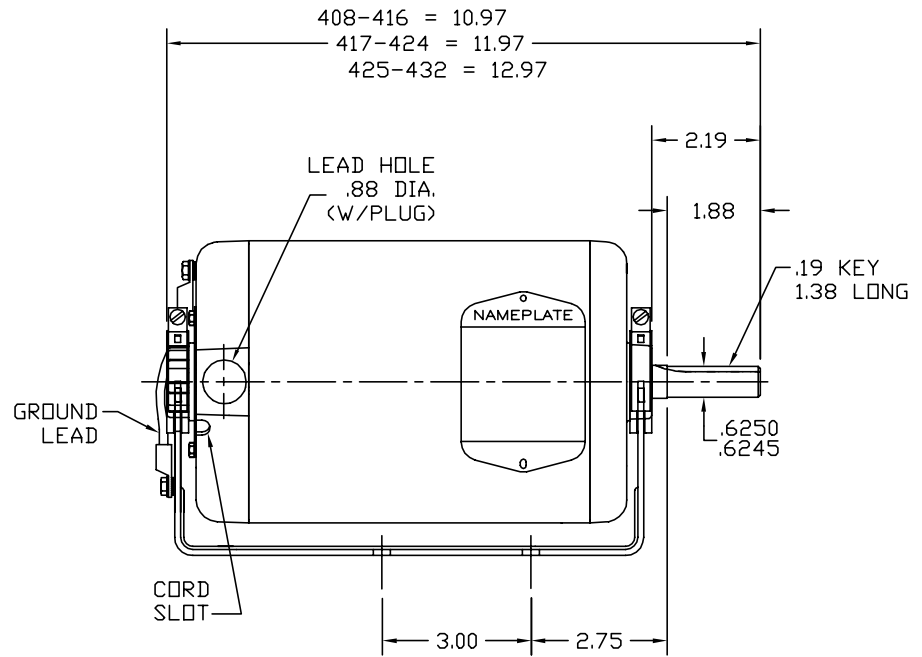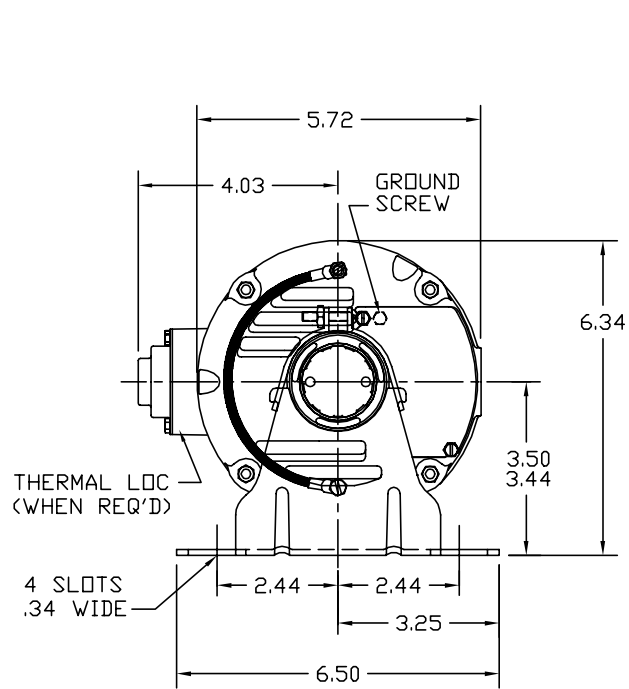

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: UPDATE LAYOUT TO MATCH WITH PARTS ON BOM		
REV. LTR: D	VERSION: 01	TDR: 000000969179
FILE: \AAA\00026\676	REVISED: 09:29:53 03/08/2016	BY: ENROSTO?
MTL: -		


BALDOR

STD RESIL MTD MODEL 34M NEMA 56 OPEN MTR


SH 1 of 1

34LY1237

CD0005

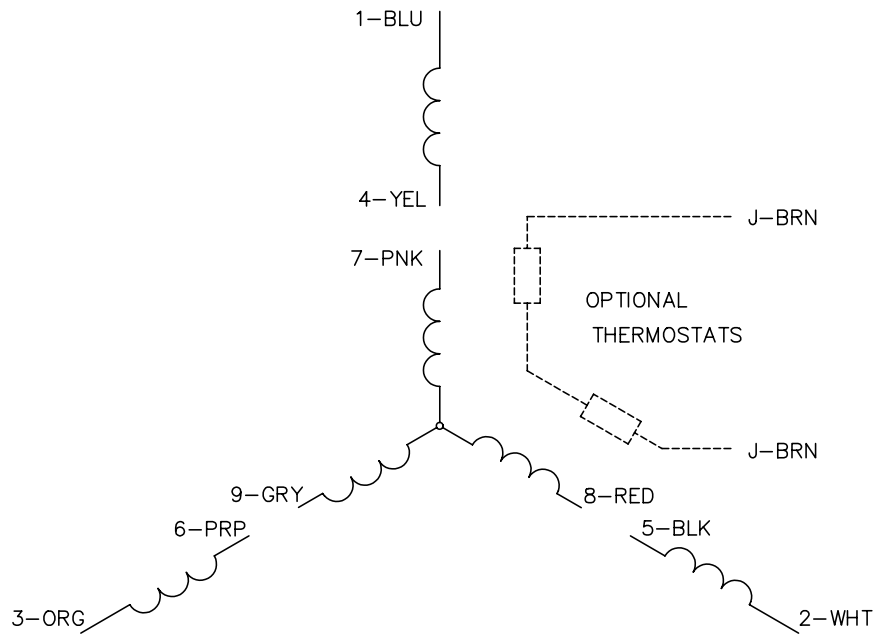


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005