PRODUCT INFORMATION PACKET

Model No: 364TSTFCD6036 Catalog No: GT1061 General Purpose Motor, 60 HP, 3 Ph, 60 Hz, 230/460 V, 1800 RPM, 364TS Frame, TEFC



Regal and are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: 364TSTFCD6036, Catalog No:GT1061 General Purpose Motor, 60 HP, 3 Ph, 60 Hz, 230/460 V, 1800 RPM, 364TS Frame, TEFC


Nameplate Specifications

60 Hp	Output KW	45.0 kW
60 Hz	Voltage	230/460 V
136.0/68.0 A	Speed	1780 rpm
1.15	Phase	3
95 %	Power Factor	87.2
Continuous	Insulation Class	F
В	KVA Code	G
364TS	Enclosure	Totally Enclosed Fan Cooled
No Protection	Ambient Temperature	40 °C
6313	Opp Drive End Bearing Size	6213
Listed	CSA	Y
Y	IP Code	55
DIVISION 2 T2B	Number of Speeds	1
	60 Hz 136.0/68.0 A 1.15 95 % Continuous B 364TS No Protection 6313 Listed Y	60 HzVoltage136.0/68.0 ASpeed1.15Phase95 %Power FactorContinuousInsulation ClassBKVA Code364TSEnclosureNo ProtectionAmbient Temperature6313Opp Drive End Bearing SizeListedCSAYIP Code

Technical Specifications


Squirrel Cage Inverter Rated	Starting Method	Part Wdg Start Low Volt Only & Wye Start Delta Run Or Inverter
4	Rotation	Reversible
.104 Ohms	Mounting	Rigid Base
Horizontal	Drive End Bearing	Ball
Ball	Frame Material	Cast Iron
тѕ	Overall Length	31.19 in
15.74 in	Shaft Diameter	1.875 in
3.75 in	Assembly/Box Mounting	F1/F2 CAPABLE
CONSTANT 2:1/VARIABLE 10:1		
EE7308AA	Outline Drawing	SS556998-100
	4 .104 Ohms Horizontal Ball TS 15.74 in 3.75 in CONSTANT 2:1/VARIABLE 10:1	4Rotation.104 OhmsMountingHorizontalDrive End BearingBallFrame MaterialTSOverall Length15.74 inShaft Diameter3.75 inAssembly/Box MountingCONSTANT 2:1/VARIABLE 10:1

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:09/15/2022

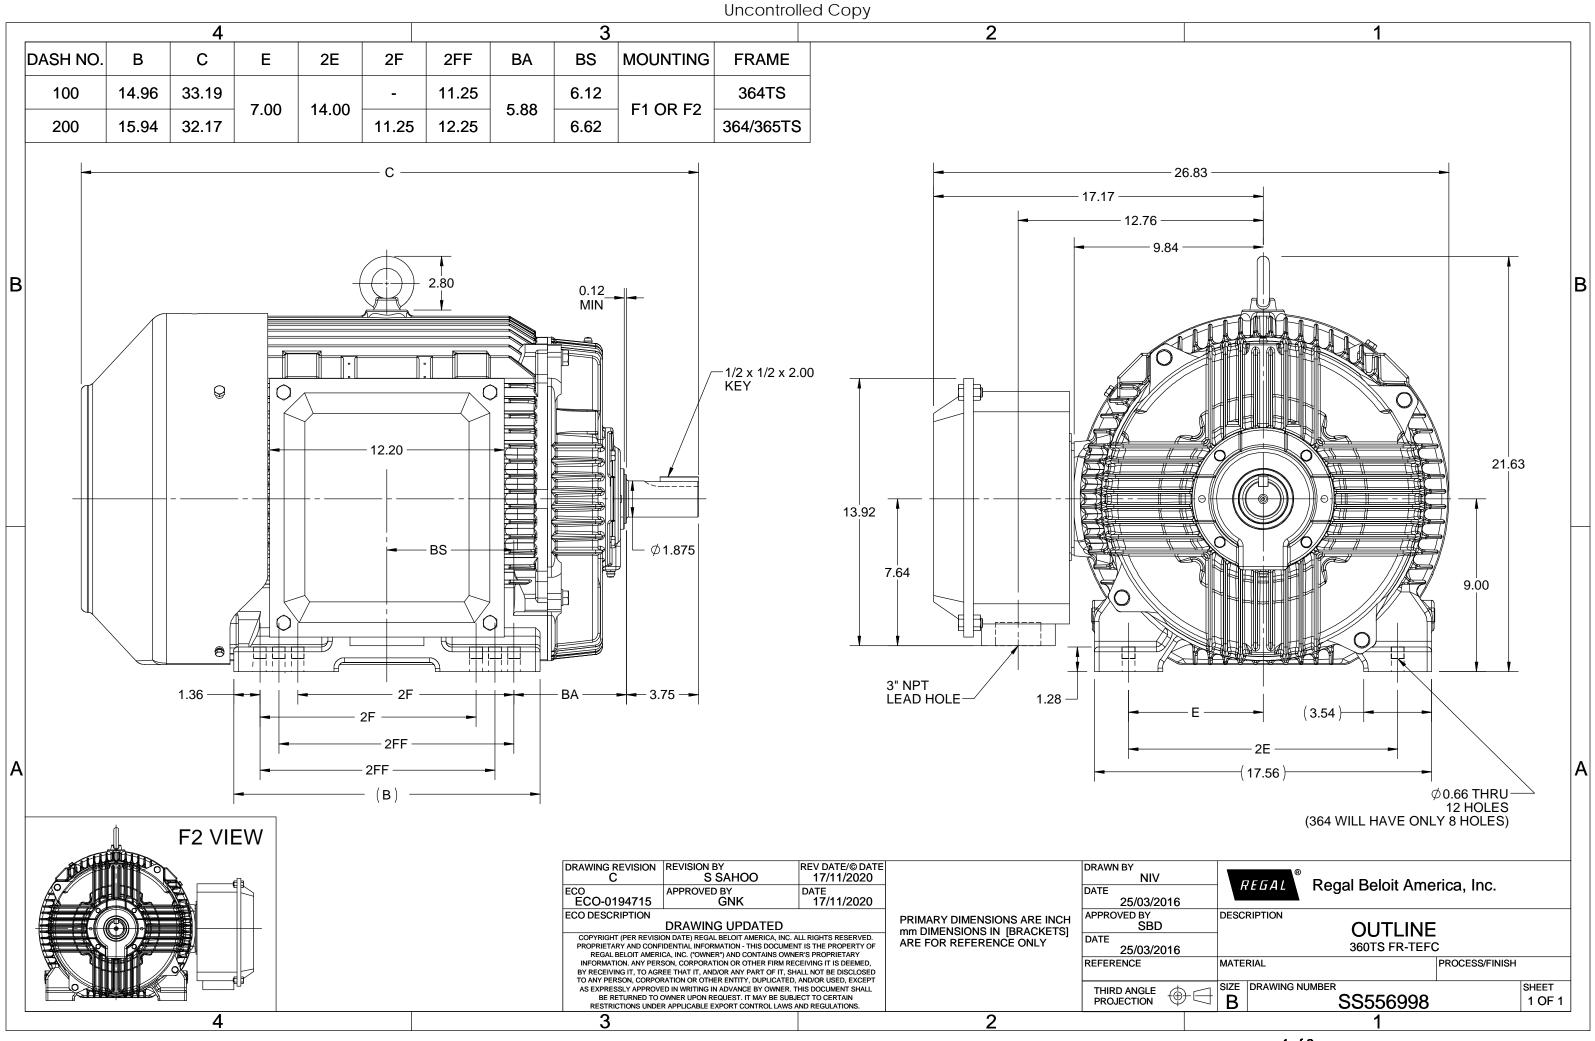

4 of 8

Uncontrolled Copy

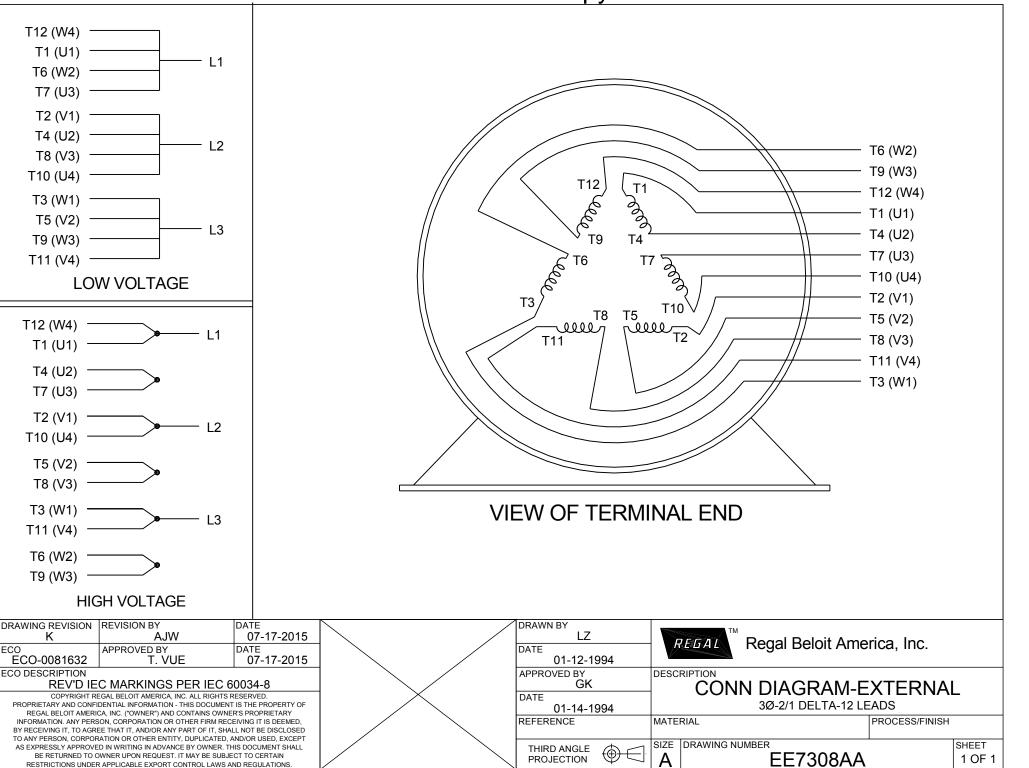



P.O. BOX 8003 WAUSAU, WI 54401-8003 PH. 715-675-3311

CERTIFICATION DATA SHEET

CUSTOMER

PO#:

MODEL #: 364TSTFCD6036 AA CUSTOMER PART #: MOUNTING: F1/F2 CAPABLE

CONN. DIAGRAM: EE7308AA OUTLINE: SS556998-364TS

CUSTOMER:

ORDER #:

WINDING #: HE32254010 2

TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
60&50	45.0&37.0	1800	1782&1480	364TS	TEFC	G	В

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB°C
З	60/50	230/460&190/380	138/69&140/70	Y START D RUN OR INV	CONTINUOUS	F7	1.15/1.15	40

FULL LOAD EFF:	95&94.5	3/4 LOAD EFF:	95.4	1/2 LOAD EFF:	95	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	85.5&85.5	3/4 LOAD PF:	83	1/2 LOAD PF:	75.5	94.5	SQ CAGE INV RATED

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
177 LB-FT	870 / 435	354 LB-FT 200 %	451 LB-FT 255 %	55

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
70 dBA	80 dBA	17.2 LB-FT^2	- LB-FT^2	25 SEC.	2	904 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	DIVISION 2 T2B	FALSE	NONE	BLUE (EPOXY)

BEAR	INGS	GREASE		HAFT TYPE SPECIAL DE SPECIAL ODI		SHAFT	FRAME
DE	ODE	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	TS	NONE	NONE	1045 HOT ROLLED (C-204)	CAST IRON
6313	6212	FULIKEX EM	15	NONE	NONE	1045 HOT KOLLED (C-204)	CAST IRON

	THERMO-PROTE	THERMISTORS	CONTROL	SPACE HEATERS		
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL	SPACE HEATERS
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

*			
N			
ο			
т			
Е			
s			
*			


PREPARED BY:	Anusha Muthyala
DATE: 09/24/20	019 01:56:24 AM
FORM 3531 RE\	/.3 02/07/99
** Subject to cl	hange without notice.

INVERTER						
TORQUE:	CONSTANT 20:1/VARIABLE 20:1					
_						
INV. HP S	PEED RANGE:	NONE				

ENCODE	R: NONE					
NONE	NO	NE				
NONE	NO	ne Pi	PR			
BRAKE:	NONE	NOM	NE			
NONE P/N NONE						
NONE	NONE					
NONE	FT-LB	NONE	V	NONE	Hz	

http://rbweb.corp.regalbeloit.com/msa/customerSubmittalRefort&lo?invoke=viewCusto... 9/24/2019

Uncontrolled Copy

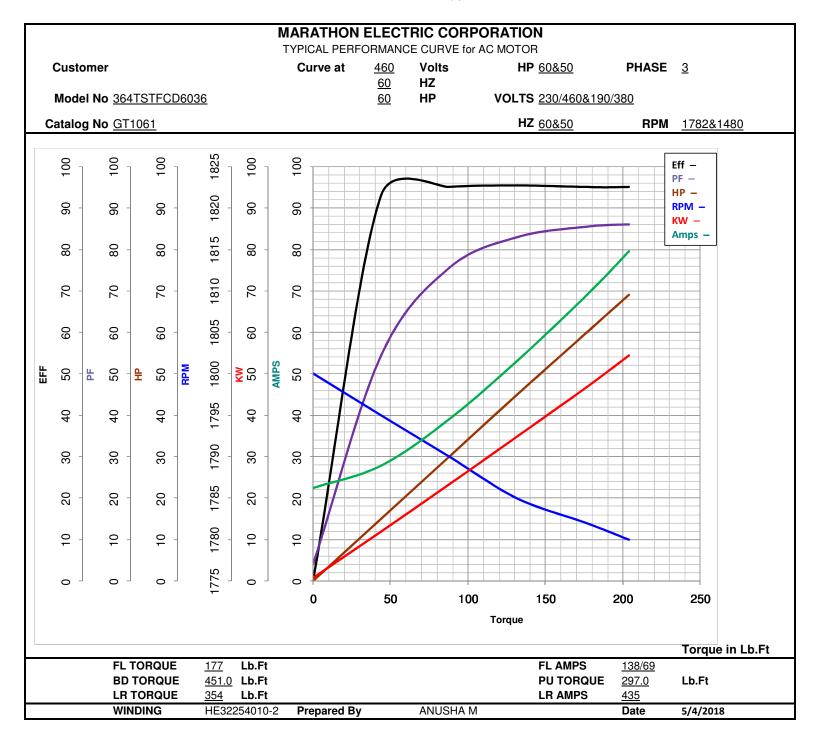



www.regalbeloit.com

EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 364TSTFCD6036

(Model No. may contain prefix and/or suffix characters)

Catalog No : GT1061

Rework No : N/A

Directives :

Low Voltage Directive 2014/35/EU

Harmonized Standards Used :

EN 60034-1: 2010 (IEC 60034-1: 2010) EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A Logsdon

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

(€ 22

Authorized Representative in the Community:

Julian Clark Marketing Engineer