



GE INDUSTRIAL MOTORS
a **WOLONG** company

Product Technical Information

October 11, 2022

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	5KS182BAA300
Catalog Number:	M1053
Instruction Manual:	GEI-56128
Connection Diagram:	GEM2034E-FIG3
Outline Drawing:	4002B5818GBP5202

Accessory Connection Diagrams

Bearing Thermocouple:	None	Heater:	None
RTD:	None	Thermistor:	None
Thermostat:	None	Winding Thermocouple:	None
Bearing RTD:	None		

Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

MODEL NUMBER:	5KS182BAA300
Outline Drawing:	4002B5818GBP5202
Connection Diagram:	GEM2034E-FIG3
Instruction Book:	GEI-56128
Design Code:	18BD3051A
Type:	KS
Frame:	182TC
Phases:	3
Poles:	6
Output Power:	1.5HP 1.1KW
RPM:	1170
Voltage:	230/460
Hertz:	60
Amps - FL:	4.8/2.4
Service Factor:	1.15
Alt Service Factor:	--

Estimated Weight:	76 Lbs
Time Rating:	CONT
Enclosure:	TEFC
Encl Construction:	GP
Ambient Max(°C):	40
Alt Ambient Max(°C):	--
Insulation Class:	F
NEMA Design:	B
Nominal Efficiency:	87.5 %
Guaranteed Efficiency:	85.5 %
3/4 Load Efficiency:	--
KVA Code:	M
Max KVAR:	1.0
Power Factor:	67.5
Bearing - DE:	6307-2ZC3
Bearing - ODE:	6206-2ZC3

Enclosure is Totally Enclosed Fan-Cooled

Stamped Nameplate Notes:

VT 0-60 HZ NEMA MG1-31; 208V-4.9A



Additional Information:

6P - TC EXTN
STANDARD FLOOR MOUNT
C/BOX 30 CU IN-0.75 NPT
F1 CONDUIT BOX MOUNTING
"C" FACE AT DE ENDSHIELD AK=8 1/2"
INVERTER DUTY PER NEMA MG1 PART 31
ALTERNATE RATING FOR PWM CONTROL:1.0SF 40C AMBIENT
VAR TORQUE RANGE 0-60 HZ
SUITABLE FOR 208V -4.9 AMPS WITH 1.15 SF



Performance Characteristics

1st Winding 1st Connection

Design: 18BD3051A

Marks:


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	87.41	87.76	88.3	88.02	86.29	79.16	0.00
% PF	73.12	71.16	69.27	58.89	46.05	28.05	5.81
AMPS	2.75	2.59	2.3	2.03	1.77	1.58	1.41

TORQ(FL)#FT	6.72	TORQ(LR)%FL	225.61	TORQ(BD)%FL	401.94
AMPS(LR)	17.65	PF AT START	0.47		

This motor is capable of two cold or one hot start with a maximum connected load inertia of 260 Lb-Ft Sq (10.95 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 61 seconds. Safe stall time at 100% voltage is 135 seconds cold, 113 seconds hot. Rotor inertia is 0.3 Lb-Ft Sq (0.01 Kg-meter Sq).


Open Circuit A-C:	0.156	Short Circuit D-C:	0.008
Short Circuit A-C:	0.011	X/R Ratio:	3.138
Stator Slots:	36	Rotor Slots:	48

Speed Torque Current Curve (First Connection, First Speed)

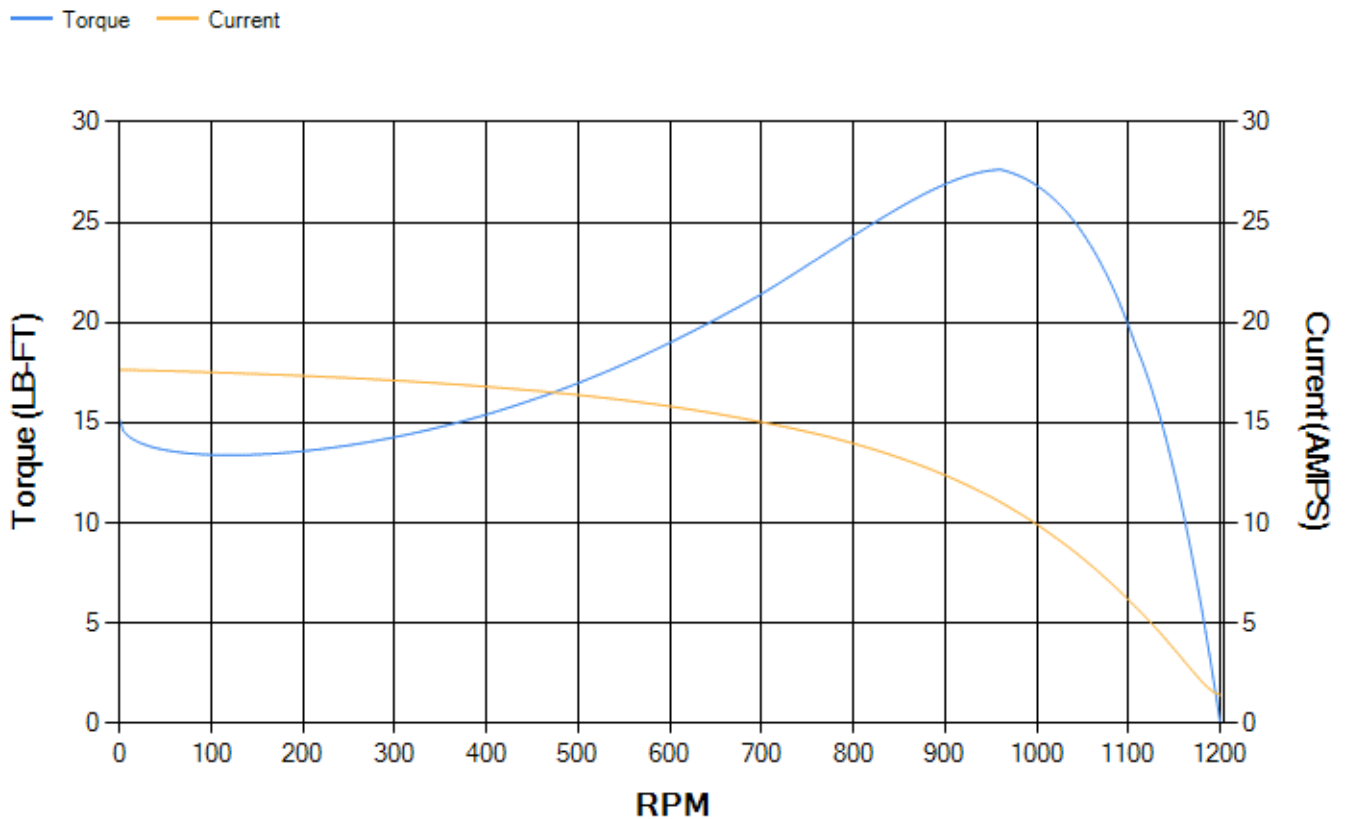

Marks:

Connection Diagram
GEM2034E-FIG3

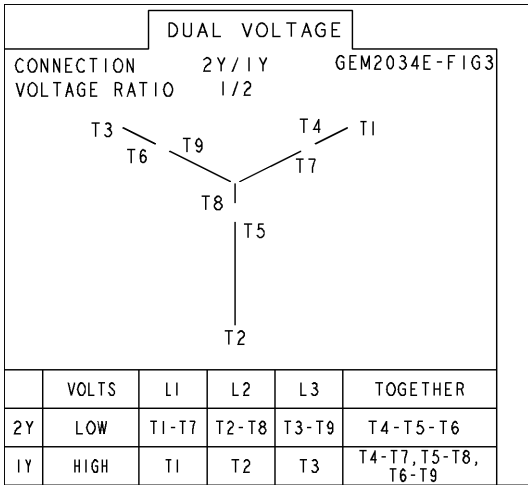

End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	4004D5286PA1	4004D5281SB1
Bearing	235A2601AA02	235A2602AA02
Slinger/Inproseal		

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	4001A5914AM-G01
Fan Cover	4003C5807PA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	4002B5718PX-G01

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

