



**GE INDUSTRIAL MOTORS**  
a **WOLONG** company

# Product Technical Information

February 17, 2023

Data shown is for the current revision model #. Ensure your nameplate model # matches.

<b>Model Number:</b>	<b>5KS447BAA208</b>
<b>Catalog Number:</b>	<b>M1958</b>
<b>Instruction Manual:</b>	GEI-56128
<b>Connection Diagram:</b>	GEM2034E-FIG7
<b>Outline Drawing:</b>	239CGJ00AA

## Accessory Connection Diagrams

<b>Bearing Thermocouple:</b>	None	<b>Heater:</b>	None
<b>RTD:</b>	None	<b>Thermistor:</b>	None
<b>Thermostat:</b>	None	<b>Winding Thermocouple:</b>	None
<b>Bearing RTD:</b>	None		

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

**MODEL NUMBER:** 5KS447BAA208  
**Outline Drawing:** 239CGJ00AA  
**Connection Diagram:** GEM2034E-FIG7  
**Instruction Book:** GEI-56128  
**Design Code:** 49BD1177A  
**Type:** KS  
**Frame:** 447T  
**Phases:** 3  
**Poles:** 4  
**Output Power:** 200HP 148KW  
**RPM:** 1790  
**Voltage:** 460  
**Hertz:** 60  
**Amps - FL:** 219.0  
**Service Factor:** 1.15  
**Alt Service Factor:** --

**Estimated Weight:** 2770 Lbs  
**Time Rating:** CONT  
**Enclosure:** TEFC  
**Encl Construction:** GP  
**Ambient Max(°C):** 40  
**Alt Ambient Max(°C):** --  
**Insulation Class:** F  
**NEMA Design:** B  
**Nominal Efficiency:** 96.2 %  
**Guaranteed Efficiency:** --  
**3/4 Load Efficiency:** --  
**KVA Code:** G  
**Max KVAR:** 43.5  
**Power Factor:** 89.0  
**Bearing - DE:** 6318ZC3  
**Bearing - ODE:** 6314ZC3

Enclosure is Totally Enclosed Fan-Cooled

---

Stamped Nameplate Notes:

VT 0-60 HZ NEMA MG1-31



**Additional Information:**

4P - T EXTN  
C/BOX 700 CU IN - 3.00" NPT  
F1 MOUNTING  
INVERTER DUTY PER NEMA MG1 PART 31  
ALTERNATE RATING FOR PWM CONTROL:1.0SF 40C AMBIENT  
VAR TORQUE RANGE 0-60 HZ



**Performance Characteristics**

1st Winding 1st Connection

**Design: 49BD1177A**

**Marks:**


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	95.58	95.82	96.34	96.52	96.53	95.25	0.00
% PF	89.2	89.16	88.76	86.63	80.37	60.76	3.08
AMPS	274.46	251.96	218.92	167.91	120.64	80.86	60.67

<b>TORQ(FL)#FT</b>	586.55	<b>TORQ(LR)%FL</b>	130.07	<b>TORQ(BD)%FL</b>	259.52
<b>AMPS(LR)</b>	1371.64	<b>PF AT START</b>	0.25		

This motor is capable of two cold or one hot start with a maximum connected load inertia of 4712 Lb-Ft Sq (198.38 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 54 seconds. Safe stall time at 100% voltage is 163 seconds cold, 84 seconds hot. Rotor inertia is 105.05 Lb-Ft Sq (4.42 Kg-meter Sq).

<b>Open Circuit A-C:</b>	1.749	<b>Short Circuit D-C:</b>	0.027
<b>Short Circuit A-C:</b>	0.07	<b>X/R Ratio:</b>	10.252
<b>Stator Slots:</b>	72	<b>Rotor Slots:</b>	58

**Speed Torque Current Curve (First Connection, First Speed)**

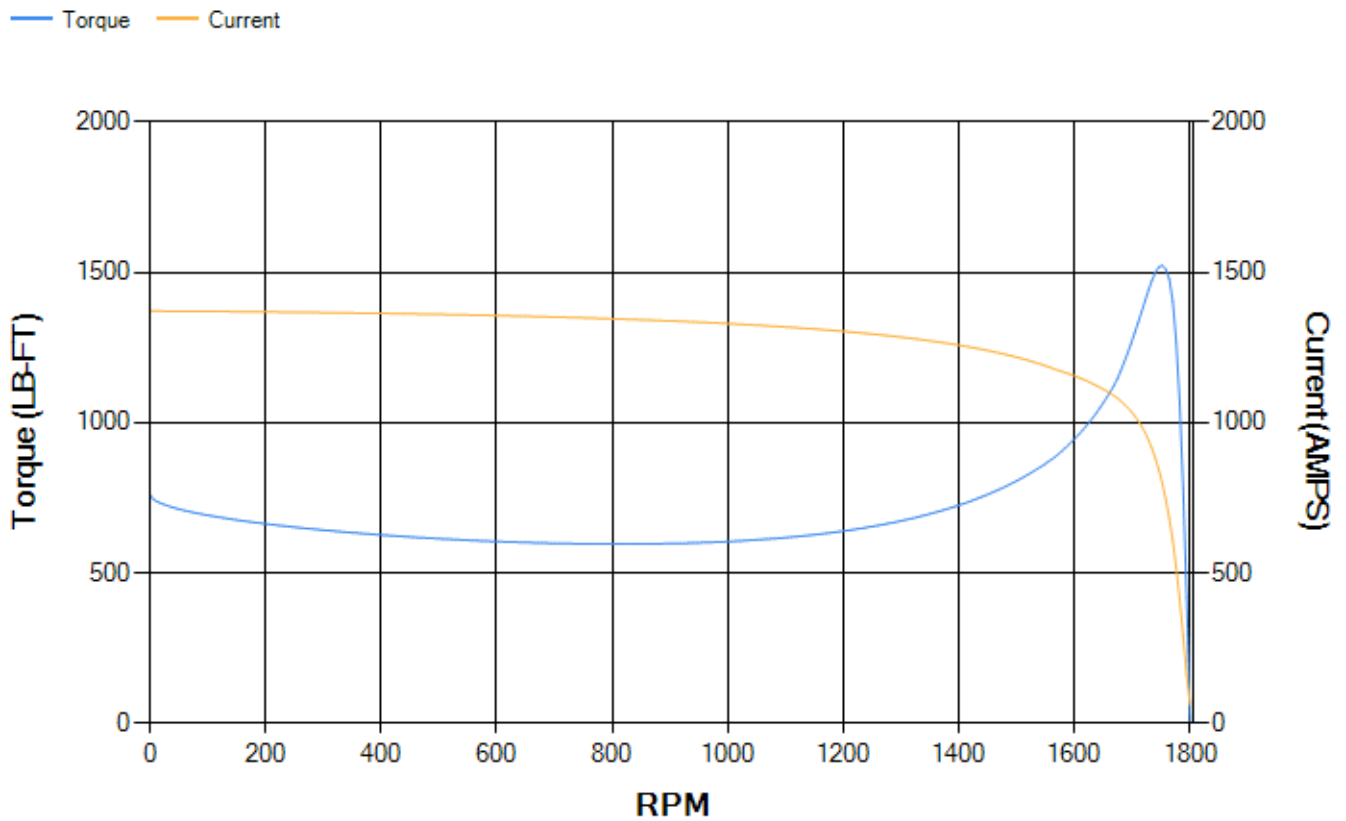



**Marks:**

**Connection Diagram**  
**GEM2034E-FIG7**



End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E4355AA1	115E4354ZA1
Bearing	235A2614AA01	235A2616AA01
Slinger/Inproseal	149C4399G07	

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	159C7100AA2
Fan Cover	128D6851AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	118D4408AD2

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

