



**GE INDUSTRIAL MOTORS**  
a **WOLONG** company

# Product Technical Information

June 25, 2020

Data shown is for the current revision model #. Ensure your nameplate model # matches.

<b>Model Number:</b>	<b>5KS447XAA114D2</b>
<b>Catalog Number:</b>	<b>M8939</b>
<b>Instruction Manual:</b>	GEI-56128
<b>Connection Diagram:</b>	GEM2034E-FIG7
<b>Outline Drawing:</b>	239C6800VY

## Accessory Connection Diagrams

<b>Bearing Thermocouple:</b>	None	<b>Heater:</b>	None
<b>RTD:</b>	None	<b>Thermistor:</b>	None
<b>Thermostat:</b>	None	<b>Winding Thermocouple:</b>	None
<b>Bearing RTD:</b>	None		

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

<b>MODEL NUMBER:</b>	<b>5KS447XAA114D2</b>	<b>Estimated Weight:</b>	2840 Lbs
<b>Outline Drawing:</b>	239C6800VY	<b>Time Rating:</b>	CONT
<b>Connection Diagram:</b>	GEM2034E-FIG7	<b>Enclosure:</b>	TEFC
<b>Instruction Book:</b>	GEI-56128	<b>Encl Construction:</b>	841
<b>Design Code:</b>	49BD0192B	<b>Ambient Max(°C):</b>	40
<b>Type:</b>	KS	<b>Alt Ambient Max(°C):</b>	--
<b>Frame:</b>	447TS	<b>Insulation Class:</b>	H
<b>Phases:</b>	3	<b>NEMA Design:</b>	B
<b>Poles:</b>	2	<b>Nominal Efficiency:</b>	95.4 %
<b>Output Power:</b>	200HP 148KW	<b>Guaranteed Efficiency:</b>	95.0 %
<b>RPM:</b>	3580	<b>3/4 Load Efficiency:</b>	95.8 %
<b>Voltage:</b>	575	<b>KVA Code:</b>	G
<b>Hertz:</b>	60	<b>Max KVAR:</b>	28.8
<b>Amps - FL:</b>	170.0	<b>Power Factor:</b>	92.5
<b>Service Factor:</b>	1.15	<b>Bearing - DE:</b>	6314ZC3
<b>Alt Service Factor:</b>	--	<b>Bearing - ODE:</b>	6314ZC3

Enclosure is Totally Enclosed Fan-Cooled

---

Stamped Nameplate Notes:

DE BRG 70BC03JP30, ODE BRG 70BC03JP30  
 STAMP NP249A5564P051 AS BELOW:  
 MODEL:5KS447XAA114D2 S/N: XXX  
 CSA CERTIFIED CSA09.2216219 FOR EX NA IIC 200 C GC  
 CL 1 ZONE2 AEX NA IIC 200C;CL 1 DIV2 GRP ABCD 200C  
 IN -25C <= AMB <= 40C, 1.0 SF ON SINE-WAVE PWR  
 SURF TEMP 230C AT 1.15SF ON SINE-WAVE PWR  
 OR 200 C VT OR 215 C CT OR --- C CHP PWM CONTROL  
 ALTERNATE RATING FOR PWM CONTROL 1.0SF 40C AMB  
 VT 0-60 HZ, CT 30-60 HZ, CHP --- HZ.  
 EXCEPTION TO IEEE-STD-841-2009:SOUND POWER 96 DBA



**Additional Information:**

2P - TS EXTN  
PAINTED FRAME ID & SHAFT,  
FAN COVER INSIDE & ODE E/S OUTSIDE  
700 CU IN - 3.00" NPT WITH DRAIN HOLES  
INPRO SEAL BOTH ENDS  
OIL RESISTANT SLEEVING ON LEADS  
.0015" TIR SHAFT RUNOUT  
ROUTINE TEST REPORT AND 5 POINT VIBRATION TEST  
REPORT INCLUDED IN C/B  
COPPER WASHER UNDER HEADS OF BEARING CAP BOLTS,  
APPLY TITE-SEAL (A50CD427A) ON BEARING CAP SCREWS,  
RABBETS AND PLUG THREADS.  
GROUND PAD  
F1 MOUNTING



**Performance Characteristics**

1st Winding 1st Connection

**Design: 49BD0192B**

**Marks:**


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	95.13	95.33	95.78	95.75	95.38	93.05	0.00
% PF	91.93	92.18	92.32	91.68	88.54	75.39	7.56
AMPS	214.04	195.97	169.37	127.94	88.66	53.37	32.27

<b>TORQ(FL)#FT</b>	293.41	<b>TORQ(LR)%FL</b>	164.53	<b>TORQ(BD)%FL</b>	286.61
<b>AMPS(LR)</b>	1107.87	<b>PF AT START</b>	0.24		


This motor is capable of two cold or one hot start with a maximum connected load inertia of 744 Lb-Ft Sq (31.32 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 34 seconds. Safe stall time at 100% voltage is 78 seconds cold, 41 seconds hot. Rotor inertia is 51.17 Lb-Ft Sq (2.15 Kg-meter Sq).

<b>Open Circuit A-C:</b>	2.396	<b>Short Circuit D-C:</b>	0.034
<b>Short Circuit A-C:</b>	0.072	<b>X/R Ratio:</b>	12.879
<b>Stator Slots:</b>	48	<b>Rotor Slots:</b>	38

**Speed Torque Current Curve (First Connection, First Speed)**

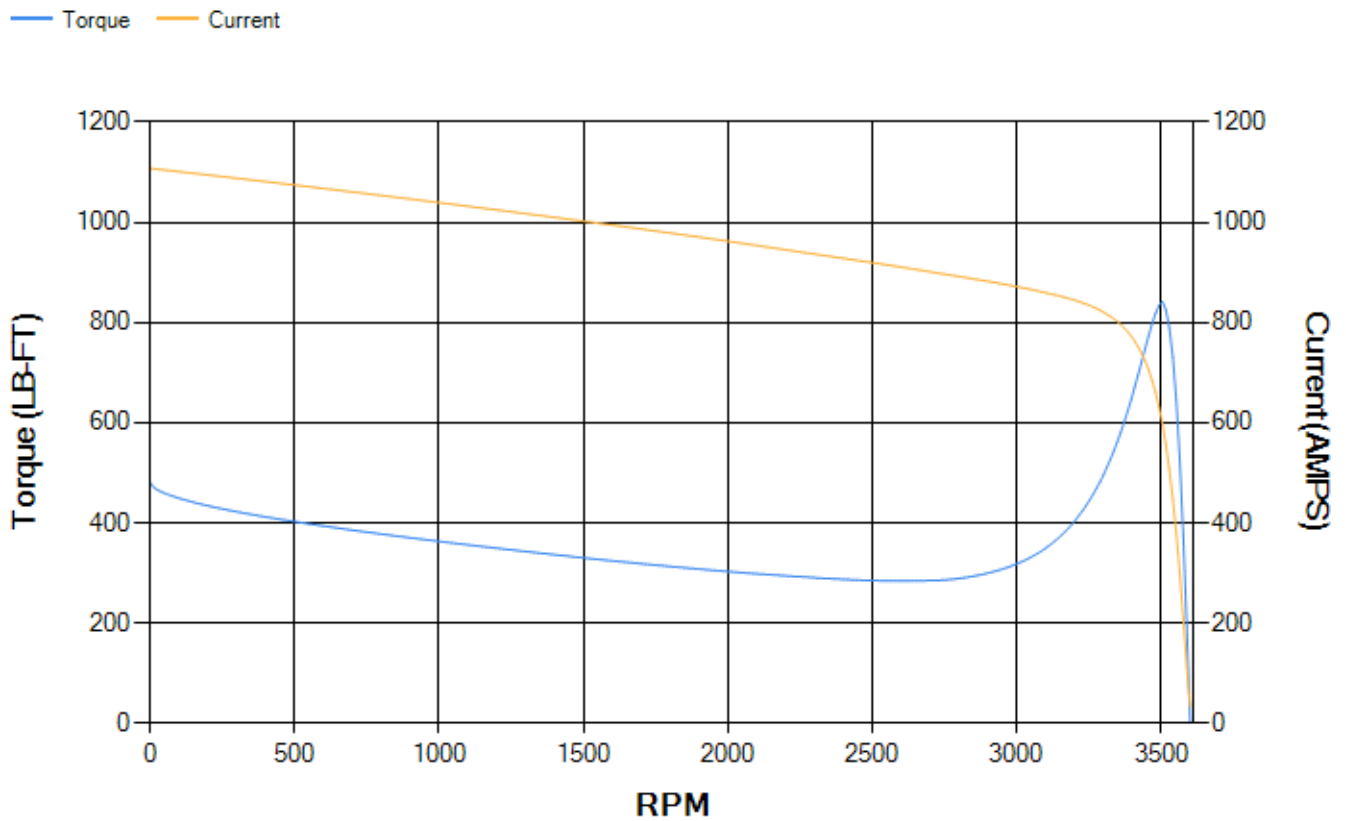

Marks:

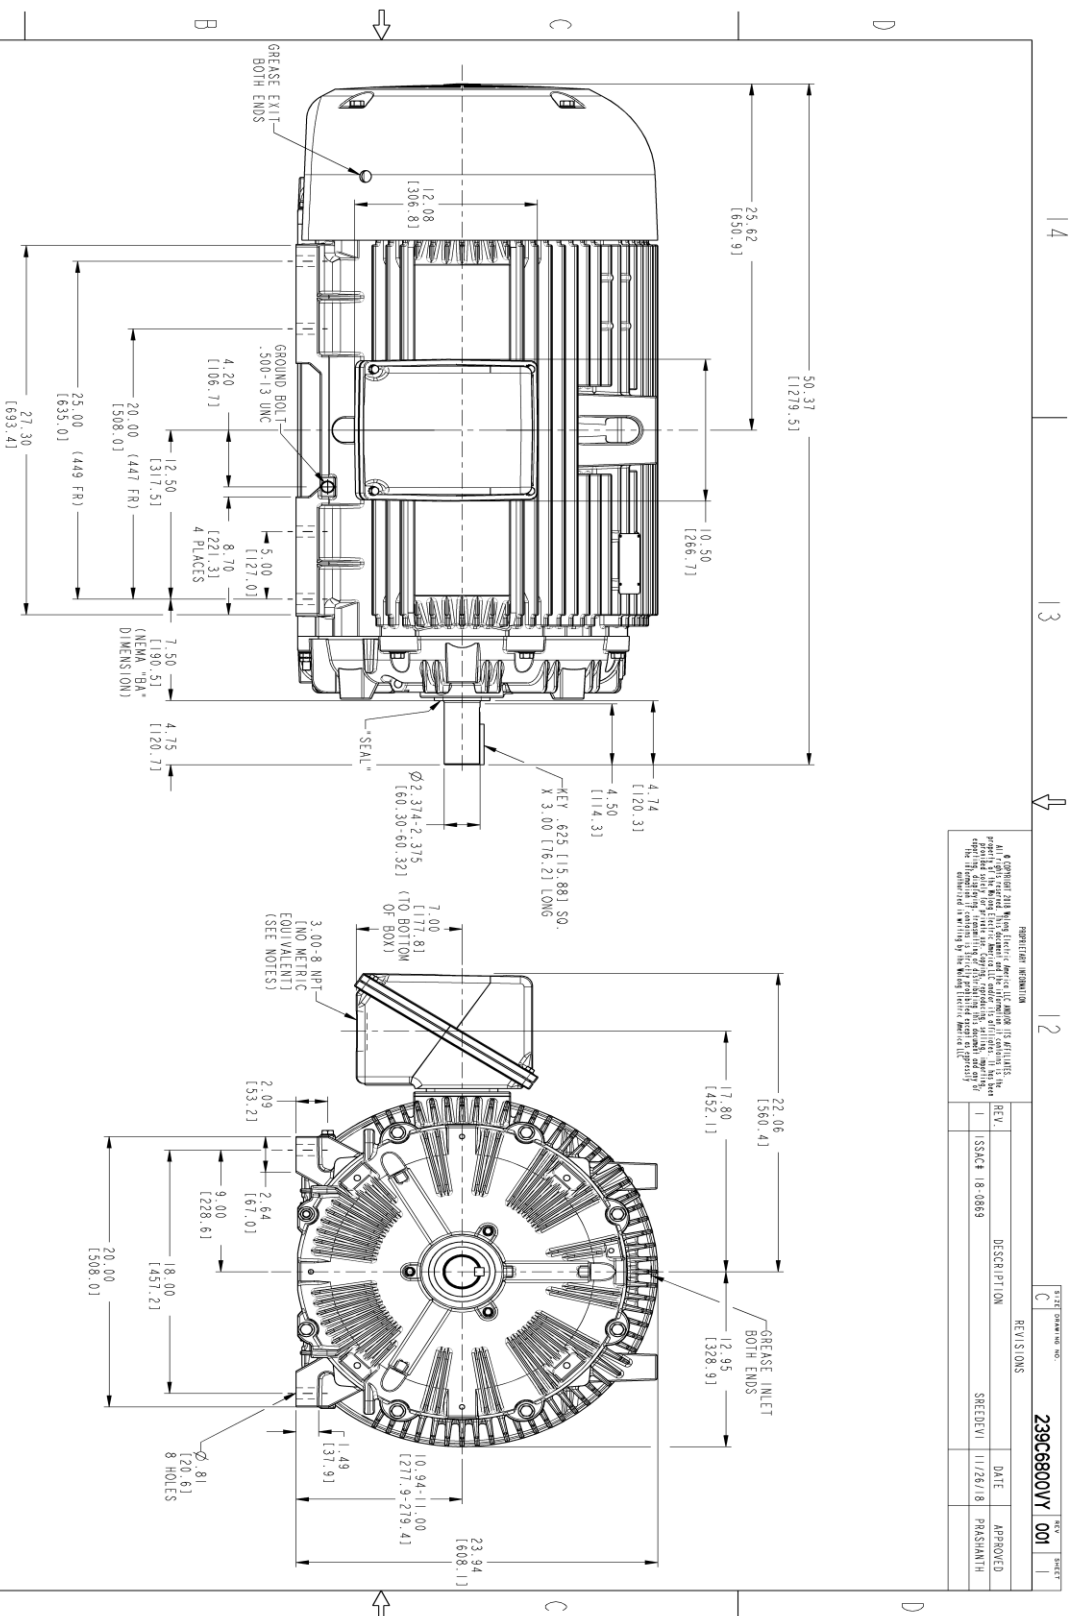

REVISION INFORMATION

REV.	DESCRIPTION	DATE	APPROVED
1	ISSUE 18-0869	11/26/18	PRASHANTH

239C6800VY 001

- NOTES:
1. CONDUIT BOX MAY BE PLACED WITH THE ENTRANCE DOWN, UP OR ON EITHER SIDE.
  2. F-1 ASSEMBLY AS SHOWN.
  3. F-2 ASSEMBLY CONDUIT BOX ON OPPOSITE SIDE.
  4. BRACKETED DIMENSIONS ARE METRIC (MILLIMETERS).
  5. TOLERANCE ON PERMISSIBLE SHAFT EXTENSION RINOUT IS .0015 T.I.R.



SIGNATURES	DATE	TITLE
MODEL: TEJANI	01/20/15	<p><b>GE INDUSTRIAL MOTORS</b> a WOLONG company</p> <p><b>OUTLINE</b></p> <p>447/449 TS TEFC XSD 841</p> <p>700 CU. IN. C BOX</p> <p>239C6800VY</p>
CHECKED: TEJANI	01/20/15	
DESIGN: VENKAT	01/20/15	
DATE: VENKAT	01/20/15	
QUALITY: TEJANI	01/20/15	
SCALE: 0.180	REF. NO: 239C6800VY	SHEET 1 OF 1

**Marks:**

**Connection Diagram**  
**GEM2034E-FIG7**



End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E4354AA1	115E4354LL1
Bearing	235A2516AC01	235A2516AC01
Slinger/Inproseal	235A4575GS3	235A4575GS3

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	159C7100AA1
Fan Cover	128D6841AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	118D4408DG2

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

