



GE INDUSTRIAL MOTORS
a **WOLONG** company

Product Technical Information

April 29, 2021

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	5KS449SAA308C
Catalog Number:	M9139
Instruction Manual:	GEI-56128
Connection Diagram:	GEM2034E-FIG8
Outline Drawing:	239C6800ARA

Accessory Connection Diagrams

Bearing Thermocouple:	None	Heater:	None
RTD:	None	Thermistor:	None
Thermostat:	None	Winding Thermocouple:	None
Bearing RTD:	None		

Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

MODEL NUMBER: 5KS449SAA308C
Outline Drawing: 239C6800ARA
Connection Diagram: GEM2034E-FIG8
Instruction Book: GEI-56128
Design Code: 49BD3187A
Type: KS
Frame: 449T
Phases: 3
Poles: 6
Output Power: 200HP 148KW
RPM: 1190
Voltage: 460
Hertz: 60
Amps - FL: 229.0
Service Factor: 1.15
Alt Service Factor: --

Estimated Weight: 2990 Lbs
Time Rating: CONT
Enclosure: TEFC
Encl Construction: 841
Ambient Max(°C): 40
Alt Ambient Max(°C): --
Insulation Class: H
NEMA Design: B
Nominal Efficiency: 95.8 %
Guaranteed Efficiency: 95.4 %
3/4 Load Efficiency: --
KVA Code: G
Max KVAR: 54.3
Power Factor: 85.5
Bearing - DE: 6318ZC3
Bearing - ODE: 6318ZC3

Enclosure is Totally Enclosed Fan-Cooled

Stamped Nameplate Notes:

IEEE-STD-841-2009
 DE BRG 90BC03JP3, ODE BRG 90BC03JP3
 STAMP NP249A5564P051 AS BELOW:
 MODEL:5KS449SAA308C S/N: XXX
 CSA CERTIFIED CSA09.2216219 FOR EX NA IIC 200 C GC
 CL 1 ZONE2 AEX NA IIC 200C;CL 1 DIV2 GRP ABCD 200C
 IN -40C <= AMB <= 40C, 1.0 SF ON SINE-WAVE PWR
 SURF TEMP 280C AT 1.15SF ON SINE-WAVE PWR
 OR 200C VT OR 230C CT OR 200C CHP PWM CONTROL
 ALTERNATE RATING FOR PWM CONTROL 1.0SF 40C AMB
 VT 0-60 HZ, CT 20-60 HZ, CHP 60-90 HZ.



Additional Information:

6P - T EXTN - SPLIT LEAD
PAINTED FRAME ID & SHAFT,
FAN COVER INSIDE & ODE E/S OUTSIDE
C/BOX 700 CU IN - 3.00" NPT
OIL RESISTANT SLEEVING ON LEADS
.0015" TIR SHAFT RUNOUT
ROUTINE TEST REPORT AND 5 POINT VIBRATION TEST
REPORT INCLUDED IN C/B
GROUND PAD
F1 MOUNTING



Performance Characteristics

1st Winding 1st Connection

Design: 49BD3187A

Marks:


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	95.26	95.49	95.99	96.08	95.91	94.08	0.00
% PF	86.22	86.04	85.32	82.25	74.26	52.92	3.27
AMPS	284.9	262.02	228.6	177.65	131.41	93.99	75.71

TORQ(FL)#FT	881.28	TORQ(LR)%FL	162.78	TORQ(BD)%FL	277.05
AMPS(LR)	1422.95	PF AT START	0.27		

This motor is capable of two cold or one hot start with a maximum connected load inertia of 14093 Lb-Ft Sq (593.32 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 60 seconds. Safe stall time at 100% voltage is 127 seconds cold, 72 seconds hot. Rotor inertia is 182.7 Lb-Ft Sq (7.69 Kg-meter Sq).


Open Circuit A-C:	1.107	Short Circuit D-C:	0.034
Short Circuit A-C:	0.054	X/R Ratio:	12.713
Stator Slots:	72	Rotor Slots:	58

Speed Torque Current Curve (First Connection, First Speed)

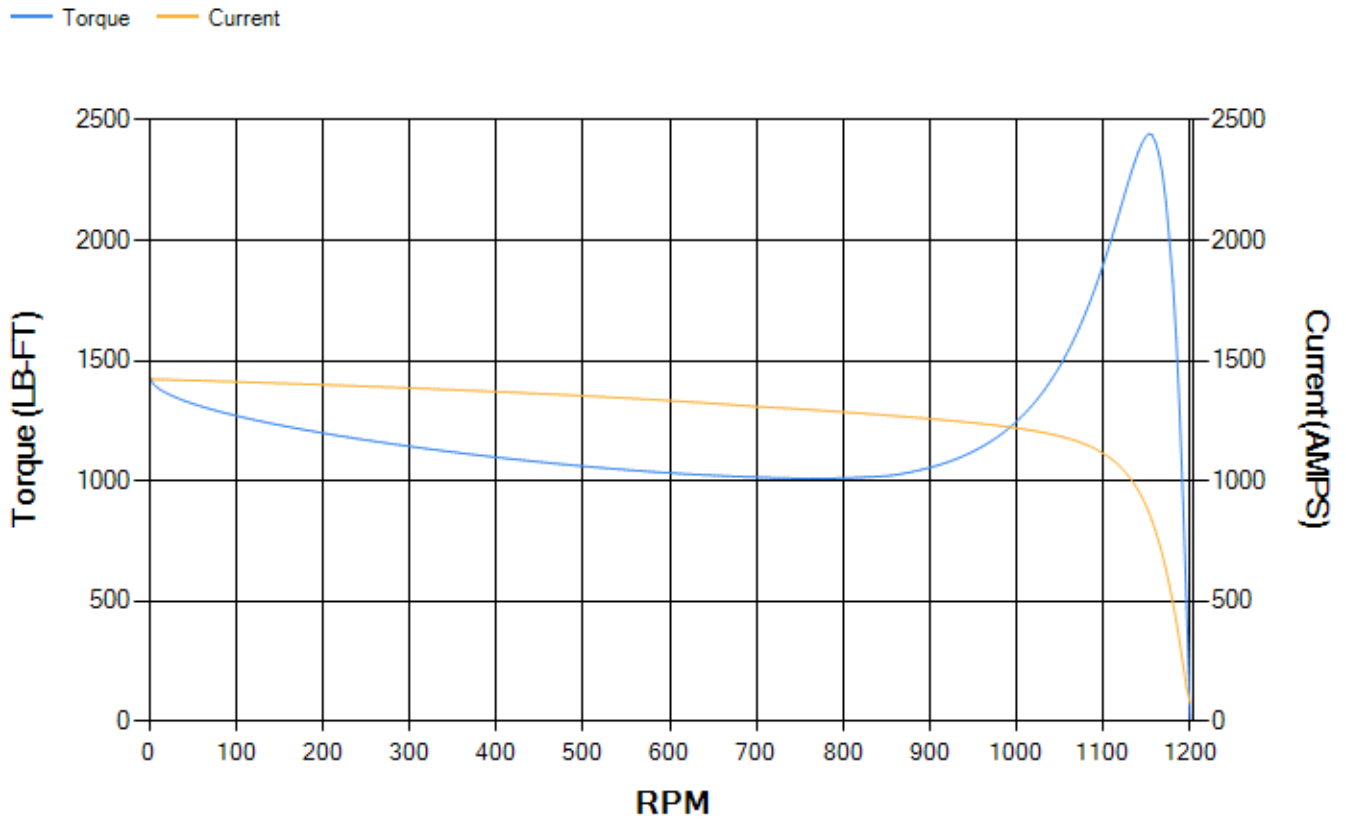

Marks:

Connection Diagram
GEM2034E-FIG8

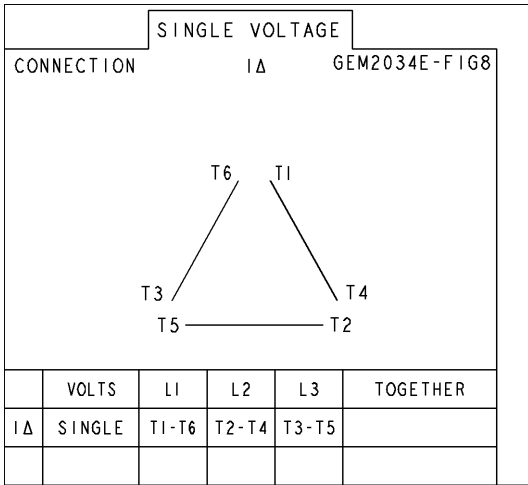

End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E4355AA1	115E4355LM1
Bearing	235A2514AG01	235A2514AG01
Slinger/Inproseal	149C4399G07	149C4399G07

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	159C7100G03
Fan Cover	128D6841AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	118D4408AD2

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

