



**GE INDUSTRIAL MOTORS**  
a **WOLONG** company

# Product Technical Information

October 23, 2020

Data shown is for the current revision model #. Ensure your nameplate model # matches.

<b>Model Number:</b>	<b>5KS449XAA275D1</b>
<b>Catalog Number:</b>	<b>M9640</b>
<b>Instruction Manual:</b>	GEI-56128
<b>Connection Diagram:</b>	GEM2034E-FIG20
<b>Outline Drawing:</b>	239C6800YS

## Accessory Connection Diagrams

<b>Bearing Thermocouple:</b>	None	<b>Heater:</b>	None
<b>RTD:</b>	None	<b>Thermistor:</b>	None
<b>Thermostat:</b>	None	<b>Winding Thermocouple:</b>	None
<b>Bearing RTD:</b>	None		

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

**Marks:**

<b>MODEL NUMBER:</b>	<b>5KS449XAA275D1</b>	<b>Estimated Weight:</b>	2990 Lbs
<b>Outline Drawing:</b>	239C6800YS	<b>Time Rating:</b>	CONT
<b>Connection Diagram:</b>	GEM2034E-FIG20	<b>Enclosure:</b>	TEFC
<b>Instruction Book:</b>	GEI-56128	<b>Encl Construction:</b>	841
<b>Design Code:</b>	49BD1181B	<b>Ambient Max(°C):</b>	40
<b>Type:</b>	KS	<b>Alt Ambient Max(°C):</b>	--
<b>Frame:</b>	449T	<b>Insulation Class:</b>	H
<b>Phases:</b>	3	<b>NEMA Design:</b>	B
<b>Poles:</b>	4	<b>Nominal Efficiency:</b>	96.2 %
<b>Output Power:</b>	300HP 222KW	<b>Guaranteed Efficiency:</b>	95.8 %
<b>RPM:</b>	1790	<b>3/4 Load Efficiency:</b>	--
<b>Voltage:</b>	575	<b>KVA Code:</b>	G
<b>Hertz:</b>	60	<b>Max KVAR:</b>	67.5
<b>Amps - FL:</b>	265.0	<b>Power Factor:</b>	88.0
<b>Service Factor:</b>	1.15	<b>Bearing - DE:</b>	6318ZC3
<b>Alt Service Factor:</b>	--	<b>Bearing - ODE:</b>	6318ZC3

Enclosure is Totally Enclosed Fan-Cooled

---

**Stamped Nameplate Notes:**

FOR DIRECT COUPLED LOAD ONLY  
 DE BRG 90BC03JP3, ODE BRG 90BC03JP3  
 STAMP NP249A5564P051 AS BELOW:  
 MODEL:5KS449XAA275D1 S/N: XXX  
 CSA CERTIFIED CSA09.2216219 FOR EX NA IIC 200 C GC  
 CL 1 ZONE2 AEX NA IIC 200C;CL 1 DIV2 GRP ABCD 200C  
 IN -25C <= AMB <= 40C, 1.0 SF ON SINE-WAVE PWR  
 SURF TEMP 260C AT 1.15SF ON SINE-WAVE PWR  
 OR 200 C VT OR 215 C CT OR 200 C CHP PWM CONTROL  
 ALTERNATE RATING FOR PWM CONTROL 1.0SF 40C AMB  
 VT 0-60 HZ, CT 45-60 HZ, CHP 60-75 HZ.  
 EXCEPTION TO IEEE-STD-841-2009:SOUND POWER 94 DBA



**Additional Information:**

4P - T EXTN - SPLIT LEAD  
PAINTED FRAME ID & SHAFT,  
FAN COVER INSIDE & ODE E/S OUTSIDE  
C/BOX 1260 CU IN - 2(4.00" NPT)  
C/B GRD PLATE  
INPRO SEAL BOTH ENDS  
OIL RESISTANT SLEEVING ON LEADS  
.0015" TIR SHAFT RUNOUT  
ROUTINE TEST REPORT AND 5 POINT VIBRATION TEST  
REPORT INCLUDED IN C/B  
COPPER WASHER UNDER HEADS OF BEARING CAP BOLTS,  
APPLY TITE-SEAL (A50CD427A) ON BEARING CAP SCREWS,  
RABBETS AND PLUG THREADS.  
GROUND PAD  
F1 MOUNTING



**Performance Characteristics**

1st Winding 1st Connection

**Design: 49BD1181B**

**Marks:**


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	95.7	95.88	96.28	96.23	95.89	93.79	0.00
% PF	88.52	88.5	88.11	85.93	79.57	60.04	4.28
AMPS	331.42	304.43	264.81	203.72	147.2	99.72	75.33

**TORQ(FL)#FT** 879.73      **TORQ(LR)%FL** 131.39      **TORQ(BD)%FL** 258.8  
**AMPS(LR)** 1646.11      **PF AT START** 0.23


This motor is capable of two cold or one hot start with a maximum connected load inertia of 8350 Lb-Ft Sq (351.54 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 63 seconds. Safe stall time at 100% voltage is 142 seconds cold, 76 seconds hot. Rotor inertia is 127.08 Lb-Ft Sq (5.35 Kg-meter Sq).

**Open Circuit A-C:** 1.726      **Short Circuit D-C:** 0.037  
**Short Circuit A-C:** 0.072      **X/R Ratio:** 14.079  
**Stator Slots:** 72      **Rotor Slots:** 58

**Speed Torque Current Curve (First Connection, First Speed)**

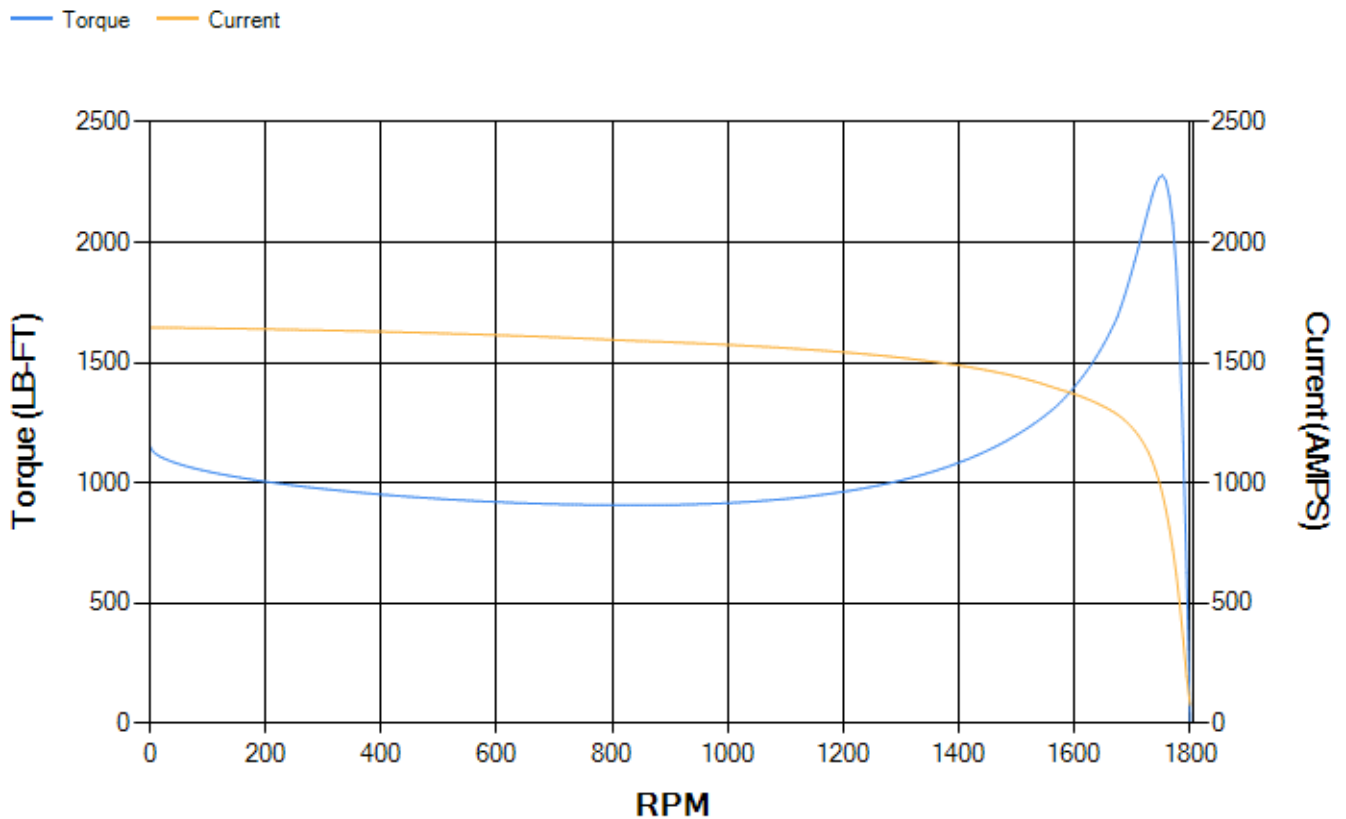

Marks:

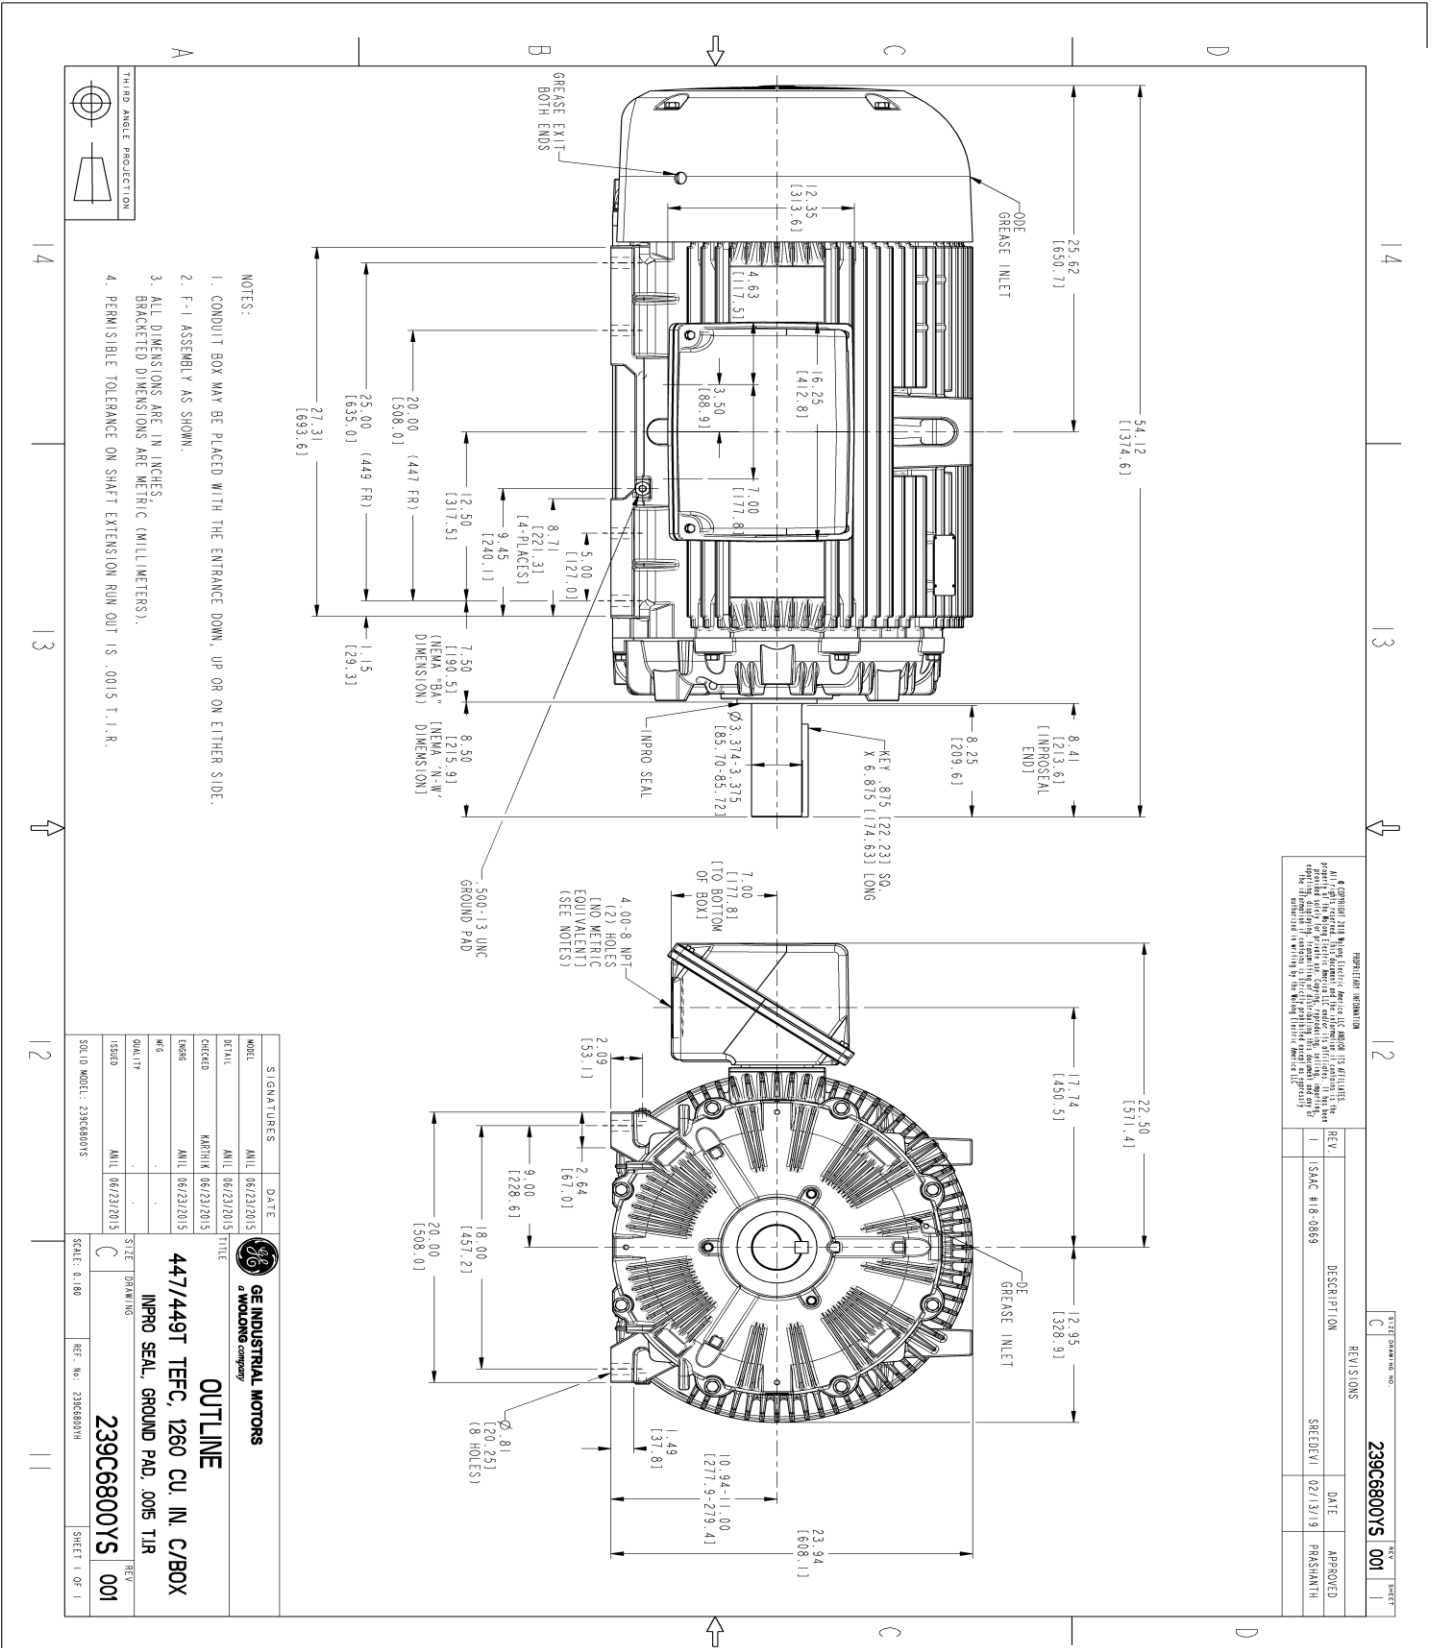

- NOTES:
1. CONDUIT BOX MAY BE PLACED WITH THE ENTRANCE DOWN, UP OR ON EITHER SIDE.
  2. F-I ASSEMBLY AS SHOWN.
  3. ALL DIMENSIONS ARE IN INCHES.
  4. PERMISSIBLE TOLERANCE ON SHAFT EXTENSION RUN OUT IS .0015 T.I.R.

**PROPRIETARY INFORMATION**  
 GE and the GE logo are trademarks of General Electric. All rights reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, without the prior written permission of GE. The information contained herein is the property of GE and is confidential.

REV.	DESCRIPTION	DATE	APPROVED
1	ISAC #18-0869	02/13/19	PARSHANTH




THIRD ANGLE PROJECTION

SIGNATURES	DATE	TITLE
AMIL 06/23/2015		GE INDUSTRIAL MOTORS
AMIL 06/23/2015		239C6800YS
AMIL 06/23/2015		447/449T TEC, 1260 CU. IN. C/BOX
AMIL 06/23/2015		IMPRO SEAL, GROUND PAD, .005 TIR
AMIL 06/23/2015		239C6800YS

SCALE: 0.180 REF. NO: 239C6800TH SHEET 1 OF 1

**Marks:**

**Connection Diagram**  
**GEM2034E-FIG20**

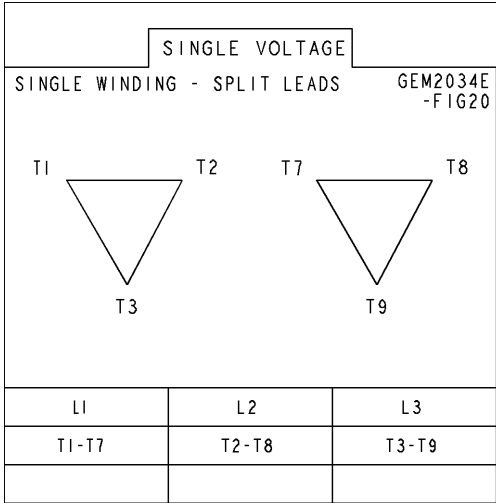

End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E4355AA1	115E4355LM1
Bearing	235A2514AG01	235A2514AG01
Slinger/Inproseal	235A4575GS5	235A4575GS5

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	159C7100G03
Fan Cover	128D6841AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	179B9058G03

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

