



**GE INDUSTRIAL MOTORS**  
a **WOLONG** company

# Product Technical Information

June 22, 2020

Data shown is for the current revision model #. Ensure your nameplate model # matches.

<b>Model Number:</b>	<b>5KS326SAA208D10</b>
<b>Catalog Number:</b>	<b>M9917</b>
<b>Instruction Manual:</b>	GEI-56128
<b>Connection Diagram:</b>	GEM2034E-FIG7
<b>Outline Drawing:</b>	239C6000AE

## Accessory Connection Diagrams

<b>Bearing Thermocouple:</b>	None	<b>Heater:</b>	None
<b>RTD:</b>	None	<b>Thermistor:</b>	None
<b>Thermostat:</b>	None	<b>Winding Thermocouple:</b>	None
<b>Bearing RTD:</b>	None		

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

<b>MODEL NUMBER:</b>	<b>5KS326SAA208D10</b>	<b>Estimated Weight:</b>	710 Lbs
<b>Outline Drawing:</b>	239C6000AE	<b>Time Rating:</b>	CONT
<b>Connection Diagram:</b>	GEM2034E-FIG7	<b>Enclosure:</b>	TEFC
<b>Instruction Book:</b>	GEI-56128	<b>Encl Construction:</b>	X\$D
<b>Design Code:</b>	32BD1183A	<b>Ambient Max(°C):</b>	40
<b>Type:</b>	KS	<b>Alt Ambient Max(°C):</b>	60
<b>Frame:</b>	326T	<b>Insulation Class:</b>	H
<b>Phases:</b>	3	<b>NEMA Design:</b>	B
<b>Poles:</b>	4	<b>Nominal Efficiency:</b>	94.5 %
<b>Output Power:</b>	50HP 37KW	<b>Guaranteed Efficiency:</b>	94.1 %
<b>RPM:</b>	1780	<b>3/4 Load Efficiency:</b>	94.8 %
<b>Voltage:</b>	460	<b>KVA Code:</b>	G
<b>Hertz:</b>	60	<b>Max KVAR:</b>	17.7
<b>Amps - FL:</b>	60.8	<b>Power Factor:</b>	81.5
<b>Service Factor:</b>	1.15	<b>Bearing - DE:</b>	6312ZC3
<b>Alt Service Factor:</b>	1.00	<b>Bearing - ODE:</b>	6312ZC3

Enclosure is Totally Enclosed Fan-Cooled

---

Stamped Nameplate Notes:

STAMP NP249A5564P051 AS BELOW:  
 MODEL:5KS326SAA208D10 S/N: XXX  
 CSA CERTIFIED CSA09.2216219 FOR EX NA IIC 200 C GC  
 CL 1 ZONE2 AEX NA IIC 200C;CL 1 DIV2 GRP ABCD 200C  
 IN -40C <= AMB <= 40C, 1.0 SF ON SINE-WAVE PWR  
 SURF TEMP 260C AT 1.15SF ON SINE-WAVE PWR  
 OR 200C VT OR 230C CT OR 200C CHP PWM CONTROL  
 ALTERNATE RATING FOR PWM CONTROL 1.0SF 40C AMB  
 VT 0 - 60 HZ, CT 10-60 HZ, CHP 60-90 HZ.

Additional Information:

4P - T EXTN  
 346 CU IN - 3.00" NPT  
 OIL RESISTANT SLEEVING ON LEADS  
 F1 MOUNTING



**Performance Characteristics**

1st Winding 1st Connection

**Design: 32BD1183A**

**Marks:**


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	93.77	94.07	94.64	94.79	94.49	91.93	0.00
% PF	83.04	82.57	81.28	76.81	66.71	44.37	3.33
AMPS	75.13	69.29	60.71	48.21	37.12	28.68	24.72

<b>TORQ(FL)#FT</b>	147.64	<b>TORQ(LR)%FL</b>	173.11	<b>TORQ(BD)%FL</b>	243.21
<b>AMPS(LR)</b>	337.38	<b>PF AT START</b>	0.34		


This motor is capable of two cold or one hot start with a maximum connected load inertia of 1058 Lb-Ft Sq (44.54 Kg-meter Sq) at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 34 seconds. Safe stall time at 100% voltage is 78 seconds cold, 40 seconds hot. Rotor inertia is 8.52 Lb-Ft Sq (0.36 Kg-meter Sq).

<b>Open Circuit A-C:</b>	0.51	<b>Short Circuit D-C:</b>	0.023
<b>Short Circuit A-C:</b>	0.031	<b>X/R Ratio:</b>	8.712
<b>Stator Slots:</b>	48	<b>Rotor Slots:</b>	38

**Speed Torque Current Curve (First Connection, First Speed)**

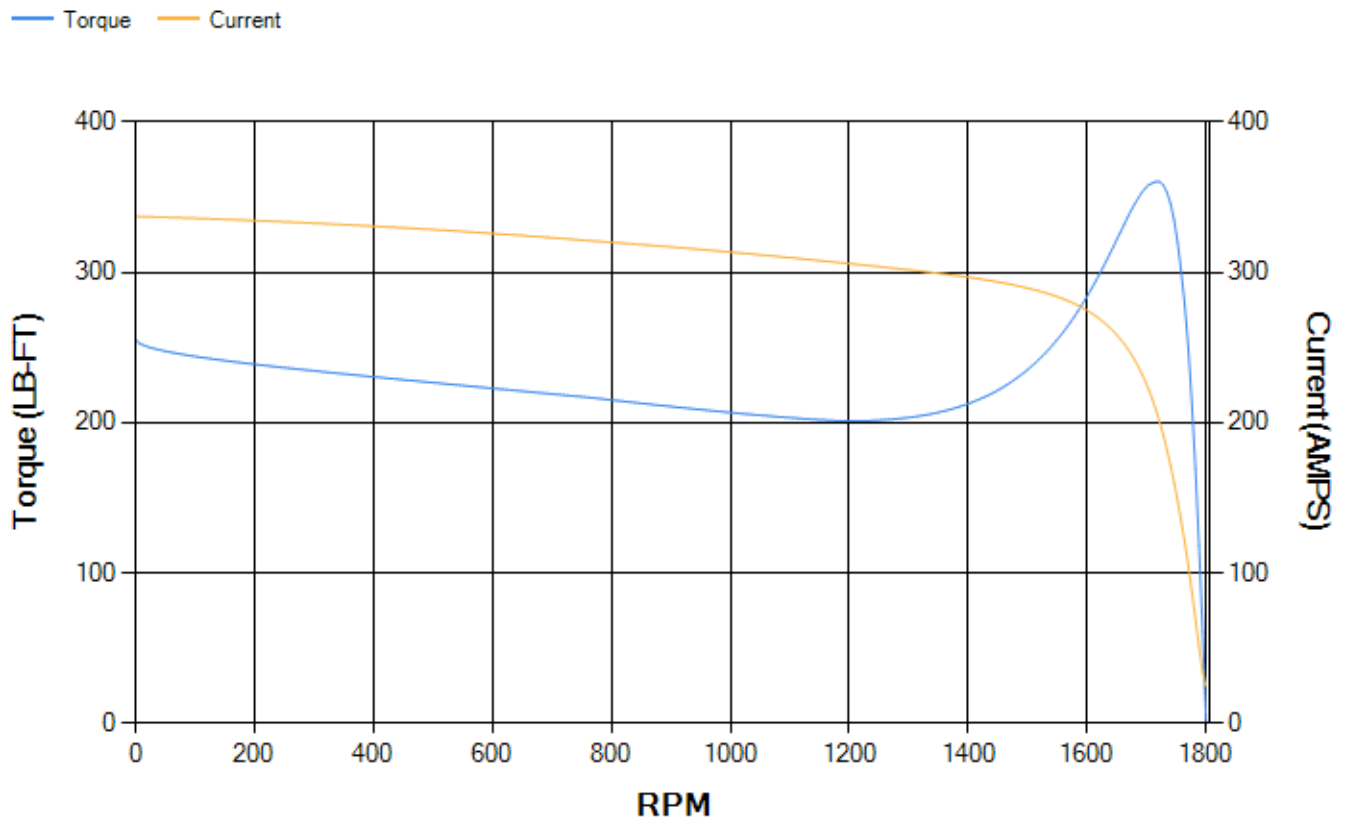

Marks:

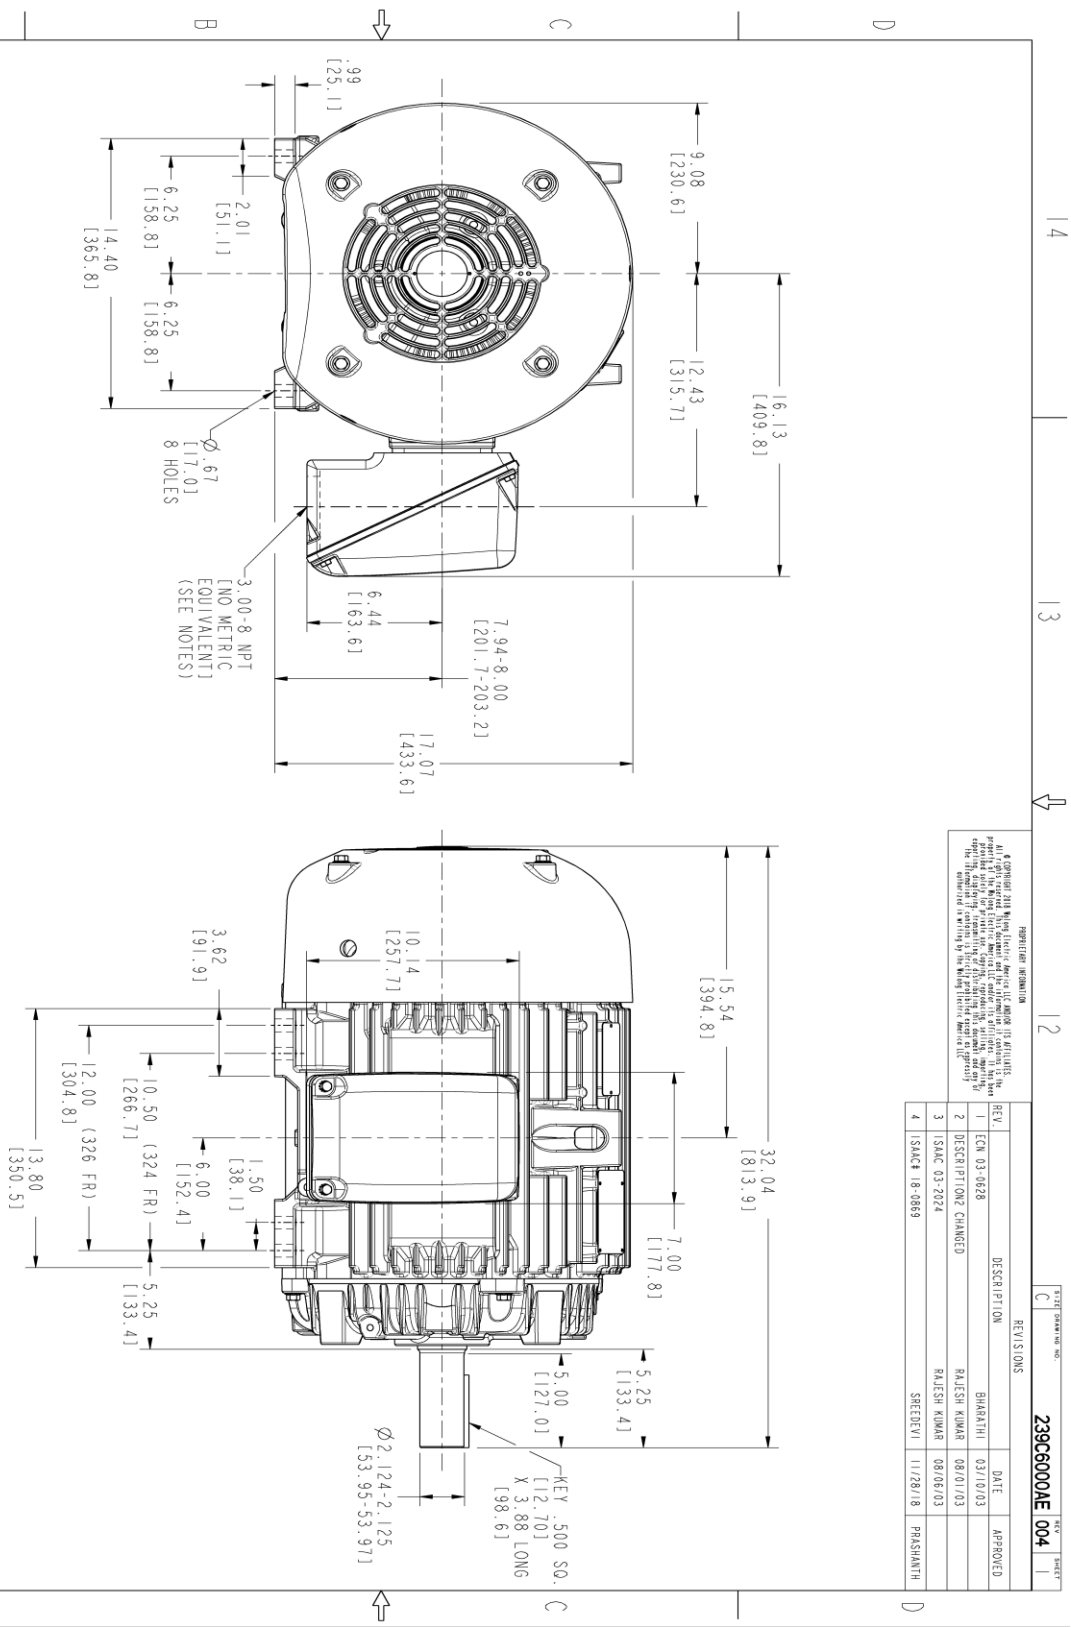

REGISTRATION INFORMATION  
 I am a registered professional engineer in the State of California, License No. 40817, in the field of Electrical Engineering. I am the author of the design and drawings of the above described project. I am not providing any services to the client of the project. The information contained herein is the property of the client and is not to be used for any other purpose without the written consent of the client. The information contained herein is the property of the client and is not to be used for any other purpose without the written consent of the client.

REV.	DESCRIPTION	DATE	APPROVED
1	ECN 03-0628	03/10/03	BHARATHI
2	DESCRIPTION CHANGED	08/01/03	RAJESH KUMAR
3	ISAC 03-2024	08/08/03	RAJESH KUMAR
4	ISAC# 18-0869	11/28/18	PRAASHANTH

- NOTES :
- CONDUIT BOX MAY BE PLACED WITH THE ENTRANCE DOWN, UP OR ON EITHER SIDE.
  - F-1 ASM AS SHOWN.
  - F-2 ASM HAS CONDUIT BOX ON OPPOSITE SIDE.
  - BRACKETED DIMENSIONS ARE METRIC (MILLIMETERS).



SIGNATURES	DATE
MODEL: MGRANJ	03/13/02
REVIEW: MANIVANNAN	03/13/02
DRAWN: [Blank]	[Blank]
W/E: [Blank]	[Blank]
QUALITY: [Blank]	[Blank]
ISSUED: MGRANJ	03/13/02
SCALE: 0.250	REF. NO: [Blank]


**GE INDUSTRIAL MOTORS**  
 a WOLONG company

**OUTLINE ASSEMBLY**  
 324/326T TEFC  
 346 CU. IN. CONDUIT BOX

**239C6000AE** REV 004  
 SHEET 1 OF 1

**Marks:**

**Connection Diagram**  
**GEM2034E-FIG7**

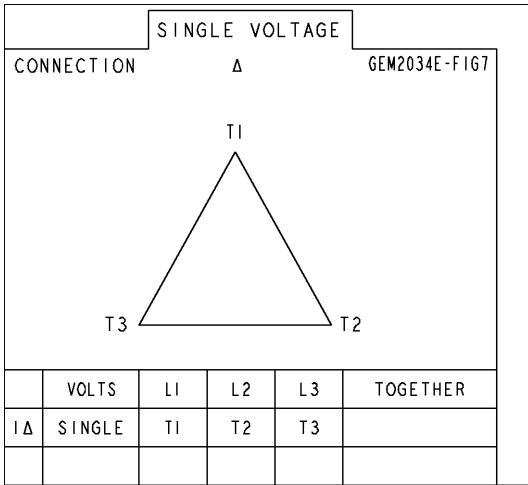

End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E4200AA1	115E4200LA1
Bearing	235A2509AS01	235A2509AS01
Slinger/Inproseal	149C4399G04	149C4399G04

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	159C6900G04
Fan Cover	128D6800AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	149C4429AA2

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

