



**GE INDUSTRIAL MOTORS**  
a **WOLONG** company

# Product Technical Information

February 12, 2021

Data shown is for the current revision model #. Ensure your nameplate model # matches.

<b>Model Number:</b>	<b>5KS447SAA204D7</b>
<b>Catalog Number:</b>	<b>M9959</b>
<b>Instruction Manual:</b>	GEI-56128
<b>Connection Diagram:</b>	GEM2034E-FIG7
<b>Outline Drawing:</b>	239C6800ARA

## Accessory Connection Diagrams

<b>Bearing Thermocouple:</b>	None	<b>Heater:</b>	None
<b>RTD:</b>	None	<b>Thermistor:</b>	None
<b>Thermostat:</b>	None	<b>Winding Thermocouple:</b>	None
<b>Bearing RTD:</b>	None		

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

**MODEL NUMBER:** 5KS447SAA204D7  
**Outline Drawing:** 239C6800ARA  
**Connection Diagram:** GEM2034E-FIG7  
**Instruction Book:** GEI-56128  
**Design Code:** 49BD1177B  
**Type:** KS  
**Frame:** 447T  
**Phases:** 3  
**Poles:** 4  
**Output Power:** 200HP 148KW  
**RPM:** 1790  
**Voltage:** 575  
**Hertz:** 60  
**Amps - FL:** 175.0  
**Service Factor:** 1.15  
**Alt Service Factor:** --

**Estimated Weight:** 2770 Lbs  
**Time Rating:** CONT  
**Enclosure:** TEFC  
**Encl Construction:** 841  
**Ambient Max(°C):** 40  
**Alt Ambient Max(°C):** --  
**Insulation Class:** H  
**NEMA Design:** B  
**Nominal Efficiency:** 96.2 %  
**Guaranteed Efficiency:** 95.8 %  
**3/4 Load Efficiency:** --  
**KVA Code:** G  
**Max KVAR:** 42.7  
**Power Factor:** 89.0  
**Bearing - DE:** 6318ZC3  
**Bearing - ODE:** 6318ZC3

**Enclosure is Totally Enclosed Fan-Cooled**

---

Stamped Nameplate Notes:

IEEE-STD-841-2009  
 DE BRG 90BC03JP3, ODE BRG 90BC03JP3  
 STAMP NP249A5564P051 AS BELOW:  
 MODEL:5KS447SAA204D7 S/N: XXX  
 CSA CERTIFIED CSA09.2216219 FOR EX NA IIC 215 C GC  
 CL 1 ZONE2 AEX NA IIC ---C;CL 1 DIV2 GRP ABCD 215C  
 IN -40C <= AMB <= 40C, 1.0 SF ON SINE-WAVE PWR  
 SURF TEMP 260C AT 1.15SF ON SINE-WAVE PWR  
 OR 215C VT OR 215C CT OR 215C CHP PWM CONTROL  
 ALTERNATE RATING FOR PWM CONTROL 1.0SF 40C AMB  
 VT 0-60 HZ, CT 45-60 HZ, CHP 60-75 HZ.



**Additional Information:**

4P - T EXTN  
PAINTED FRAME ID & SHAFT,  
FAN COVER INSIDE & ODE E/S OUTSIDE  
C/BOX 700 CU IN - 3.00" NPT  
OIL RESISTANT SLEEVING ON LEADS  
.0015" TIR SHAFT RUNOUT  
ROUTINE TEST REPORT AND 5 POINT VIBRATION TEST  
REPORT INCLUDED IN C/B  
GROUND PAD  
F1 MOUNTING



**Performance Characteristics**

1st Winding 1st Connection

**Design: 49BD1177B**

**Marks:**


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	95.53	95.78	96.31	96.5	96.53	95.28	0.00
% PF	89.2	89.2	88.85	86.83	80.76	61.41	3.11
AMPS	219.66	201.57	175.01	134.04	96.05	63.99	47.63

<b>TORQ(FL)#FT</b>	586.61	<b>TORQ(LR)%FL</b>	127.72	<b>TORQ(BD)%FL</b>	255.22
<b>AMPS(LR)</b>	1079.27	<b>PF AT START</b>	0.25		

This motor is capable of two cold or one hot start with a maximum connected load inertia of 4688 Lb-Ft Sq (197.36 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 55 seconds. Safe stall time at 100% voltage is 168 seconds cold, 86 seconds hot. Rotor inertia is 105.05 Lb-Ft Sq (4.42 Kg-meter Sq).

<b>Open Circuit A-C:</b>	1.75	<b>Short Circuit D-C:</b>	0.027
<b>Short Circuit A-C:</b>	0.07	<b>X/R Ratio:</b>	10.288
<b>Stator Slots:</b>	72	<b>Rotor Slots:</b>	58

**Speed Torque Current Curve (First Connection, First Speed)**

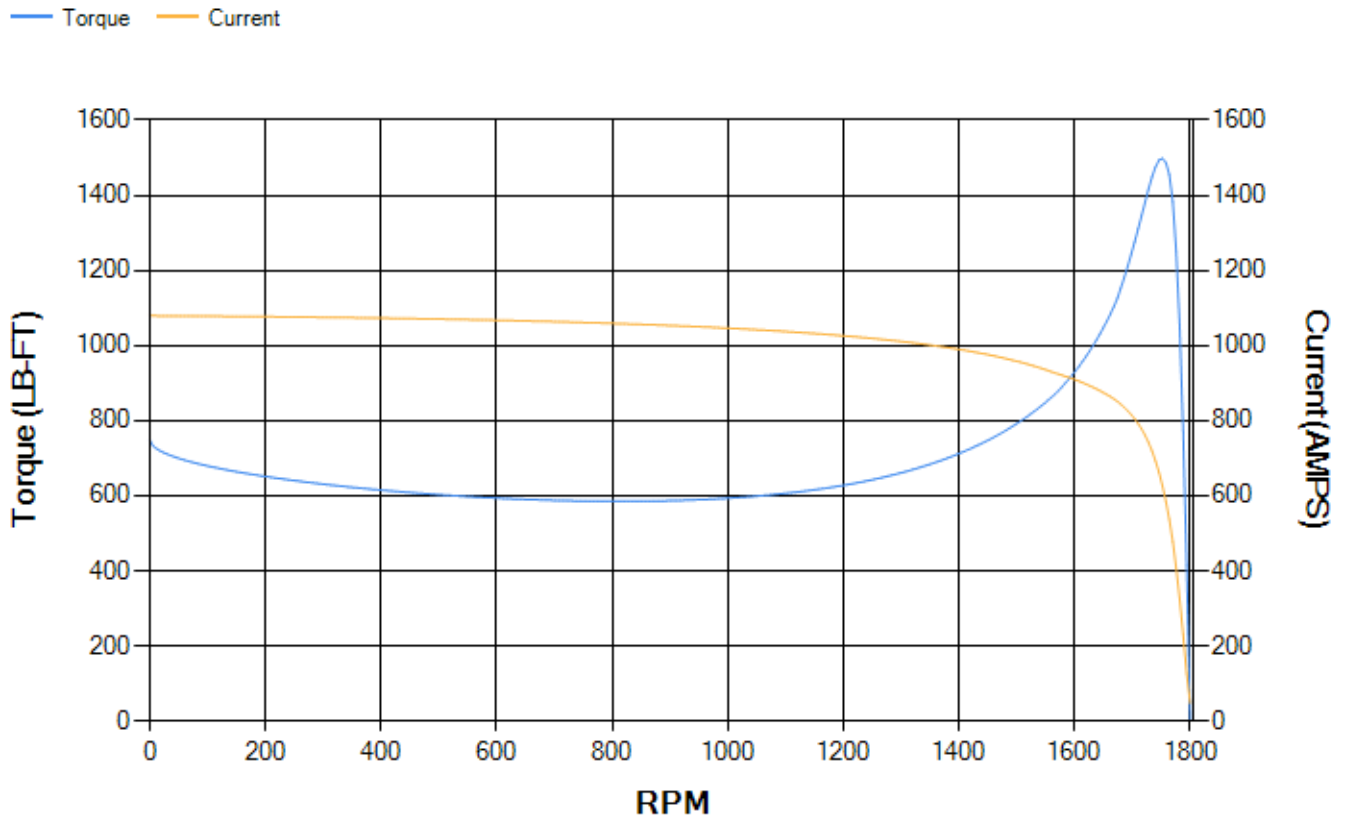



**Marks:**

**Connection Diagram**  
**GEM2034E-FIG7**



End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E4355AA1	115E4355LM1
Bearing	235A2514AG01	235A2514AG01
Slinger/Inproseal	149C4399G07	149C4399G07

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	159C7100AA2
Fan Cover	128D6841AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	118D4408AD2

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

