



**GE INDUSTRIAL MOTORS**  
a **WOLONG** company

# Product Technical Information

February 15, 2021

Data shown is for the current revision model #. Ensure your nameplate model # matches.

<b>Model Number:</b>	<b>5KS449SAA201D9</b>
<b>Catalog Number:</b>	<b>M9988</b>
<b>Instruction Manual:</b>	GEI-56128
<b>Connection Diagram:</b>	GEM2034E-FIG25
<b>Outline Drawing:</b>	239C6800APZ

## Accessory Connection Diagrams

<b>Bearing Thermocouple:</b>	None	<b>Heater:</b>	None
<b>RTD:</b>	None	<b>Thermistor:</b>	None
<b>Thermostat:</b>	None	<b>Winding Thermocouple:</b>	None
<b>Bearing RTD:</b>	None		

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

<b>MODEL NUMBER:</b>	<b>5KS449SAA201D9</b>	<b>Estimated Weight:</b>	3100 Lbs
<b>Outline Drawing:</b>	239C6800APZ	<b>Time Rating:</b>	CONT
<b>Connection Diagram:</b>	GEM2034E-FIG25	<b>Enclosure:</b>	TEFC
<b>Instruction Book:</b>	GEI-56128	<b>Encl Construction:</b>	841
<b>Design Code:</b>	49BD1241A	<b>Ambient Max(°C):</b>	40
<b>Type:</b>	KS	<b>Alt Ambient Max(°C):</b>	--
<b>Frame:</b>	449T	<b>Insulation Class:</b>	H
<b>Phases:</b>	3	<b>NEMA Design:</b>	B
<b>Poles:</b>	4	<b>Nominal Efficiency:</b>	96.5 %
<b>Output Power:</b>	250HP 185KW	<b>Guaranteed Efficiency:</b>	96.2 %
<b>RPM:</b>	1790	<b>3/4 Load Efficiency:</b>	--
<b>Voltage:</b>	460	<b>KVA Code:</b>	G
<b>Hertz:</b>	60	<b>Max KVAR:</b>	54.5
<b>Amps - FL:</b>	274.0	<b>Power Factor:</b>	88.5
<b>Service Factor:</b>	1.15	<b>Bearing - DE:</b>	6318ZC3
<b>Alt Service Factor:</b>	--	<b>Bearing - ODE:</b>	6318ZC3

Enclosure is Totally Enclosed Fan-Cooled

---

Stamped Nameplate Notes:

IEEE-STD-841-2009

FOR DIRECT COUPLED LOAD ONLY

DE BRG 90BC03JP3, ODE BRG 90BC03JP3

STAMP NP249A5564P051 AS BELOW:

MODEL:5KS449SAA201D9 S/N: XXX

CSA CERTIFIED CSA09.2216219 FOR EX NA IIC 200 C GC

CL 1 ZONE2 AEX NA IIC 200C;CL 1 DIV2 GRP ABCD 200C

IN -40C <= AMB <= 40C, 1.0 SF ON SINE-WAVE PWR

SURF TEMP 260C AT 1.15SF ON SINE-WAVE PWR

OR 200C VT OR 230C CT OR 200C CHP PWM CONTROL

ALTERNATE RATING FOR PWM CONTROL 1.0SF 40C AMB

VT 0-60 HZ, CT 30-60 HZ, CHP 60-75 HZ.



**Additional Information:**

4P - T EXTN - SPLIT LEAD  
PAINTED FRAME ID & SHAFT,  
FAN COVER INSIDE & ODE E/S OUTSIDE  
C/BOX 1260 CU IN - 2(4.00" NPT)  
C/B GRD PLATE  
OIL RESISTANT SLEEVING ON LEADS  
.0015" TIR SHAFT RUNOUT  
ROUTINE TEST REPORT AND 5 POINT VIBRATION TEST  
REPORT INCLUDED IN C/B  
GROUND PAD  
F1 MOUNTING



**Performance Characteristics**

1st Winding 1st Connection

**Design: 49BD1241A**

**Marks:**


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	96.2	96.38	96.82	96.86	96.74	95.32	0.00
% PF	89.22	89.16	88.72	86.53	80.22	60.6	3.15
AMPS	340.74	313.11	272.41	209.38	150.76	101.26	76

<b>TORQ(FL)#FT</b>	732.88	<b>TORQ(LR)%FL</b>	139.77	<b>TORQ(BD)%FL</b>	269.92
<b>AMPS(LR)</b>	1774.89	<b>PF AT START</b>	0.23		

This motor is capable of two cold or one hot start with a maximum connected load inertia of 8521 Lb-Ft Sq (358.73 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 73 seconds. Safe stall time at 100% voltage is 172 seconds cold, 88 seconds hot. Rotor inertia is 137.24 Lb-Ft Sq (5.78 Kg-meter Sq).

<b>Open Circuit A-C:</b>	1.866	<b>Short Circuit D-C:</b>	0.038
<b>Short Circuit A-C:</b>	0.072	<b>X/R Ratio:</b>	14.172
<b>Stator Slots:</b>	72	<b>Rotor Slots:</b>	58

**Speed Torque Current Curve (First Connection, First Speed)**

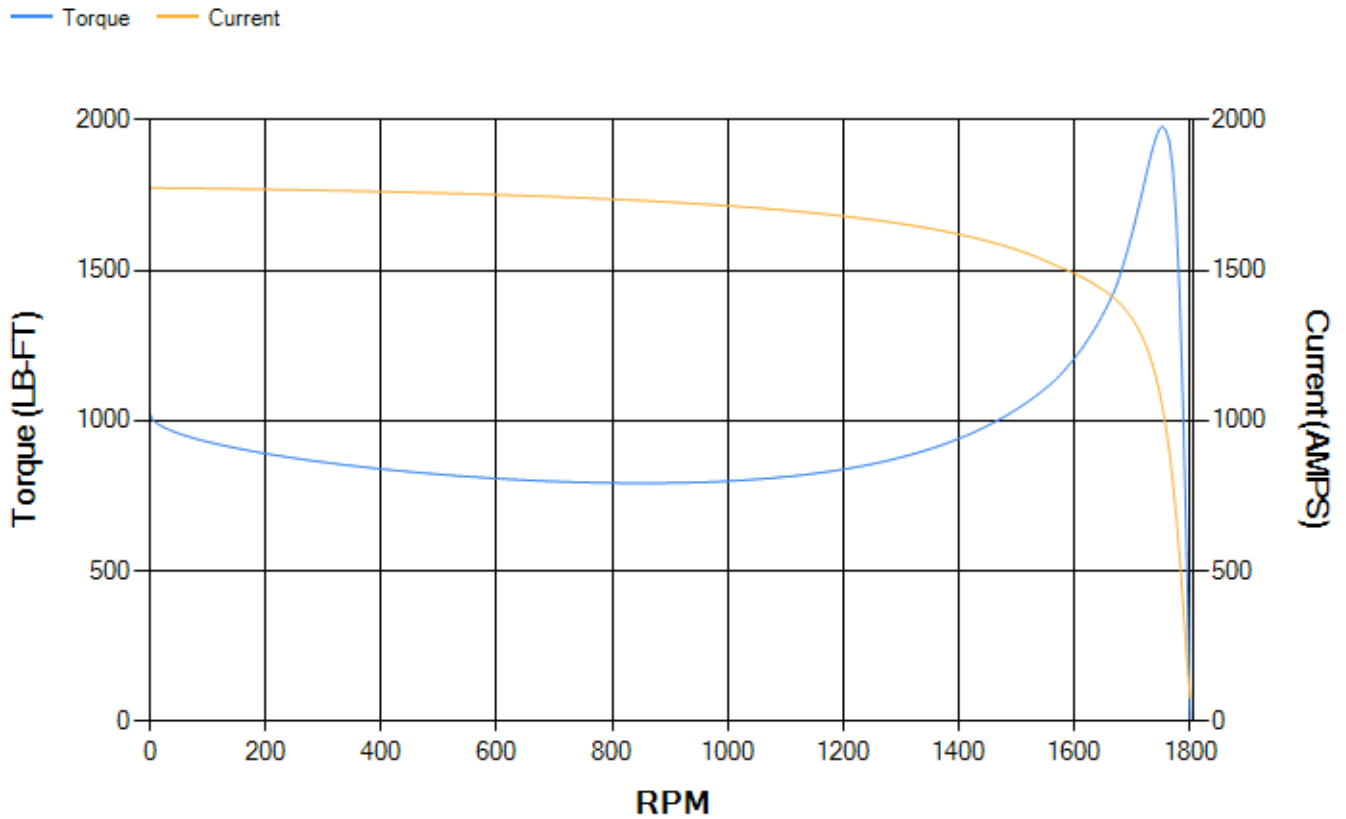


Marks:

TYPICAL DRAWING NO.		REV. / APPROVED	
C		239C6800APZ 000	
REV.	DESCRIPTION	DATE	APPROVED

**PROHIBITION INFORMATION**

© Copyright 2018 GE Industrial America LLC. All rights reserved. This document is the property of GE Industrial America LLC. It is intended for the use of the customer to whom it is issued. It is not to be distributed, copied, or used in any way without the prior written permission of GE Industrial America LLC. The information contained herein is the confidential property of GE Industrial America LLC.

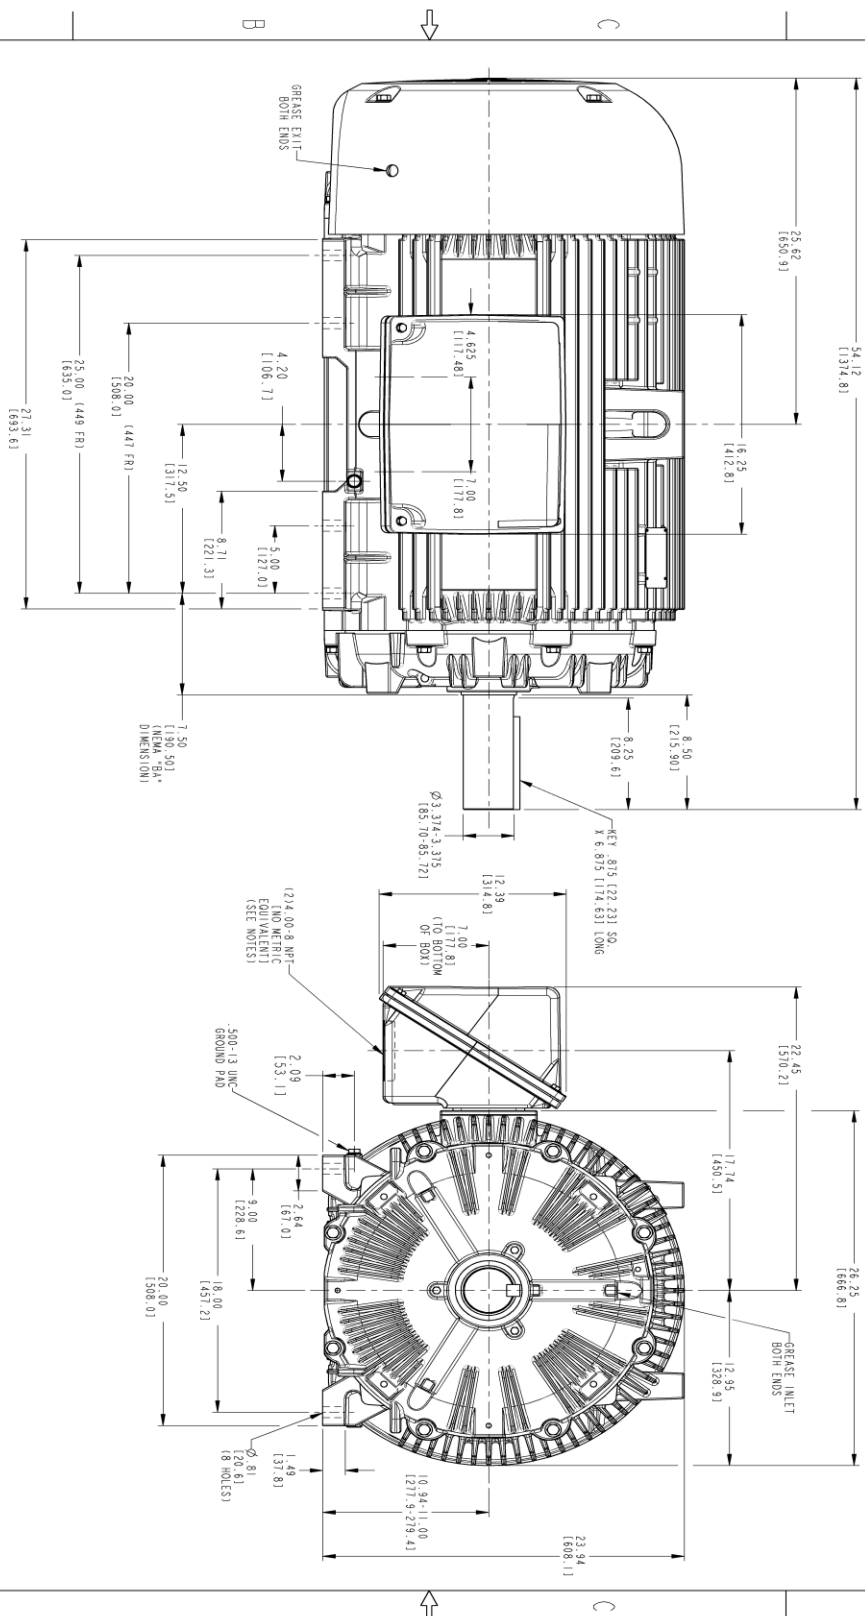

- NOTES:**
1. CONDUIT BOX MAY BE PLACED WITH THE ENTRANCE DOWN, UP OR ON EITHER SIDE.
  2. F-1 ASSEMBLY AS SHOWN.
  3. ALL DIMENSIONS ARE IN INCHES, BRACKETED DIMENSIONS ARE METRIC (MILLIMETERS).




SIGNATURES		DATE	
MODEL	WMSI	11/10/20	
REV. 1	WMSI	11/10/20	
DESIGNED	VILAY	11/10/20	
DRWING	SHAWMHI	11/10/20	
CHKD			
APPV			
DATE			
SCALE: 0.180	REF. NO: 239C68000	SHEET 1 OF 1	

**GE INDUSTRIAL MOTORS**  
a WOLKING company

**OUTLINE**  
447/449 T, TEFC  
1260 CU IN CONDUIT BOX, GROUND PAD  
239C6800APZ 000

**Marks:**

**Connection Diagram**  
**GEM2034E-FIG25**

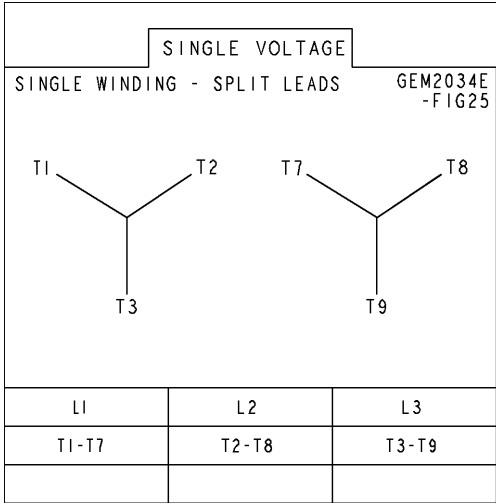

End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E4355AA1	115E4355LM1
Bearing	235A2514AG01	235A2514AG01
Slinger/Inproseal	149C4399G07	149C4399G07

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	159C7100AA2
Fan Cover	128D6841AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	179B9058G03

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

