



**GE INDUSTRIAL MOTORS**  
a **WOLONG** company

# Product Technical Information

February 17, 2023

Data shown is for the current revision model #. Ensure your nameplate model # matches.

<b>Model Number:</b>	<b>5KS447DAJ6067</b>
<b>Catalog Number:</b>	<b>V4491</b>
<b>Instruction Manual:</b>	GEI-M1045
<b>Connection Diagram:</b>	GEM2034E-FIG273
<b>Outline Drawing:</b>	148CB49VMJKLGAA0001

## Accessory Connection Diagrams

<b>Bearing Thermocouple:</b>	None	<b>Heater:</b>	3027JE-1C
<b>RTD:</b>	None	<b>Thermistor:</b>	None
<b>Thermostat:</b>	None	<b>Winding Thermocouple:</b>	None
<b>Bearing RTD:</b>	None		

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

<b>MODEL NUMBER:</b>	<b>5KS447DAJ6067</b>	<b>Estimated Weight:</b>	3050 Lbs
<b>Outline Drawing:</b>	148CB49VMJKLGAA0001	<b>Time Rating:</b>	CONT
<b>Connection Diagram:</b>	GEM2034E-FIG273	<b>Enclosure:</b>	WPI
<b>Instruction Book:</b>	GEI-M1045	<b>Encl Construction:</b>	OPEN
<b>Design Code:</b>	49BD1521A	<b>Ambient Max(°C):</b>	40
<b>Type:</b>	KS	<b>Alt Ambient Max(°C):</b>	--
<b>Frame:</b>	L447TP20	<b>Insulation Class:</b>	H
<b>Phases:</b>	3	<b>NEMA Design:</b>	B
<b>Poles:</b>	4	<b>Nominal Efficiency:</b>	95.8 %
<b>Output Power:</b>	350HP 259KW	<b>Guaranteed Efficiency:</b>	95.0 %
<b>RPM:</b>	1790	<b>3/4 Load Efficiency:</b>	--
<b>Voltage:</b>	460/575	<b>KVA Code:</b>	G
<b>Hertz:</b>	60	<b>Max KVAR:</b>	73.6
<b>Amps - FL:</b>	392/322	<b>Power Factor:</b>	87.5
<b>Service Factor:</b>	1.15	<b>Bearing - DE:</b>	6217C3
<b>Alt Service Factor:</b>	--	<b>Bearing - ODE:</b>	235A2536AB01

Enclosure is Weather Protected One

---

Stamped Nameplate Notes:

NEMA ENCLOSURE WP-I, CSA ENCL DP  
 HTR LDS HE1-HE2 115V 145W  
 ROT CCW FACING ODE LEAD/PH SEQ 1-2-3/1-2-3  
 INVERTER DUTY PER NEMA MG1 PART 31  
 ALTERNATE RATING FOR PWM CONTROL:1.0SF 40C AMBIENT  
 VAR TORQUE RANGE 5 -60 HZ  
 UPPER BRG LUBE OIL: 10.2 QTS  
 AMB 0 TO 40 DEG C : ISO 32(MINERAL OR SYNTHETIC)  
 AMB -15 TO 0 DEG C : ISO 32 SYNTHETIC  
 SUITABLE FOR 300 HP, 380V, 50 HZ WITH  
 407.0 AMPS AND 1490 RPM AT 1.00 SF



**Additional Information:**

4P, VERT HOLLOW SHAFT HIGH THRUST (2D)  
C/BOX 1260 CU IN - 2(4.00" NPT)  
C/B GRD PLATE  
OIL RESISTANT SLEEVING ON LEADS  
115V HTR LDS TO MAIN CONDUIT BOX  
BEARING LIFE 8760 HRS AT 22276 LB THRUST  
BEARING LIFE 9198 HRS AT 22000 LB THRUST  
CG:25.10 IN FROM P-BASE FACE, STAT DEF:= 0.005 IN  
RCF: 2567 CPM  
NON-REVERSE BALL CARRIER,  
BOLTED COUPLING, BX = 2.188 IN, EW= 0.500 IN  
FIRE PUMP MOTOR  
ESTIMATED SOUND PRESSURE 90.8 DBA AT 1 METER



**Performance Characteristics**

1st Winding 1st Connection

**Design: 49BD1521A**

**Marks:**


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	94.92	95.18	95.7	95.79	95.54	93.44	0.00
% PF	87.05	87.36	87.43	86.02	80.63	62.4	4.79
AMPS	495.56	453.02	391.52	298.18	212.61	140.44	102.67

<b>TORQ(FL)#FT</b>	1027.38	<b>TORQ(LR)%FL</b>	105.18	<b>TORQ(BD)%FL</b>	215.91
<b>AMPS(LR)</b>	2011.18	<b>PF AT START</b>	0.22		

This motor is capable of two cold or one hot start with a maximum connected load inertia of 7758 Lb-Ft Sq (326.61 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 67 seconds. Safe stall time at 100% voltage is 129 seconds cold, 81 seconds hot. Rotor inertia is 108.44 Lb-Ft Sq (4.57 Kg-meter Sq).

<b>Open Circuit A-C:</b>	1.615	<b>Short Circuit D-C:</b>	0.037
<b>Short Circuit A-C:</b>	0.075	<b>X/R Ratio:</b>	13.93
<b>Stator Slots:</b>	72	<b>Rotor Slots:</b>	58


**Speed Torque Current Curve (First Connection, First Speed)**

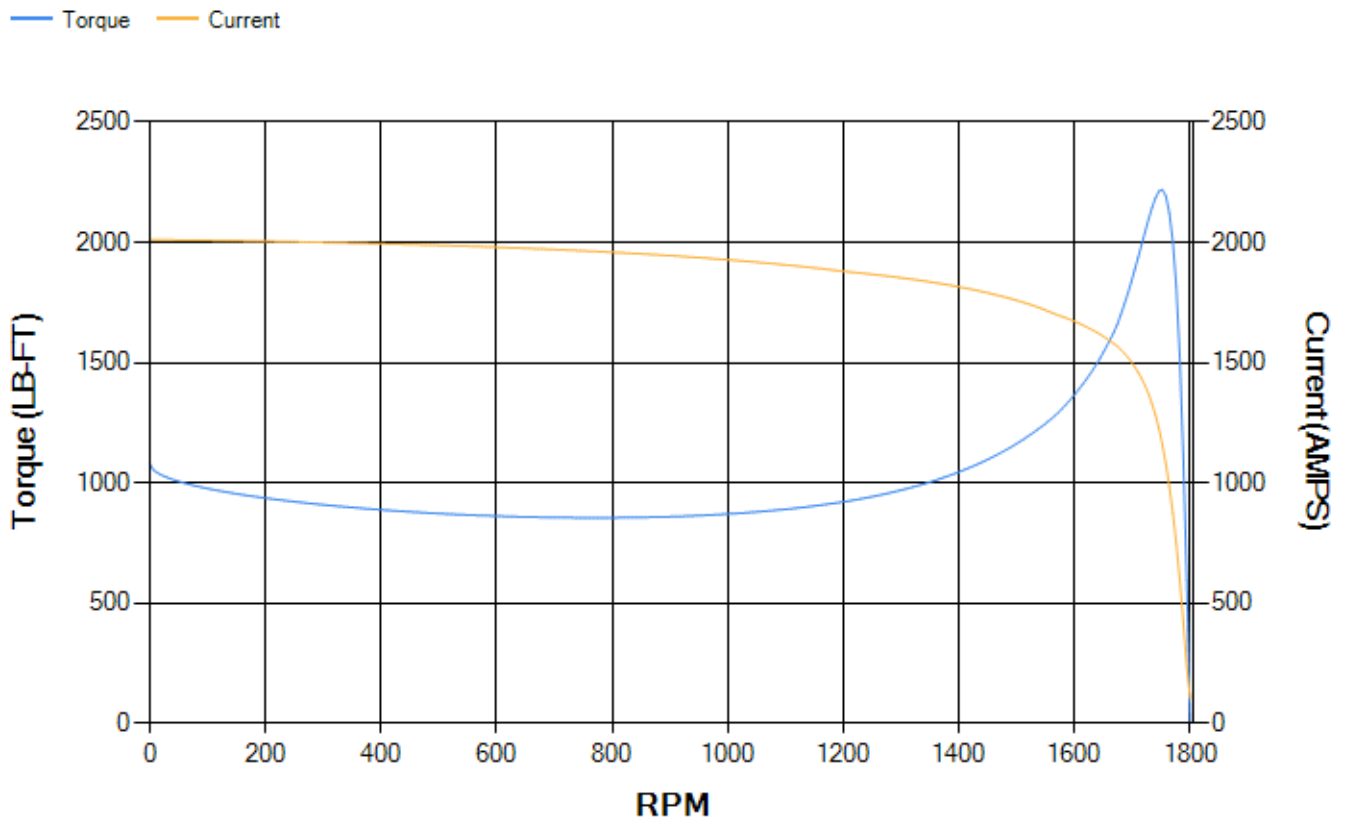



Marks:

**Connection Diagram**  
**GEM2034E-FIG273**

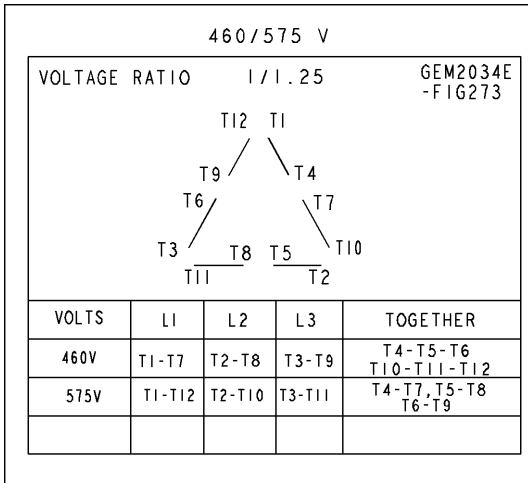

**Heater Connection**  
**3027JE-1C**



End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E7661AA1	115E7670LM1
Bearing	235A2622AA01	235A2536AB01
Slinger/Inproseal	149C4399G06	

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	
Fan Cover	161C1050AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	179B9058G03

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

