



**GE INDUSTRIAL MOTORS**  
a **WOLONG** company

# Product Technical Information

February 17, 2023

Data shown is for the current revision model #. Ensure your nameplate model # matches.

<b>Model Number:</b>	<b>5KS445DAJ7050</b>
<b>Catalog Number:</b>	<b>V4612</b>
<b>Instruction Manual:</b>	GEI-M1045
<b>Connection Diagram:</b>	GEM2034E-FIG7
<b>Outline Drawing:</b>	148CB44VMHKCCAA0001

## Accessory Connection Diagrams

<b>Bearing Thermocouple:</b>	None	<b>Heater:</b>	3027JE-1C
<b>RTD:</b>	None	<b>Thermistor:</b>	None
<b>Thermostat:</b>	None	<b>Winding Thermocouple:</b>	None
<b>Bearing RTD:</b>	None		

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05

Marks:

<b>MODEL NUMBER:</b>	<b>5KS445DAJ7050</b>	<b>Estimated Weight:</b>	2480 Lbs
<b>Outline Drawing:</b>	148CB44VMHKCCAA0001	<b>Time Rating:</b>	CONT
<b>Connection Diagram:</b>	GEM2034E-FIG7	<b>Enclosure:</b>	WPI
<b>Instruction Book:</b>	GEI-M1045	<b>Encl Construction:</b>	OPEN
<b>Design Code:</b>	44BD3094AA	<b>Ambient Max(°C):</b>	40
<b>Type:</b>	KS	<b>Alt Ambient Max(°C):</b>	--
<b>Frame:</b>	L445TP16	<b>Insulation Class:</b>	H
<b>Phases:</b>	3	<b>NEMA Design:</b>	B
<b>Poles:</b>	6	<b>Nominal Efficiency:</b>	95.0 %
<b>Output Power:</b>	125HP 92.5KW	<b>Guaranteed Efficiency:</b>	94.1 %
<b>RPM:</b>	1190	<b>3/4 Load Efficiency:</b>	--
<b>Voltage:</b>	460	<b>KVA Code:</b>	G
<b>Hertz:</b>	60	<b>Max KVAR:</b>	41.5
<b>Amps - FL:</b>	151.0	<b>Power Factor:</b>	82.0
<b>Service Factor:</b>	1.15	<b>Bearing - DE:</b>	6217C3
<b>Alt Service Factor:</b>	--	<b>Bearing - ODE:</b>	235A2536AB01

Enclosure is Weather Protected One

---

Stamped Nameplate Notes:

NEMA ENCLOSURE WP-I, CSA ENCL DP  
HTR LDS HE1-HE2 115V 145W  
ROT CCW FACING ODE LEAD/PH SEQ 1-2-3/1-2-3  
INVERTER DUTY PER NEMA MG1 PART 31  
ALTERNATE RATING FOR PWM CONTROL:1.0SF 40C AMBIENT  
VAR TORQUE RANGE 7.5-60 HZ  
UPPER BRG LUBE OIL: 10.2 QTS  
AMB 0 TO 40 DEG C : ISO 32(MINERAL OR SYNTHETIC)  
AMB -15 TO 0 DEG C : ISO 32 SYNTHETIC



**Additional Information:**

6P, VERT HOLLOW SHAFT HIGH THRUST (1D)  
C/BOX 700 CU IN - 3.00" NPT  
OIL RESISTANT SLEEVING ON LEADS  
115V HTR LDS TO MAIN CONDUIT BOX  
BEARING LIFE 8760 HRS AT 16083 LB THRUST  
CG:22.60 IN FROM P-BASE FACE, STAT DEF:= 0.005 IN  
RCF: 2627 CPM  
NON-REVERSE BALL CARRIER,  
BOLTED COUPLING, BX = 1.938 IN, EW= 0.500 IN



**Performance Characteristics**

1st Winding 1st Connection

**Design: 44BD3094AA**

**Marks:**


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	94.1	94.32	94.75	94.64	93.98	90.67	0.00
% PF	83.46	83.14	82.12	78.21	68.91	47.2	4.59
AMPS	186.2	171.57	150.36	118.54	90.32	68.35	57.82

<b>TORQ(FL)#FT</b>	551.01	<b>TORQ(LR)%FL</b>	177.71	<b>TORQ(BD)%FL</b>	234.39
<b>AMPS(LR)</b>	850.93	<b>PF AT START</b>	0.35		



This motor is capable of two cold or one hot start with a maximum connected load inertia of 6657 Lb-Ft Sq (280.26 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 44 seconds. Safe stall time at 100% voltage is 75 seconds cold, 53 seconds hot. Rotor inertia is 90.13 Lb-Ft Sq (3.79 Kg-meter Sq).

<b>Open Circuit A-C:</b>	0.891	<b>Short Circuit D-C:</b>	0.027
<b>Short Circuit A-C:</b>	0.055	<b>X/R Ratio:</b>	10.079
<b>Stator Slots:</b>	72	<b>Rotor Slots:</b>	58

**Speed Torque Current Curve (First Connection, First Speed)**

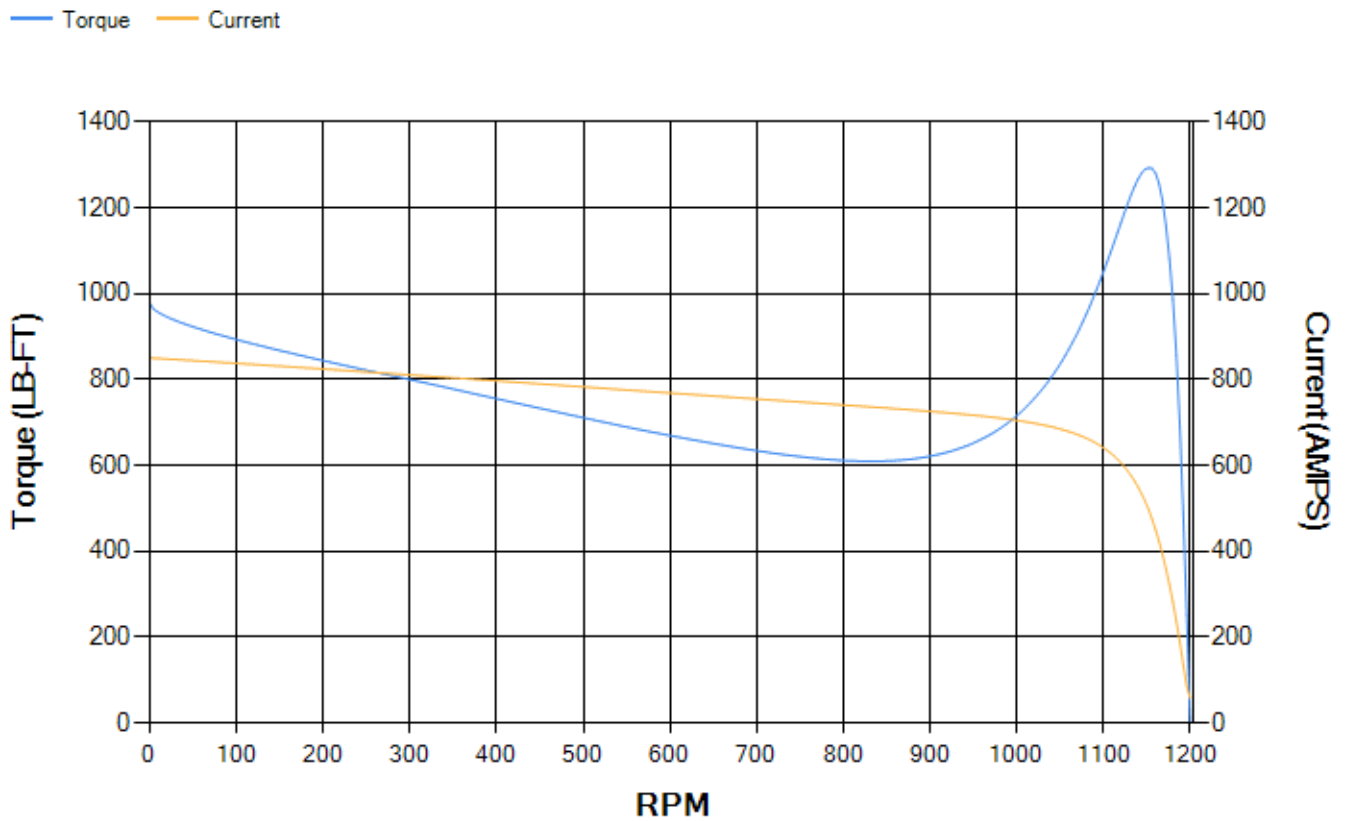

Marks:

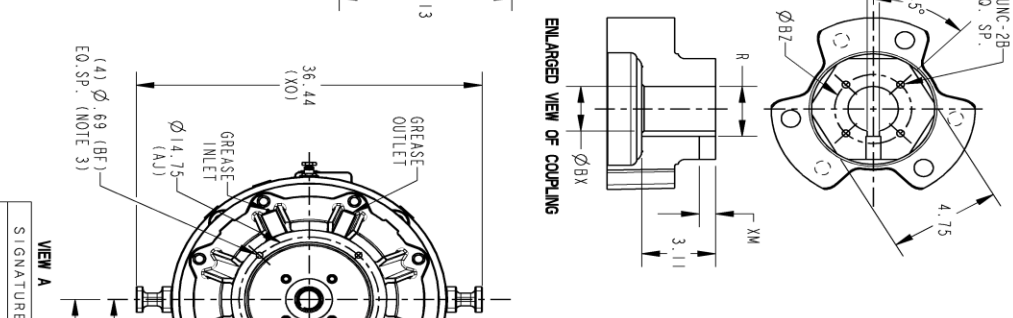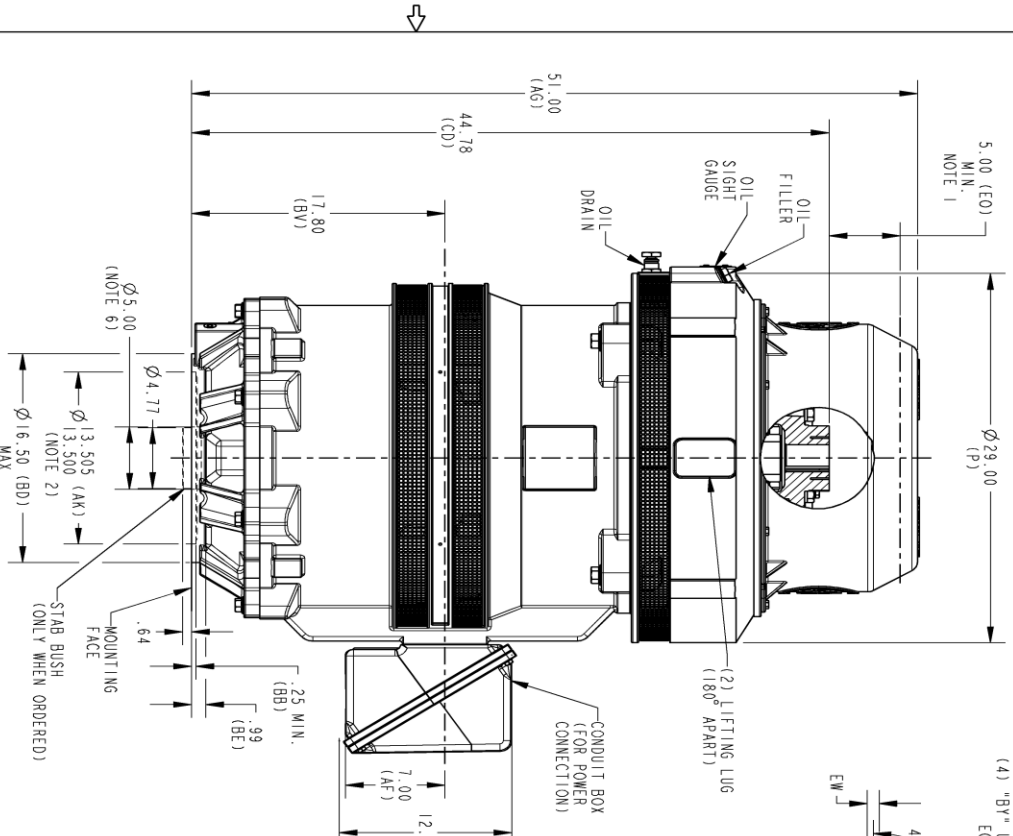

REVISIONS


REV.	DESCRIPTION	DATE	APPROVED
1	ISAC#19-0070	01/30/19	DHEERAJ

NOTES:

- THE TOTAL HEIGHT OF PUMP SHAFT AND LOCKING NUT ABOVE COUPLING MUST NOT EXCEED THIS DIMENSION.
- TOLERANCE ON FACE ROUNDOFF AND PERMISSIBLE ECCENTRICITY OF MOUNTING RABBET ARE .007 T.1.R
- CENTRE OF MOUNTING BOLTS HOLES WITHIN 0.025 OF ANGULAR & DIAMETRICAL LOCATION WITHIN REFERENCE TO THE CENTRILINE OF MOUNTING RABBET.
- PROVIDED MONTING CONDITIONS PERMIT, CONDUIT BOX MAY BE TURNED SO THAT ENTRANCE CAN BE MADE UPWARD, DOWNWARD OR FROM EITHER SIDE.
- FOR ESTIMATING ONLY UNLESS ENDORSED FOR CONSTRUCTION.
- MAINTAIN MINIMUM CLEARANCE FOR SHAFT SLINGER.

DIMENSIONS IN INCHES  
NEMA TYPE P BASE

COUPLING DIMENSIONS		KEY WAY	
BY	BZ	EW	R
1.501	1/4-20 2.125	.375	1.559 .562
1.688	1/4-20 2.500	.375	1.859 .562
1.751	1/4-20 2.500	.375	1.922 .562
1.813	1/4-20 2.500	.500	2.033 .688
1.938	1/4-20 2.500	.500	2.160 .688
2.001	3/8-16 3.250	.500	2.223 .688
2.063	3/8-16 3.250	.500	2.287 .688
2.126	3/8-16 3.250	.500	2.350 .688
2.188	3/8-16 3.250	.500	2.414 .688
2.251	3/8-16 3.250	.500	2.477 .688
2.316	3/8-16 3.250	.500	2.550 .688
2.438	3/8-16 3.250	.625	2.715 .812
2.501	3/8-16 3.250	.625	2.777 .812



PROPRIETARY INFORMATION  
© COPYRIGHT 2018 Wabtec Electric America LLC AND/OR ITS AFFILIATES. All rights reserved. This document and the information it contains is the property of the Wabtec Electric America LLC and/or its affiliates. It has been provided solely for the private use. Copying, reproducing, selling, importing, exporting, distributing, transmitting or distributing this document and any of the information it contains is strictly prohibited. The Wabtec Electric America LLC.

SIGNATURES DATE  
 MODEL RAVI 07/01/16  
 DETAIL RAVI 07/01/16  
 CHECKED SASI 07/01/16  
 ENG'G SASI 07/01/16  
 QUALITY  
 ISSUED  
 SOLID MODEL: 148CB44VMHKCCAA0001

TITLE  
**GE INDUSTRIAL MOTORS**  
 a Wabtec company  
**OUTLINE, NEMA WPI 444/445**  
**VERTICAL HOLLOW SHAFT, HIGH THRUST GRS LOWER**  
 16.5 BD, 700 CU IN C/BXD

SCALE: 0.120 REF. No.:  
**148CB44VMHKCCAA0001**  
 REV: 001


SIZE DRAWING NO. **B 148CB44VMHKCCAA0001** REV. SHEET **001**

**Marks:**

**Connection Diagram**  
**GEM2034E-FIG7**



**Heater Connection**  
**3027JE-1C**

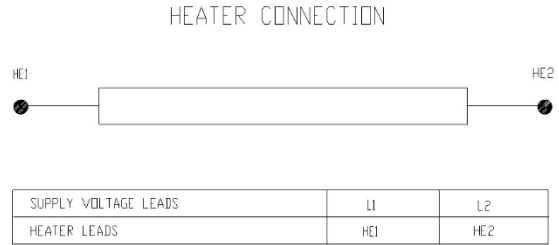

End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E7660AA1	115E7670LM1
Bearing	235A2622AA01	235A2536AB01
Slinger/Inproseal	149C4399G06	

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	
Fan Cover	161C1050AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	118D4408AD2

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	

