

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Premium Efficiency Three-Phase	Product code :	14797782
		Catalog # :	00112ET3E56-S
Frame	: 56H	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 38.1 lb
Protection degree	: IP55	Moment of inertia (J)	: 0.1597 sq.ft.lb
Design	: B		
Output [HP]	1	1	1
Poles	6	6	6
Frequency [Hz]	60	50	50
Rated voltage [V]	230/460	190/380	220/415
Rated current [A]	3.16/1.58	3.74/1.87	3.41/1.81
L. R. Amperes [A]	18.3/9.16	16.5/8.23	16.7/8.87
LRC [A]	5.8x(Code J)	4.4x(Code F)	4.9x(Code G)
No load current [A]	2.03/1.01	2.00/1.00	2.02/1.07
Rated speed [RPM]	1145	915	930
Slip [%]	4.58	8.50	7.00
Rated torque [ft.lb]	4.59	5.74	5.65
Locked rotor torque [%]	229	170	200
Breakdown torque [%]	280	200	229
Service factor		1.00	1.00
Temperature rise	80 K	105 K	105 K
Locked rotor time	55s (cold) 31s (hot)	54s (cold) 30s (hot)	50s (cold) 28s (hot)
Noise level <sup>2</sup>	50.0 dB(A)	48.0 dB(A)	48.0 dB(A)
Efficiency (%)	25%	79.5	80.4
	50%	80.0	79.4
	75%	82.5	80.4
	100%	82.5	78.6
Power Factor	25%	0.28	0.31
	50%	0.50	0.54
	75%	0.63	0.68
	100%	0.72	0.76
Bearing type	: <u>Drive end</u> 6204 ZZ	<u>Non drive end</u> 6202 ZZ	Foundation loads
Sealing	: V'Ring	Without Bearing Seal	Max. traction : 108 lb
			Max. compression : 146 lb
Lubrication interval	: -	-	
Lubricant amount	: -	-	
Lubricant type	: Mobil Polyrex EM		
Notes			
USABLE @208V 3.50A SF 1.00 SFA 3.50A			
This revision replaces and cancel the previous one, which must be eliminated.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
(1) Looking the motor from the shaft end.			
(2) Measured at 1m and with tolerance of +3dB(A).			
(3) Approximate weight subject to changes after manufacturing process.			
(4) At 100% of full load.			
Rev.	Changes Summary	Performed	Checked
Performed by			
Checked by			
Date	11/04/2022		
		Page	Revision
		1 / 13	

# TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Premium Efficiency Three-Phase


Product code :

14797782

Catalog # :

00112ET3E56-S

TORQUE AND CURRENT VS SPEED CURVE

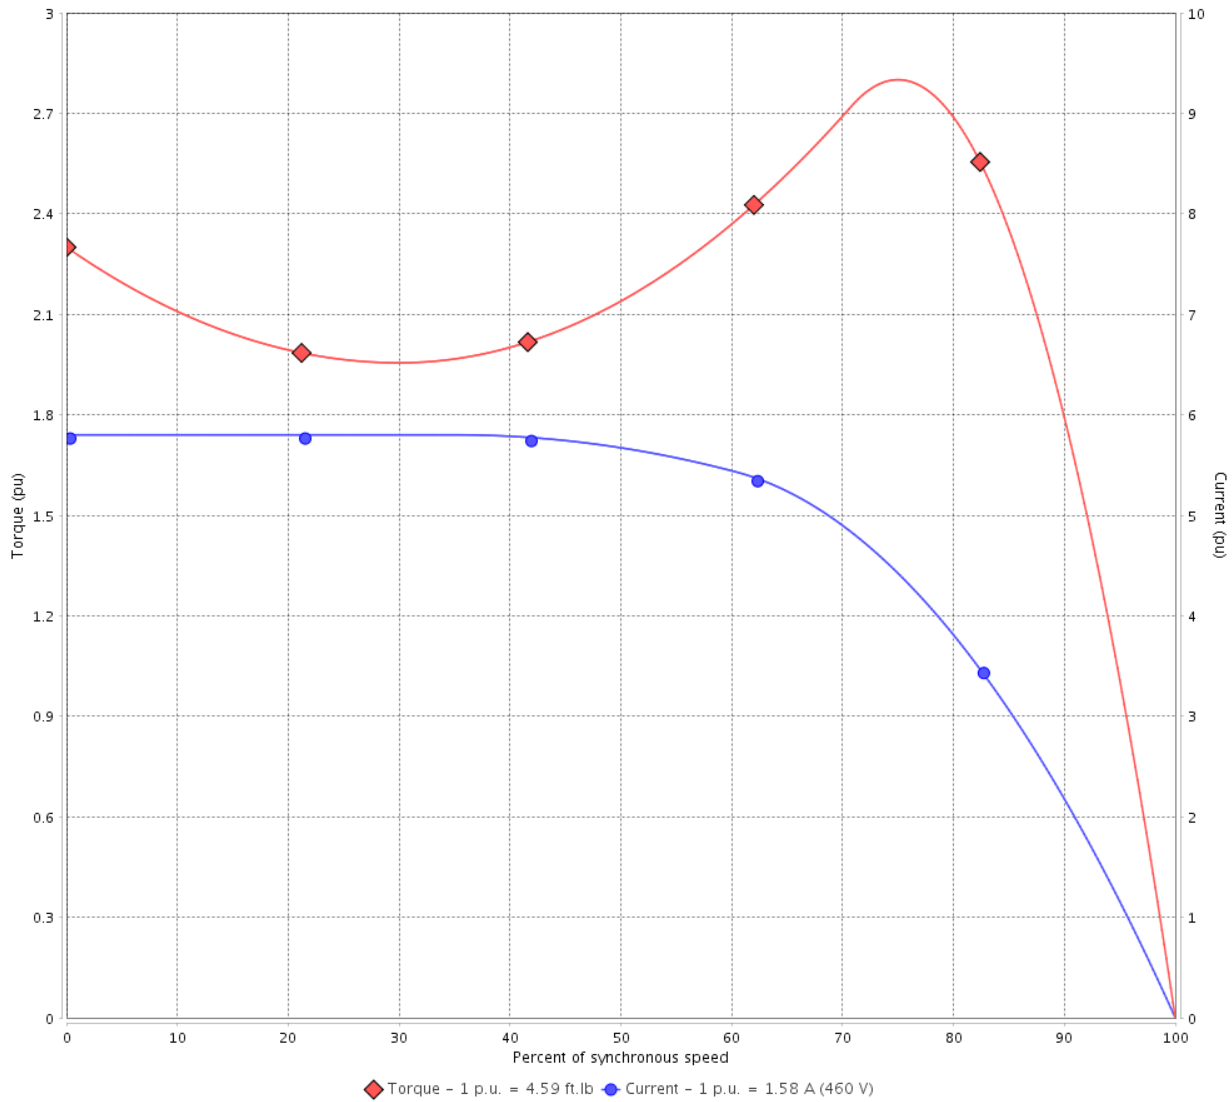

Performance : 230/460 V 60 Hz 6P

Rated current : 3.16/1.58 A  
 LRC : 5.8  
 Rated torque : 4.59 ft.lb  
 Locked rotor torque : 229 %  
 Breakdown torque : 280 %  
 Rated speed : 1145 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : B

Locked rotor time : 55s (cold) 31s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		2 / 13		
Date	11/04/2022			

# TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_


Product line : Premium Efficiency Three-Phase

Product code :

14797782

Catalog # :

00112ET3E56-S

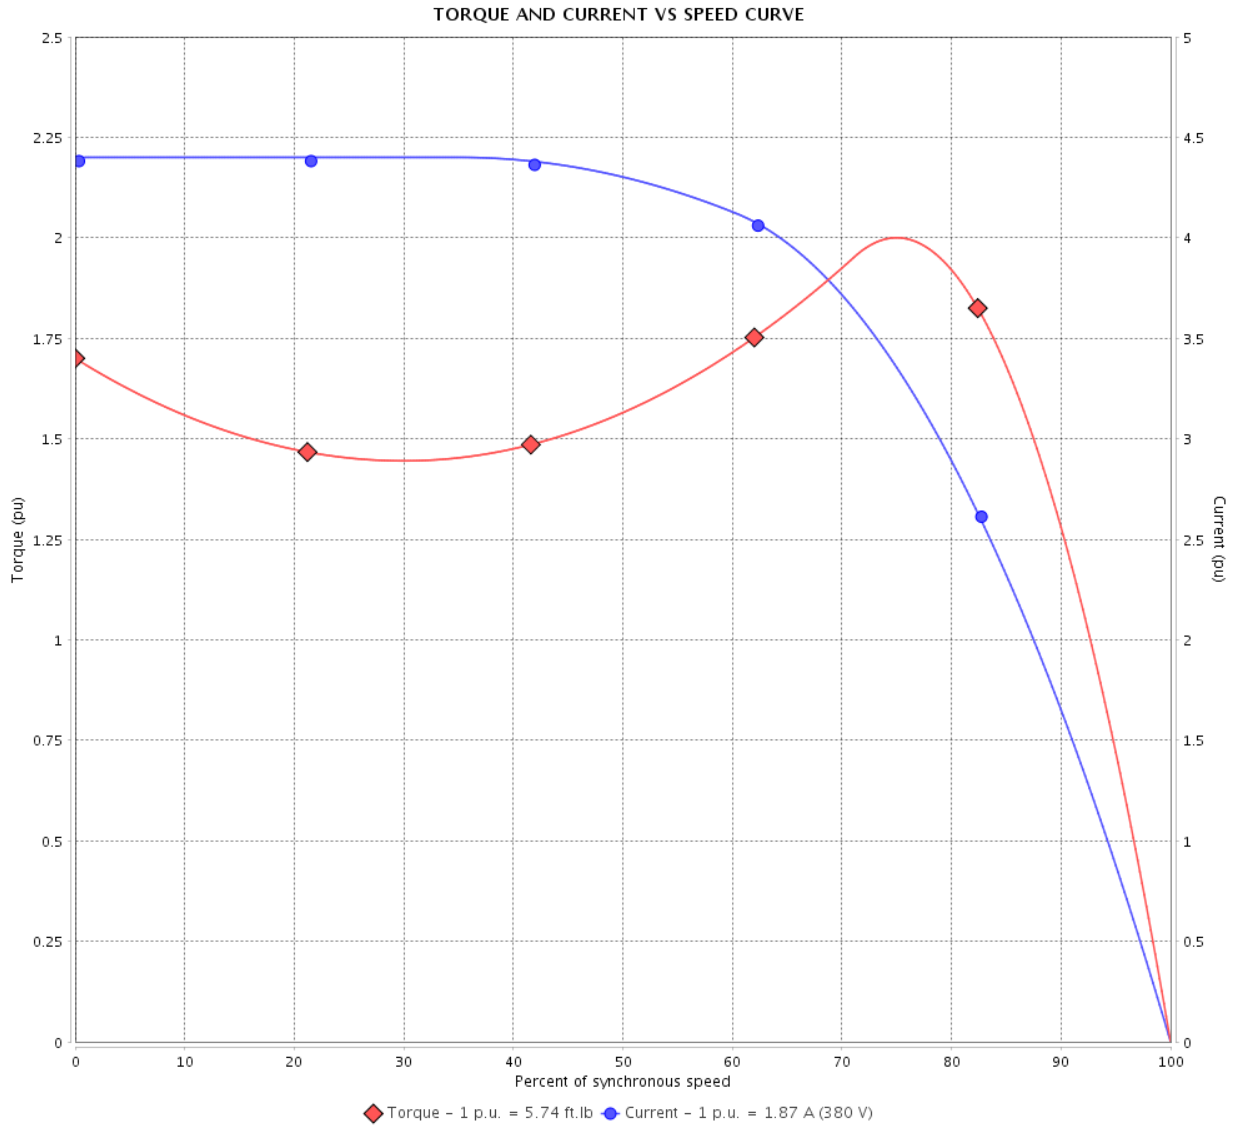

Performance : 190/380 V 50 Hz 6P

Rated current	: 3.74/1.87 A	Moment of inertia (J)	: 0.1597 sq.ft.lb
LRC	: 4.4	Duty cycle	: Cont.(S1)
Rated torque	: 5.74 ft.lb	Insulation class	: F
Locked rotor torque	: 170 %	Service factor	: 1.00
Breakdown torque	: 200 %	Temperature rise	: 105 K
Rated speed	: 915 rpm	Design	: B

Locked rotor time : 54s (cold) 30s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 13	Revision
Checked by				
Date	11/04/2022			

# TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :


Product line : Premium Efficiency Three-Phase

Product code :

14797782

Catalog # :

00112ET3E56-S

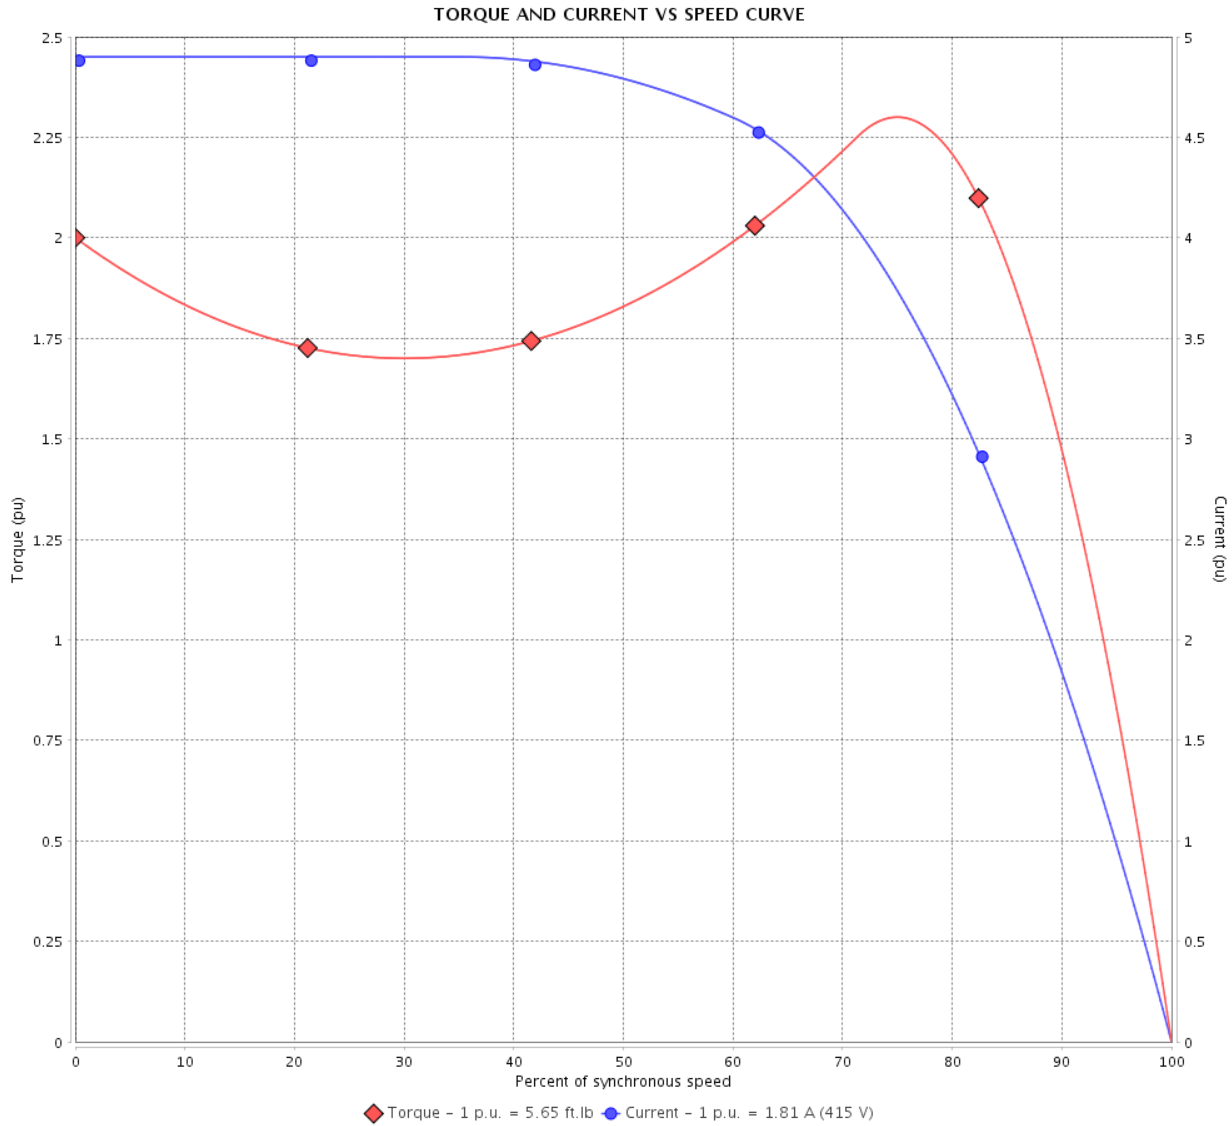

Performance : 220/415 V 50 Hz 6P

Rated current : 3.41/1.81 A  
 LRC : 4.9  
 Rated torque : 5.65 ft.lb  
 Locked rotor torque : 200 %  
 Breakdown torque : 229 %  
 Rated speed : 930 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Locked rotor time : 50s (cold) 28s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 13	Revision
Checked by				
Date	11/04/2022			

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_


Product line : Premium Efficiency Three-Phase

Product code :

14797782

Catalog # :

00112ET3E56-S

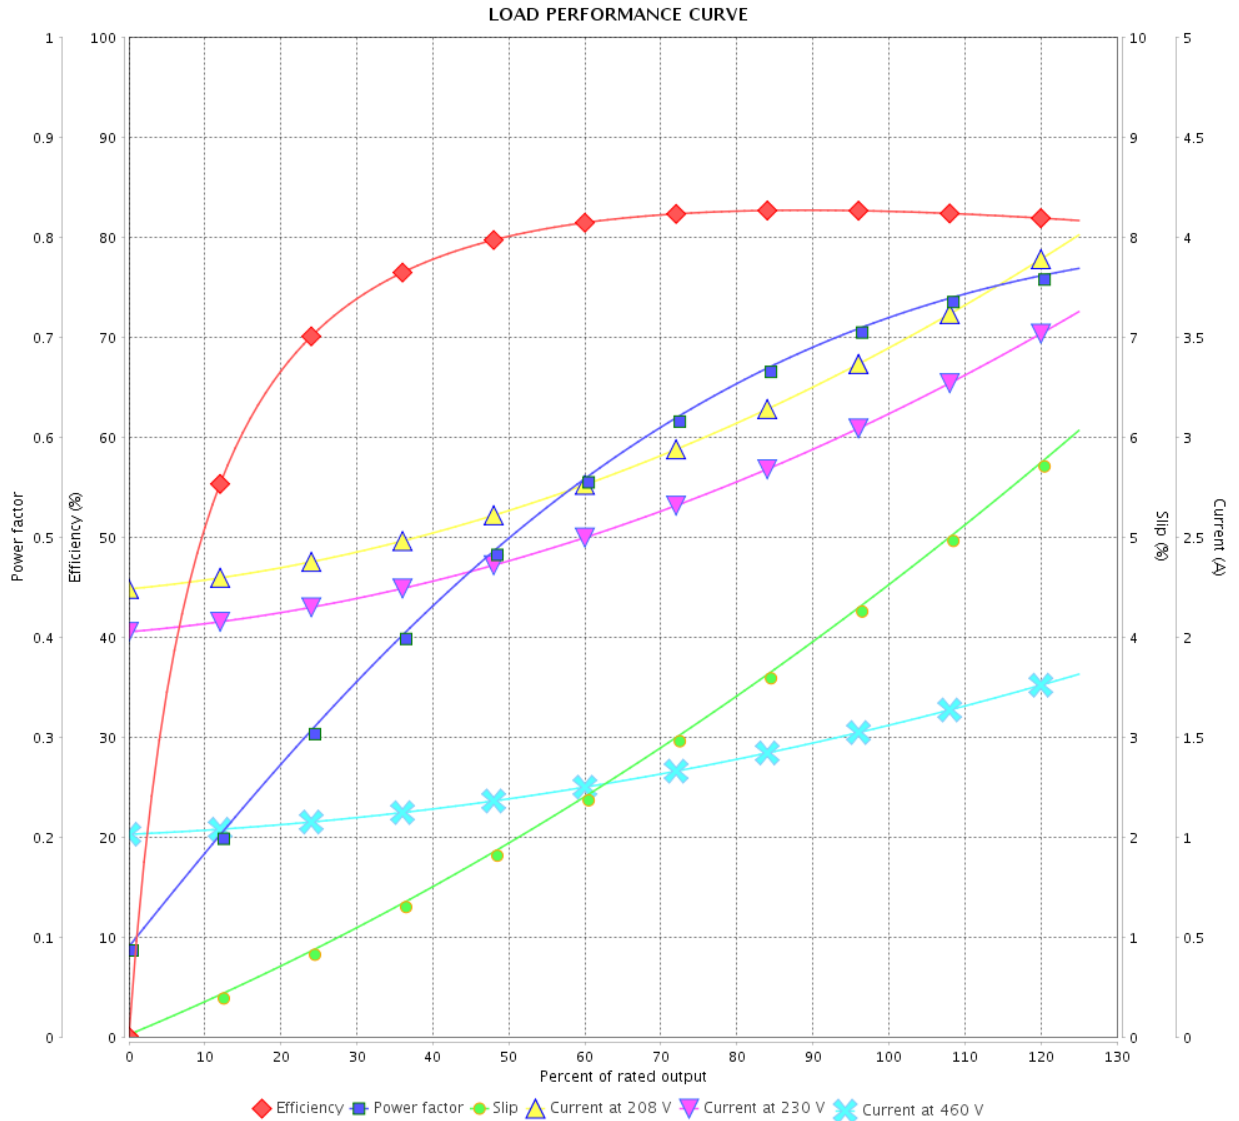

Performance : 230/460 V 60 Hz 6P

Rated current : 3.16/1.58 A  
 LRC : 5.8  
 Rated torque : 4.59 ft.lb  
 Locked rotor torque : 229 %  
 Breakdown torque : 280 %  
 Rated speed : 1145 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : Premium Efficiency Three-Phase


Product code :

14797782

Catalog # :

00112ET3E56-S

LOAD PERFORMANCE CURVE

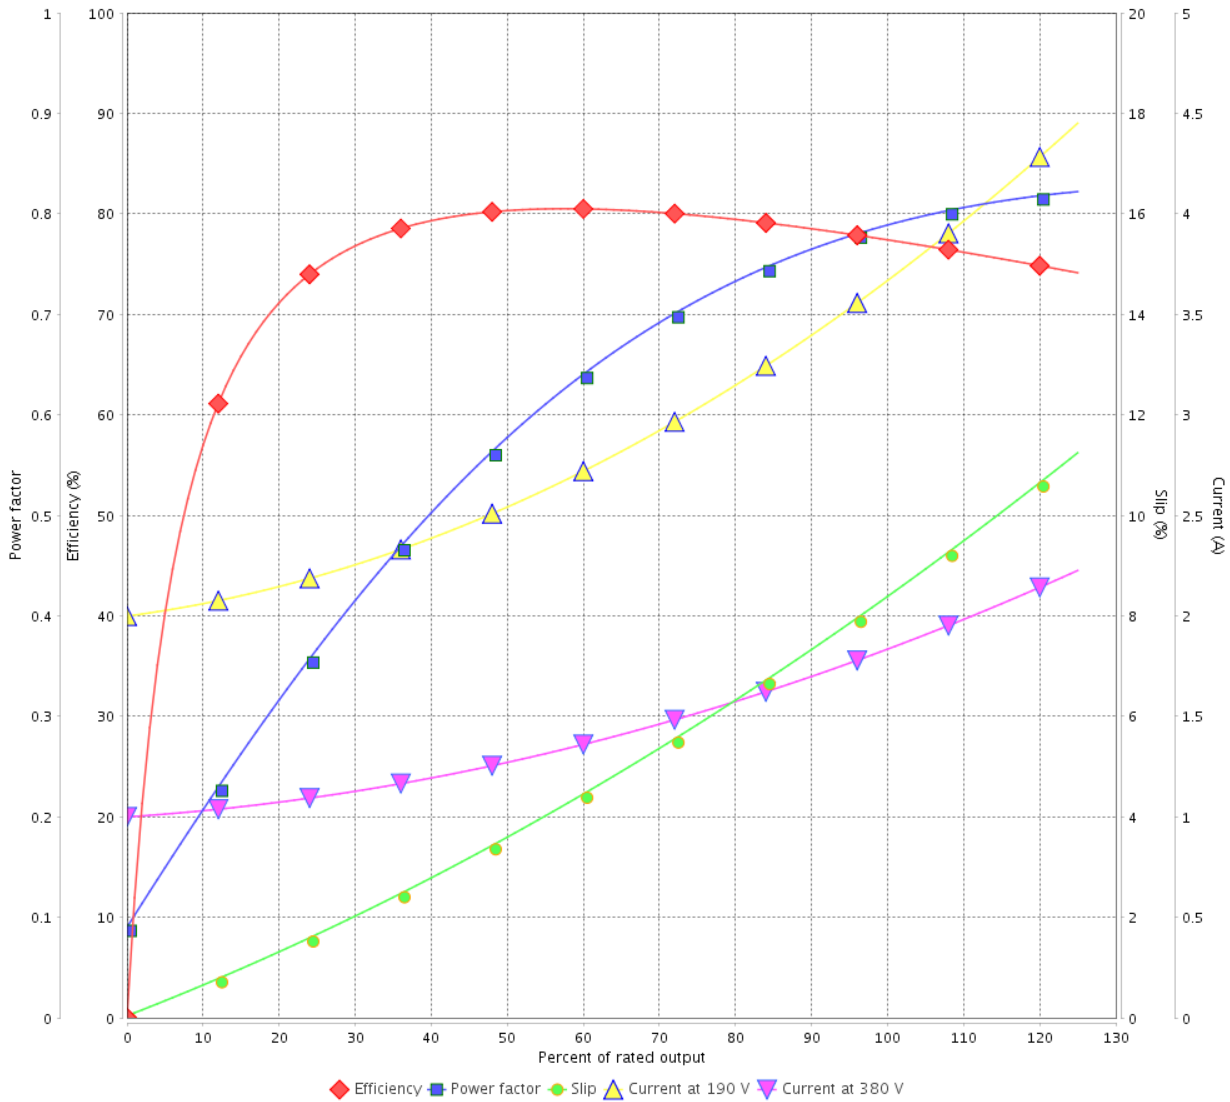

Performance : 190/380 V 50 Hz 6P

Rated current : 3.74/1.87 A  
 LRC : 4.4  
 Rated torque : 5.74 ft.lb  
 Locked rotor torque : 170 %  
 Breakdown torque : 200 %  
 Rated speed : 915 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_


Product line : Premium Efficiency Three-Phase

Product code :

14797782

Catalog # :

00112ET3E56-S

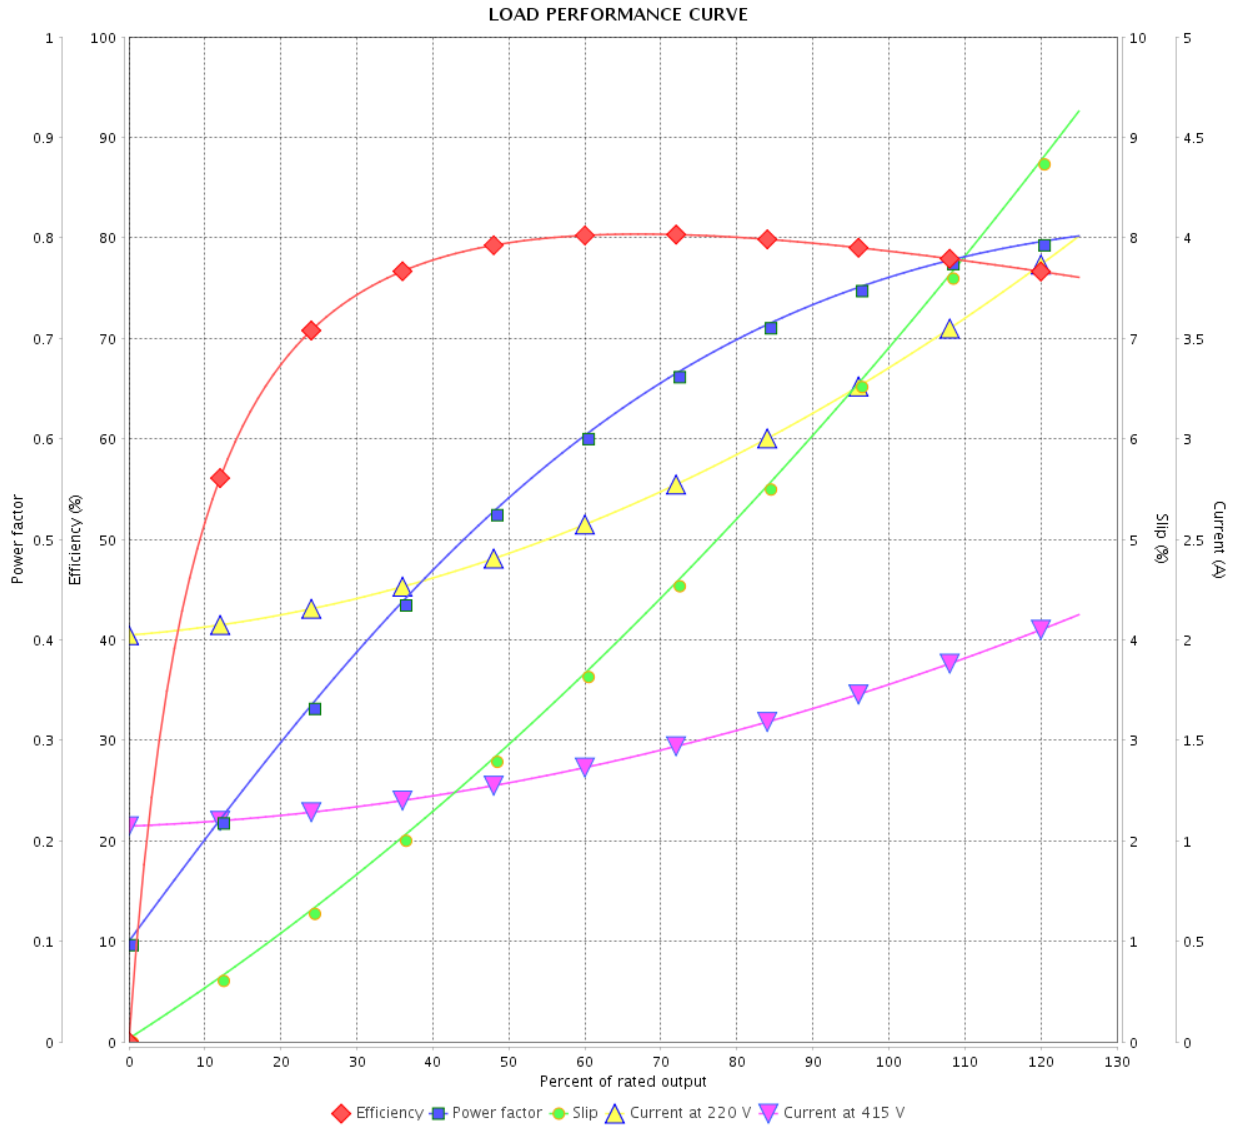

Performance : 220/415 V 50 Hz 6P

Rated current : 3.41/1.81 A  
 LRC : 4.9  
 Rated torque : 5.65 ft.lb  
 Locked rotor torque : 200 %  
 Breakdown torque : 229 %  
 Rated speed : 930 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		7 / 13		
Date		11/04/2022		

# THERMAL LIMIT CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :


Product line : Premium Efficiency Three-Phase

Product code :

14797782

Catalog # :

00112ET3E56-S

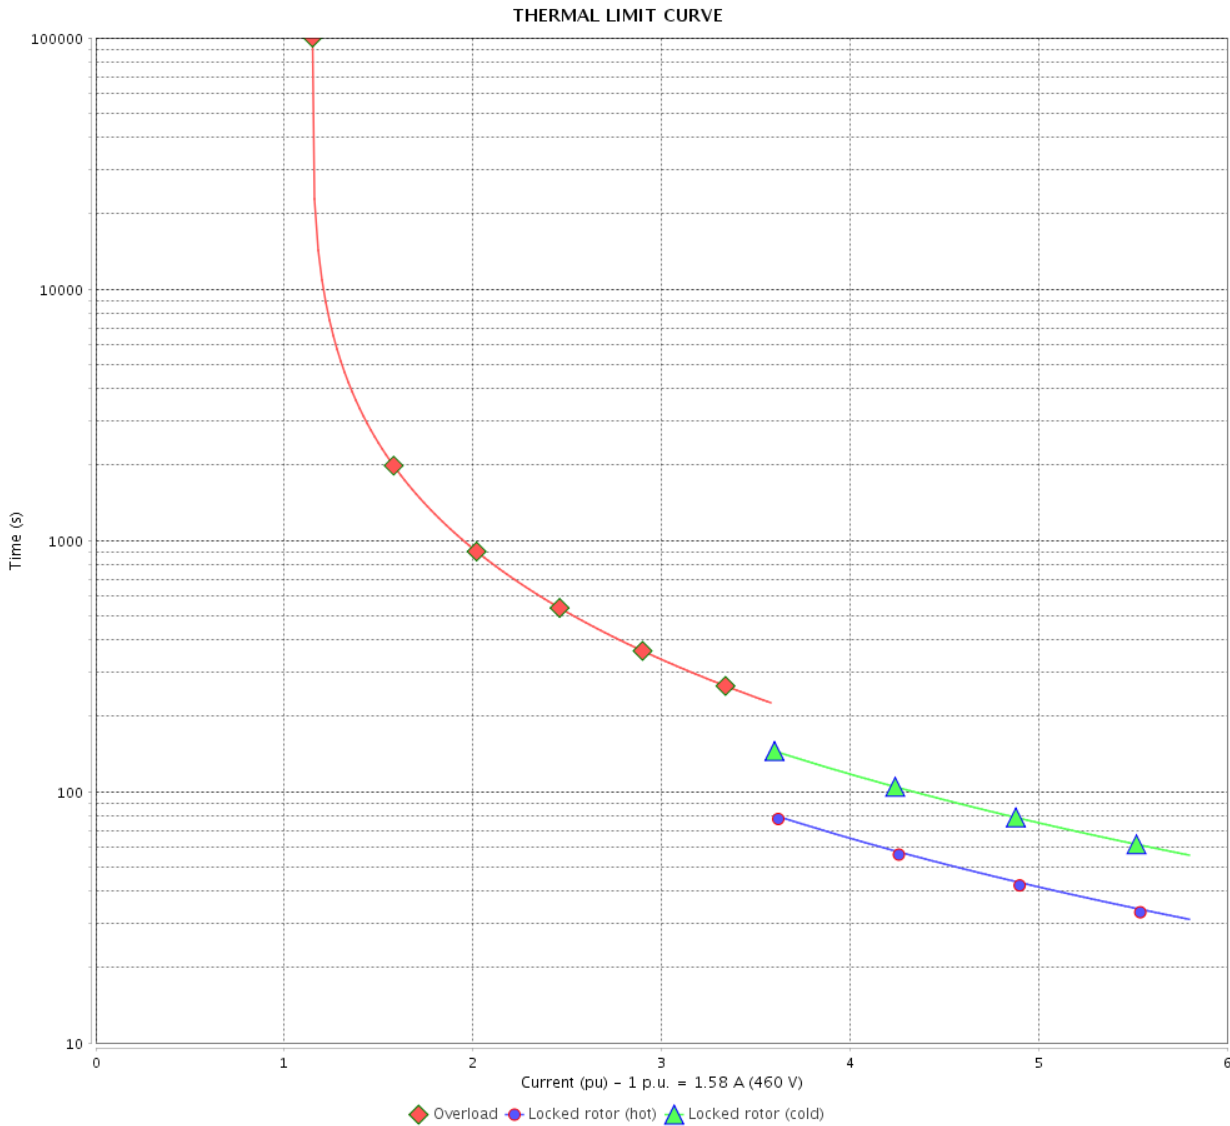

Performance : 230/460 V 60 Hz 6P

Rated current : 3.16/1.58 A  
 LRC : 5.8  
 Rated torque : 4.59 ft.lb  
 Locked rotor torque : 229 %  
 Breakdown torque : 280 %  
 Rated speed : 1145 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : B

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by	11/04/2022	Page		Revision
Checked by		8 / 13		
Date				



# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_


Product line : Premium Efficiency Three-Phase

Product code :

14797782

Catalog # :

00112ET3E56-S

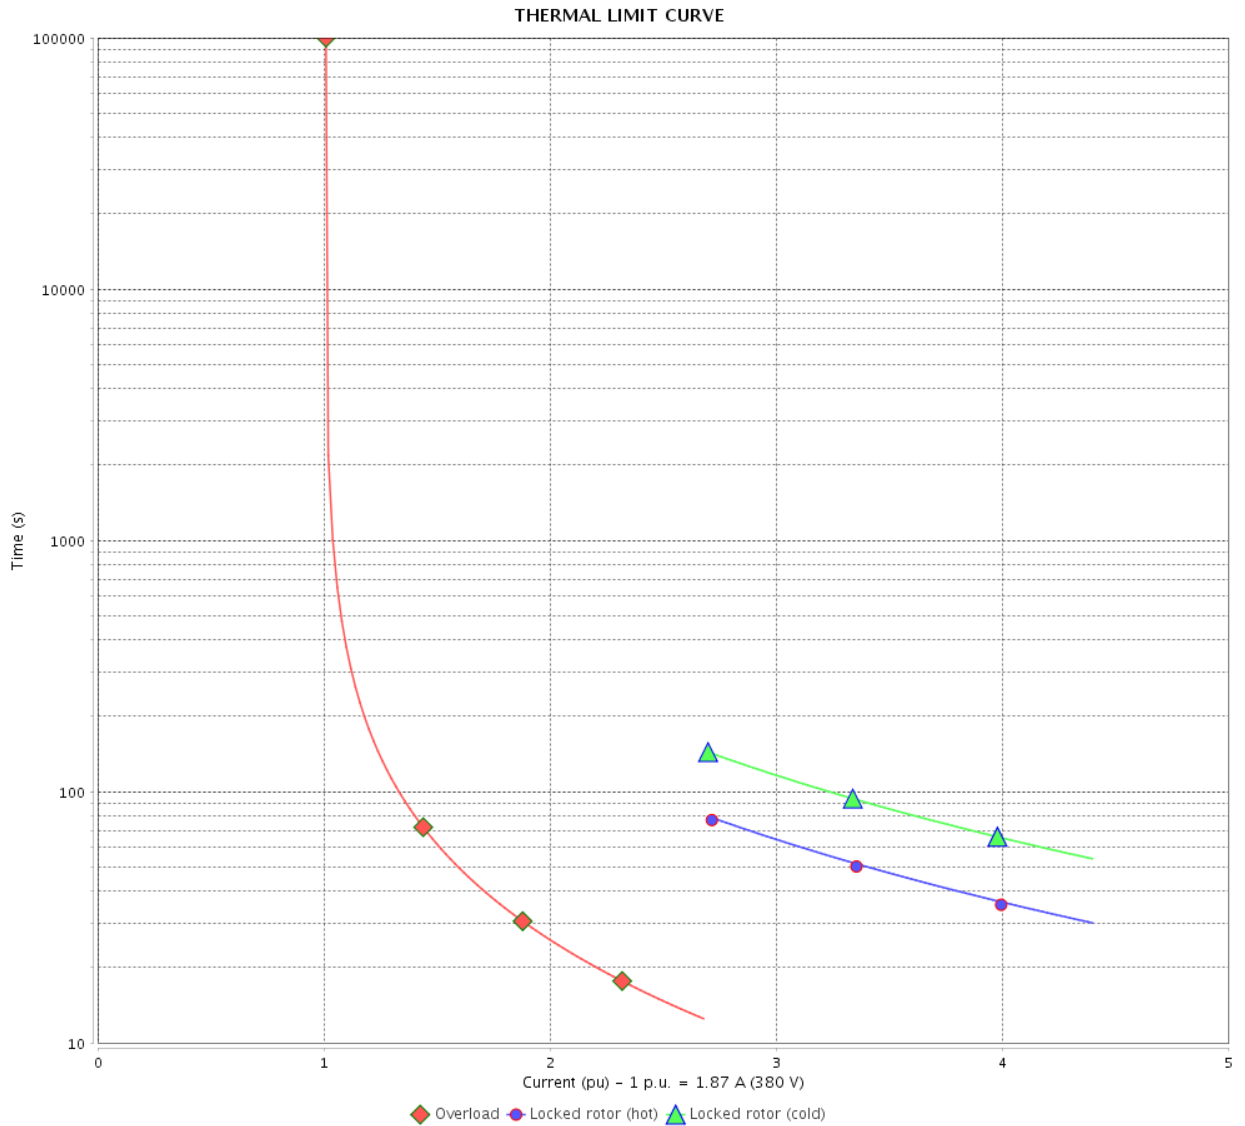

Performance : 190/380 V 50 Hz 6P

Rated current : 3.74/1.87 A  
 LRC : 4.4  
 Rated torque : 5.74 ft.lb  
 Locked rotor torque : 170 %  
 Breakdown torque : 200 %  
 Rated speed : 915 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# THERMAL LIMIT CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : Premium Efficiency Three-Phase


Product code :

14797782

Catalog # :

00112ET3E56-S

THERMAL LIMIT CURVE

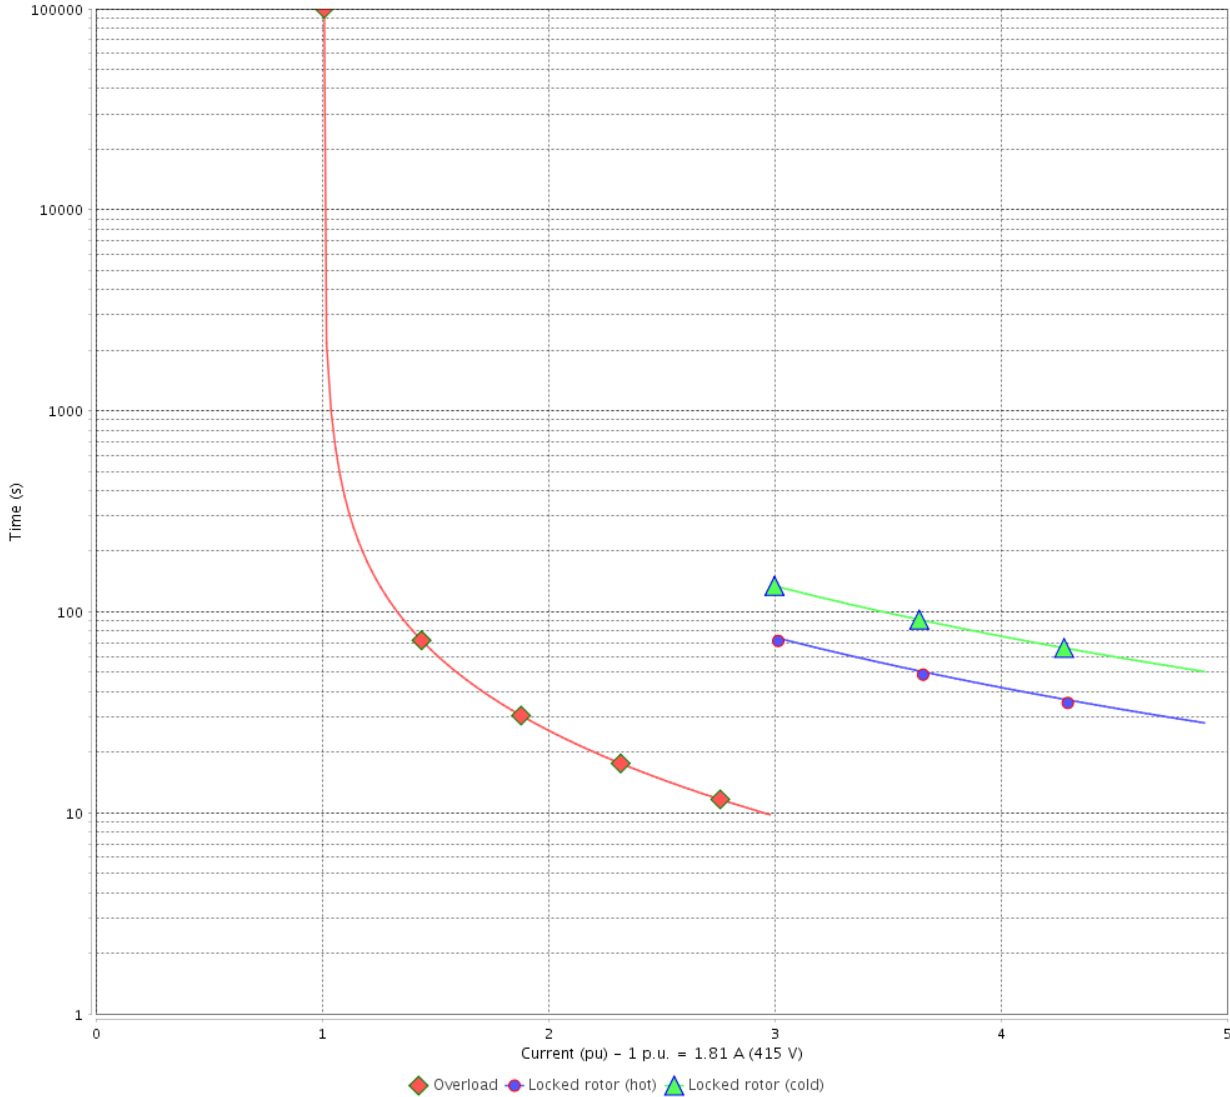

Performance : 220/415 V 50 Hz 6P

Rated current : 3.41/1.81 A  
 LRC : 4.9  
 Rated torque : 5.65 ft.lb  
 Locked rotor torque : 200 %  
 Breakdown torque : 229 %  
 Rated speed : 930 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 10 / 13	Revision
Checked by				
Date	11/04/2022			

# VFD OPERATION CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :


Product line : Premium Efficiency Three-Phase

Product code :

14797782

Catalog # :

00112ET3E56-S

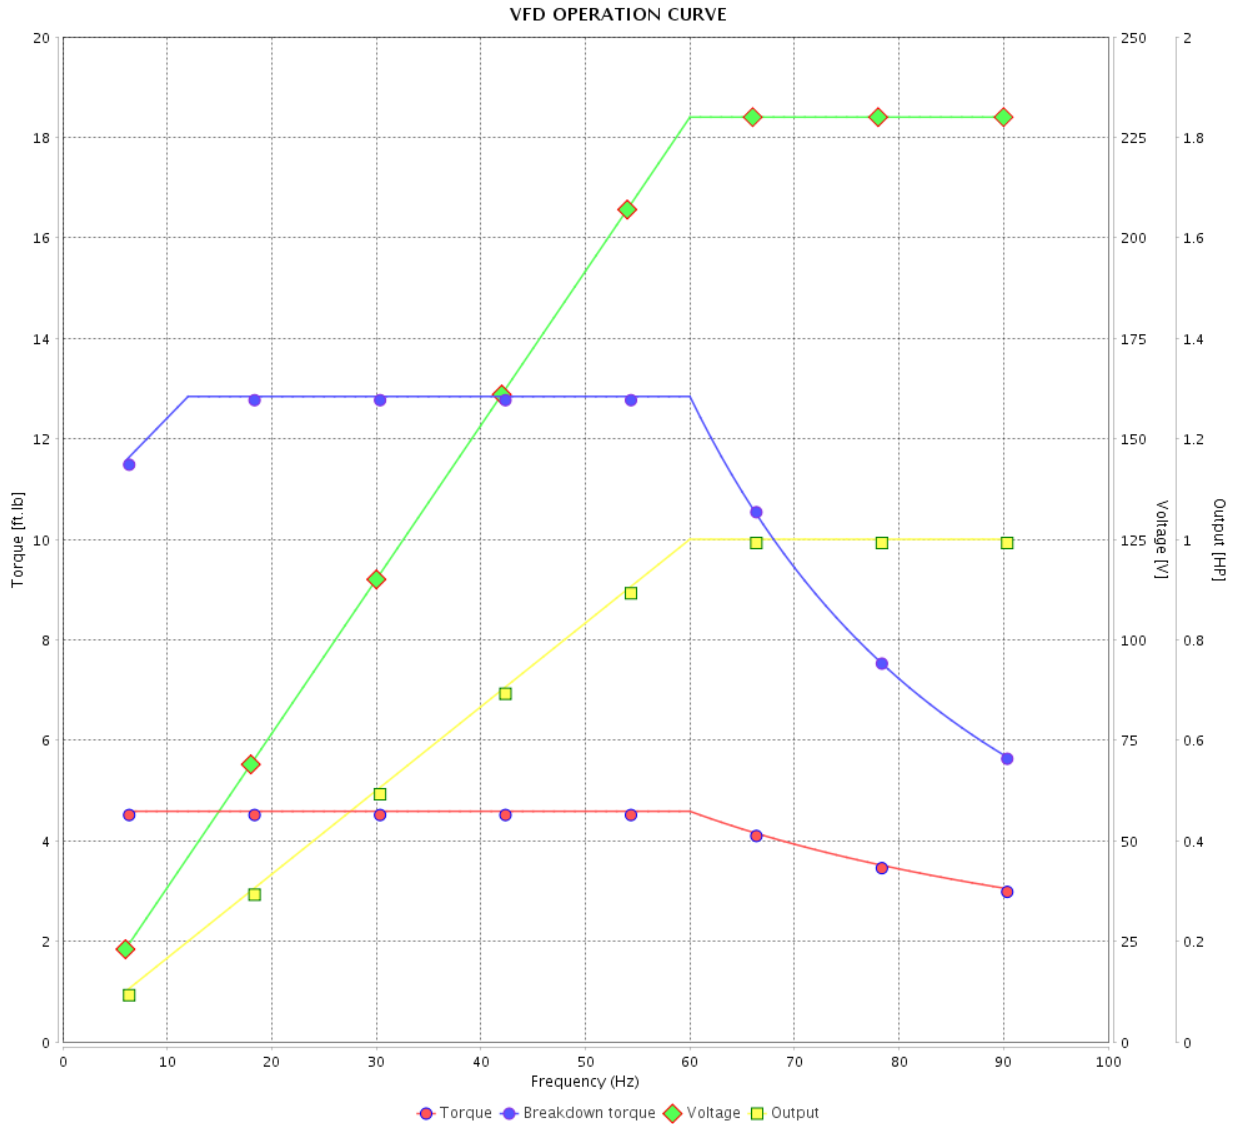

Performance : 230/460 V 60 Hz 6P

Rated current : 3.16/1.58 A  
 LRC : 5.8  
 Rated torque : 4.59 ft.lb  
 Locked rotor torque : 229 %  
 Breakdown torque : 280 %  
 Rated speed : 1145 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :


Product line : Premium Efficiency Three-Phase

Product code :

14797782

Catalog # :

00112ET3E56-S

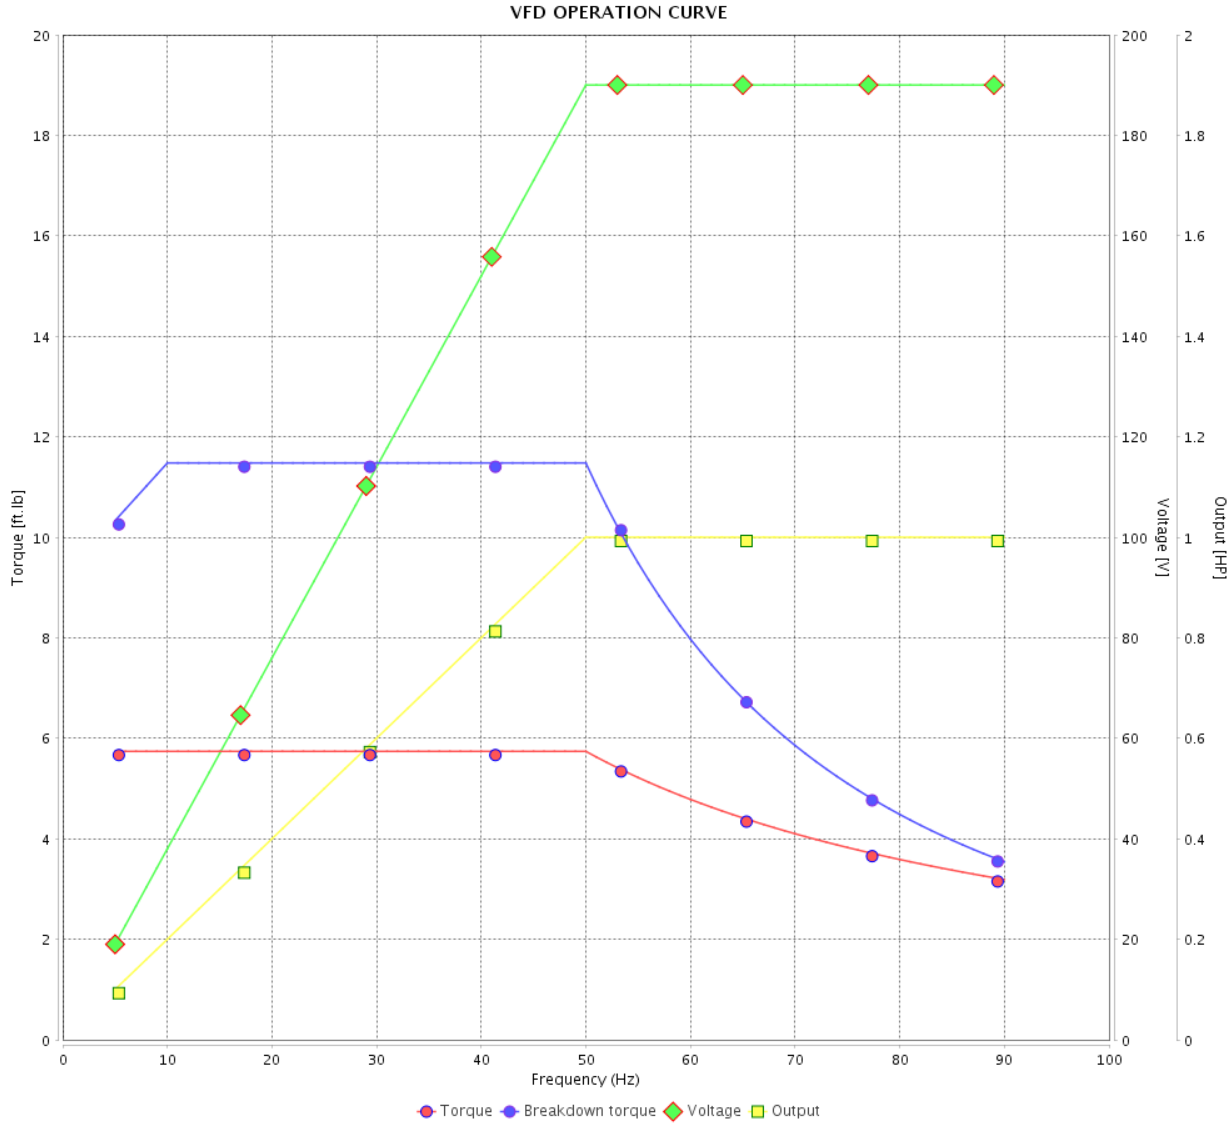

Performance : 190/380 V 50 Hz 6P

Rated current : 3.74/1.87 A  
 LRC : 4.4  
 Rated torque : 5.74 ft.lb  
 Locked rotor torque : 170 %  
 Breakdown torque : 200 %  
 Rated speed : 915 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 12 / 13	Revision
Checked by				
Date	11/04/2022			


# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Premium Efficiency Three-Phase      Product code : 14797782  
 Catalog # : 00112ET3E56-S

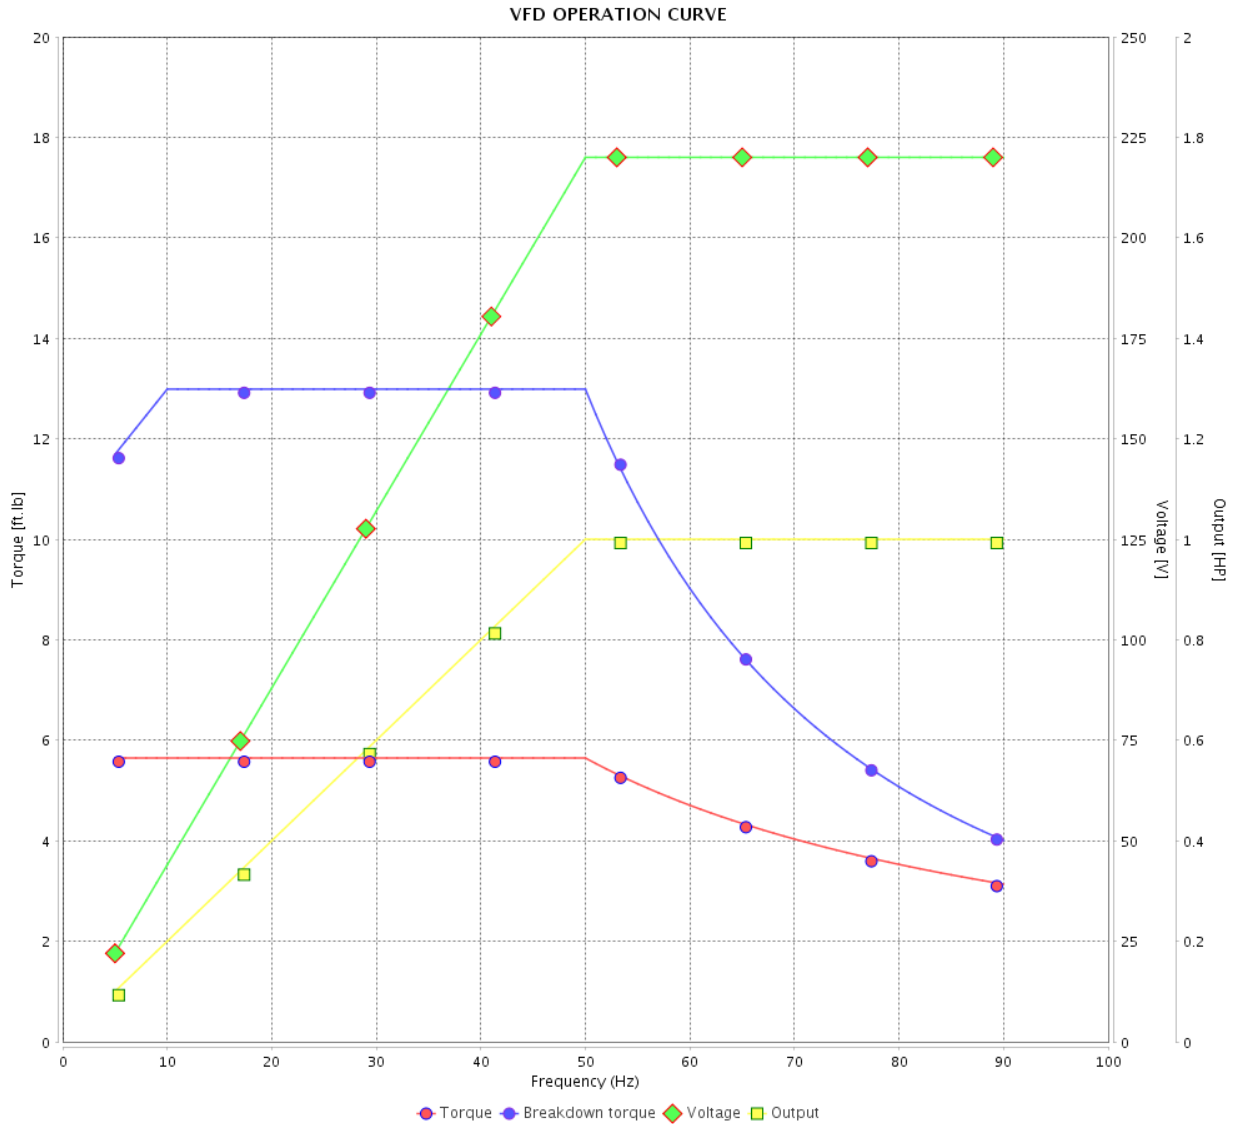



Performance : 220/415 V 50 Hz 6P

Rated current : 3.41/1.81 A  
 LRC : 4.9  
 Rated torque : 5.65 ft.lb  
 Locked rotor torque : 200 %  
 Breakdown torque : 229 %  
 Rated speed : 930 rpm

Moment of inertia (J) : 0.1597 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 105 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 13 / 13
Checked by				
Date	11/04/2022			
				Revision

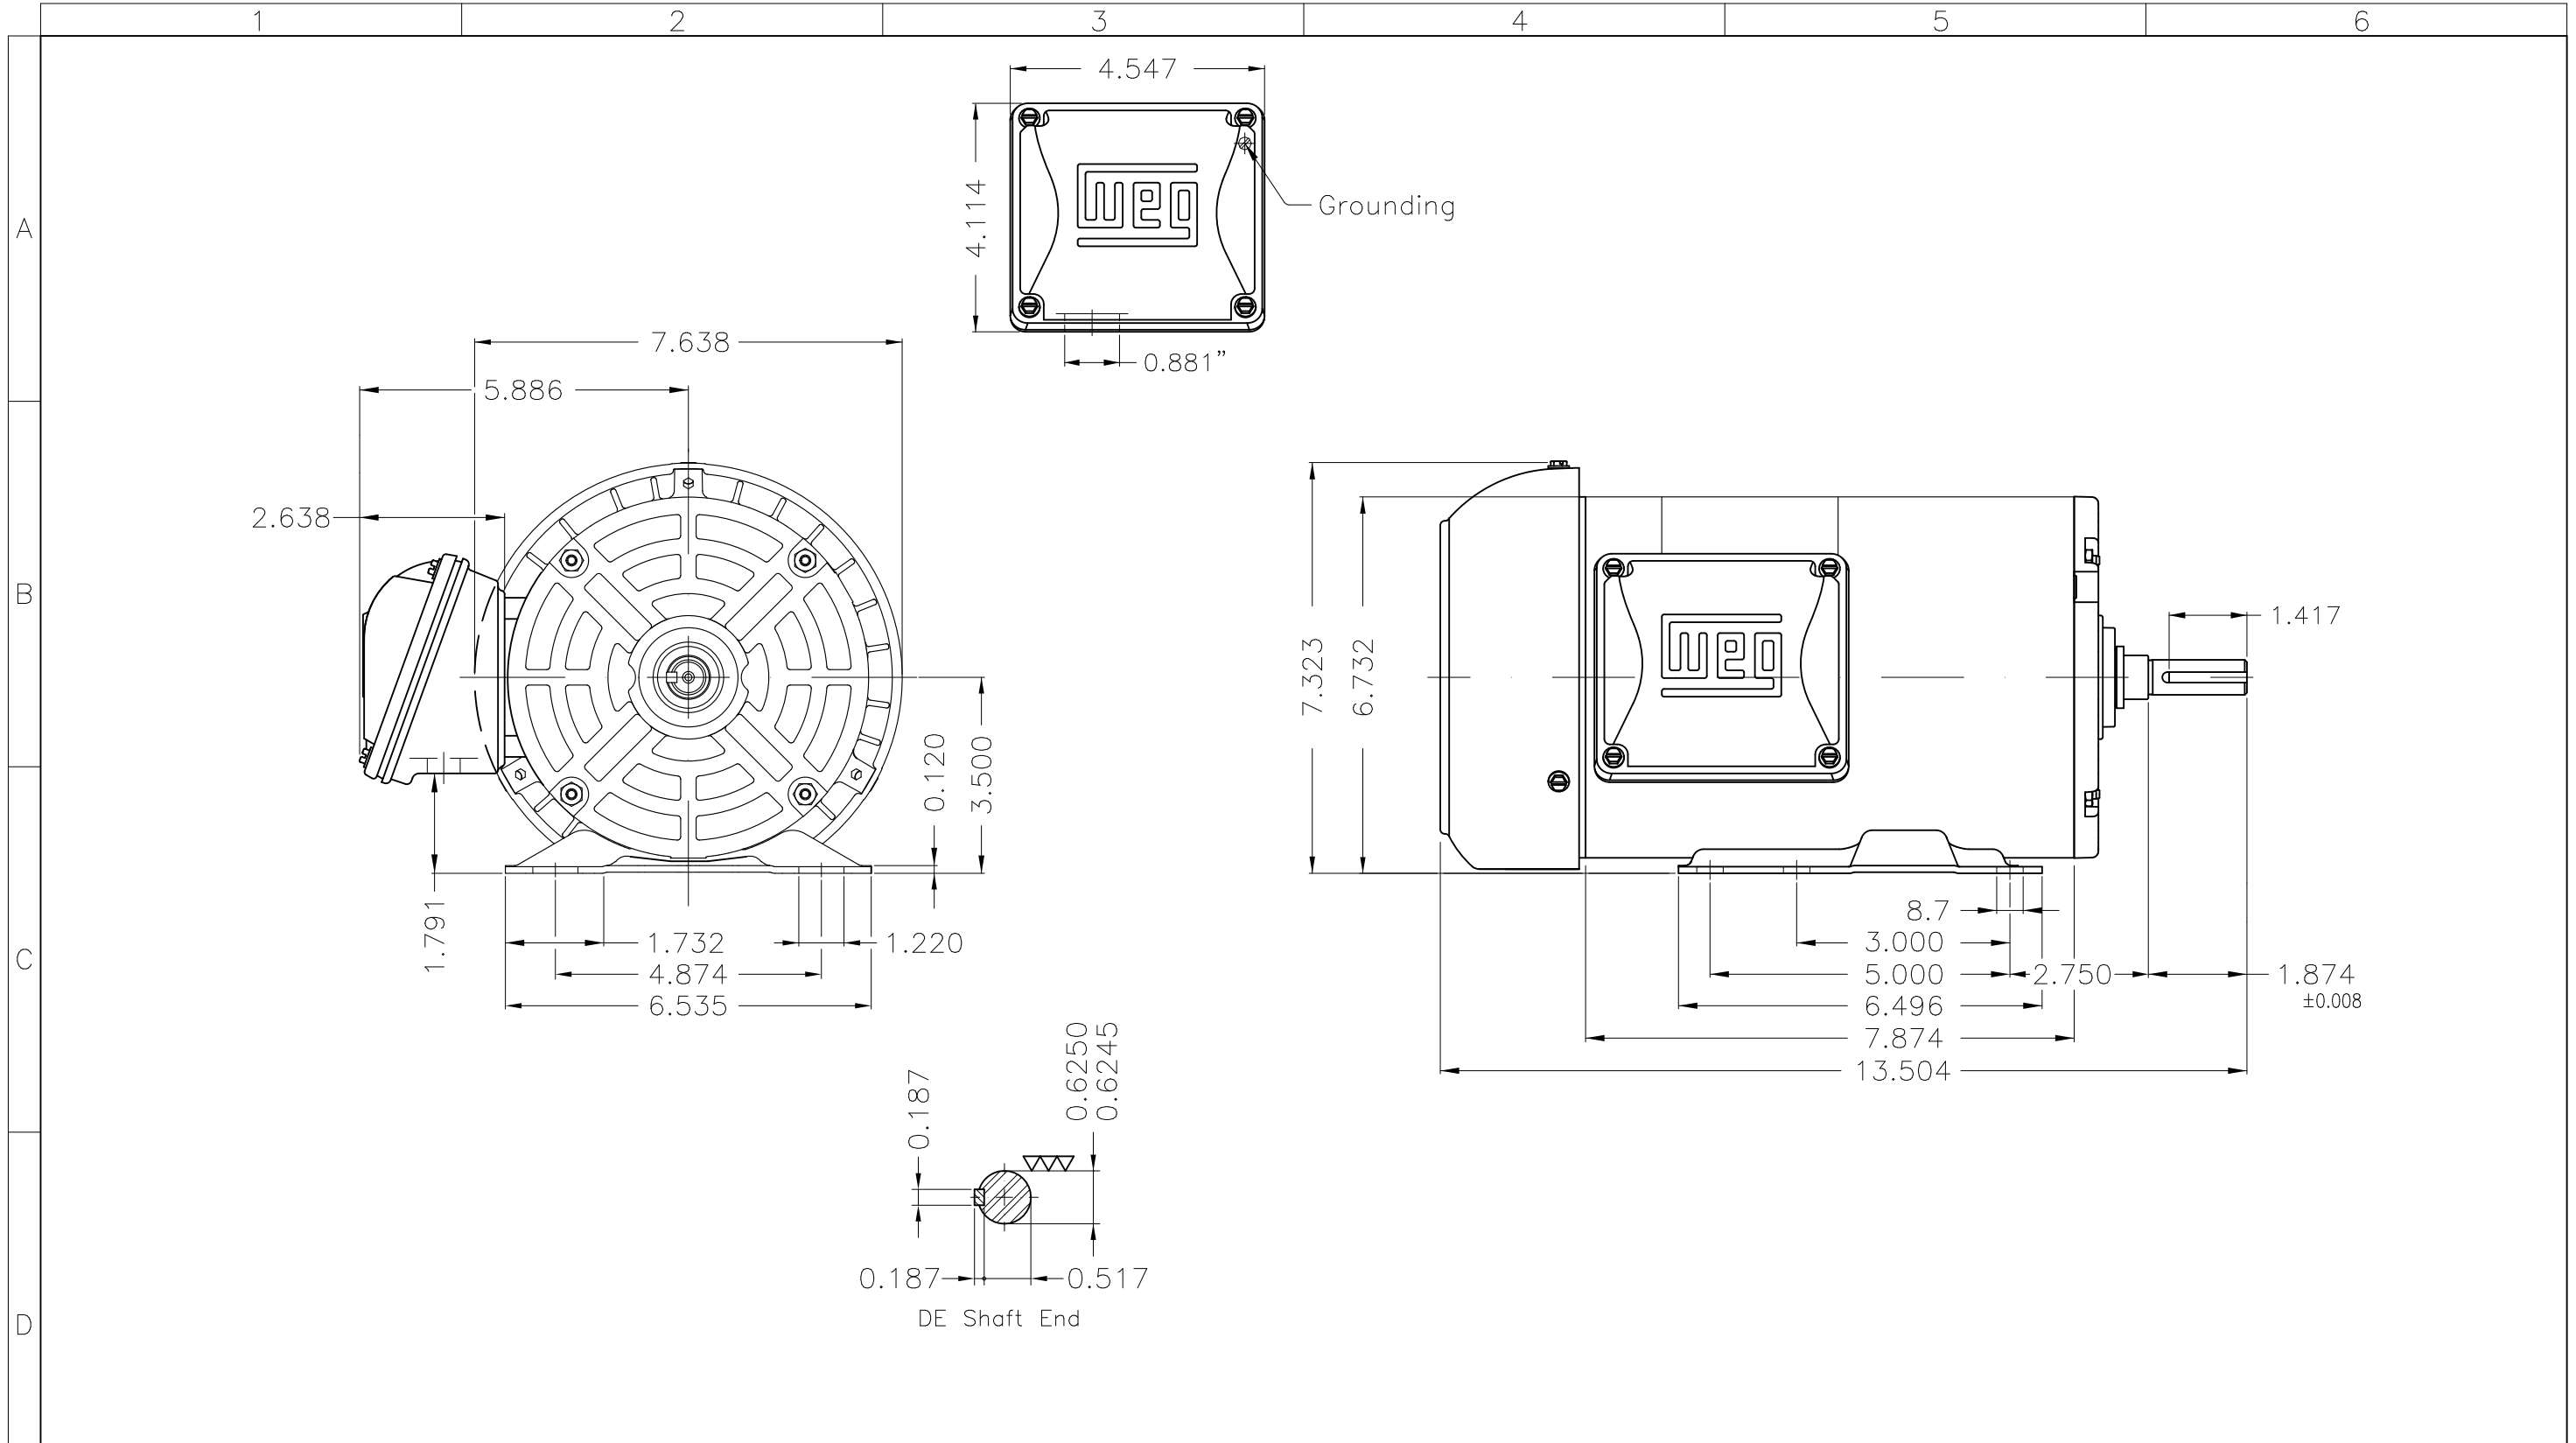

Fan cover - steel plate										
Without coating										
Mounting F-1/B3R(D)										
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PH. MOTOR ROLLED STEEL PREM. EFF.					<b>PREVIEW</b> WDD			
CHECKED		FRAME 56H IP55 TEFC								
RELEASED										
REL DT.		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1				

1 HP 06 Poles 60 Hz



**NEMA**  
**Premium**



3PT9



Energy Verified

MADE IN MEXICO

**MAT: 14797782 CC029A**  
**W01.TE0IC0X0X**  
**MODEL 00112ET3E56-S**  
**06APR2022 B/N:**

**For 60Hz: Class I, Zone 2, IIC**  
**Class I, Div.2, Gr. A,B,C,D - T3**  
**Div 2 Inverter Duty (SF1.00)**  
**CT 2:1/VT 1000:1**

<b>PH 3</b>	<b>Hz 60</b>	<b>HP 1.0</b>
<b>FR 56H</b>		<b>KW 0.75</b>
<b>DUTY CONT.</b>		<b>V 230/460</b>
<b>ALT 1000 m.a.s.l.</b>		<b>A 3.16/1.58</b>
<b>INS CL F AT 80K</b>	<b>IP55</b>	<b>SFA 3.63/1.82</b>
<b>AMB 40°C</b>	<b>DES B</b>	<b>SF 1.15</b>
<b>ENCL TEFC</b>	<b>CODE J</b>	<b>PF 0.72</b>
<b>USABLE @ 208V 3.50A</b>		<b>RPM 1145</b>
<b>SF1.00</b>		<b>NEMA</b>
		<b>NOM. EFF 82.5%</b>

<b>ALTERNATE RATING: 1.0HP</b>	<b>50Hz</b>	<b>190-220/380-415V</b>	<b>SF1.00</b>
<b>3.74-3.36/1.87-1.78A</b>	<b>915RPM</b>	<b>EFF 77.3% (IE2)</b>	<b>IEC 60034-1</b>

For safe area-inverter duty motor For 60Hz use on VPWM 1000:1 VT, 5:1 CT

<b>DE 6204-ZZ</b>	<b>ODE 6202-ZZ</b>	<b>MOBIL POLYREX EM</b>
-------------------	--------------------	-------------------------



T1-BLU T2-WHT  
T3-ORG T4-YEL  
T5-BLK T6-GRY  
T7-PNK T8-RED  
T9-BRK RED

INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION

**WARNING:** Motor must be grounded in accordance with local and national electrical codes to prevent serious electrical shocks. Disconnect power source before servicing unit.



**AVERTISSEMENT:** Le moteur doit être mis à la terre conformément aux codes électriques locaux et nationaux afin d'éviter tout choc électrique grave. Déconnectez l'alimentation avant l'entretien de la machine.

