

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :		
Product line	: JP Pump NEMA Premium Efficiency Three-Phase	
Product code :	14808413	
Catalog # :	00156ET3E143JP-S	
Frame	: 143/5JP	
Insulation class	: F	
Duty cycle	: Cont.(S1)	
Ambient temperature	: -20°C to +40°C	
Altitude	: 1000 m.a.s.l.	
Protection degree	: IP55	
Design	: B	
Cooling method	: IC411 - TEFC	
Mounting	: F-1	
Rotation ¹	: Both (CW and CCW)	
Starting method	: Direct On Line	
Approx. weight ²	: 34.2 lb	
Moment of inertia (J)	: 0.1023 sq.ft.lb	
Output [HP]	1.5	
Poles	2	
Frequency [Hz]	60	
Rated voltage [V]	230/460	
Rated current [A]	3.74/1.87	
L. R. Amperes [A]	34.0/17.0	
LRC [A]	9.1x(Code L)	
No load current [A]	1.72/0.859	
Rated speed [RPM]	3520	
Slip [%]	2.22	
Rated torque [ft.lb]	2.24	
Locked rotor torque [%]	229	
Breakdown torque [%]	300	
Service factor	1.15	
Temperature rise	80 K	
Locked rotor time	30s (cold) 17s (hot)	
Noise level ²	68.0 dB(A)	
Efficiency (%)	25%	78.4
	50%	80.0
	75%	82.5
	100%	84.0
Power Factor	25%	0.44
	50%	0.71
	75%	0.82
	100%	0.88
Bearing type	: <u>Drive end</u> 6206 ZZ <u>Non drive end</u> 6203 ZZ	
Sealing	: V'Ring Without Bearing Seal	
Lubrication interval	: -	
Lubricant amount	: -	
Lubricant type	: Mobil Polyrex EM	
Foundation loads	Max. traction : 56 lb	
	Max. compression : 90 lb	
Notes USABLE @208V 4.13A SF 1.00 SFA 4.13A		
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		
These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	
Performed by	Performed	
Checked by	Checked	
Date	Date	
12/04/2022		
Page	Revision	
1 / 16		

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

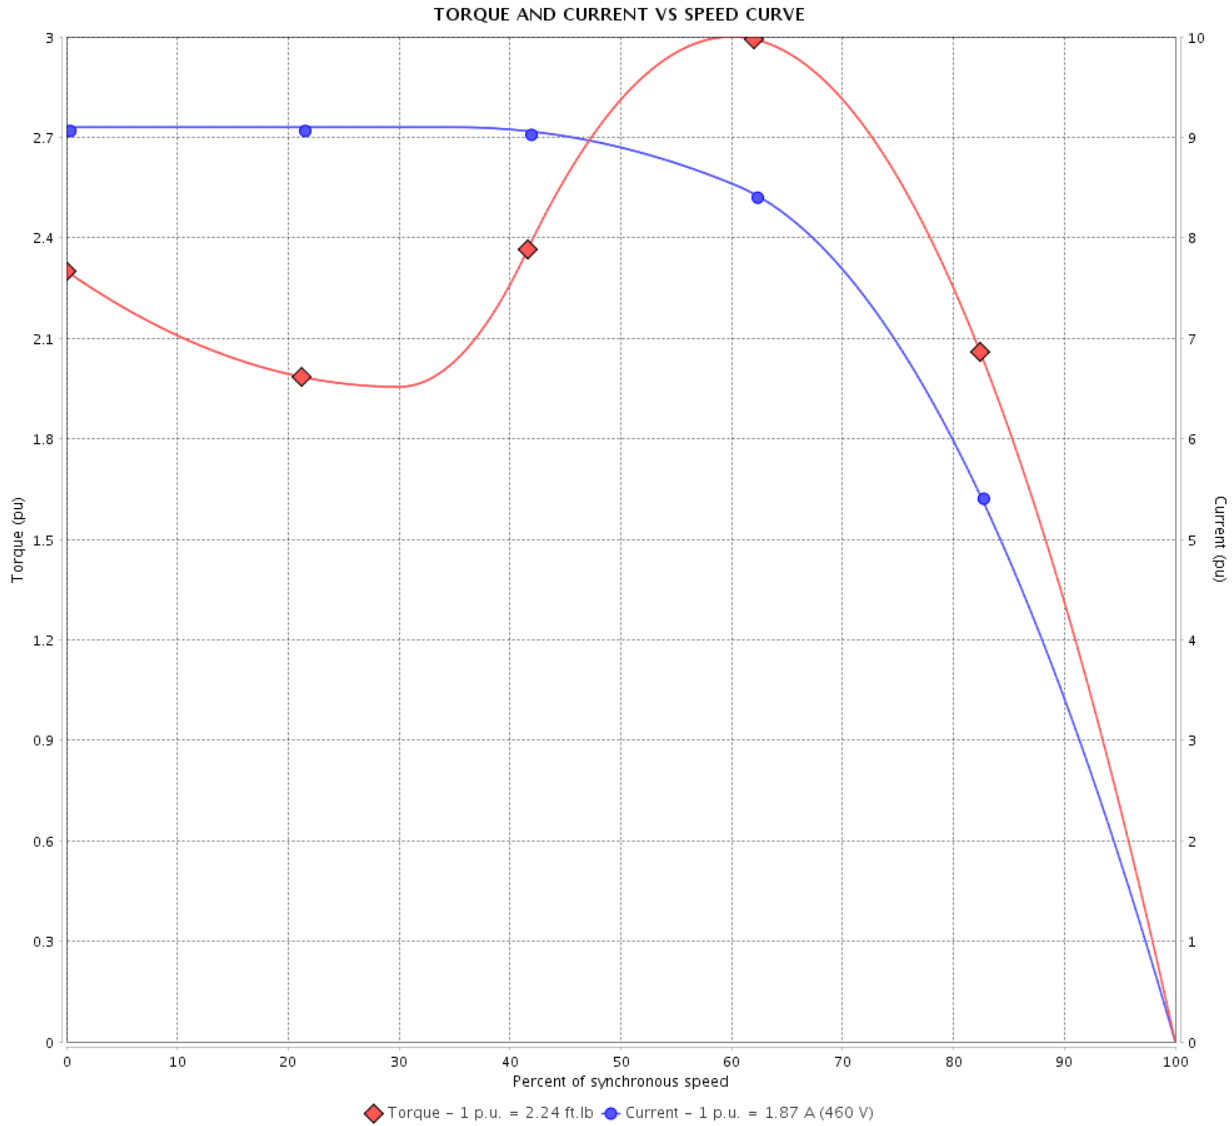

Performance : 230/460 V 60 Hz 2P

Rated current	: 3.74/1.87 A	Moment of inertia (J)	: 0.1023 sq.ft.lb
LRC	: 9.1	Duty cycle	: Cont.(S1)
Rated torque	: 2.24 ft.lb	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	:
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 3520 rpm	Design	: B

Locked rotor time : 30s (cold) 17s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 16	Revision
Checked by				
Date	12/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

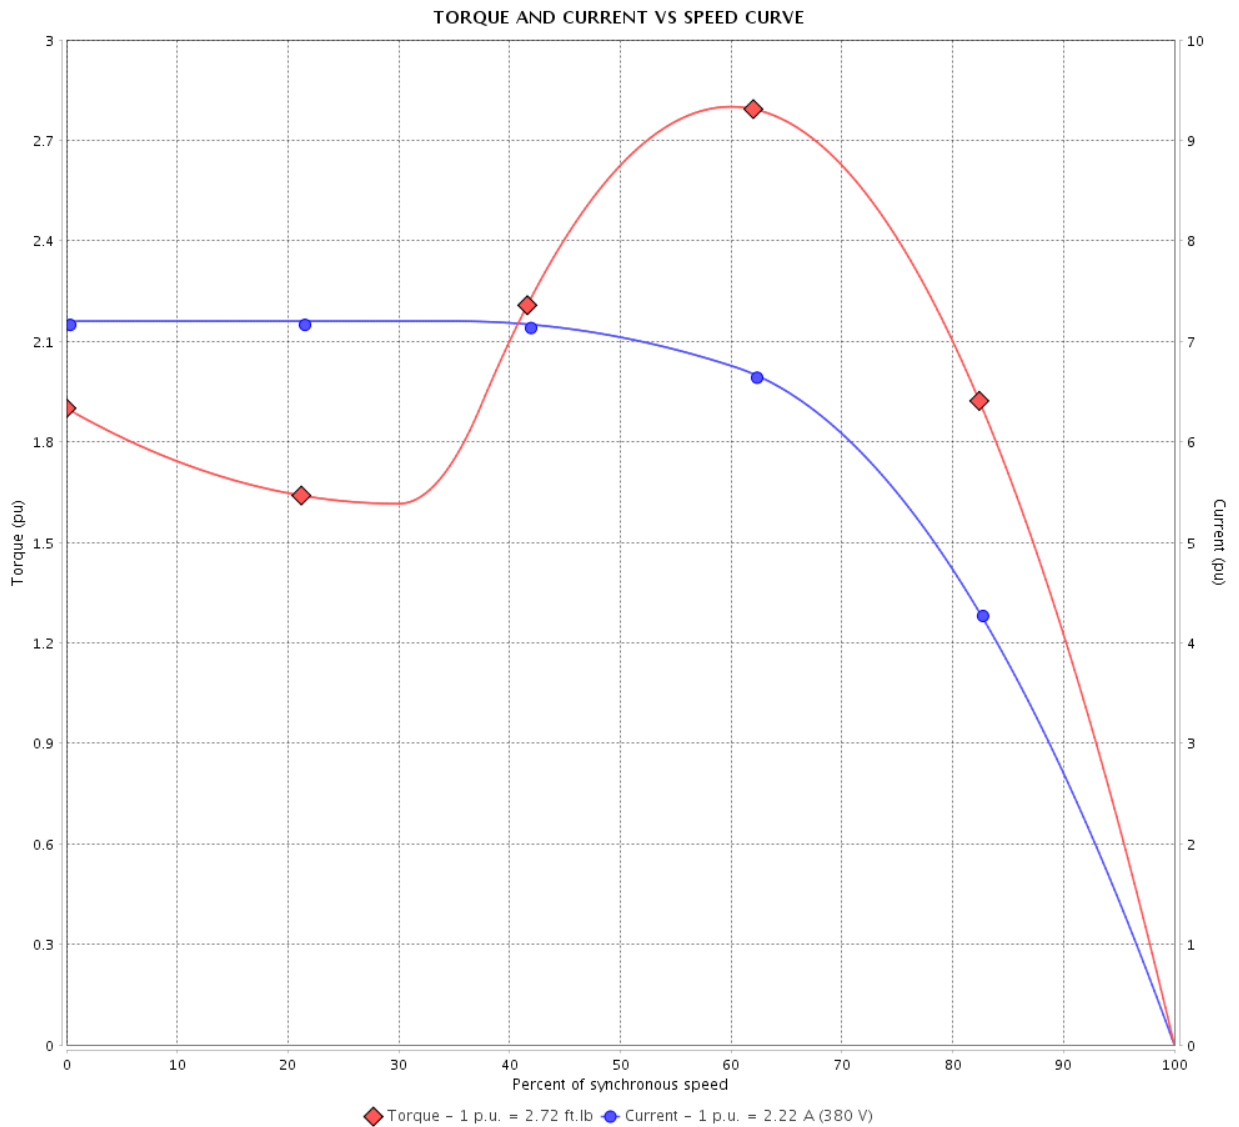

Performance : 190/380 V 50 Hz 2P

Rated current : 4.44/2.22 A
 LRC : 7.2
 Rated torque : 2.72 ft.lb
 Locked rotor torque : 190 %
 Breakdown torque : 280 %
 Rated speed : 2895 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Locked rotor time : 0s (cold) 0s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 16		
Date	12/04/2022			

TORQUE AND CURRENT VS SPEED CURVE



Three Phase Induction Motor - Squirrel Cage


Customer :

Product line : JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

TORQUE AND CURRENT VS SPEED CURVE

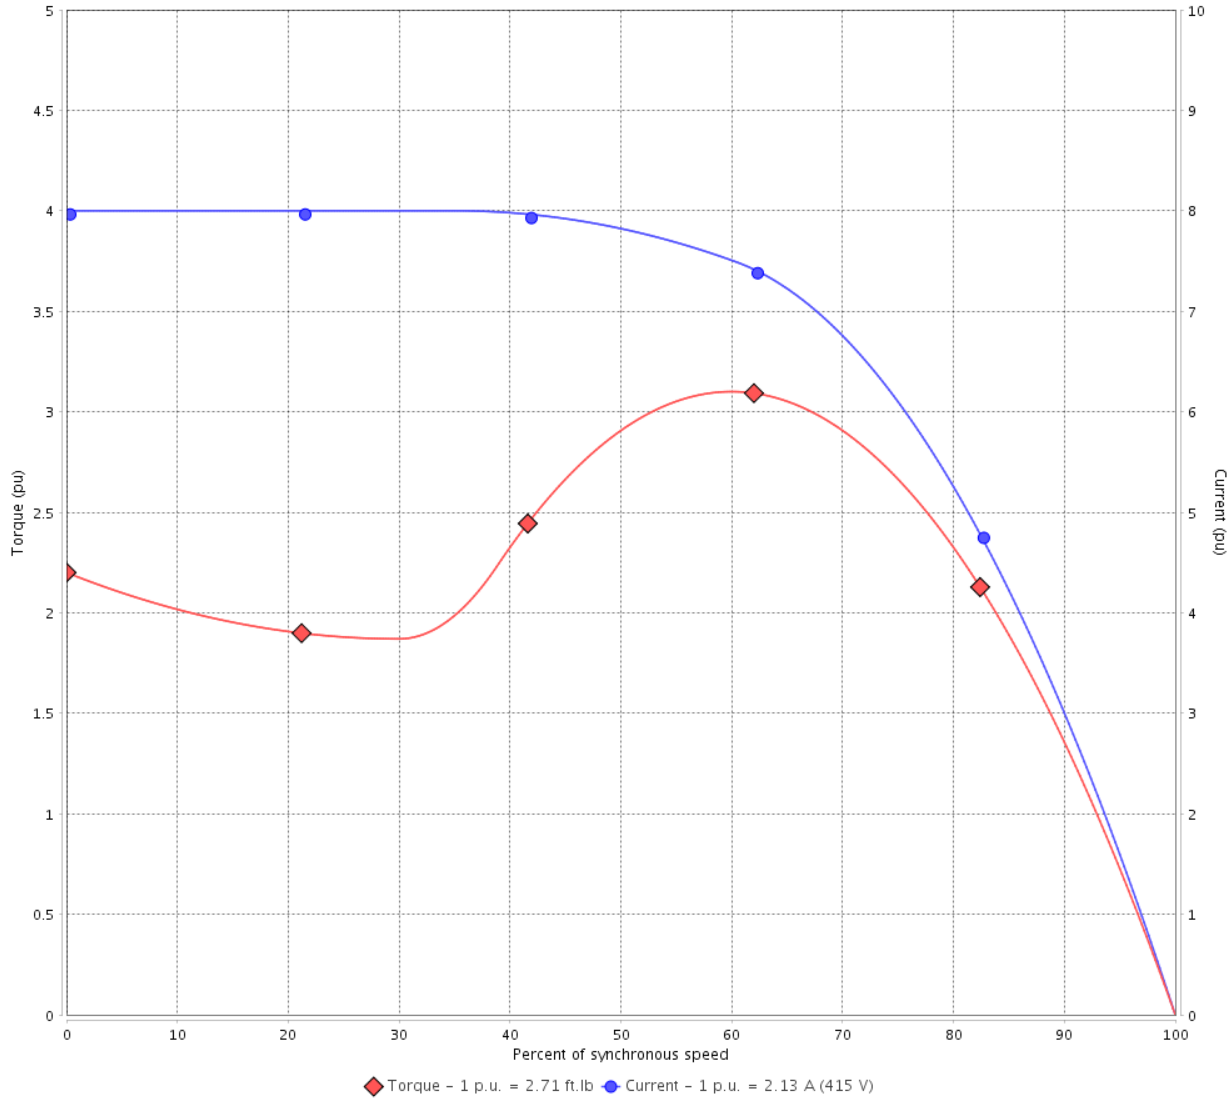

Performance : 220/415 V 50 Hz 2P

Rated current	: 4.02/2.13 A	Moment of inertia (J)	: 0.1023 sq.ft.lb
LRC	: 8.0	Duty cycle	: Cont.(S1)
Rated torque	: 2.71 ft.lb	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.15
Breakdown torque	: 310 %	Temperature rise	: 80 K
Rated speed	: 2905 rpm	Design	: B

Locked rotor time : 0s (cold) 0s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 16	Revision
Checked by				
Date	12/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

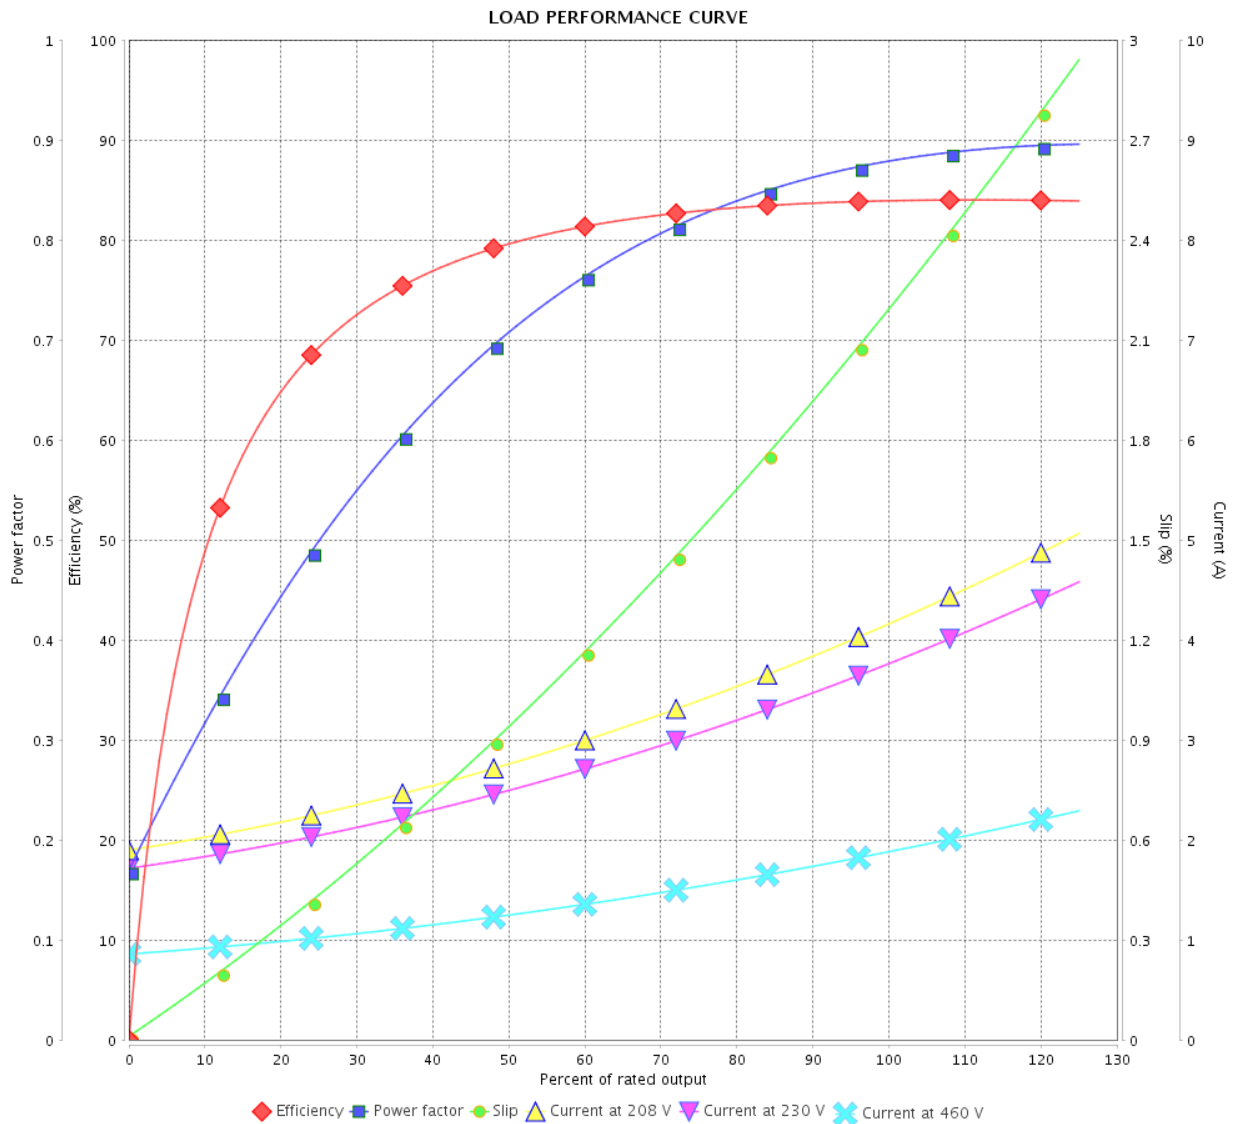

Performance : 230/460 V 60 Hz 2P

Rated current : 3.74/1.87 A
 LRC : 9.1
 Rated torque : 2.24 ft.lb
 Locked rotor torque : 229 %
 Breakdown torque : 300 %
 Rated speed : 3520 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 16		
Date		12/04/2022		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

LOAD PERFORMANCE CURVE

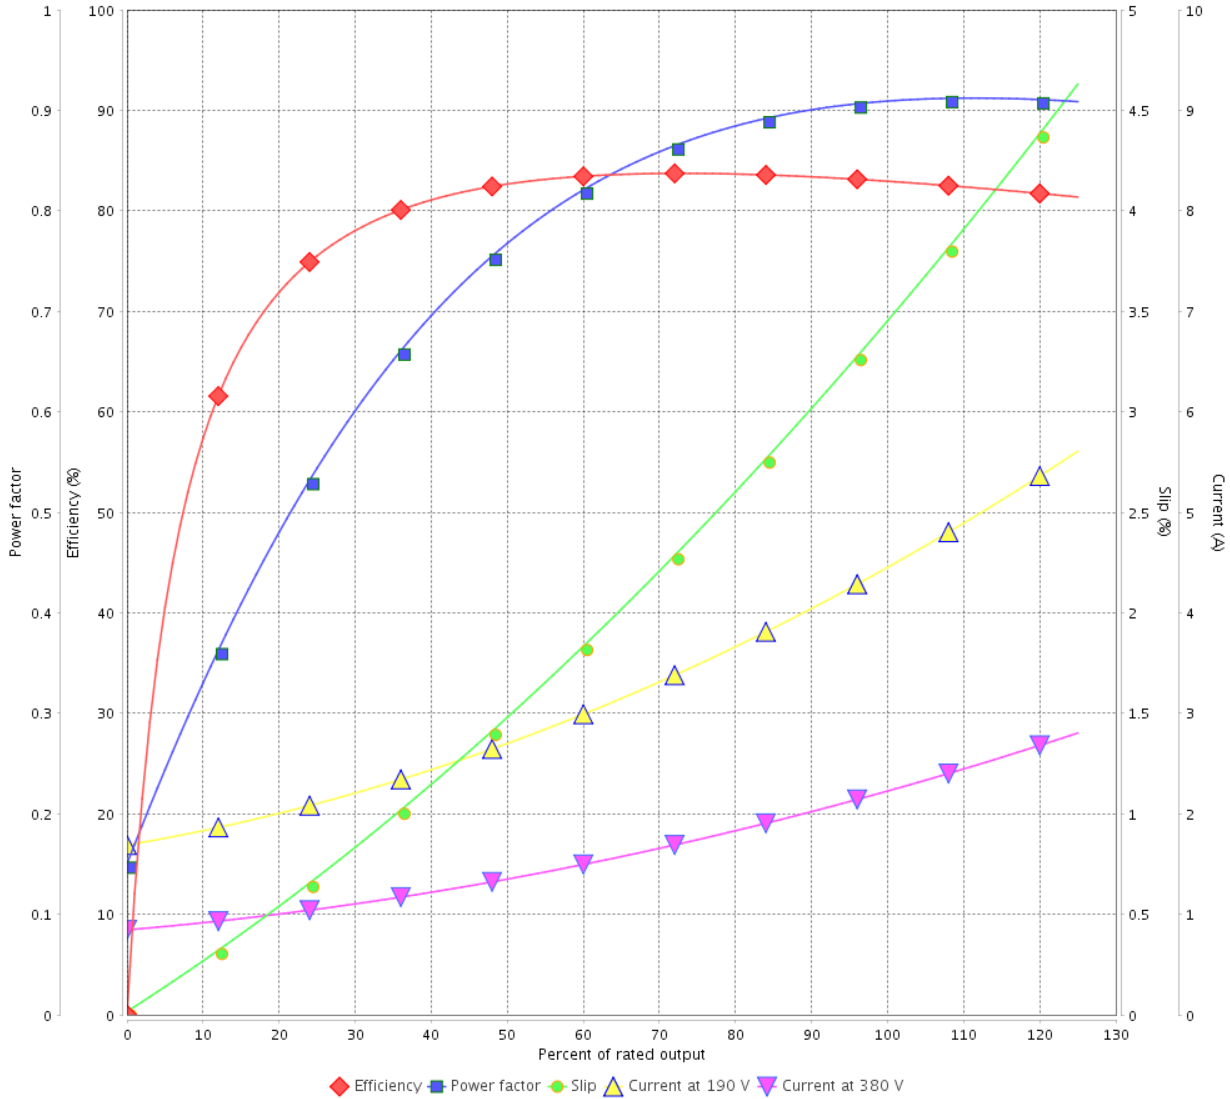

Performance : 190/380 V 50 Hz 2P

Rated current : 4.44/2.22 A
LRC : 7.2
Rated torque : 2.72 ft.lb
Locked rotor torque : 190 %
Breakdown torque : 280 %
Rated speed : 2895 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

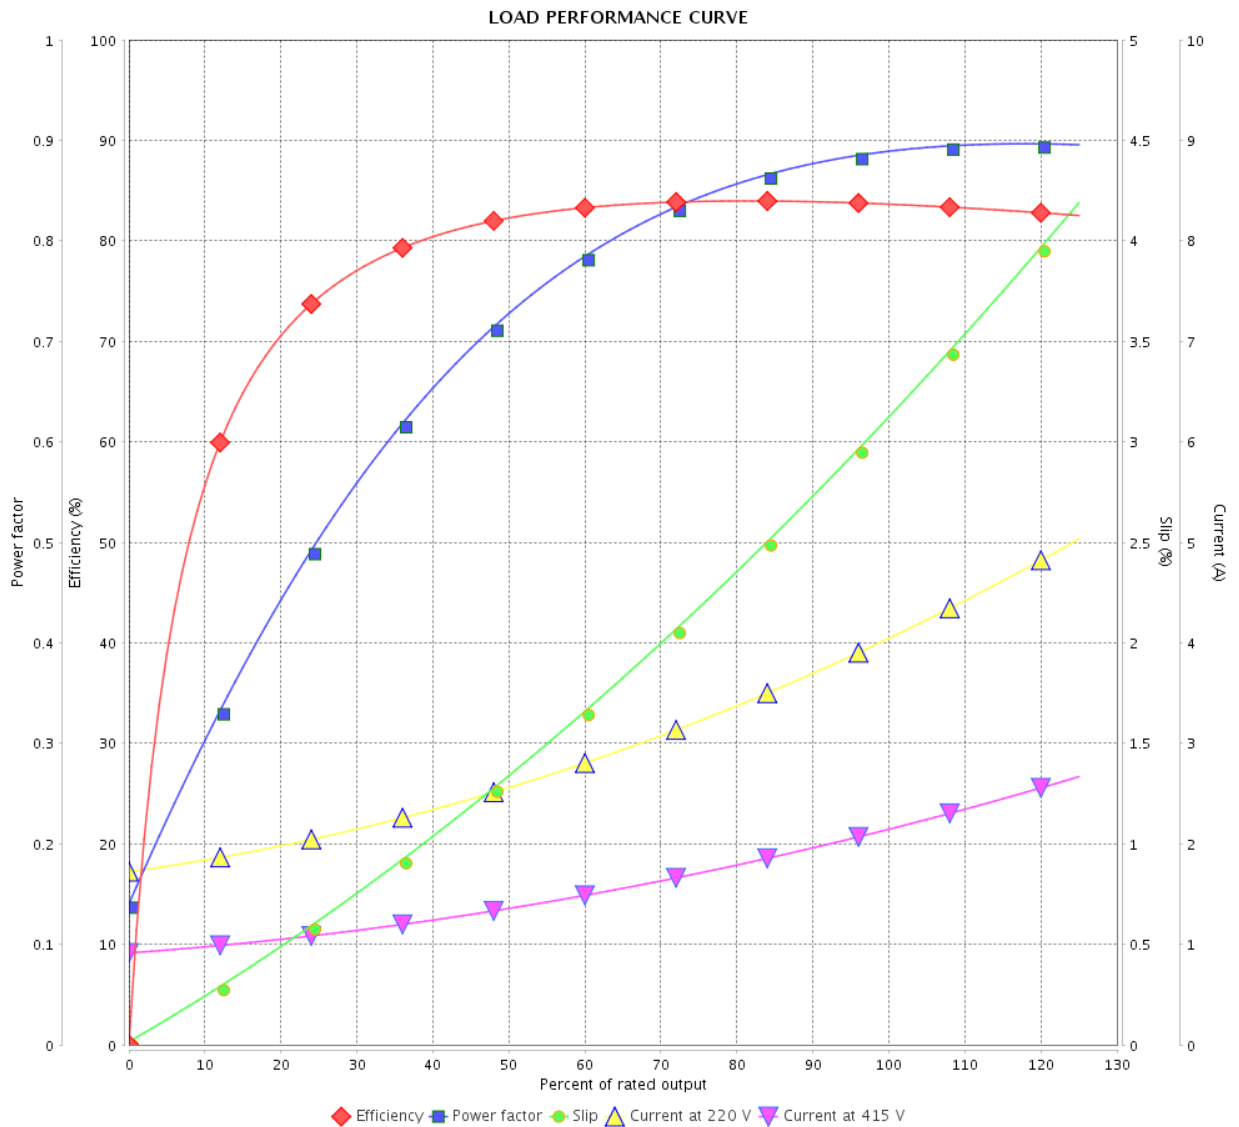

Performance : 220/415 V 50 Hz 2P

Rated current : 4.02/2.13 A
 LRC : 8.0
 Rated torque : 2.71 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 310 %
 Rated speed : 2905 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

Performance : 230/460 V 60 Hz 2P

Rated current : 3.74/1.87 A
LRC : 9.1
Rated torque : 2.24 ft.lb
Locked rotor torque : 229 %
Breakdown torque : 300 %
Rated speed : 3520 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor :
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		8 / 16	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

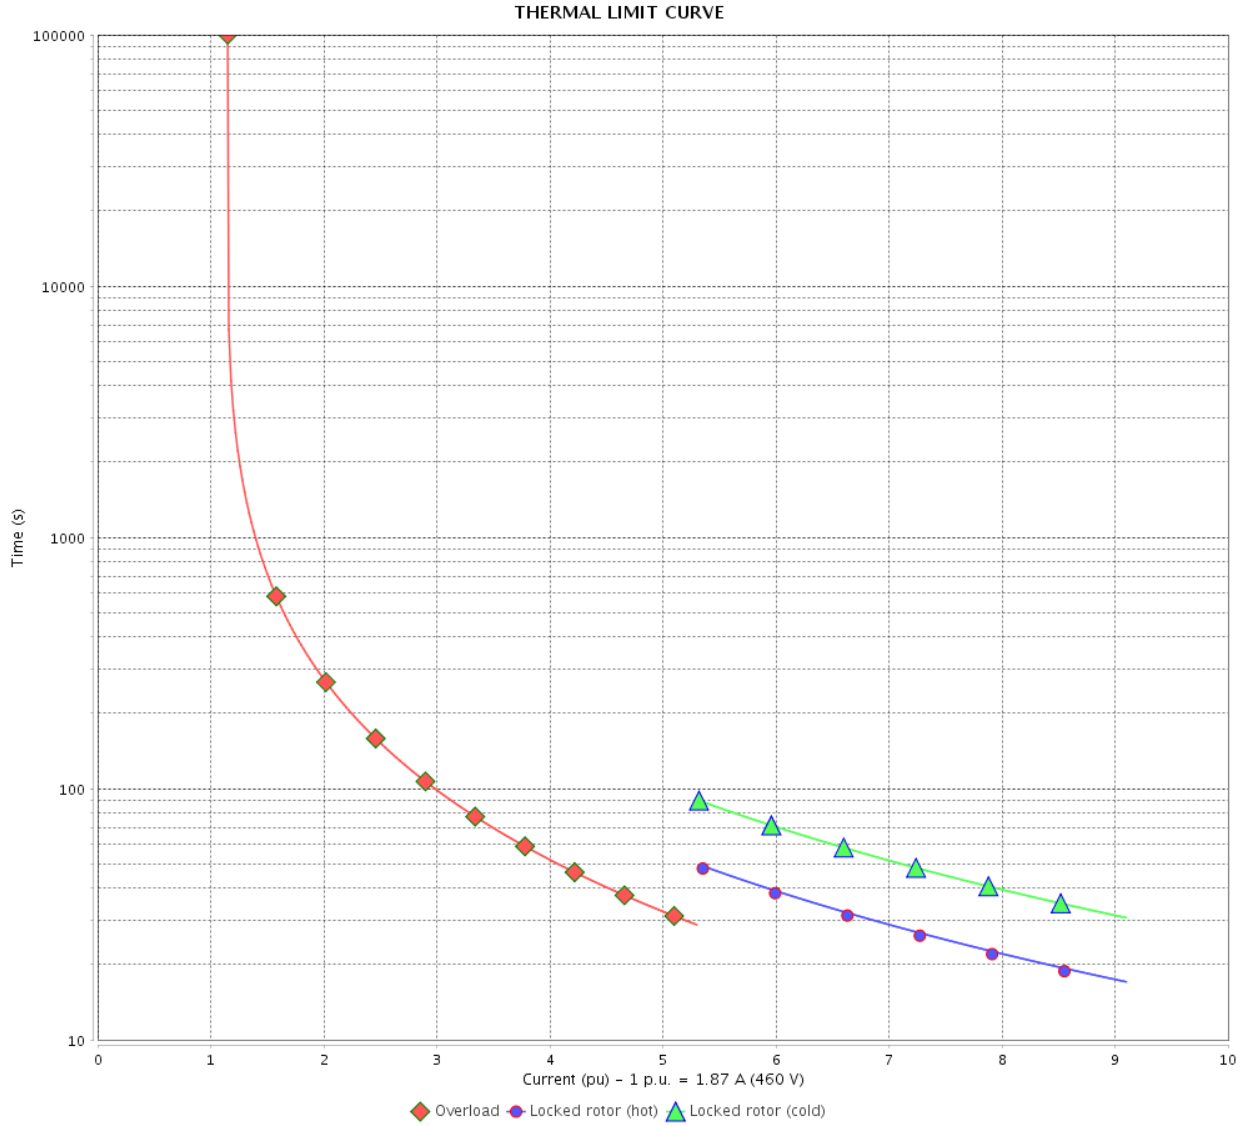

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
			Page	Revision
			9 / 16	

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

Performance : 190/380 V 50 Hz 2P

Rated current : 4.44/2.22 A
LRC : 7.2
Rated torque : 2.72 ft.lb
Locked rotor torque : 190 %
Breakdown torque : 280 %
Rated speed : 2895 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		10 / 16	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

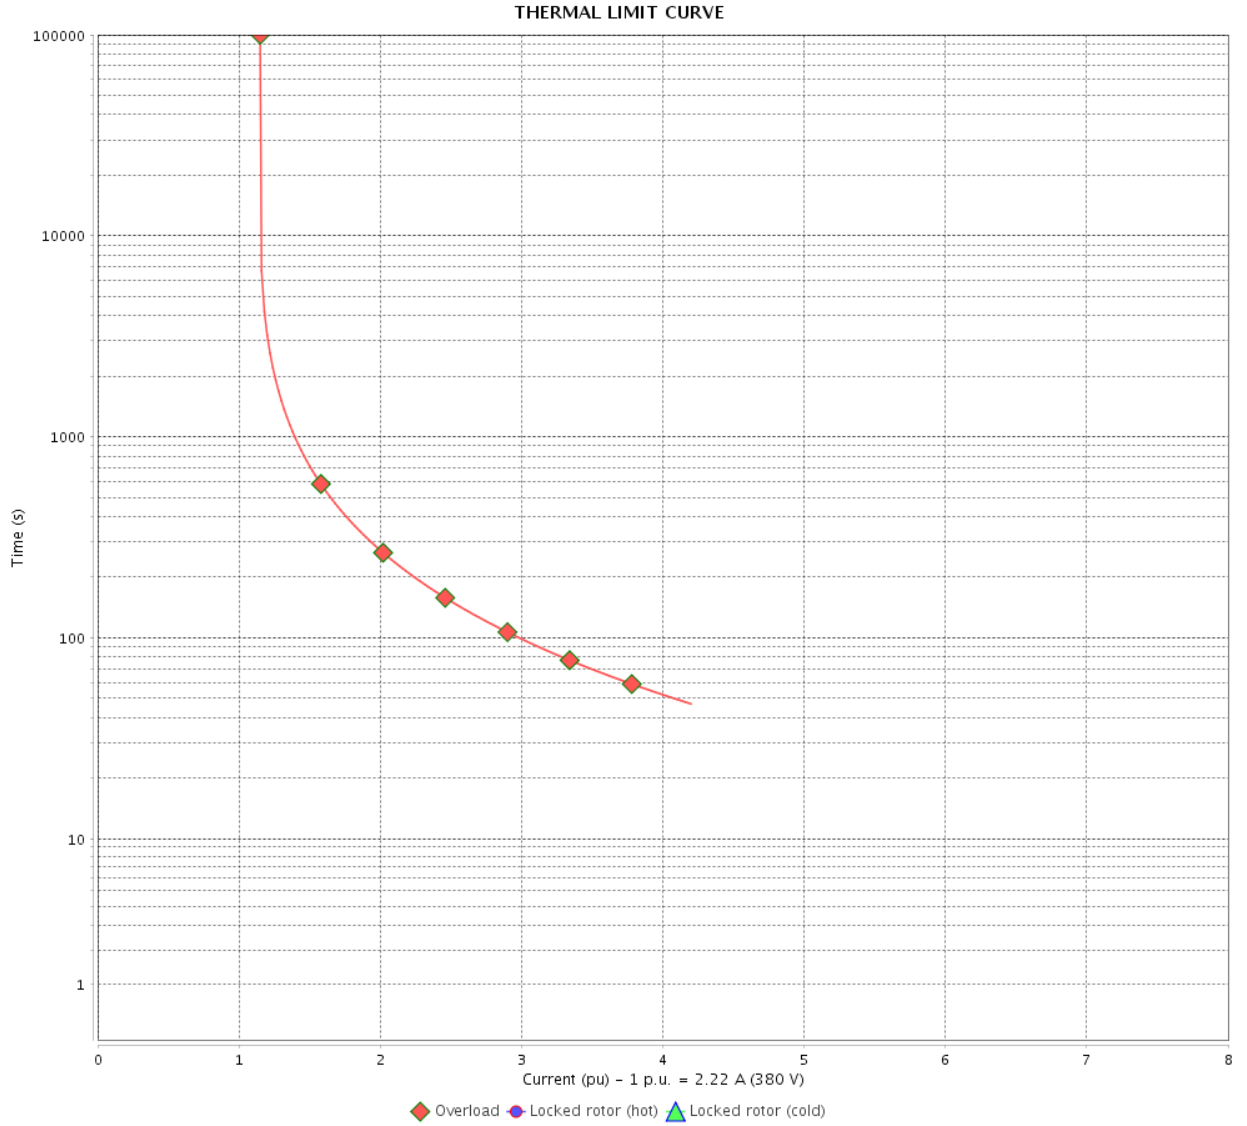

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 11 / 16		
Checked by				
Date				

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

Performance : 220/415 V 50 Hz 2P

Rated current : 4.02/2.13 A
LRC : 8.0
Rated torque : 2.71 ft.lb
Locked rotor torque : 220 %
Breakdown torque : 310 %
Rated speed : 2905 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		12 / 16	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

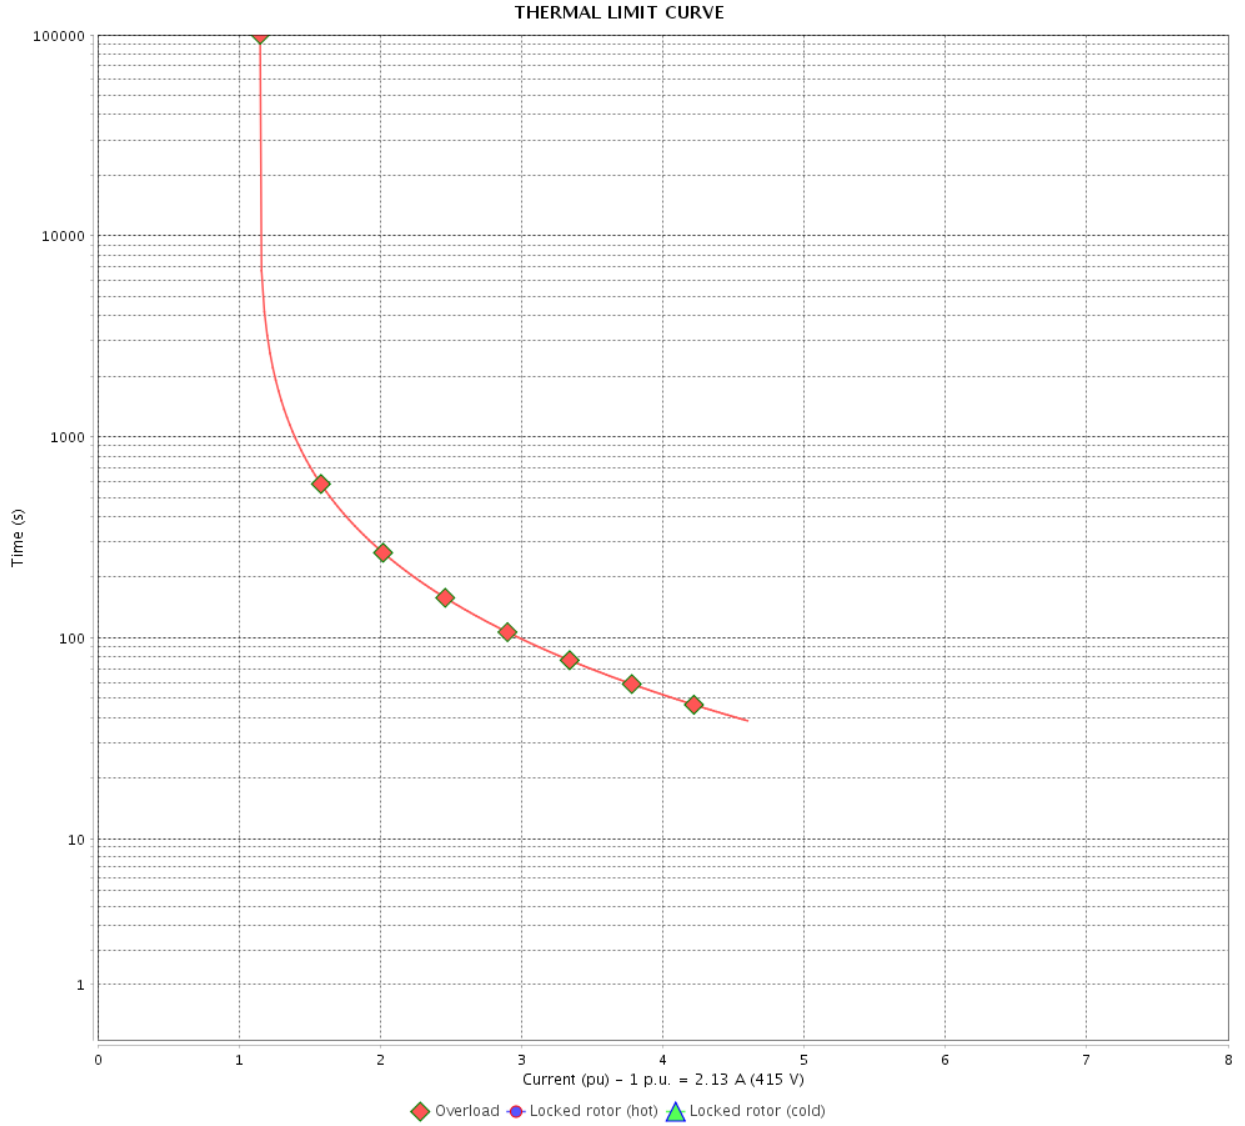

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 13 / 16		
Checked by				
Date				

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

VFD OPERATION CURVE

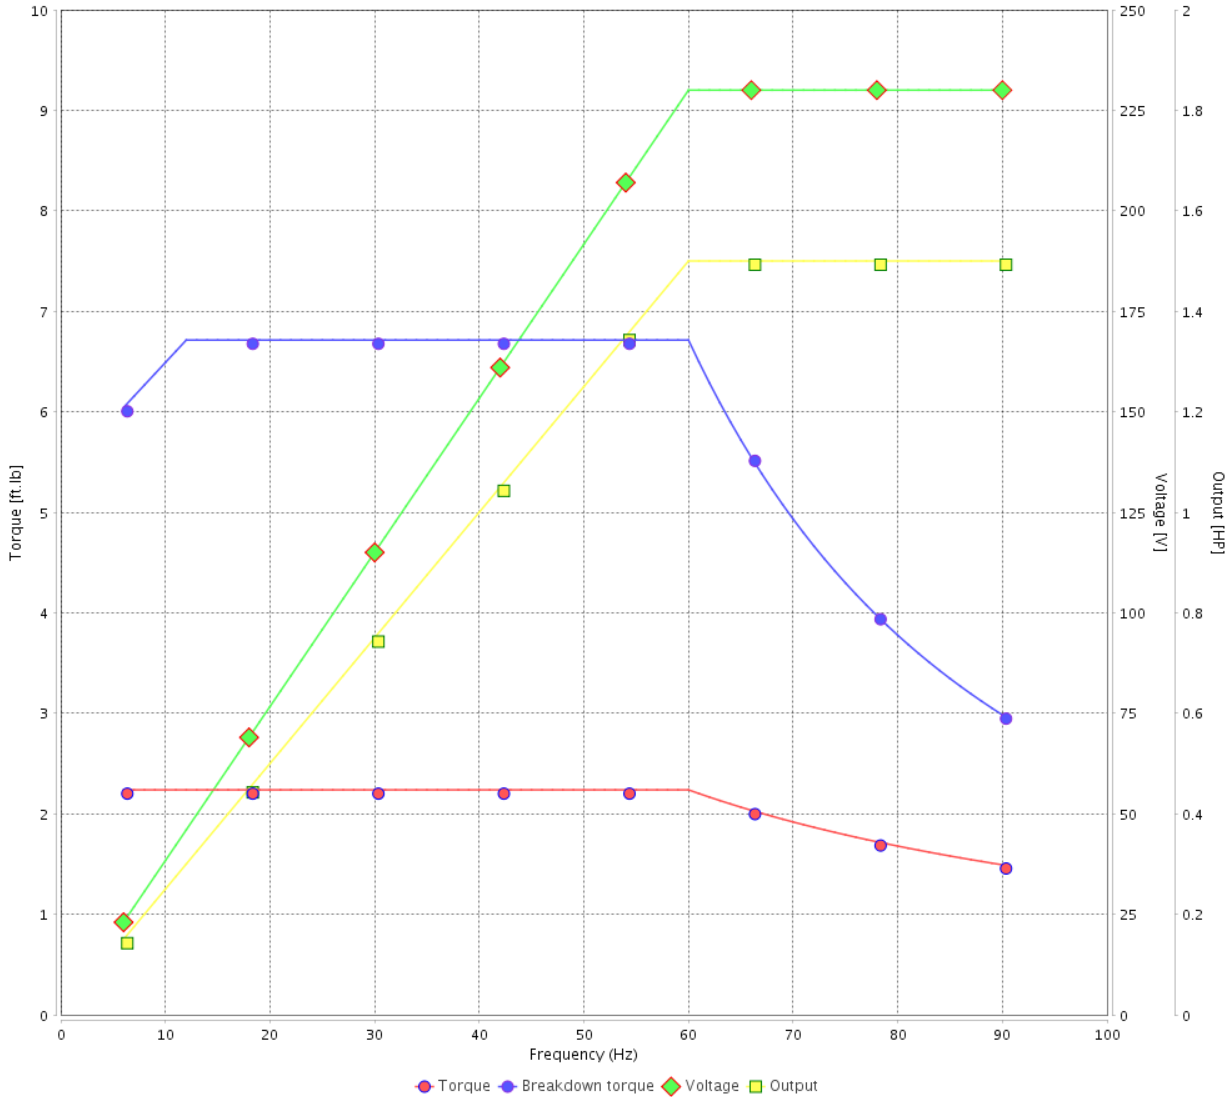

Performance : 230/460 V 60 Hz 2P

Rated current : 3.74/1.87 A
 LRC : 9.1
 Rated torque : 2.24 ft.lb
 Locked rotor torque : 229 %
 Breakdown torque : 300 %
 Rated speed : 3520 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 14 / 16	Revision
Checked by				
Date	12/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

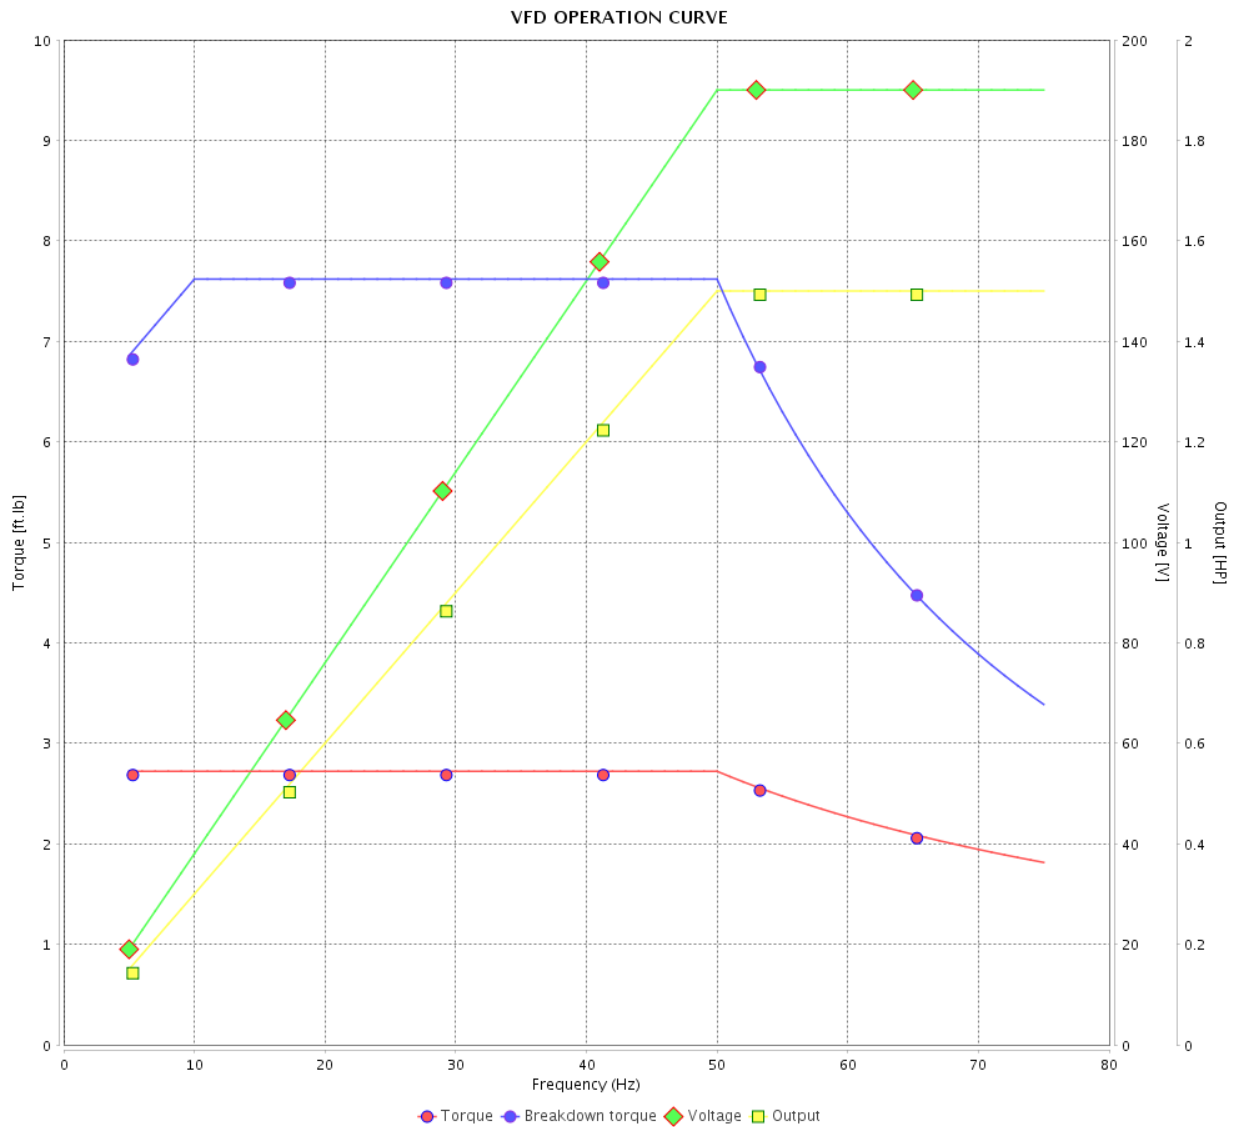

Performance : 190/380 V 50 Hz 2P

Rated current : 4.44/2.22 A
 LRC : 7.2
 Rated torque : 2.72 ft.lb
 Locked rotor torque : 190 %
 Breakdown torque : 280 %
 Rated speed : 2895 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		15 / 16		
Date	12/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14808413

Catalog # : 00156ET3E143JP-S

VFD OPERATION CURVE

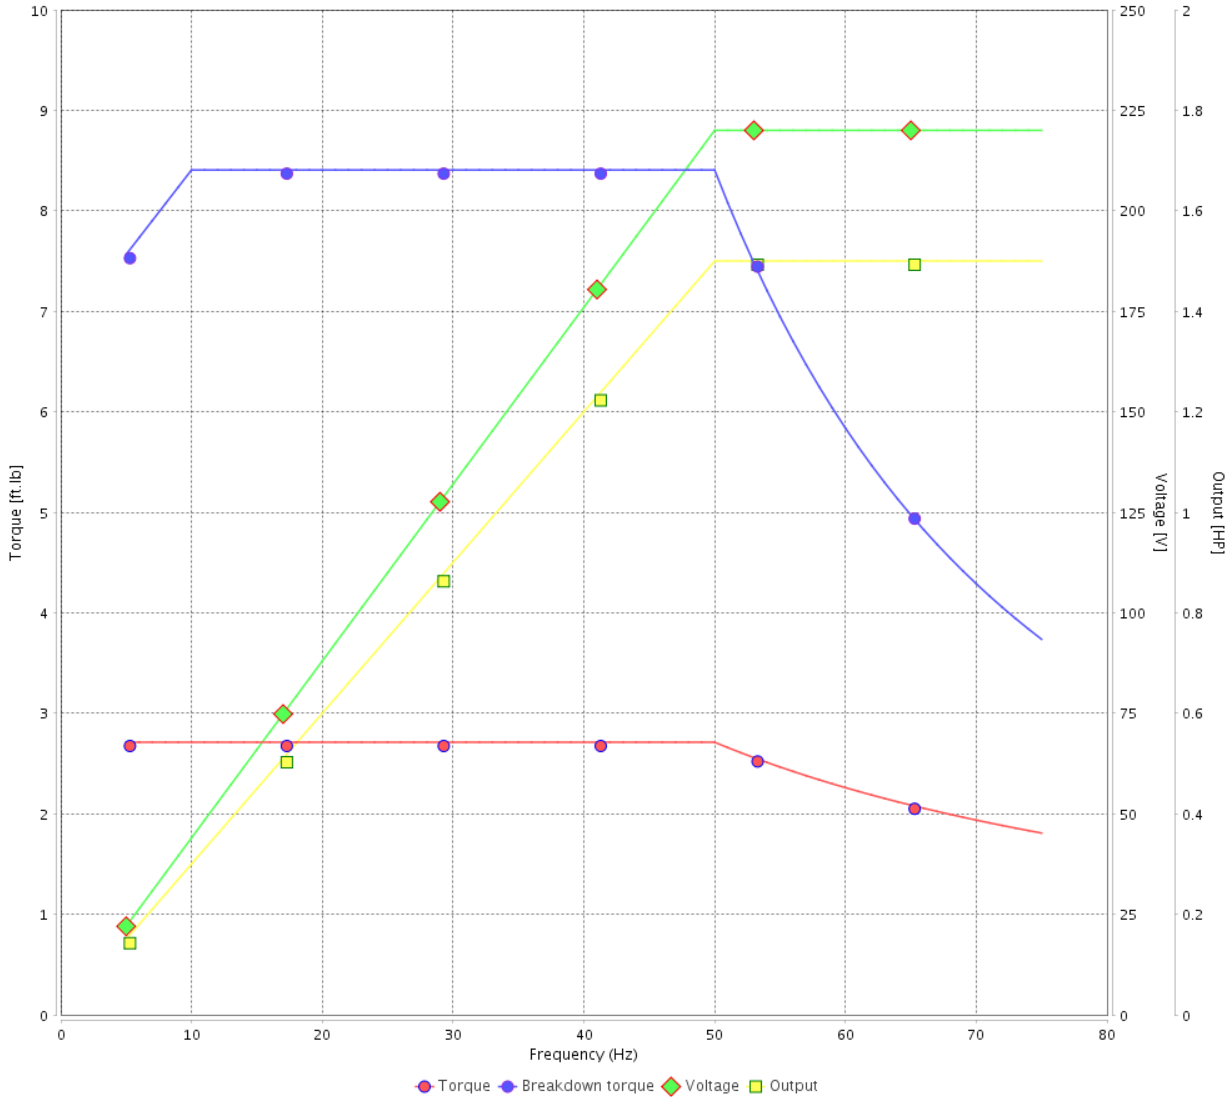

Performance : 220/415 V 50 Hz 2P

Rated current : 4.02/2.13 A
 LRC : 8.0
 Rated torque : 2.71 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 310 %
 Rated speed : 2905 rpm

Moment of inertia (J) : 0.1023 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

