

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :			
Product line	: JM Pump NEMA Premium Efficiency Three-Phase	Product code :	14808741
		Catalog # :	00158ET3E145JM-SG
Frame	: 143/5JM	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 40.9 lb
Protection degree	: IP55	Moment of inertia (J)	: 0.1101 sq.ft.lb
Design	: B		
Output [HP]	1.5	1.5	1.5
Poles	4	4	4
Frequency [Hz]	60	50	50
Rated voltage [V]	230/460	190/380	220/415
Rated current [A]	4.04/2.02	4.82/2.41	4.38/2.32
L. R. Amperes [A]	33.1/16.6	29.4/14.7	29.3/15.5
LRC [A]	8.2x(Code K)	6.1x(Code H)	6.7x(Code J)
No load current [A]	2.17/1.08	2.13/1.07	2.20/1.17
Rated speed [RPM]	1750	1420	1430
Slip [%]	2.78	5.33	4.67
Rated torque [ft.lb]	4.50	5.55	5.51
Locked rotor torque [%]	270	210	240
Breakdown torque [%]	300	250	280
Service factor		1.15	1.15
Temperature rise	80 K	105 K	80 K
Locked rotor time	37s (cold) 21s (hot)	0s (cold) 0s (hot)	0s (cold) 0s (hot)
Noise level ²	52.0 dB(A)	49.0 dB(A)	49.0 dB(A)
Efficiency (%)	25%	85.2	85.0
	50%	85.5	84.2
	75%	86.5	84.9
	100%	86.5	83.6
Power Factor	25%	0.35	0.37
	50%	0.59	0.62
	75%	0.72	0.75
	100%	0.79	0.82
Bearing type	: <u>Drive end</u> 6206 ZZ <u>Non drive end</u> 6203 ZZ	Foundation loads	
Sealing	: V'Ring Without Bearing Seal	Max. traction	: 114 lb
		Max. compression	: 155 lb
Lubrication interval	: -		
Lubricant amount	: -		
Lubricant type	: Mobil Polyrex EM		
Notes USABLE @208V 4.47A SF 1.00 SFA 4.47A			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary	Performed	Checked
			Date
Performed by			
Checked by			Page
Date	12/04/2022		Revision
			1 / 16

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

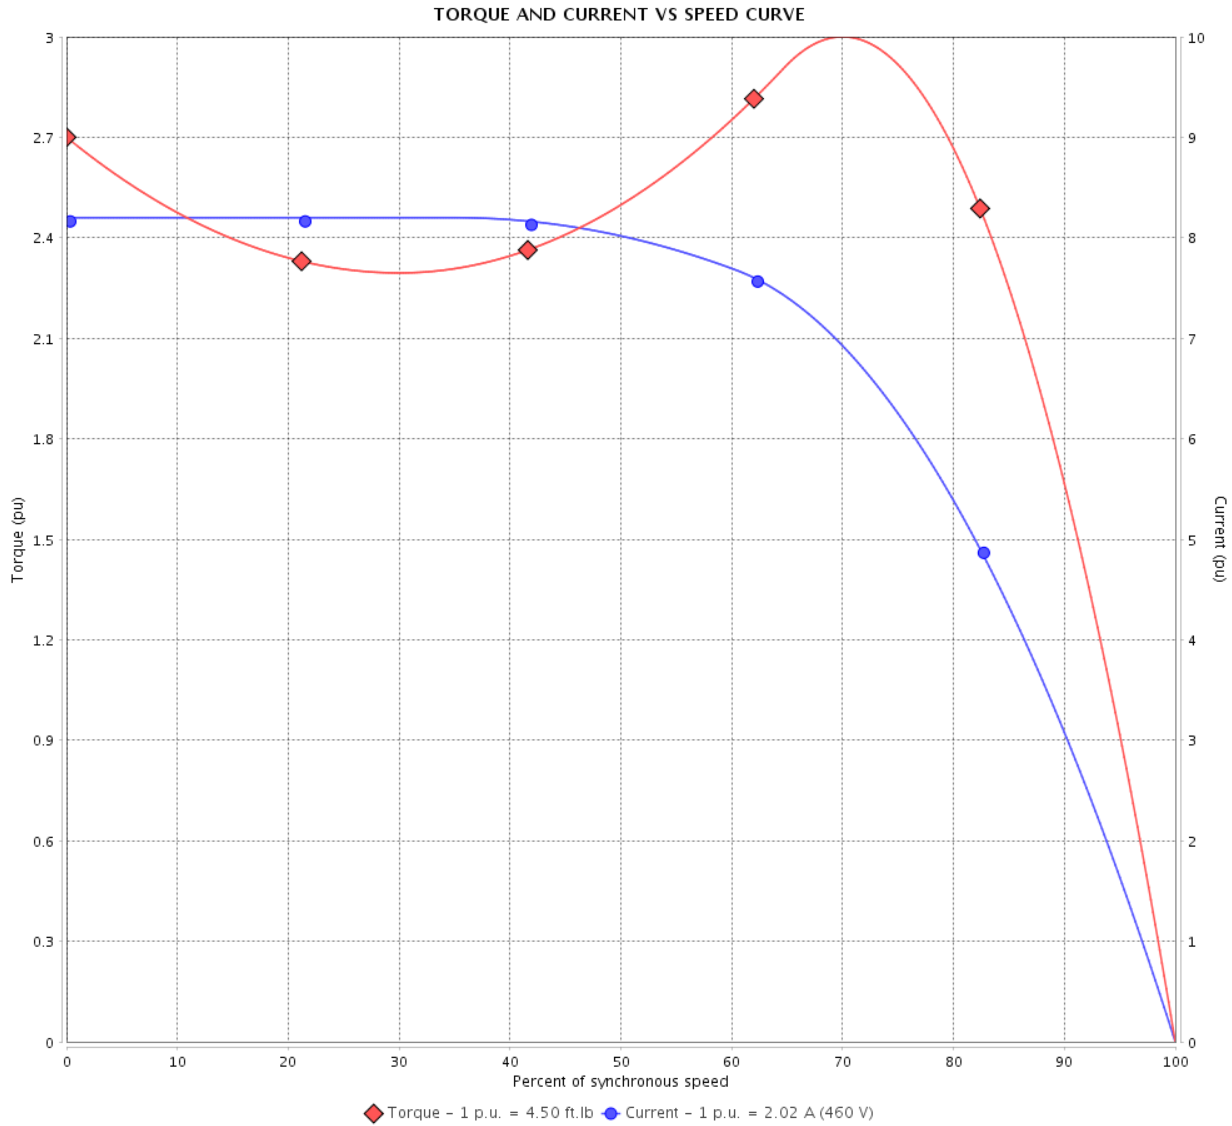

Performance : 230/460 V 60 Hz 4P

Rated current : 4.04/2.02 A
LRC : 8.2
Rated torque : 4.50 ft.lb
Locked rotor torque : 270 %
Breakdown torque : 300 %
Rated speed : 1750 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor :
Temperature rise : 80 K
Design : B

Locked rotor time : 37s (cold) 21s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 16	Revision
Checked by				
Date	12/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : JM Pump NEMA Premium Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

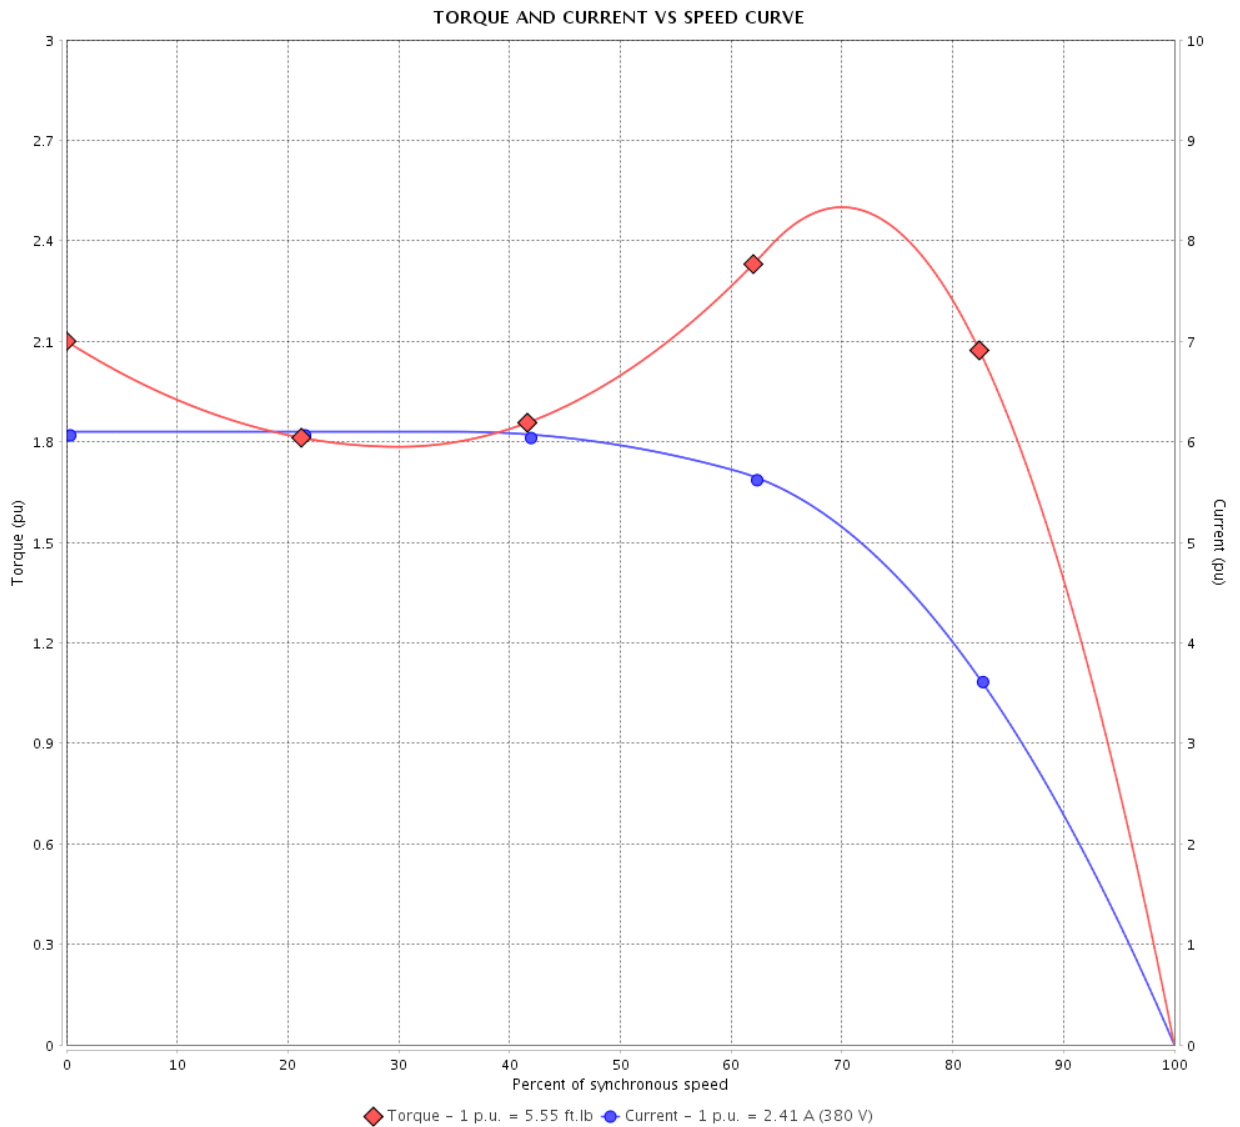

Performance : 190/380 V 50 Hz 4P

Rated current : 4.82/2.41 A
 LRC : 6.1
 Rated torque : 5.55 ft.lb
 Locked rotor torque : 210 %
 Breakdown torque : 250 %
 Rated speed : 1420 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 105 K
 Design : B

Locked rotor time : 0s (cold) 0s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 16	Revision
Checked by				
Date	12/04/2022			

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

TORQUE AND CURRENT VS SPEED CURVE

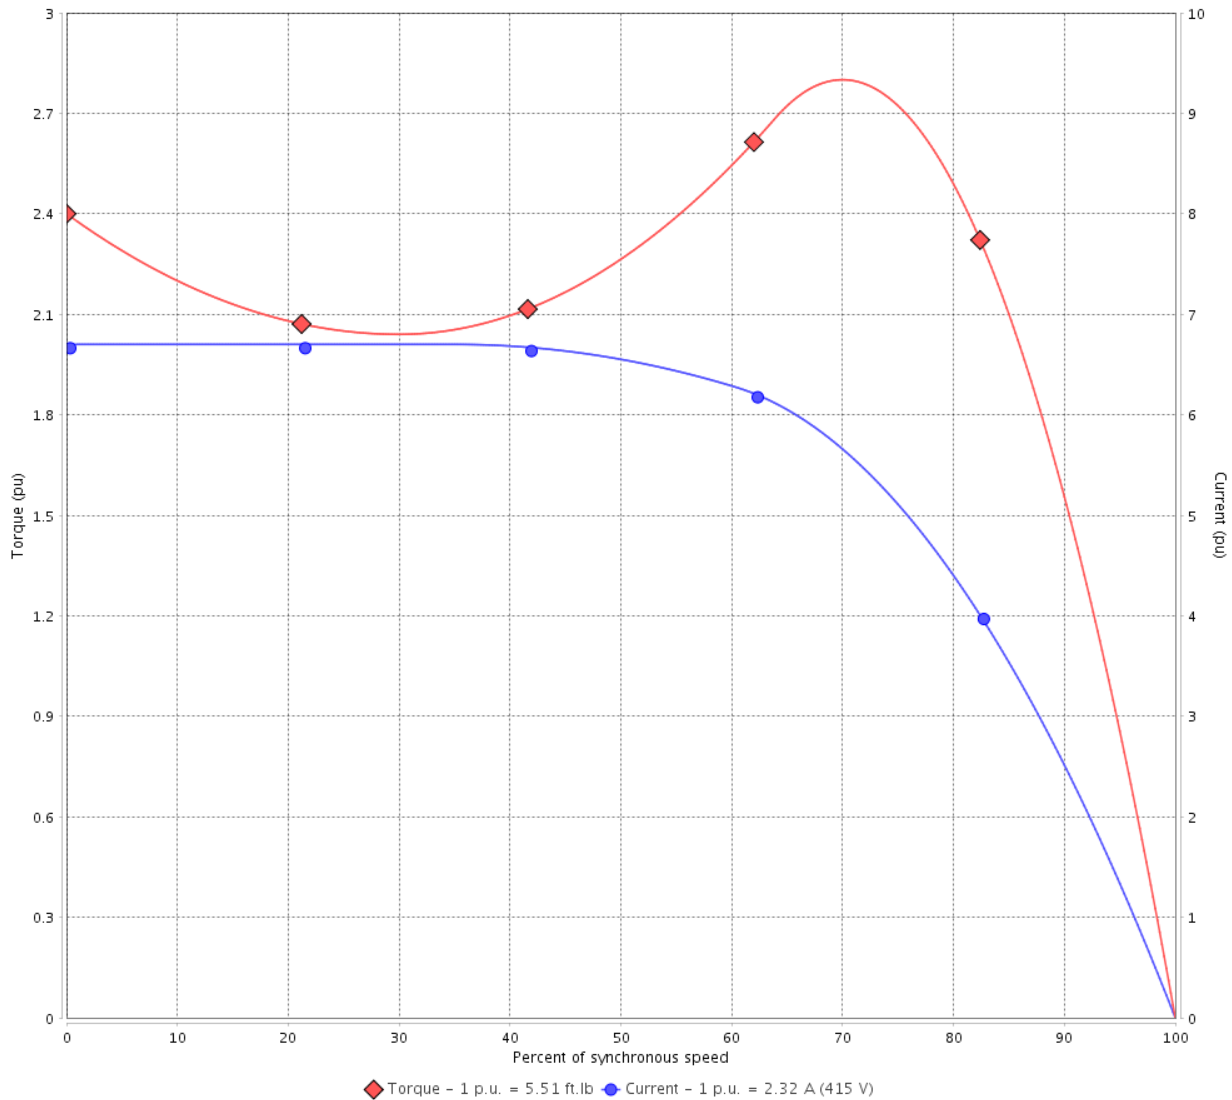

Performance : 220/415 V 50 Hz 4P

Rated current	: 4.38/2.32 A	Moment of inertia (J)	: 0.1101 sq.ft.lb
LRC	: 6.7	Duty cycle	: Cont.(S1)
Rated torque	: 5.51 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.15
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1430 rpm	Design	: B

Locked rotor time : 0s (cold) 0s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 16	Revision
Checked by				
Date	12/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

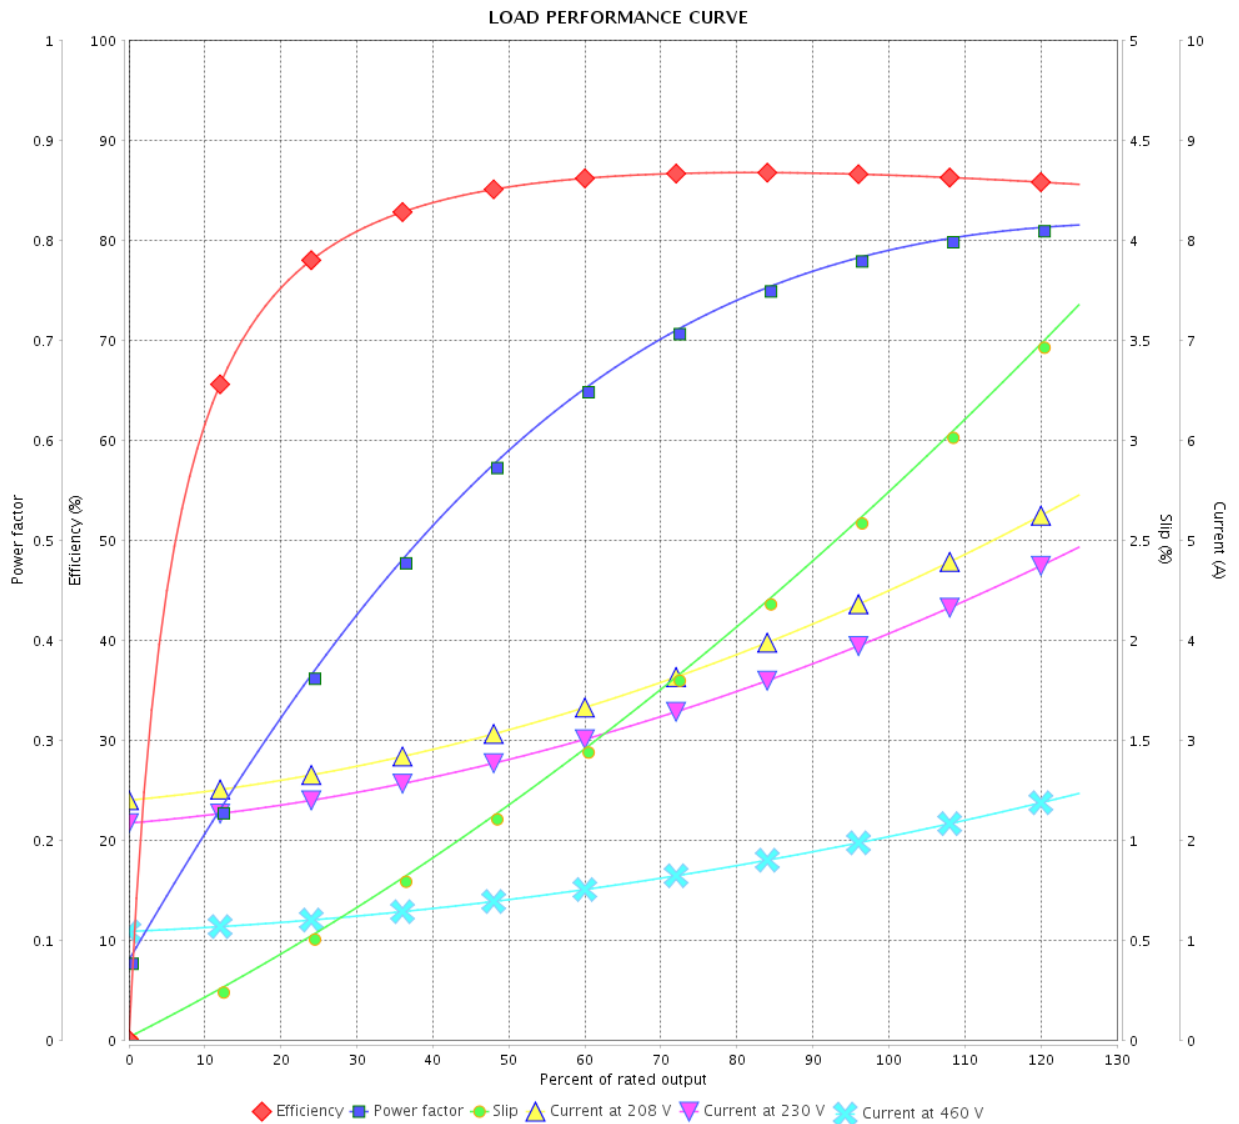

Performance : 230/460 V 60 Hz 4P

Rated current : 4.04/2.02 A
 LRC : 8.2
 Rated torque : 4.50 ft.lb
 Locked rotor torque : 270 %
 Breakdown torque : 300 %
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 16		
Date		12/04/2022		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

LOAD PERFORMANCE CURVE

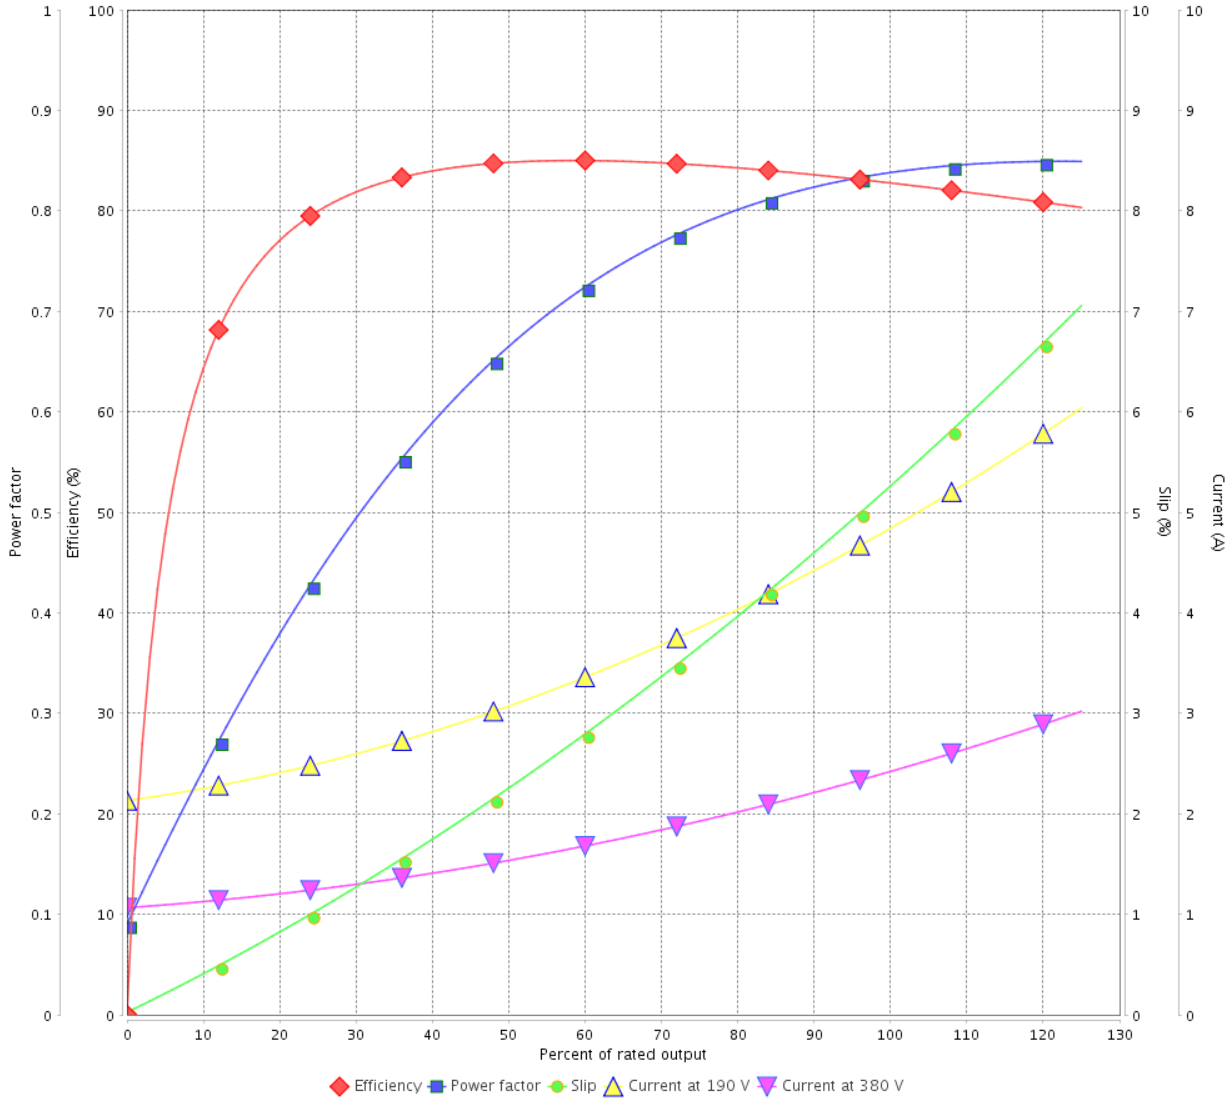

Performance : 190/380 V 50 Hz 4P

Rated current : 4.82/2.41 A
 LRC : 6.1
 Rated torque : 5.55 ft.lb
 Locked rotor torque : 210 %
 Breakdown torque : 250 %
 Rated speed : 1420 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			6 / 16	
Date	12/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

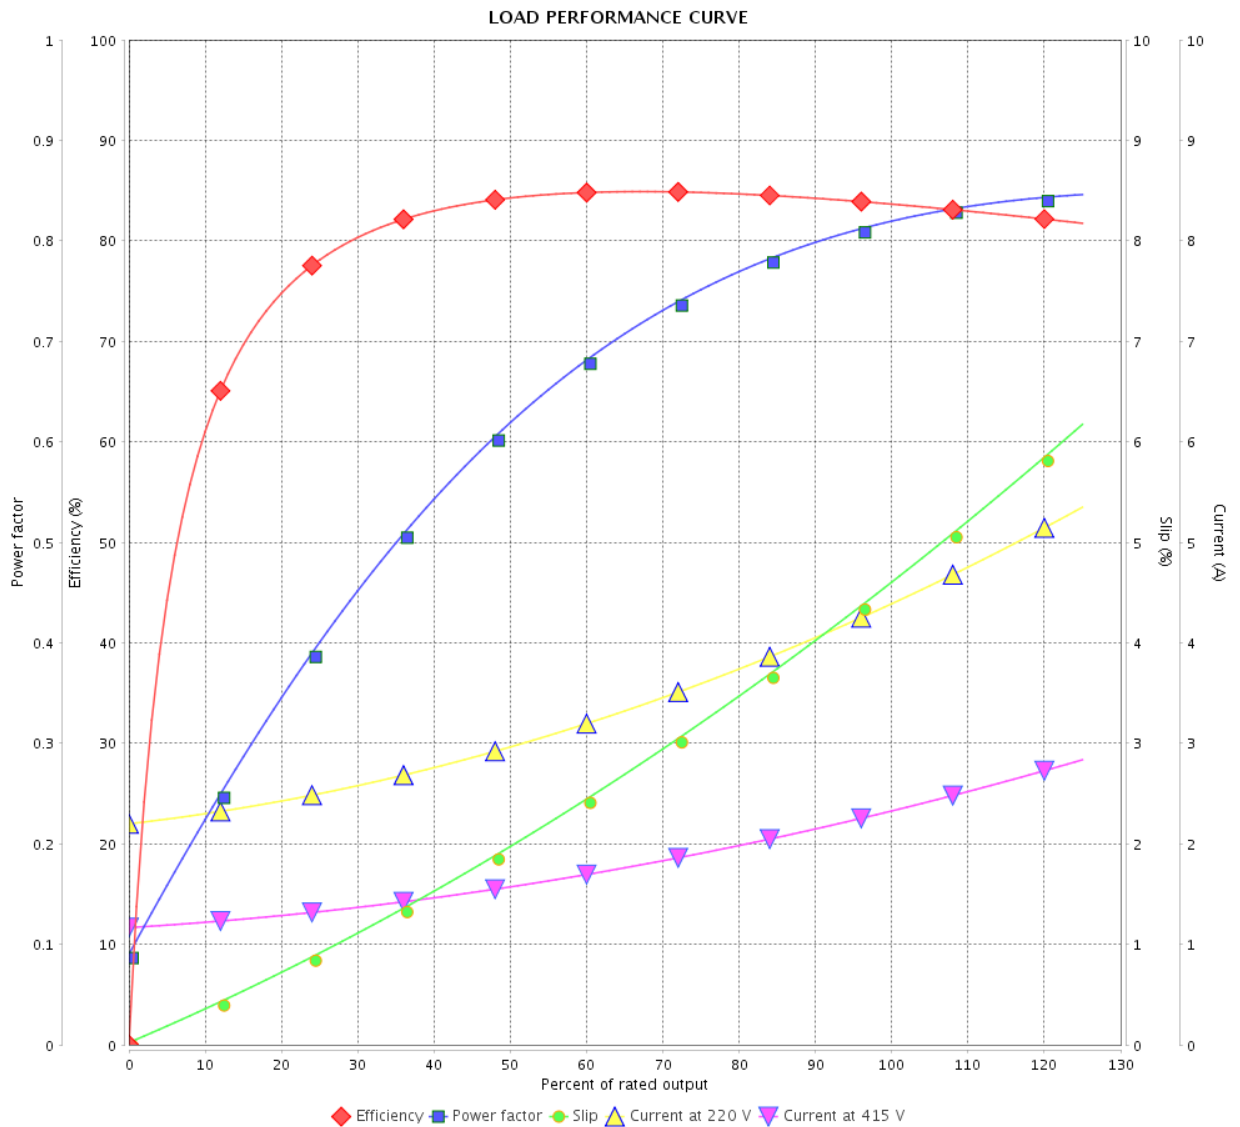

Performance : 220/415 V 50 Hz 4P

Rated current : 4.38/2.32 A
 LRC : 6.7
 Rated torque : 5.51 ft.lb
 Locked rotor torque : 240 %
 Breakdown torque : 280 %
 Rated speed : 1430 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

Performance : 230/460 V 60 Hz 4P

Rated current : 4.04/2.02 A
LRC : 8.2
Rated torque : 4.50 ft.lb
Locked rotor torque : 270 %
Breakdown torque : 300 %
Rated speed : 1750 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor :
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		8 / 16	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

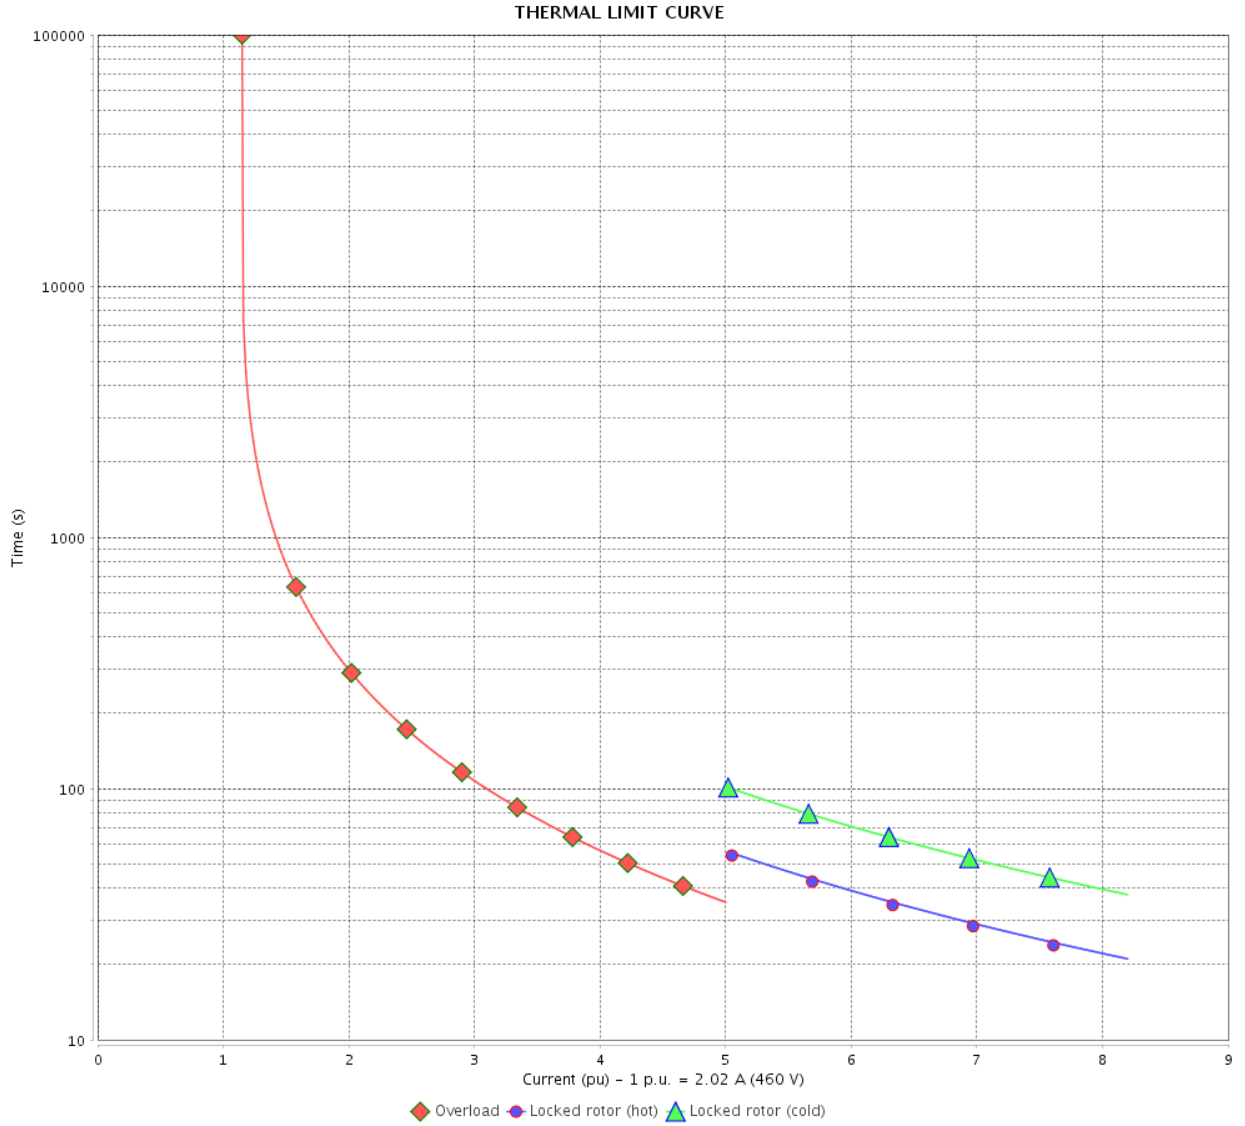

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
			Page	Revision
			9 / 16	

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

Performance : 190/380 V 50 Hz 4P

Rated current : 4.82/2.41 A
LRC : 6.1
Rated torque : 5.55 ft.lb
Locked rotor torque : 210 %
Breakdown torque : 250 %
Rated speed : 1420 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 105 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		10 / 16	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

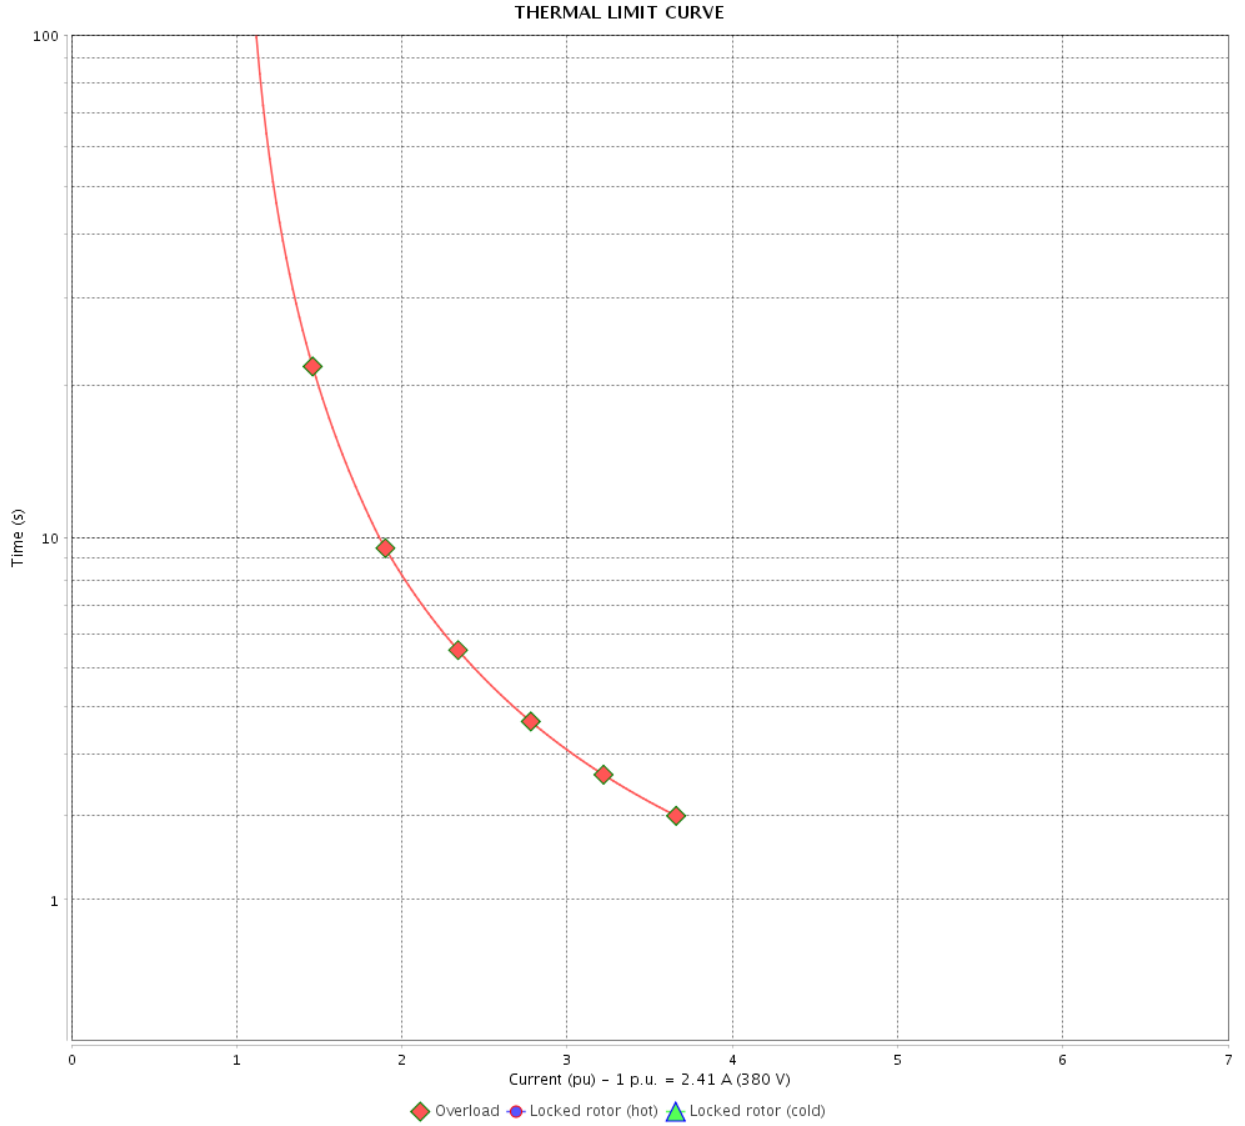

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 11 / 16		
Checked by				
Date				

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

Performance : 220/415 V 50 Hz 4P

Rated current : 4.38/2.32 A
LRC : 6.7
Rated torque : 5.51 ft.lb
Locked rotor torque : 240 %
Breakdown torque : 280 %
Rated speed : 1430 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		12 / 16	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

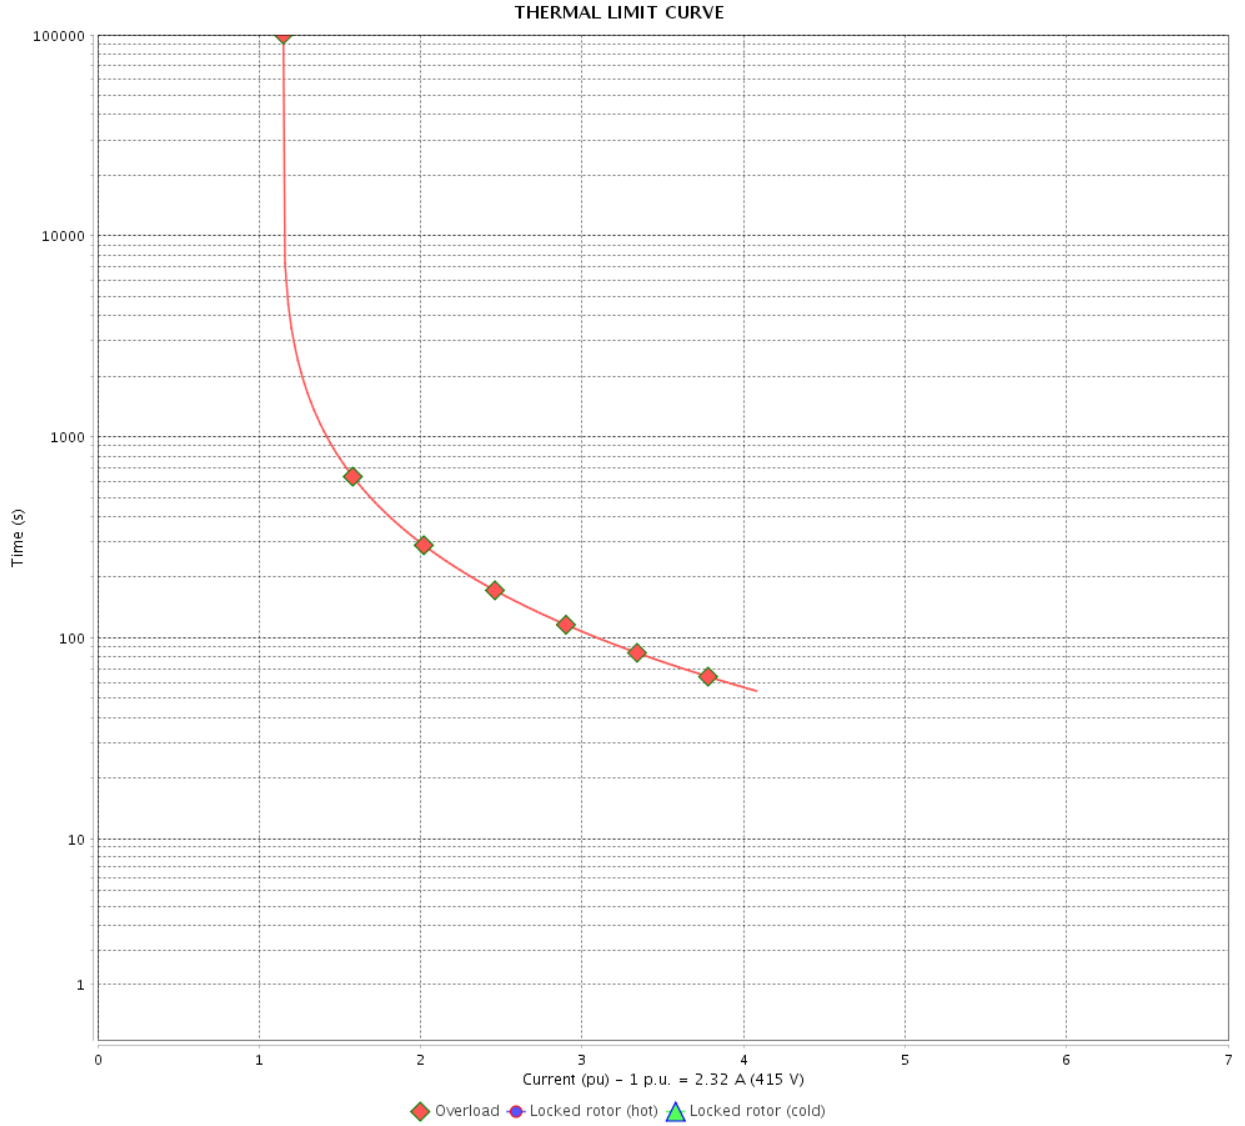

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		13 / 16		
Date		12/04/2022		

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

VFD OPERATION CURVE

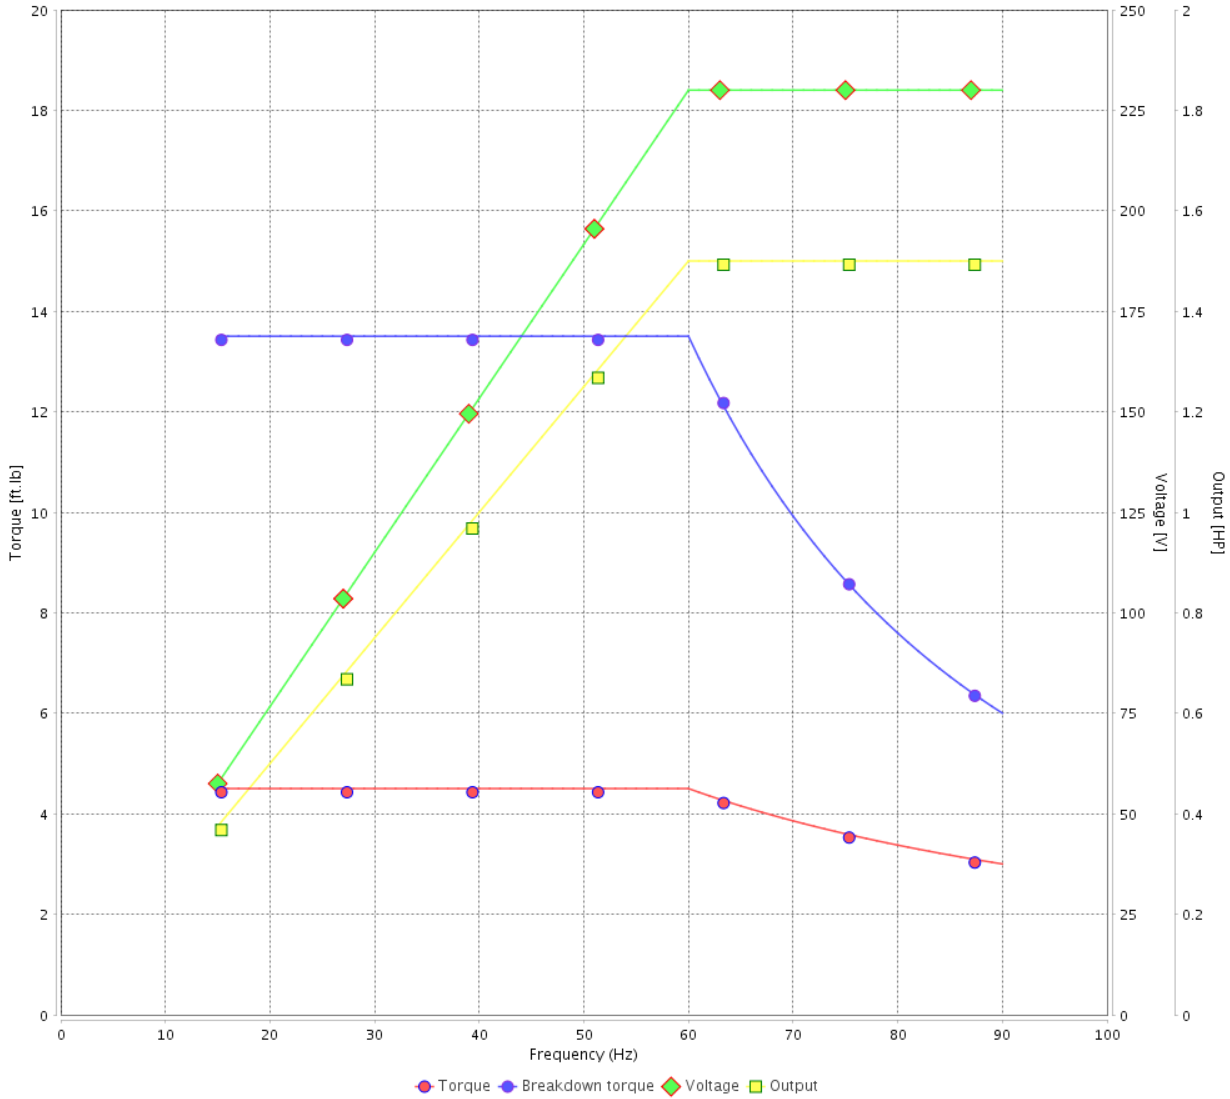

Performance : 230/460 V 60 Hz 4P

Rated current : 4.04/2.02 A
 LRC : 8.2
 Rated torque : 4.50 ft.lb
 Locked rotor torque : 270 %
 Breakdown torque : 300 %
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

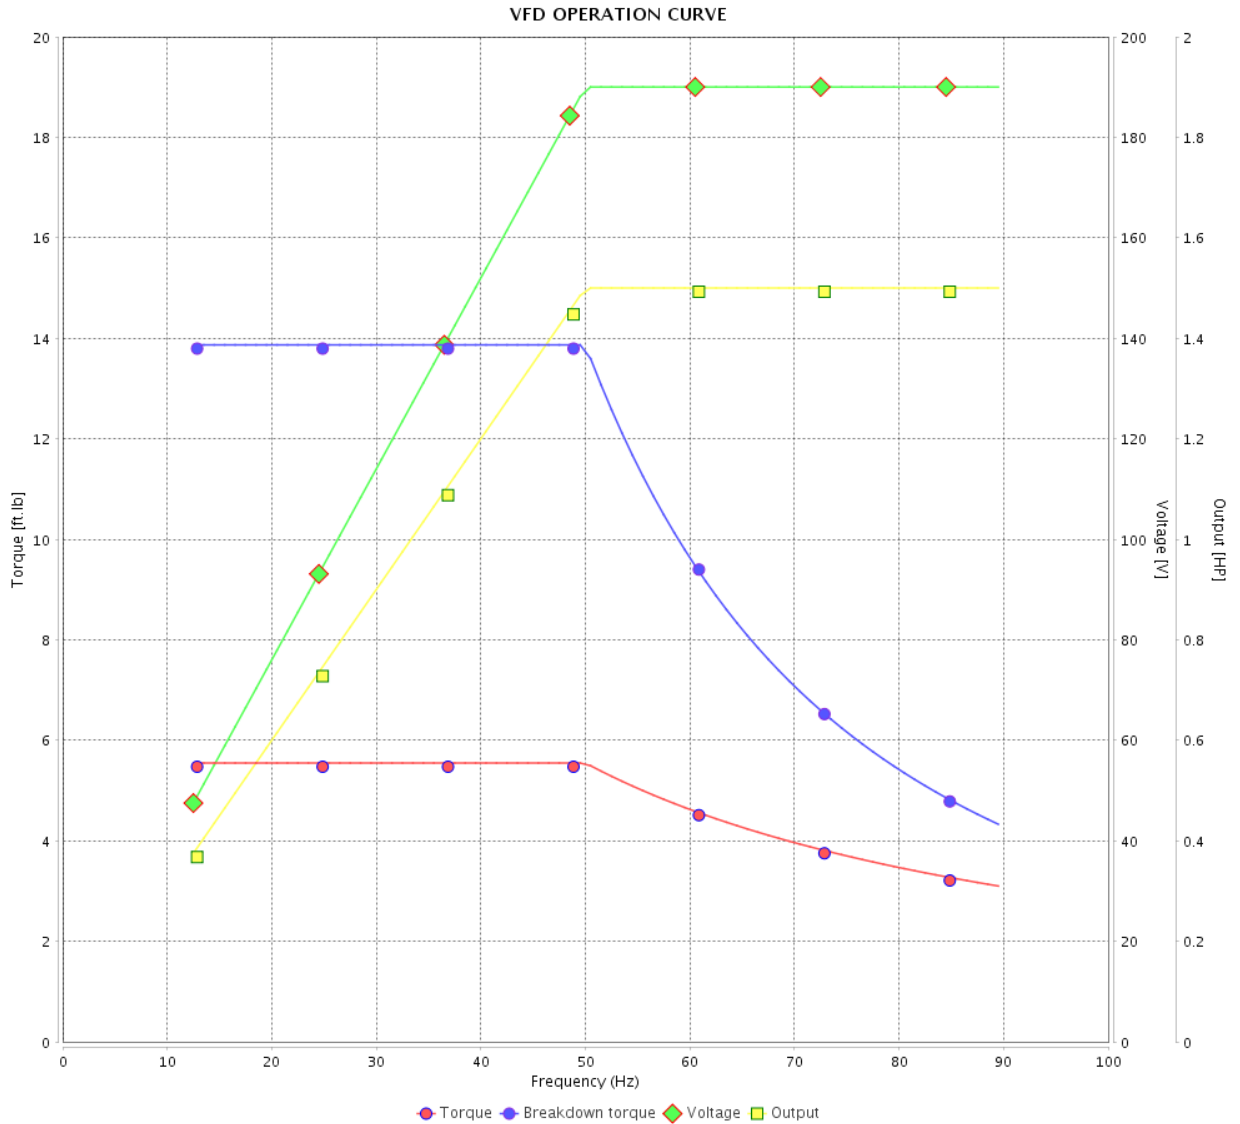

Performance : 190/380 V 50 Hz 4P

Rated current : 4.82/2.41 A
 LRC : 6.1
 Rated torque : 5.55 ft.lb
 Locked rotor torque : 210 %
 Breakdown torque : 250 %
 Rated speed : 1420 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 15 / 16
Checked by				
Date	12/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium Efficiency Three-Phase

Product code : 14808741

Catalog # : 00158ET3E145JM-SG

VFD OPERATION CURVE


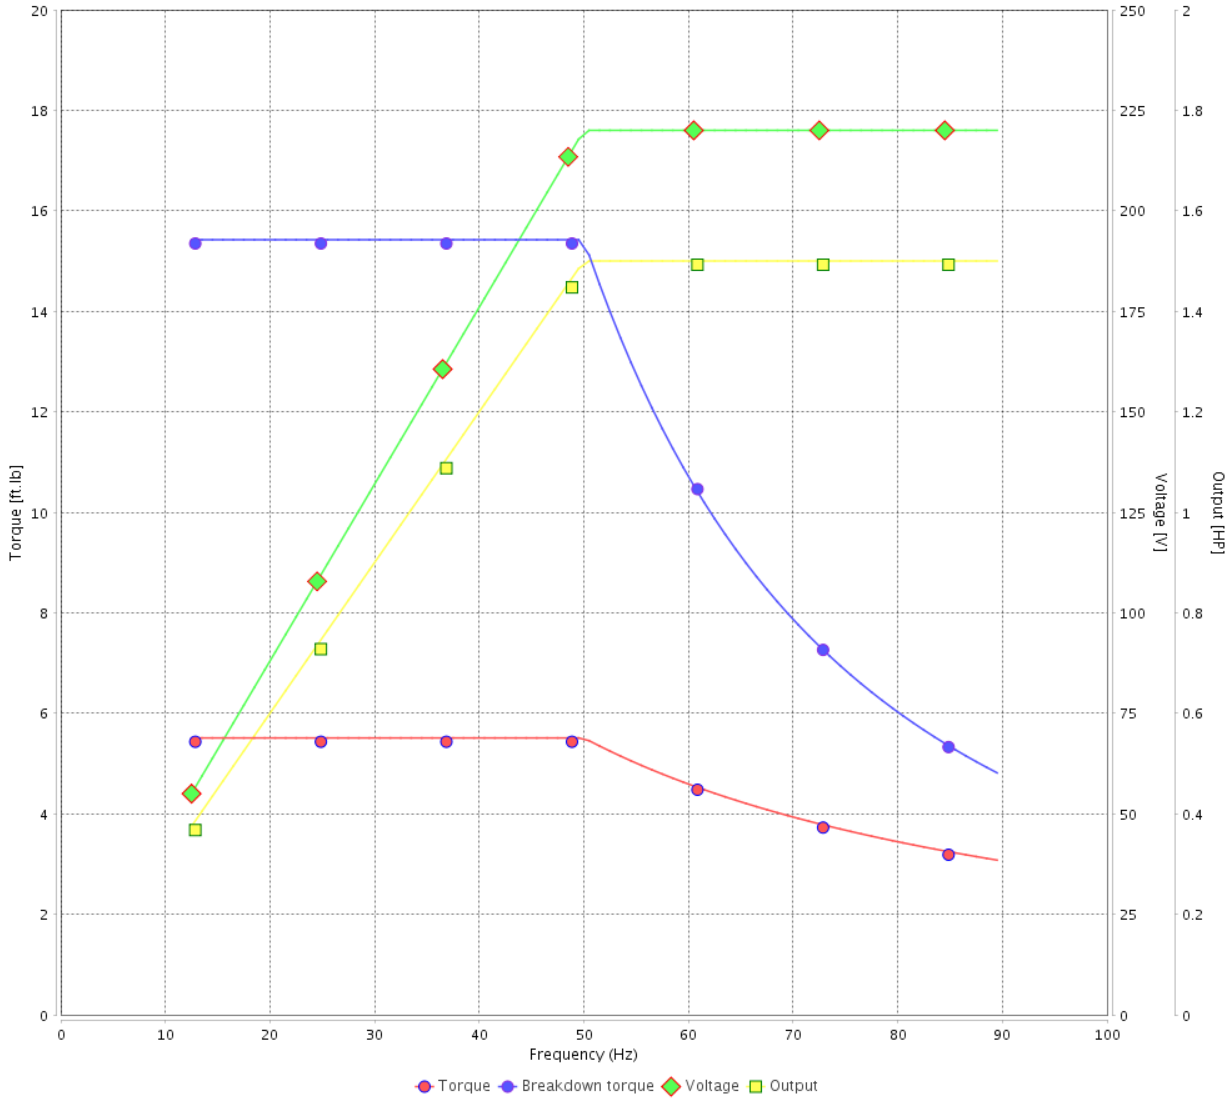


Performance : 220/415 V 50 Hz 4P

Rated current : 4.38/2.32 A
 LRC : 6.7
 Rated torque : 5.51 ft.lb
 Locked rotor torque : 240 %
 Breakdown torque : 280 %
 Rated speed : 1430 rpm

Moment of inertia (J) : 0.1101 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 16 / 16	Revision
Checked by				
Date	12/04/2022			

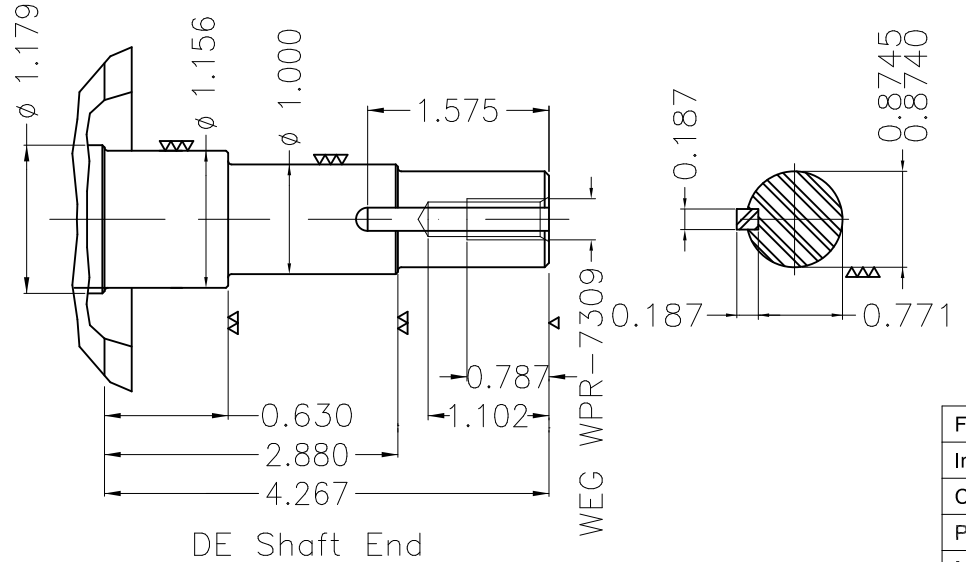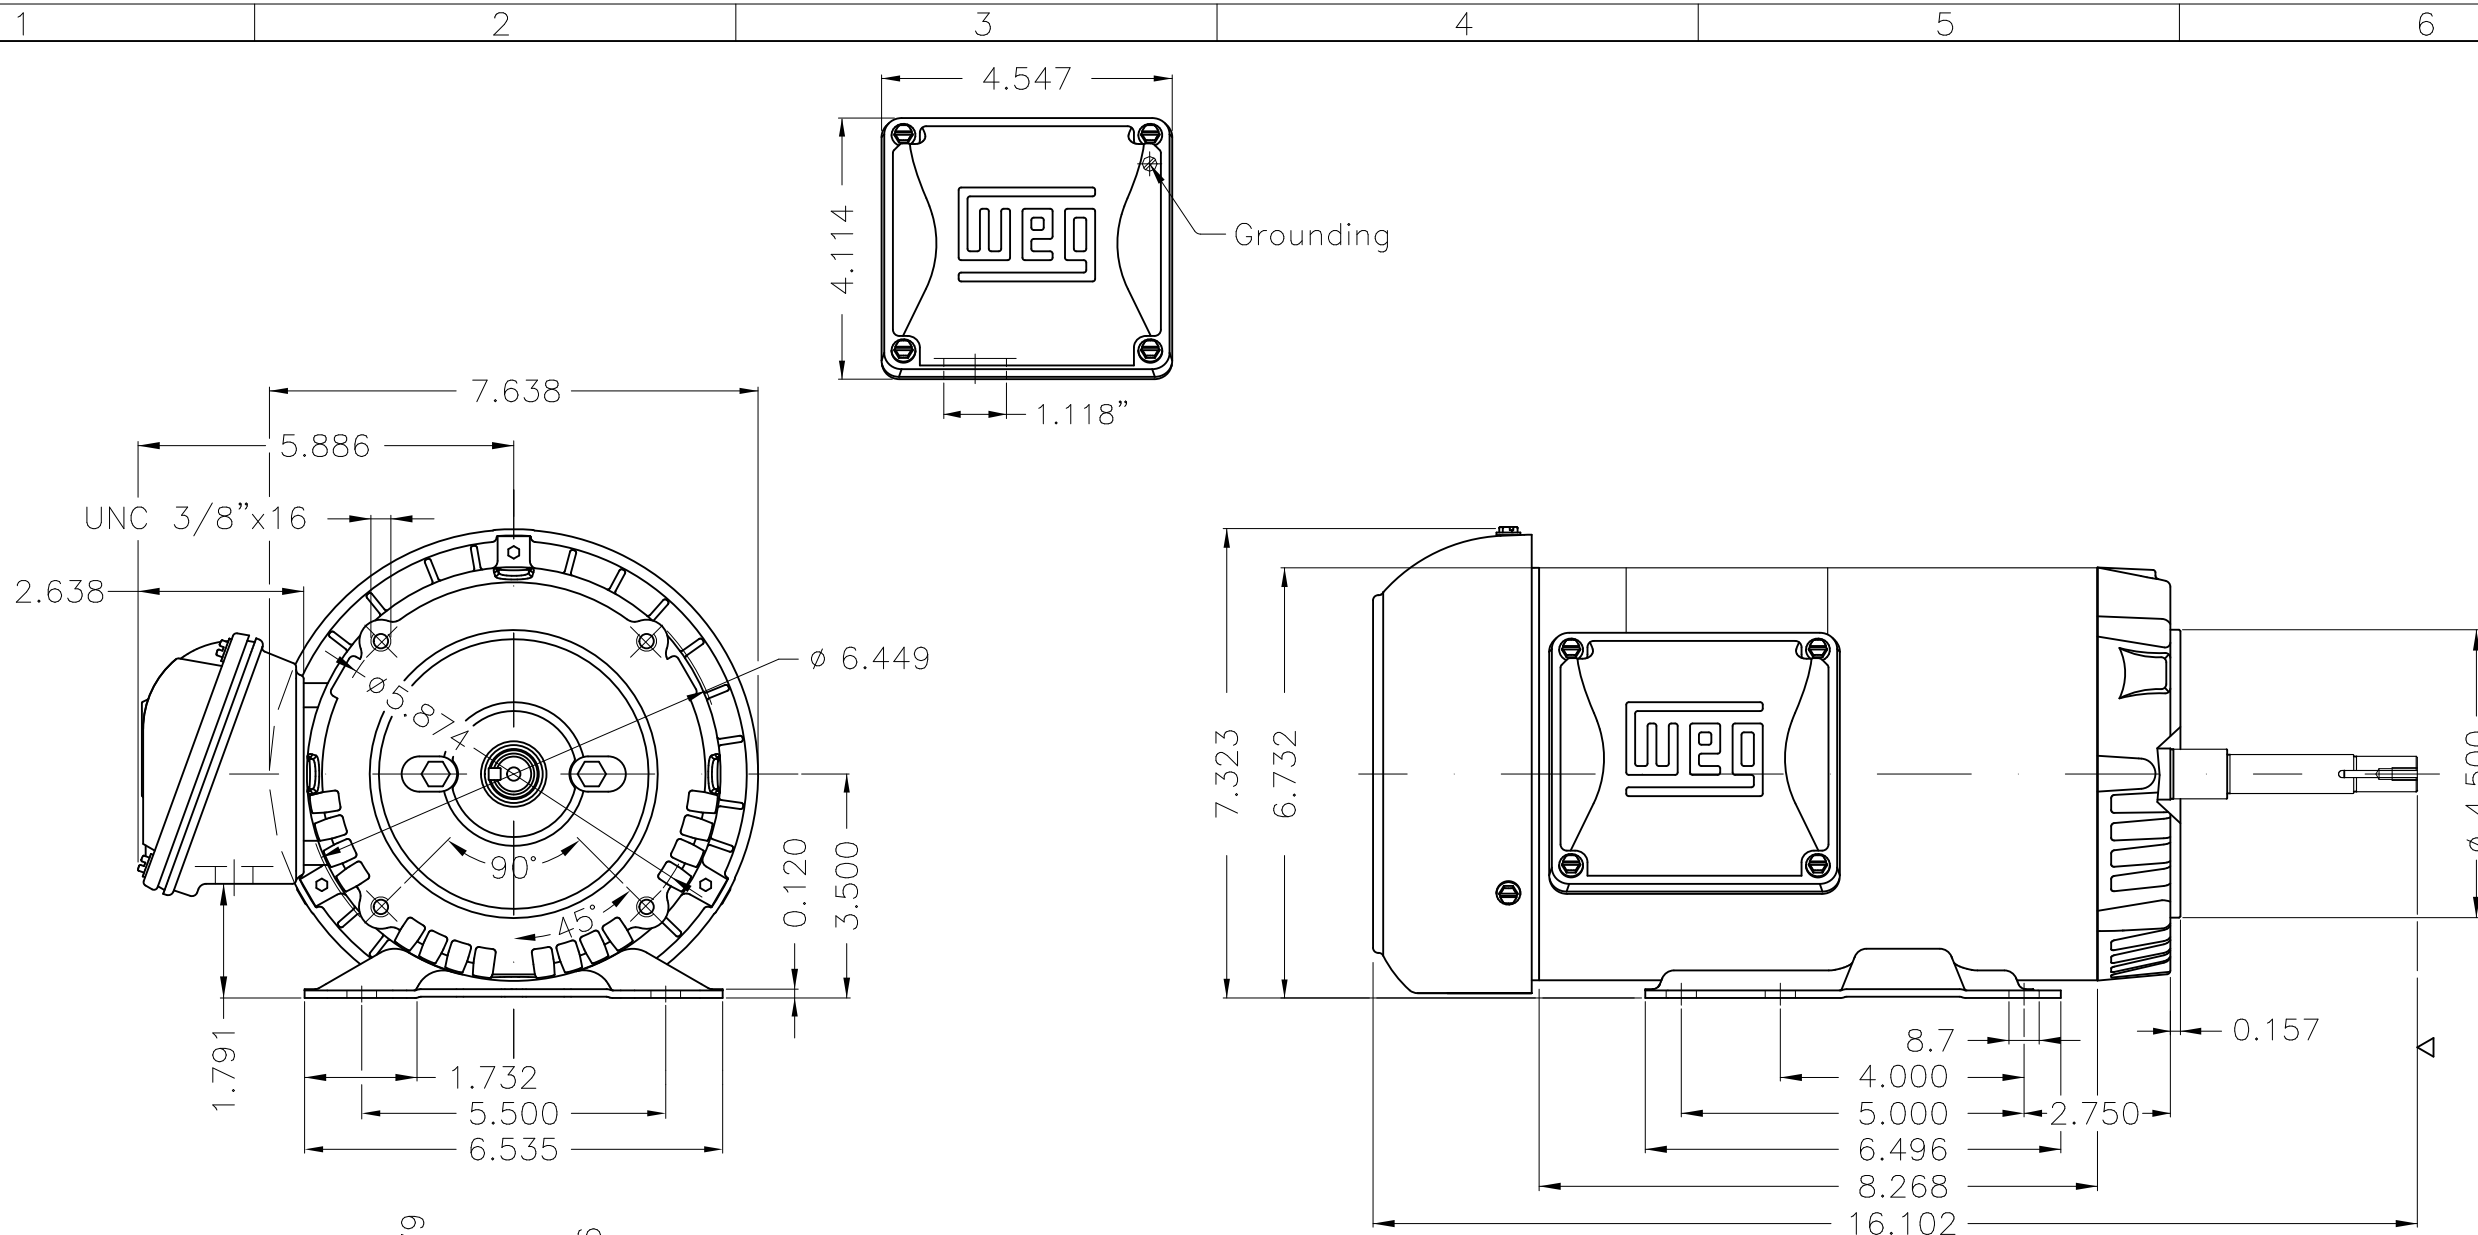

EUNC 3/8"-16 WEG WPR-7309

DE Shaft End

- Fan cover - steel plate
- Internal AEGIS ground ring on the DE
- Color Munsell N 1 matte black
- Painting plan 207N
- Mounting F-1/B34R(D)

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWUSER	THREE PH. MOTOR ROLLED STEEL CLOSE COUPLED PUMP JN TYPE PSE 1/2					
CHECKED		FRAME 143/5JM IP55 TEFC					
RELEASED							
REL DT.		WMO Jaragua do Sul	Product Engineering	WDD	SHEET	1 / 1	

1.5 HP 04 Poles 60 Hz

Dimensions in inches XME A3



**NEMA**
Premium

MADE IN MEXICO

MAT: 14808741 CC029A**W01.TE0IC0X0N****MODEL 00158ET3E145JM-SG****01MAR2022 B/N:**

PH 3	Hz 60	HP 1.5
FR 143/5JM		KW 1.1
DUTY CONT.		V 230/460
ALT 1000 m.a.s.l.		A 4.04/2.02
INS CL F AT 80K	IP55	SFA 4.65/2.32
AMB 40°C	DES B	SF 1.15
ENCL TEFC	CODE K	PF 0.79
USABLE @ 208V 4.47A		RPM 1750
SF1.00		NEMA NOM. EFF 86.5%

ALTERNATE RATING: 1.5HP 50Hz 190-220/380-415V SF1.15
4.82-4.28/2.41-2.27A 1420RPM EFF 82.7% (IE2) IEC 60034-1

Inverter duty motor For 80Hz use on VPWM 1000:1 VT, 4:1 CT

DE 6206-ZZ	ODE 6203-ZZ	MOBIL POLYREX EM
-------------------	--------------------	-------------------------



T1-BLU T2-WHT
 T3-ORG T4-YEL
 T5-BLK T6-GRY
 T7-PNK T8-RED
 T9-BRK RED

INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION

WARNING: Motor must be grounded in accordance with local and national electrical codes to prevent serious electrical shocks. Disconnect power source before servicing unit.



AVERTISSEMENT: Le moteur doit être mis à la terre conformément aux codes électriques locaux et nationaux afin d'éviter tout choc électrique grave. Déconnectez l'alimentation avant l'entretien de la machine.

