

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line	: 00021 Premium Efficiency Three-Phase	Product code :	13661000	
		Catalog # :	00158OT3ERB56-S	
Frame	: 56H	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 40.9 lb	
Design	: A	Moment of inertia (J)	: 0.1296 sq.ft.lb	
Output [HP]	1.5	1.5	1.5	
Poles	4	4	4	
Frequency [Hz]	60	50	50	
Rated voltage [V]	230/460	190/380	220/415	
Rated current [A]	4.20/2.10	4.94/2.47	4.56/2.42	
L. R. Amperes [A]	37.0/18.5	33.6/16.8	33.8/17.9	
LRC [A]	8.8x(Code L)	6.8x(Code J)	7.4x(Code K)	
No load current [A]	2.60/1.30	2.61/1.30	2.71/1.44	
Rated speed [RPM]	1760	1445	1450	
Slip [%]	2.22	3.67	3.33	
Rated torque [ft.lb]	4.48	5.45	5.43	
Locked rotor torque [%]	290	220	250	
Breakdown torque [%]	350	280	310	
Service factor		1.15	1.15	
Temperature rise	80 K	80 K	80 K	
Locked rotor time	25s (cold) 14s (hot)	27s (cold) 15s (hot)	25s (cold) 14s (hot)	
Noise level ²	52.0 dB(A)	49.0 dB(A)	49.0 dB(A)	
Efficiency (%)	25%	82.9	82.7	
	50%	84.0	82.7	
	75%	85.5	84.5	
	100%	86.5	84.1	
Power Factor	25%	0.30	0.32	
	50%	0.53	0.56	
	75%	0.66	0.70	
	100%	0.76	0.78	
Bearing type	: <u>Drive end</u> 6204 ZZ <u>Non drive end</u> 6202 ZZ	Foundation loads		
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction	: 145 lb	
		Max. compression	: 186 lb	
Lubrication interval	: - -			
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes USABLE @208V 4.64A SF 1.00 SFA 4.64A				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		1 / 16	

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : 00021 Premium Efficiency Three-Phase

Product code : 13661000

Catalog # : 00158OT3ERB56-S

TORQUE AND CURRENT VS SPEED CURVE

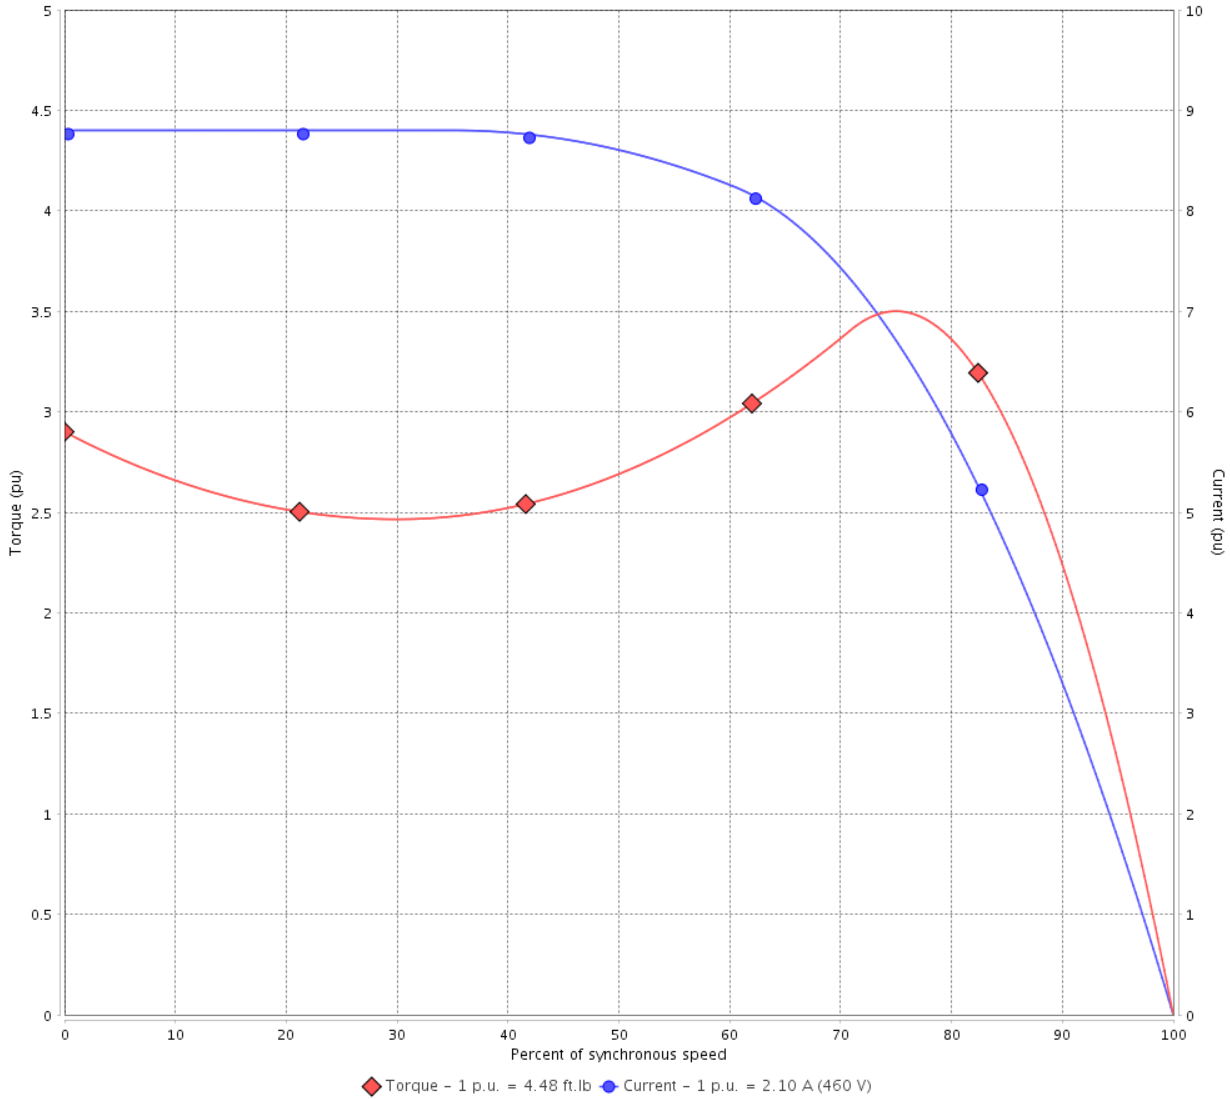

Performance : 230/460 V 60 Hz 4P

Rated current : 4.20/2.10 A
 LRC : 8.8
 Rated torque : 4.48 ft.lb
 Locked rotor torque : 290 %
 Breakdown torque : 350 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.1296 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : A

Locked rotor time : 25s (cold) 14s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 16	Revision
Checked by				
Date	12/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : 00021 Premium Efficiency Three-Phase

Product code : 13661000

Catalog # : 00158OT3ERB56-S

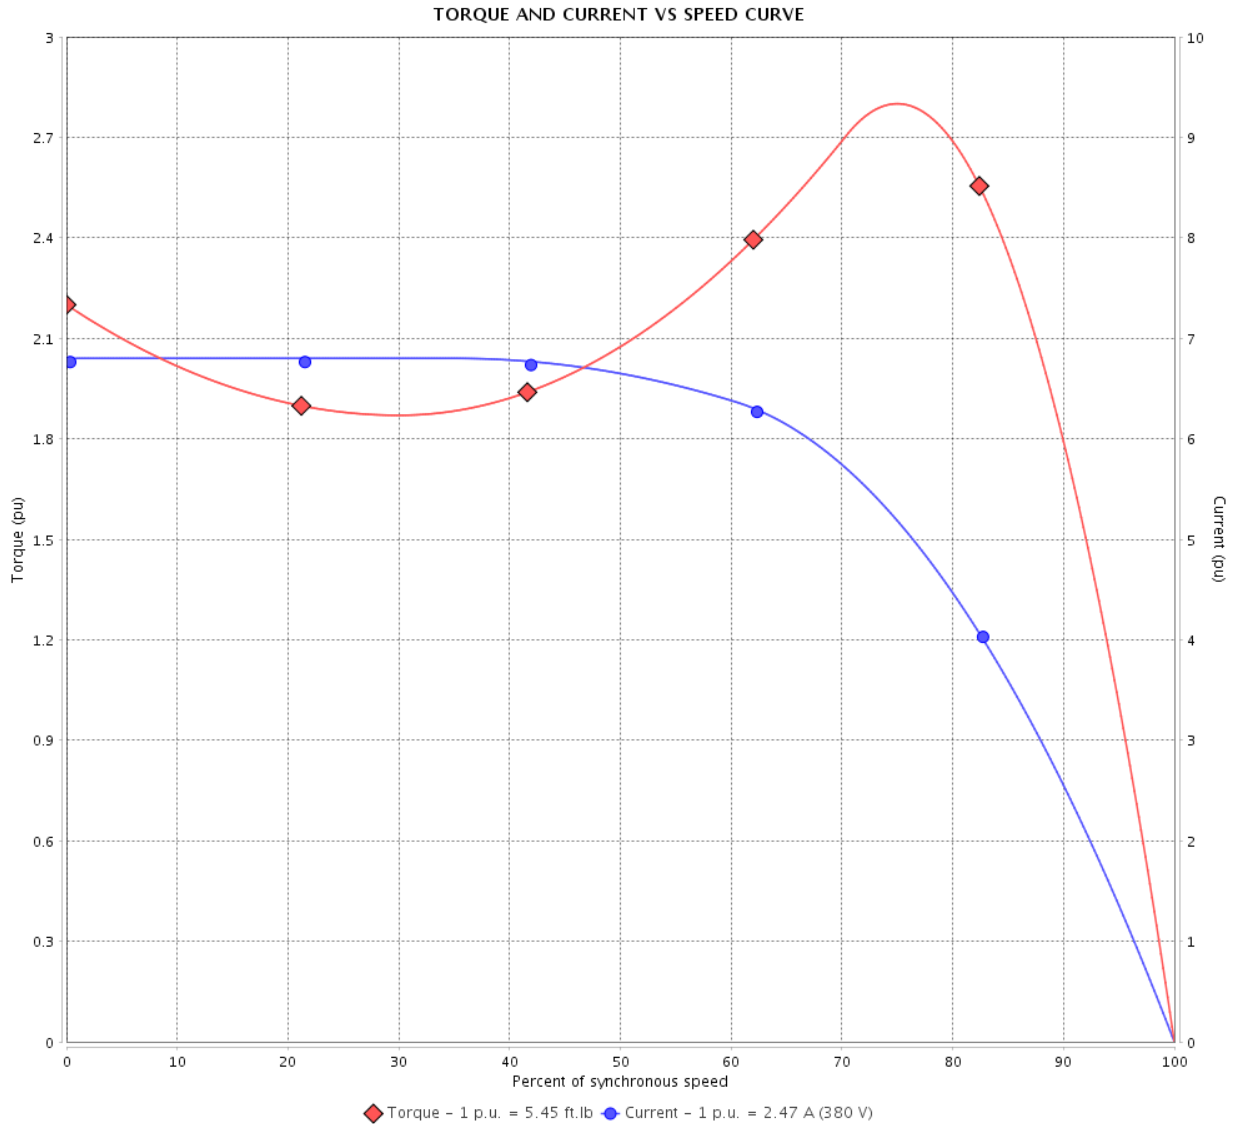

Performance : 190/380 V 50 Hz 4P

Rated current : 4.94/2.47 A
 LRC : 6.8
 Rated torque : 5.45 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 280 %
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.1296 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Locked rotor time : 27s (cold) 15s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 16		
Date	12/04/2022			

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : 00021 Premium Efficiency Three-Phase

Product code : 13661000

Catalog # : 00158OT3ERB56-S

TORQUE AND CURRENT VS SPEED CURVE

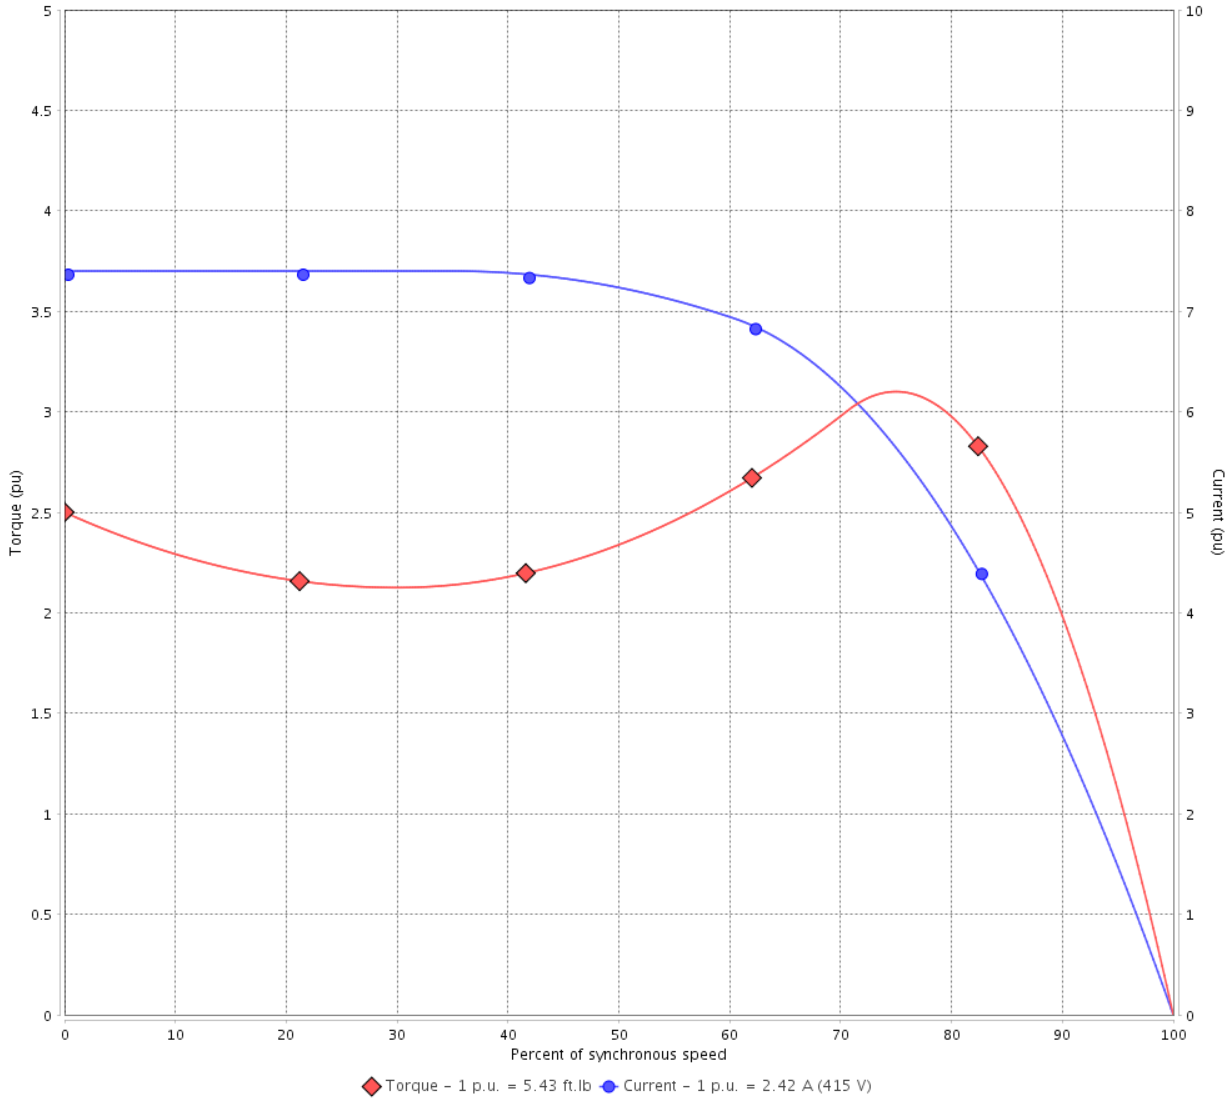

Performance : 220/415 V 50 Hz 4P

Rated current : 4.56/2.42 A
 LRC : 7.4
 Rated torque : 5.43 ft.lb
 Locked rotor torque : 250 %
 Breakdown torque : 310 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.1296 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Locked rotor time : 25s (cold) 14s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 16	Revision
Checked by				
Date	12/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : 00021 Premium Efficiency Three-Phase

Product code : 13661000

Catalog # : 00158OT3ERB56-S

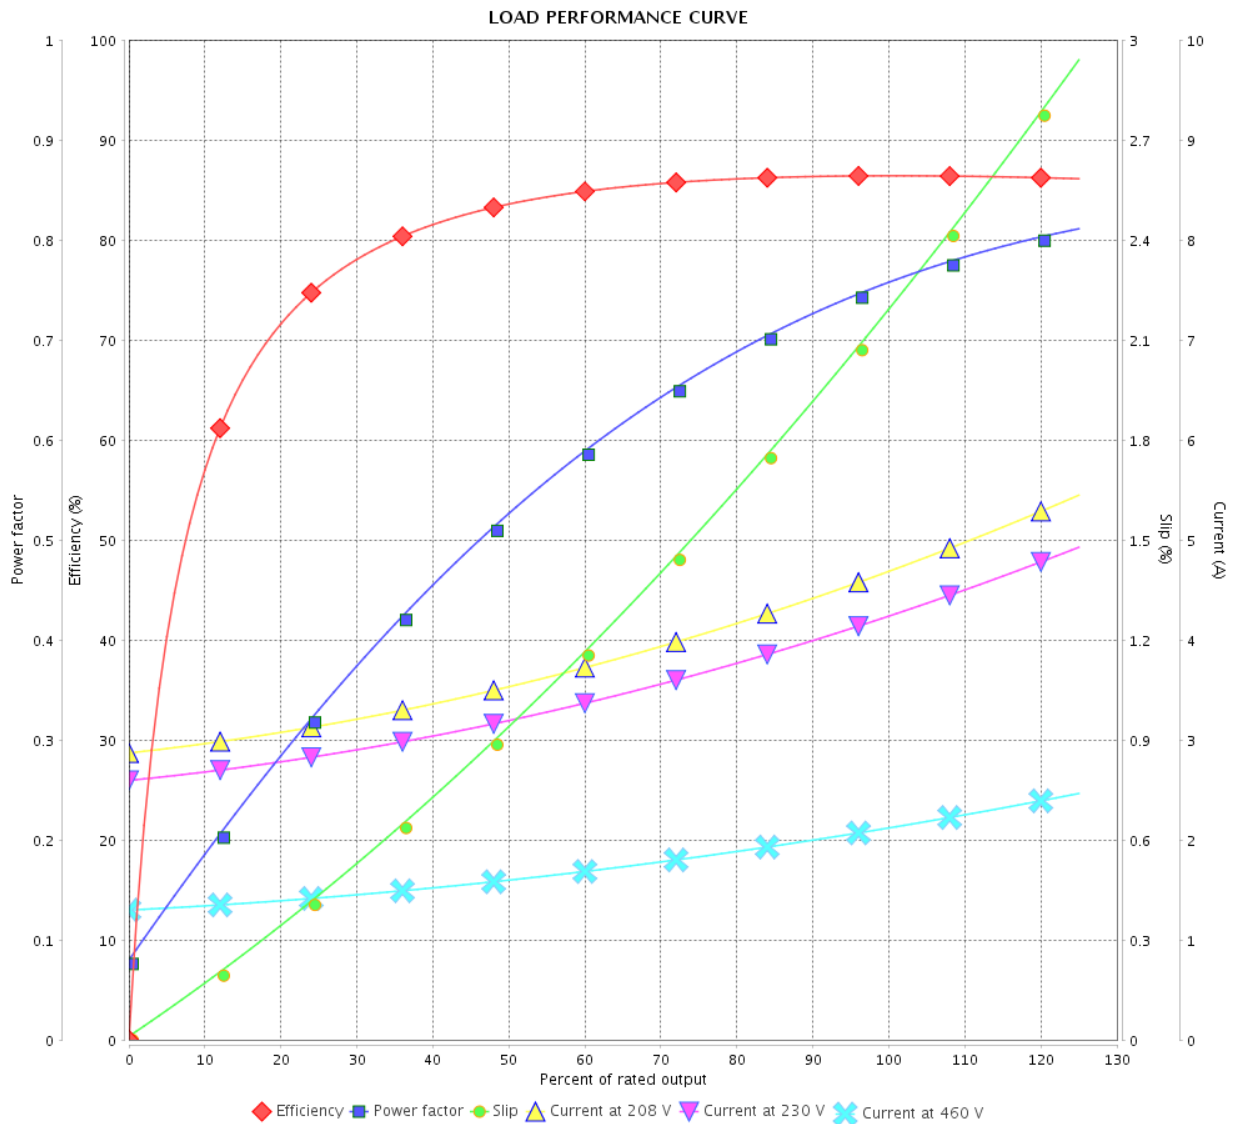

Performance : 230/460 V 60 Hz 4P

Rated current : 4.20/2.10 A
 LRC : 8.8
 Rated torque : 4.48 ft.lb
 Locked rotor torque : 290 %
 Breakdown torque : 350 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.1296 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : 00021 Premium Efficiency Three-Phase

Product code : 13661000

Catalog # : 00158OT3ERB56-S

LOAD PERFORMANCE CURVE

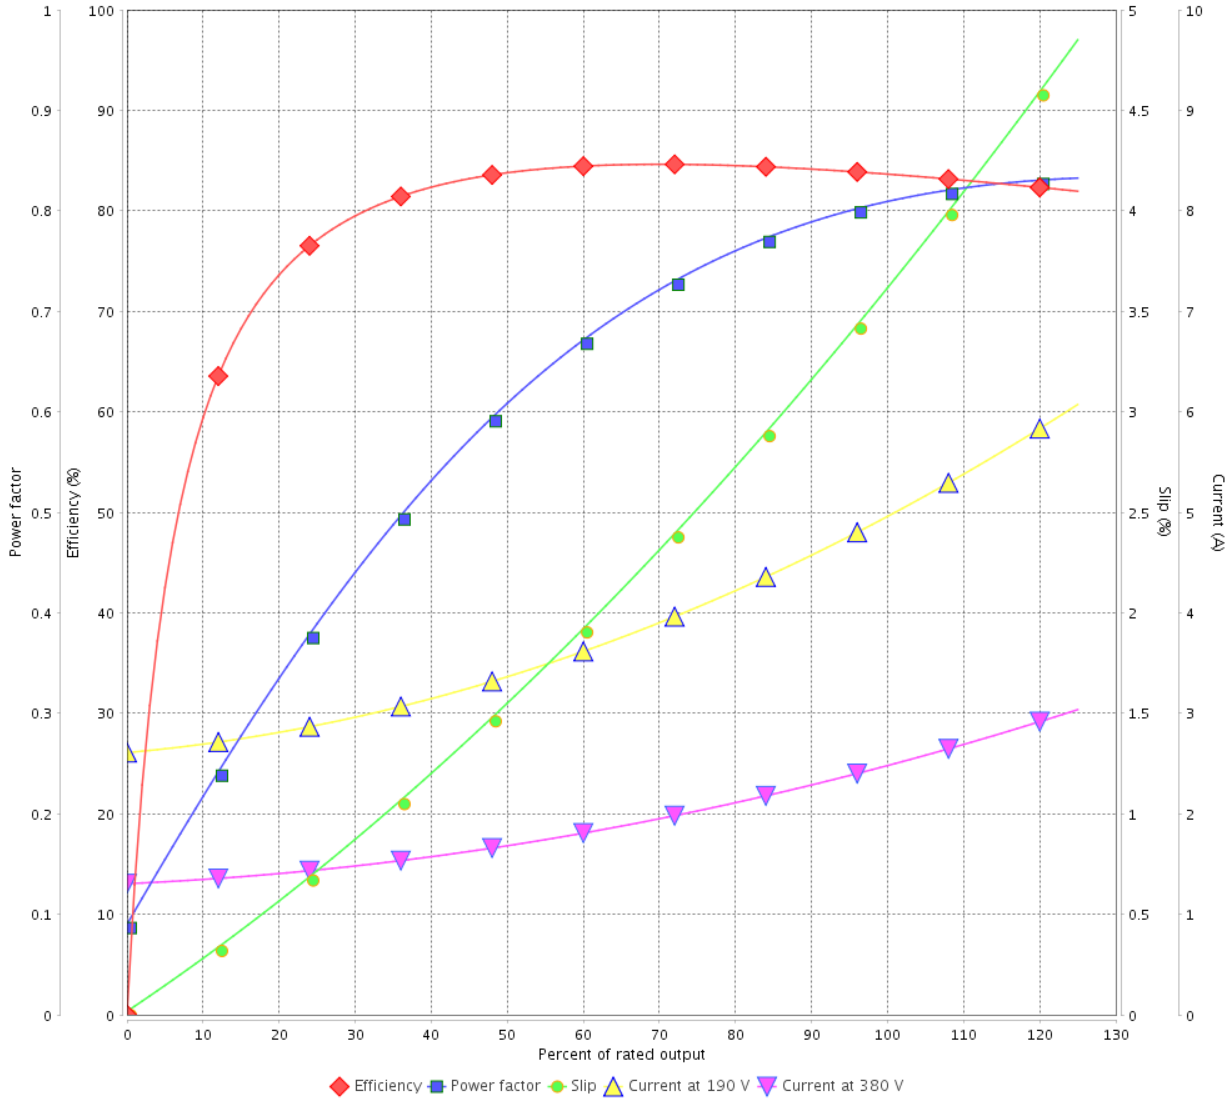

Performance : 190/380 V 50 Hz 4P

Rated current : 4.94/2.47 A
 LRC : 6.8
 Rated torque : 5.45 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 280 %
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.1296 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			6 / 16	
Date	12/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : 00021 Premium Efficiency Three-Phase

Product code : 13661000

Catalog # : 00158OT3ERB56-S

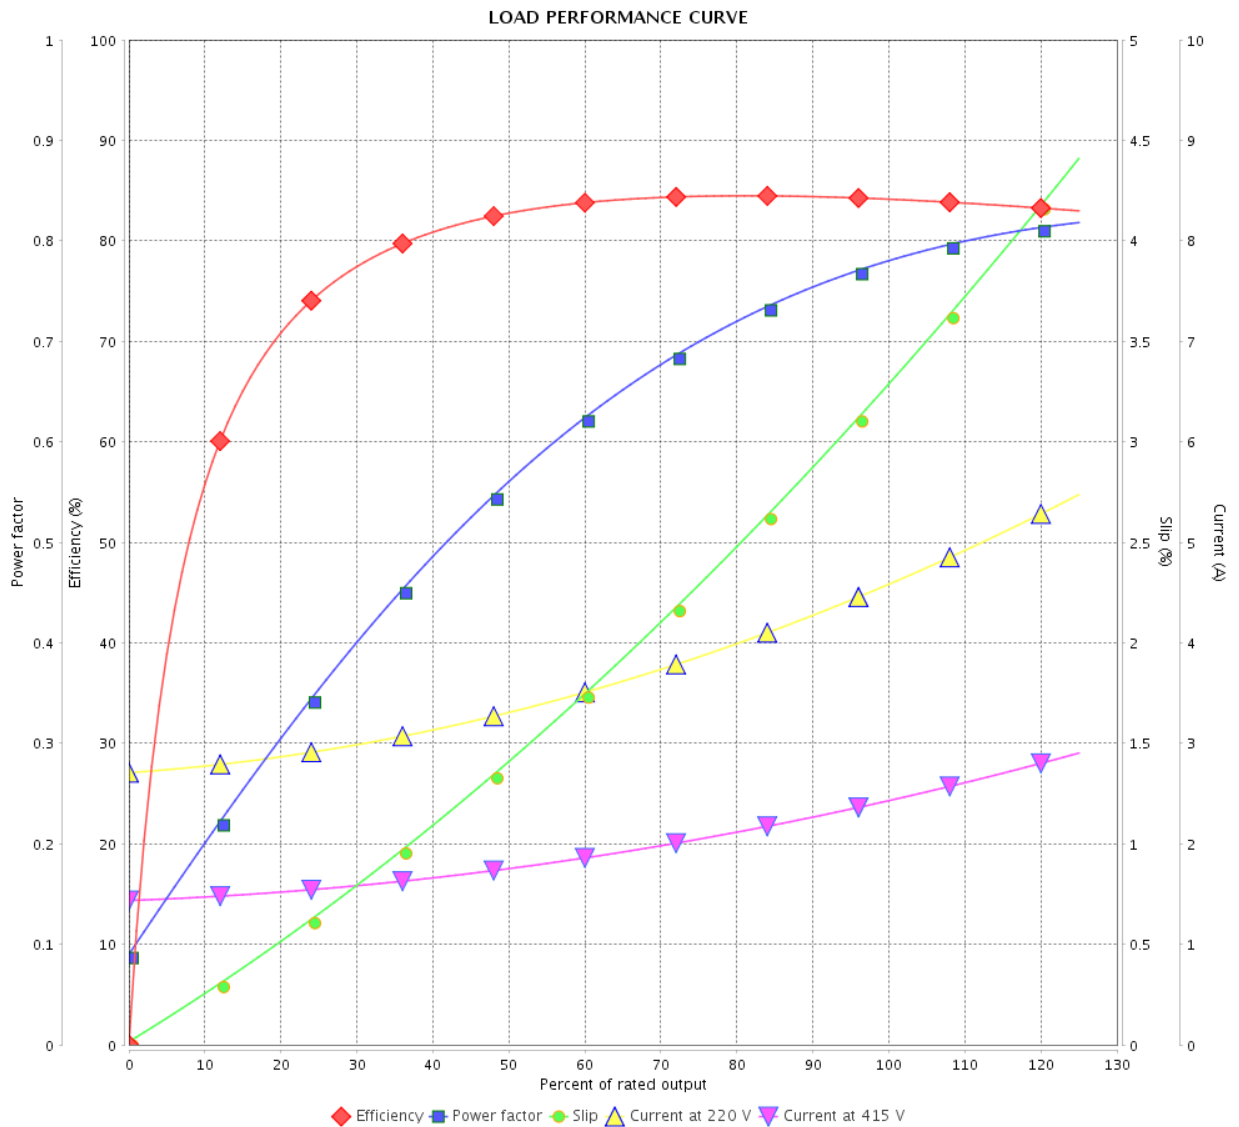

Performance : 220/415 V 50 Hz 4P

Rated current : 4.56/2.42 A
 LRC : 7.4
 Rated torque : 5.43 ft.lb
 Locked rotor torque : 250 %
 Breakdown torque : 310 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.1296 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			7 / 16	
Date	12/04/2022			

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : 00021 Premium Efficiency Three-Phase
 Product code : 13661000
 Catalog # : 00158OT3ERB56-S

Performance : 230/460 V 60 Hz 4P

Rated current : 4.20/2.10 A	Moment of inertia (J) : 0.1296 sq.ft.lb
LRC : 8.8	Duty cycle : Cont.(S1)
Rated torque : 4.48 ft.lb	Insulation class : F
Locked rotor torque : 290 %	Service factor :
Breakdown torque : 350 %	Temperature rise : 80 K
Rated speed : 1760 rpm	Design : A

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 16	Revision
Checked by				
Date	12/04/2022			

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

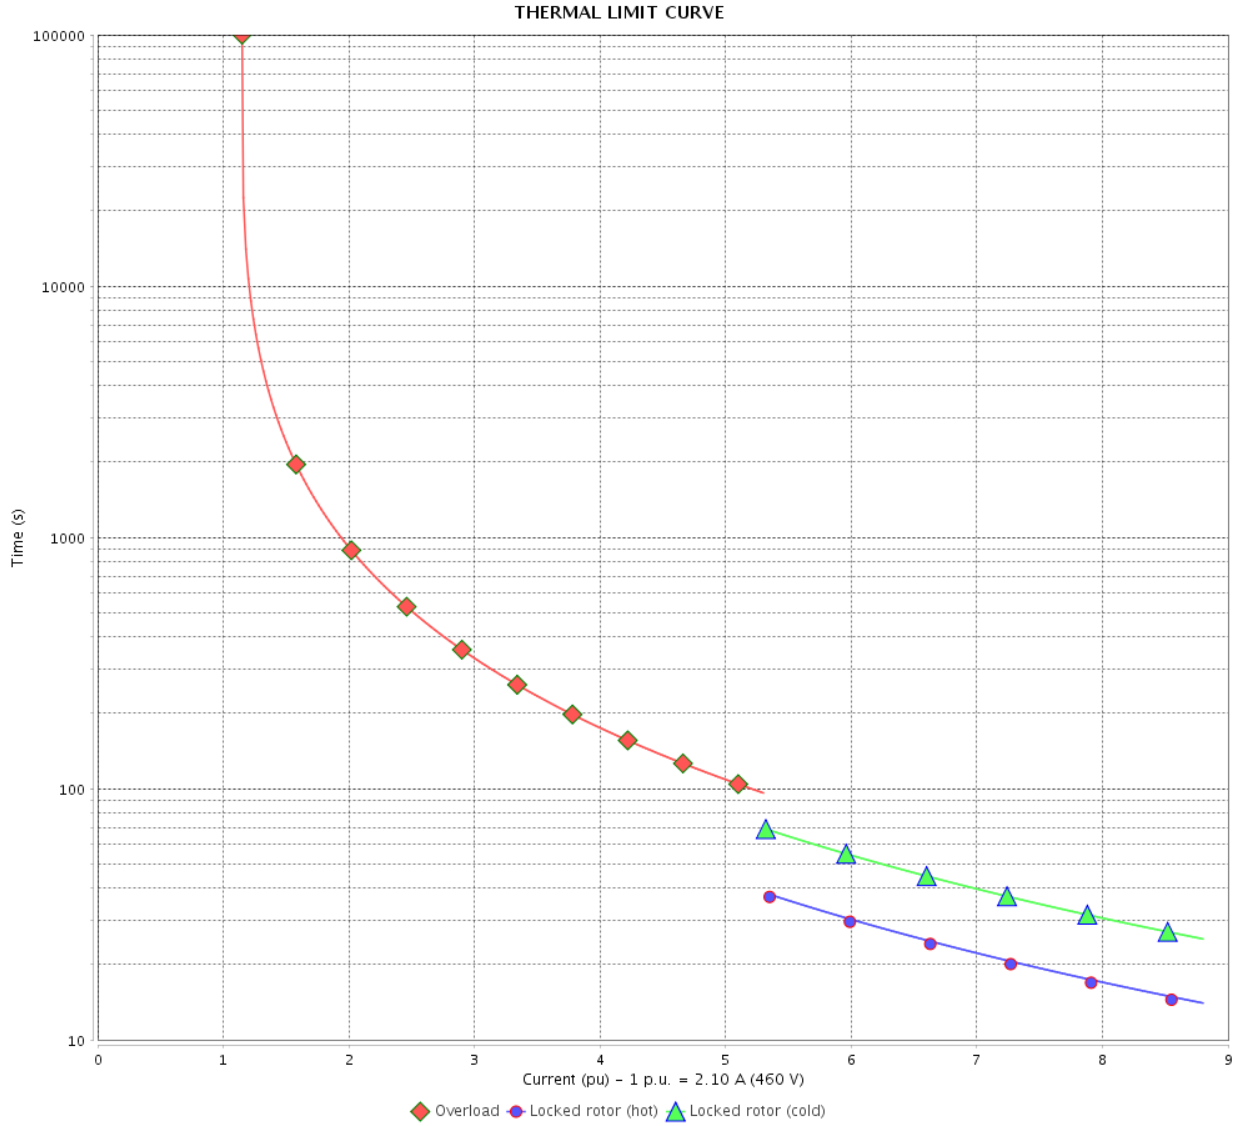

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 16		
Date	12/04/2022			

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : 00021 Premium Efficiency Three-Phase
 Product code : 13661000
 Catalog # : 00158OT3ERB56-S

Performance : 190/380 V 50 Hz 4P

Rated current : 4.94/2.47 A	Moment of inertia (J) : 0.1296 sq.ft.lb
LRC : 6.8	Duty cycle : Cont.(S1)
Rated torque : 5.45 ft.lb	Insulation class : F
Locked rotor torque : 220 %	Service factor : 1.15
Breakdown torque : 280 %	Temperature rise : 80 K
Rated speed : 1445 rpm	Design : A

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 10 / 16	Revision
Checked by				
Date	12/04/2022			

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

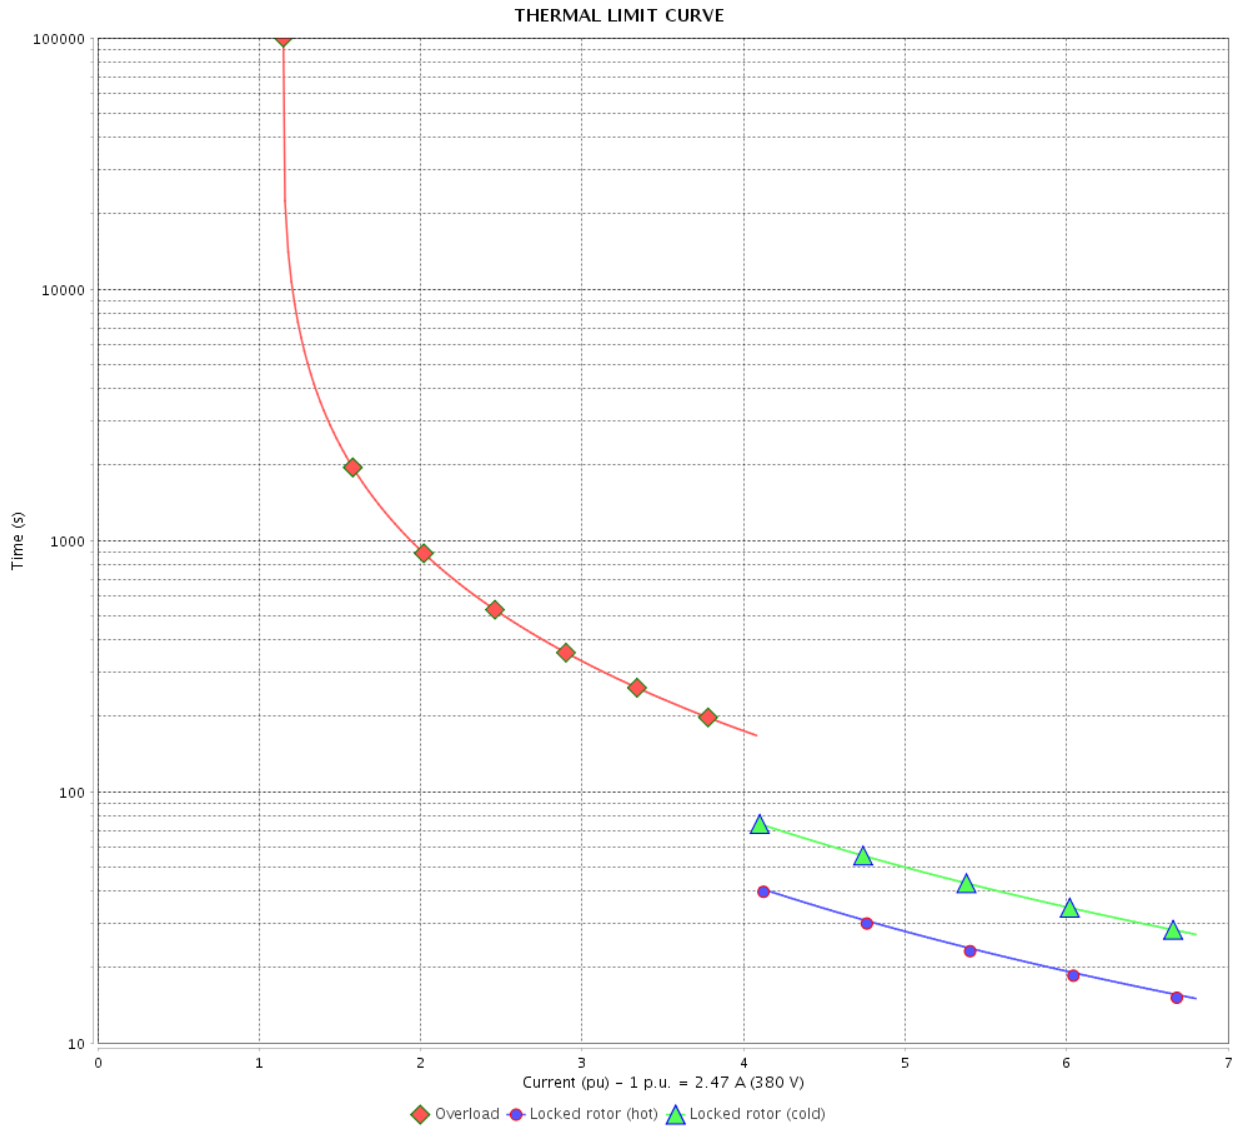

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 11 / 16		Revision
Checked by				
Date				

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : 00021 Premium Efficiency Three-Phase
Product code : 13661000
Catalog # : 00158OT3ERB56-S

Performance : 220/415 V 50 Hz 4P

Rated current : 4.56/2.42 A	Moment of inertia (J) : 0.1296 sq.ft.lb
LRC : 7.4	Duty cycle : Cont.(S1)
Rated torque : 5.43 ft.lb	Insulation class : F
Locked rotor torque : 250 %	Service factor : 1.15
Breakdown torque : 310 %	Temperature rise : 80 K
Rated speed : 1450 rpm	Design : A

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		12 / 16	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

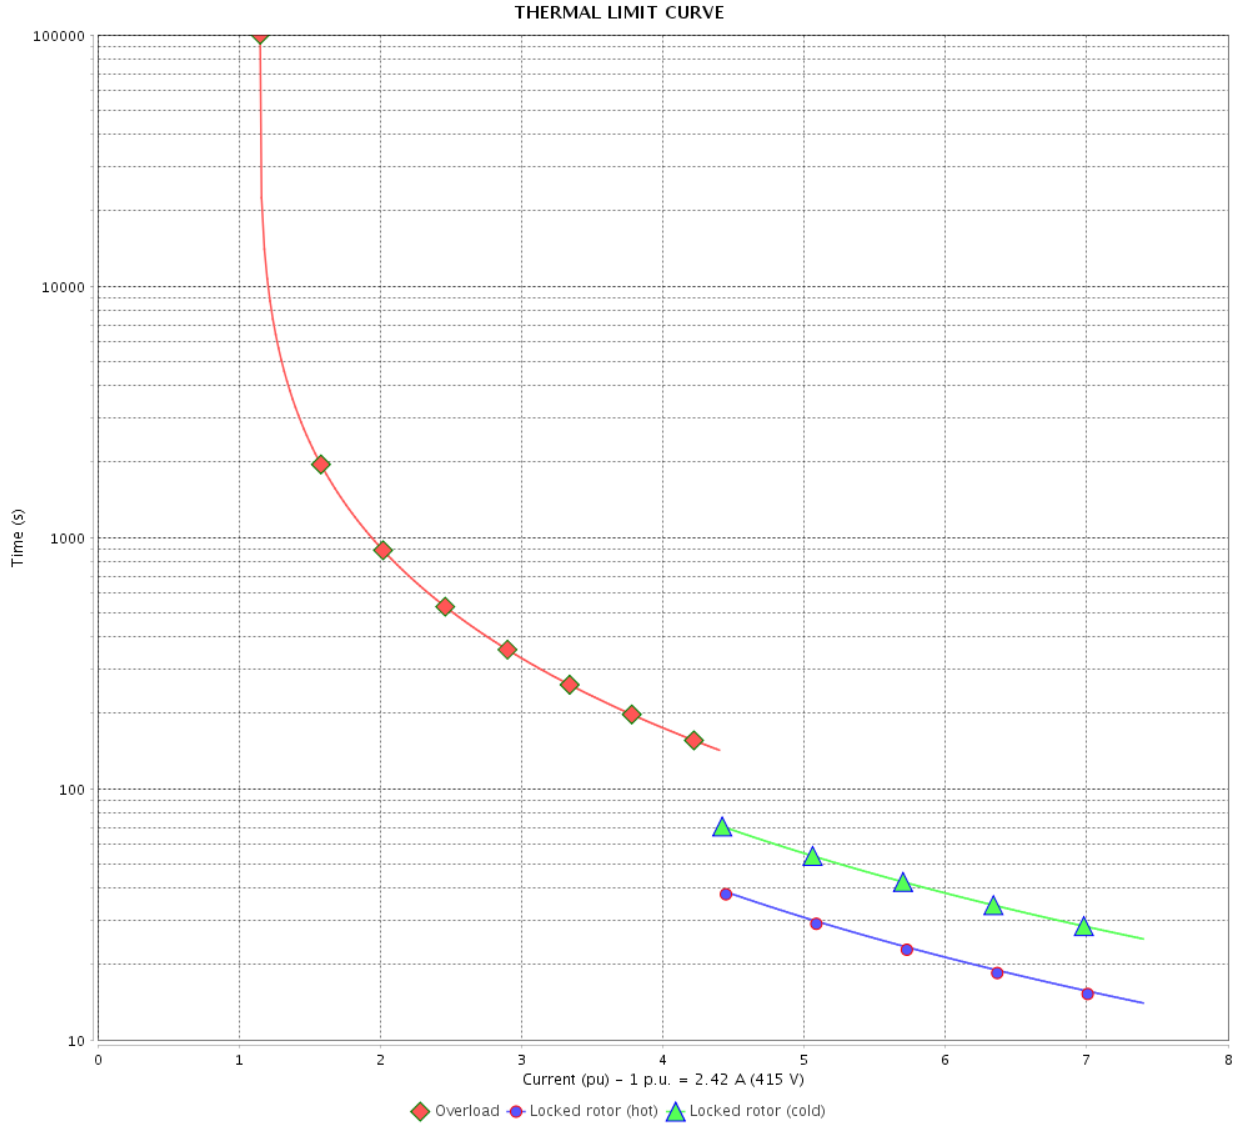

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		13 / 16		
Date		12/04/2022		

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : 00021 Premium Efficiency Three-Phase

Product code : 13661000

Catalog # : 00158OT3ERB56-S

VFD OPERATION CURVE

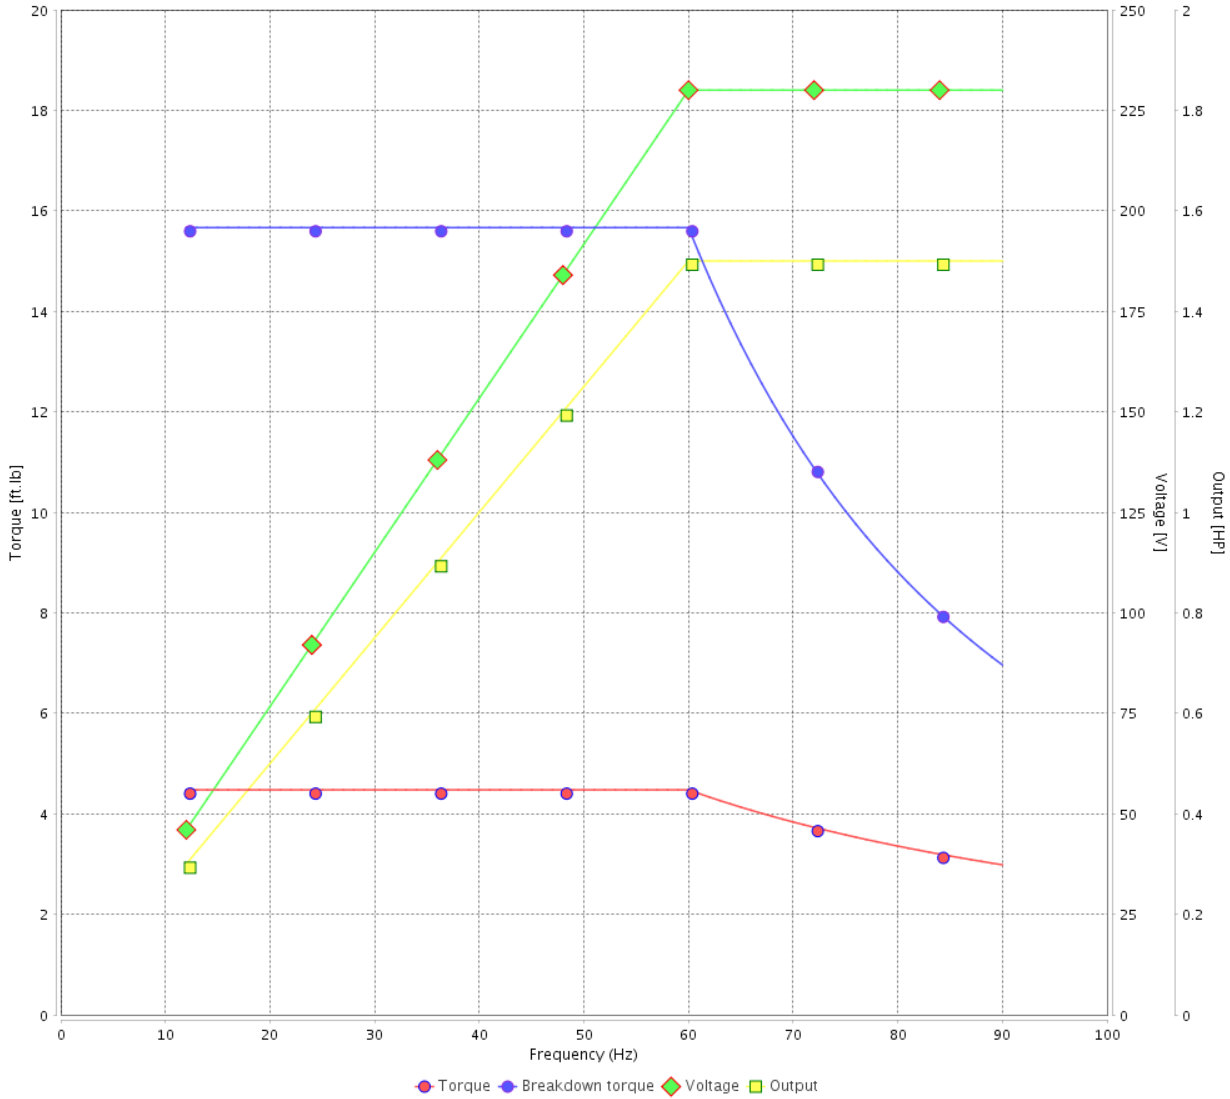

Performance : 230/460 V 60 Hz 4P

Rated current : 4.20/2.10 A
 LRC : 8.8
 Rated torque : 4.48 ft.lb
 Locked rotor torque : 290 %
 Breakdown torque : 350 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.1296 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : 00021 Premium Efficiency Three-Phase

Product code : 13661000

Catalog # : 00158OT3ERB56-S

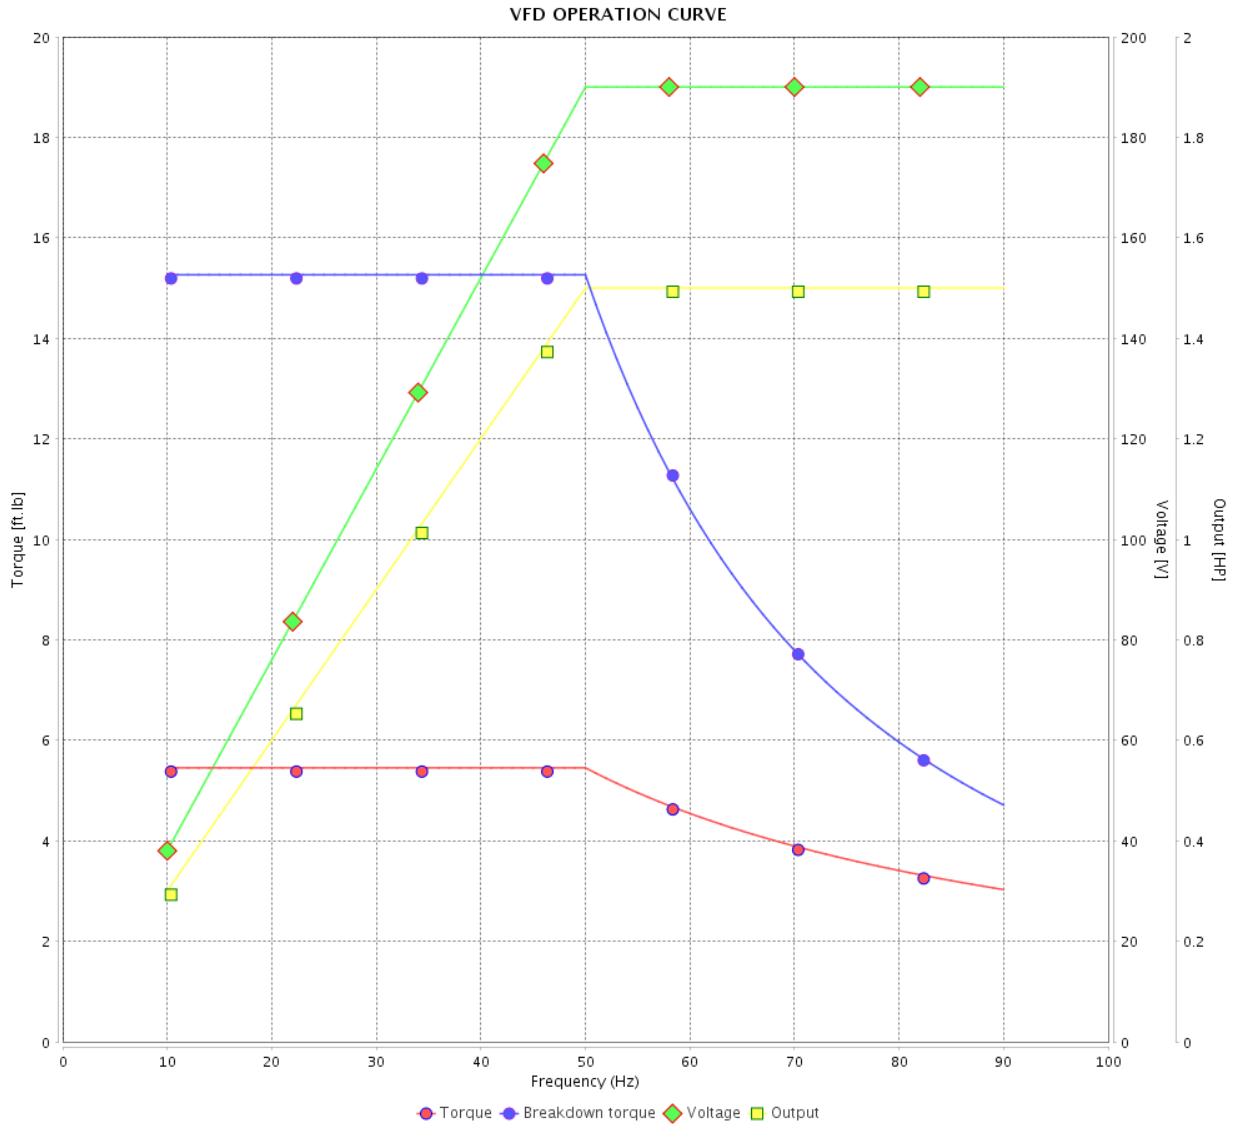

Performance : 190/380 V 50 Hz 4P

Rated current : 4.94/2.47 A
 LRC : 6.8
 Rated torque : 5.45 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 280 %
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.1296 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 15 / 16
Checked by				
Date	12/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : 00021 Premium Efficiency Three-Phase

Product code : 13661000

Catalog # : 00158OT3ERB56-S

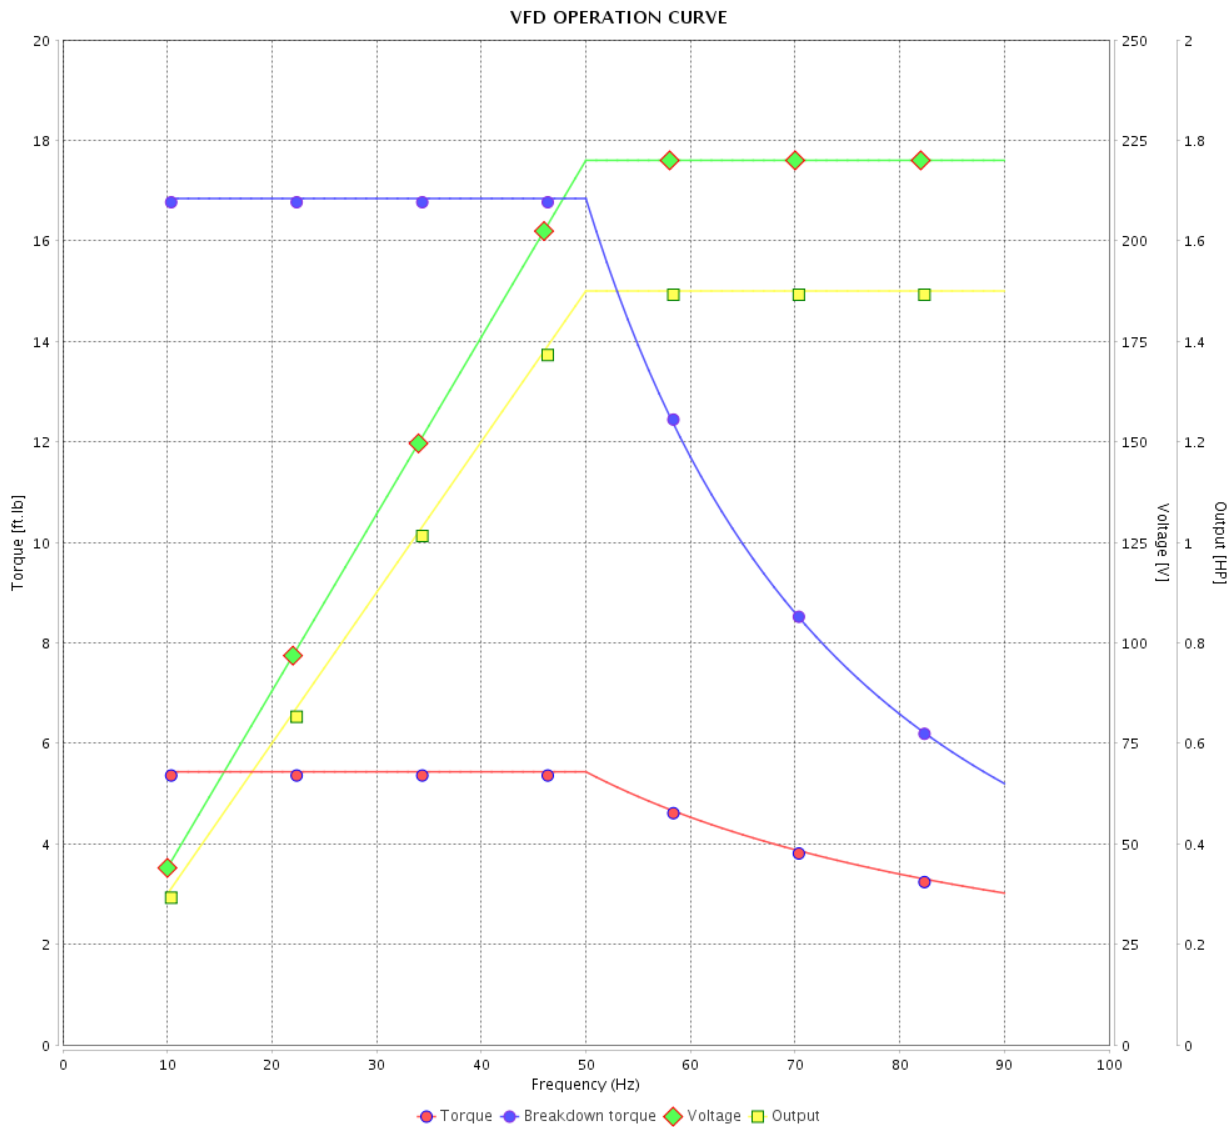

Performance : 220/415 V 50 Hz 4P

Rated current : 4.56/2.42 A
 LRC : 7.4
 Rated torque : 5.43 ft.lb
 Locked rotor torque : 250 %
 Breakdown torque : 310 %
 Rated speed : 1450 rpm

Moment of inertia (J) : 0.1296 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

1 2 3 4 5 6




A

B

C

D

E

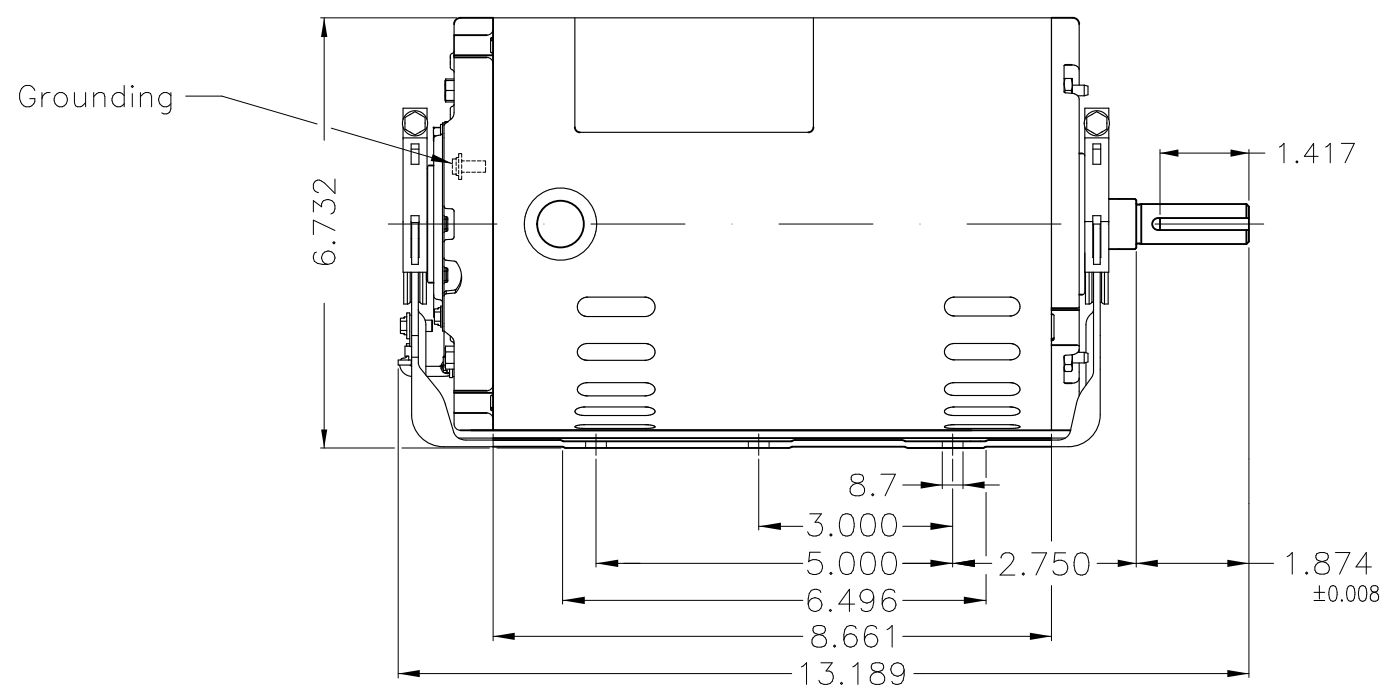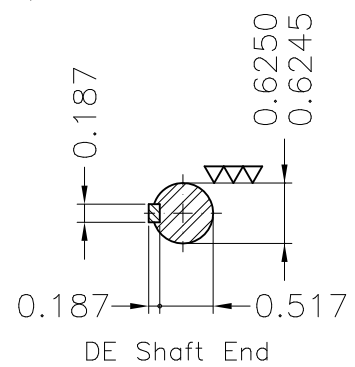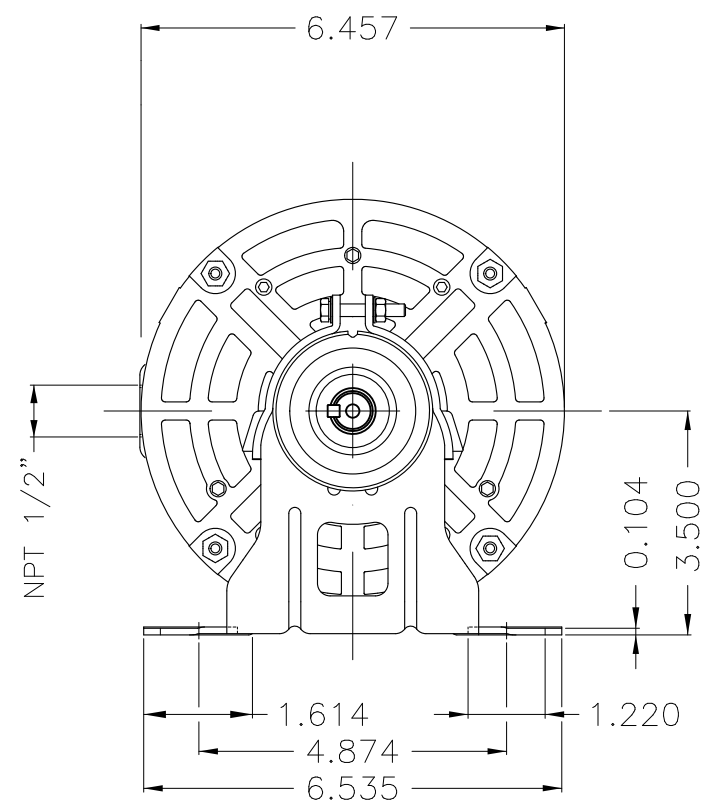

Dimensions in inches

Without coating									
Mounting F-1/B3R(D)									
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PH. MOTOR ROLLED STEEL FAN AND EXHAUST PREM. STS							
CHECKED		FRAME 56H IP21 ODP							
RELEASED									
REL DT.		WMO	Jaragua do Sul	Product Engineering	SHEET		1 / 1		

1.5 HP 04 Poles 60 Hz

A

PREVIEW
WDD



XME A3

**NEMA**
Premium

MADE IN MEXICO

MAT: 13661000**W01.T00IC0X0X****MODEL 001580T3ERB56-S****10MAR2022 B/N:**

PH 3	Hz 60	HP 1.5
FR 56H		KW 1.1
DUTY CONT.		V 230/460
ALT 1000 m.a.s.l.		A 4.20/2.10
INS CL F AT 80K		SFA 4.83/2.42
AMB 40°C	DES A	SF 1.15
ENCL ODP	CODE L	PF 0.76
USABLE @ 208V 4.84A		RPM 1760
SF1.00		NEMA NOM. EFF 86.5%

ALTERNATE RATING: 1.5HP 50Hz 190-220/380-415V SF1.15
4.94-4.51/2.47-2.39A 1445RPM EFF 83.6% (IE2) IEC 60034-1

Inverter duty motor For 80Hz use on VPWM 1000:1 VT, 5:1 CT

DE 6204-ZZ	ODE 6202-ZZ	MOBIL POLYREX EM
-------------------	--------------------	-------------------------



T1-BLU T2-WHT
 T3-ORG T4-YEL
 T5-BLK T6-GRY
 T7-PNK T8-RED
 T9-BRK RED

INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION

WARNING: Motor must be grounded in accordance with local and national electrical codes to prevent serious electrical shocks. Disconnect power source before servicing unit.



AVERTISSEMENT: Le moteur doit être mis à la terre conformément aux codes électriques locaux et nationaux afin d'éviter tout choc électrique grave. Déconnectez l'alimentation avant l'entretien de la machine.

