

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	14325085		
		Catalog # :	00218XT3E145T		
Frame	: 143/5T	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>2</sup>	: 73.3 lb		
Protection degree	: IP55	Moment of inertia (J)	: 0.1595 sq.ft.lb		
Design	: B				
Output [HP]	2	2	2	2	
Poles	4	4	4	4	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	5.58/2.79	3.29	3.18	3.18	
L. R. Amperes [A]	49.7/24.8	25.0	24.8	24.8	
LRC [A]	8.9x(Code L)	7.6x(Code K)	7.8x(Code K)	7.8x(Code K)	
No load current [A]	3.20/1.60	1.60	1.80	2.00	
Rated speed [RPM]	1750	1425	1435	1445	
Slip [%]	2.78	5.00	4.33	3.67	
Rated torque [ft.lb]	6.00	7.37	7.32	7.27	
Locked rotor torque [%]	270	190	220	240	
Breakdown torque [%]	320	220	250	270	
Service factor	1.15	1.00	1.00	1.00	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	19s (cold) 11s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	
Noise level <sup>2</sup>	51.0 dB(A)	49.0 dB(A)	49.0 dB(A)	49.0 dB(A)	
Efficiency (%)	25%	82.9	85.0	82.1	82.1
	50%	84.0	84.0	82.5	82.5
	75%	85.5	84.0	84.0	84.0
	100%	86.5	82.5	84.0	84.0
Power Factor	25%	0.32	0.38	0.34	0.31
	50%	0.56	0.64	0.59	0.55
	75%	0.70	0.77	0.73	0.69
	100%	0.78	0.84	0.81	0.78
Bearing type	: Drive end : 6205 2RS Non drive end : 6204 2RS	Foundation loads	Max. traction : 134 lb Max. compression : 207 lb		
Sealing	: Oil Seal Lip Seal				
Lubrication interval	: - -				
Lubricant amount	: - -				
Lubricant type	: Mobil Polyrex EM				
Notes USABLE @208V 6.02A SF 1.15 SFA 6.92A					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by			Page	Revision	
Date	14/04/2022		1 / 22		

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

### Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/04/2022		2 / 22	

# TORQUE AND CURRENT VS SPEED CURVE




## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

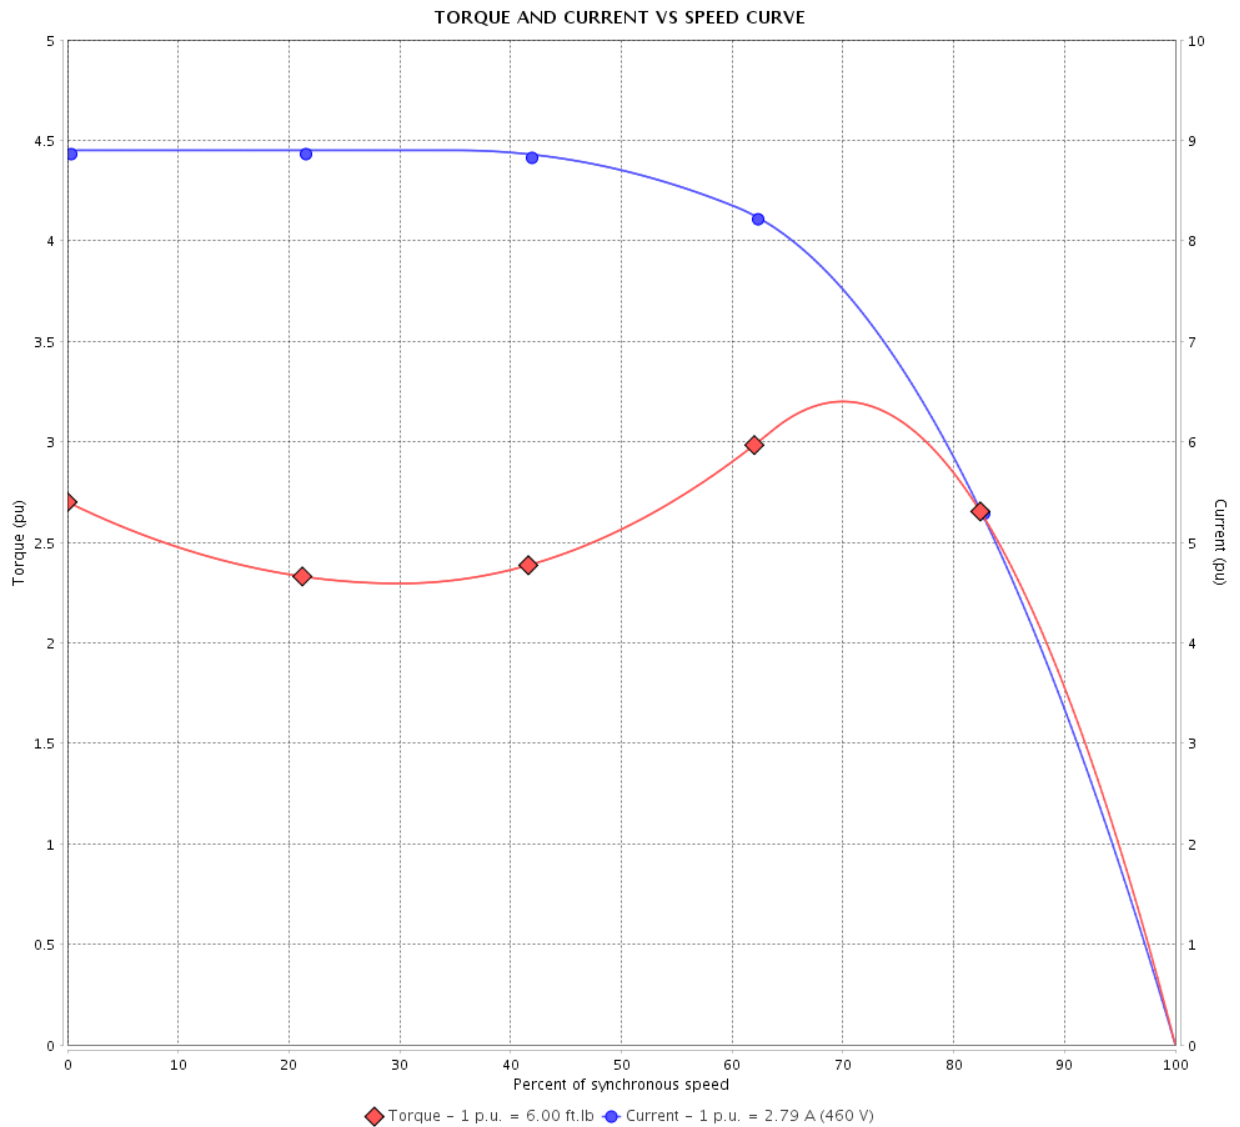

Performance : 230/460 V 60 Hz 4P

Rated current : 5.58/2.79 A  
 LRC : 8.9  
 Rated torque : 6.00 ft.lb  
 Locked rotor torque : 270 %  
 Breakdown torque : 320 %  
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.1595 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Locked rotor time : 19s (cold) 11s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 22		
Date		14/04/2022		

# TORQUE AND CURRENT VS SPEED CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

TORQUE AND CURRENT VS SPEED CURVE

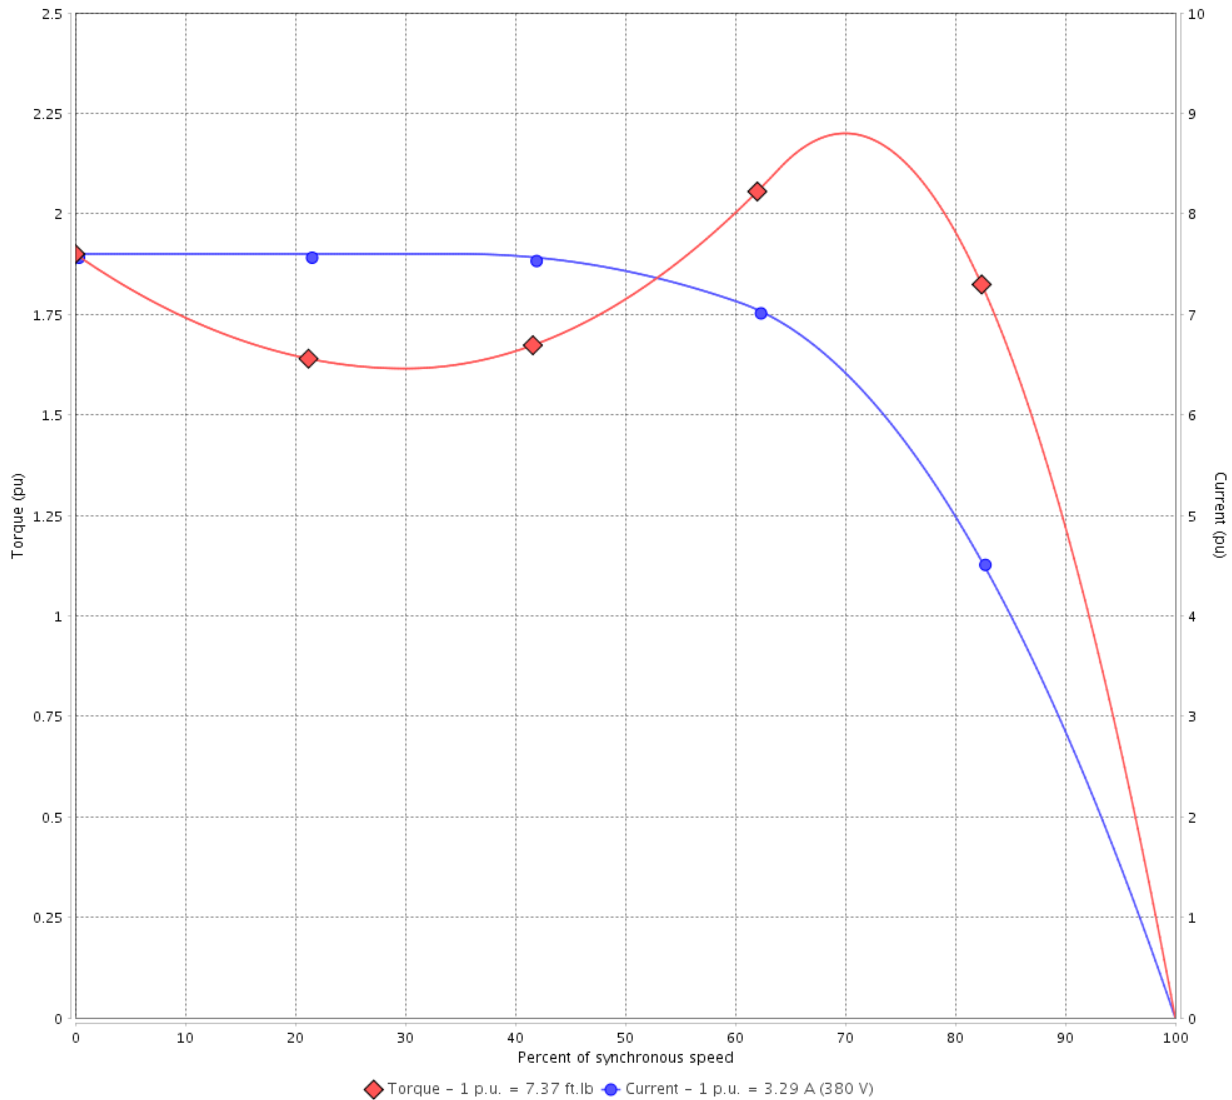

Performance : 380 V 50 Hz 4P IE1

Rated current	: 3.29 A	Moment of inertia (J)	: 0.1595 sq.ft.lb
LRC	: 7.6	Duty cycle	: Cont.(S1)
Rated torque	: 7.37 ft.lb	Insulation class	: F
Locked rotor torque	: 190 %	Service factor	: 1.00
Breakdown torque	: 220 %	Temperature rise	: 80 K
Rated speed	: 1425 rpm	Design	: B

Locked rotor time : 21s (cold) 12s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 22	Revision
Checked by				
Date	14/04/2022			

# TORQUE AND CURRENT VS SPEED CURVE




## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

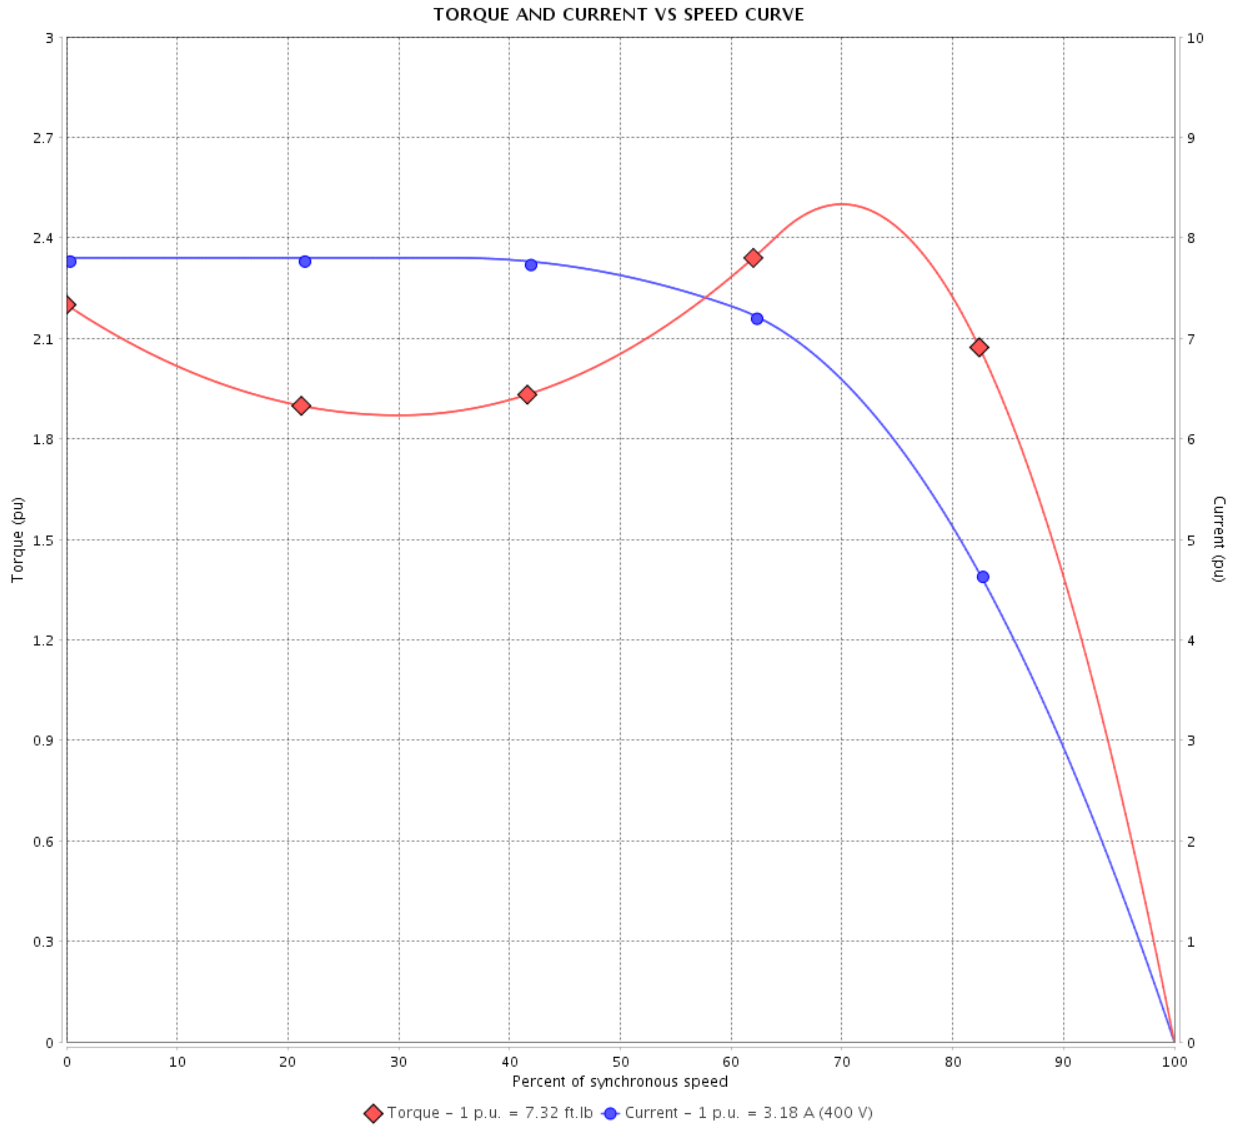

Performance : 400 V 50 Hz 4P IE2

Rated current	: 3.18 A	Moment of inertia (J)	: 0.1595 sq.ft.lb
LRC	: 7.8	Duty cycle	: Cont.(S1)
Rated torque	: 7.32 ft.lb	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.00
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1435 rpm	Design	: B

Locked rotor time : 21s (cold) 12s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 22	Revision
Checked by				
Date	14/04/2022			

# TORQUE AND CURRENT VS SPEED CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

TORQUE AND CURRENT VS SPEED CURVE

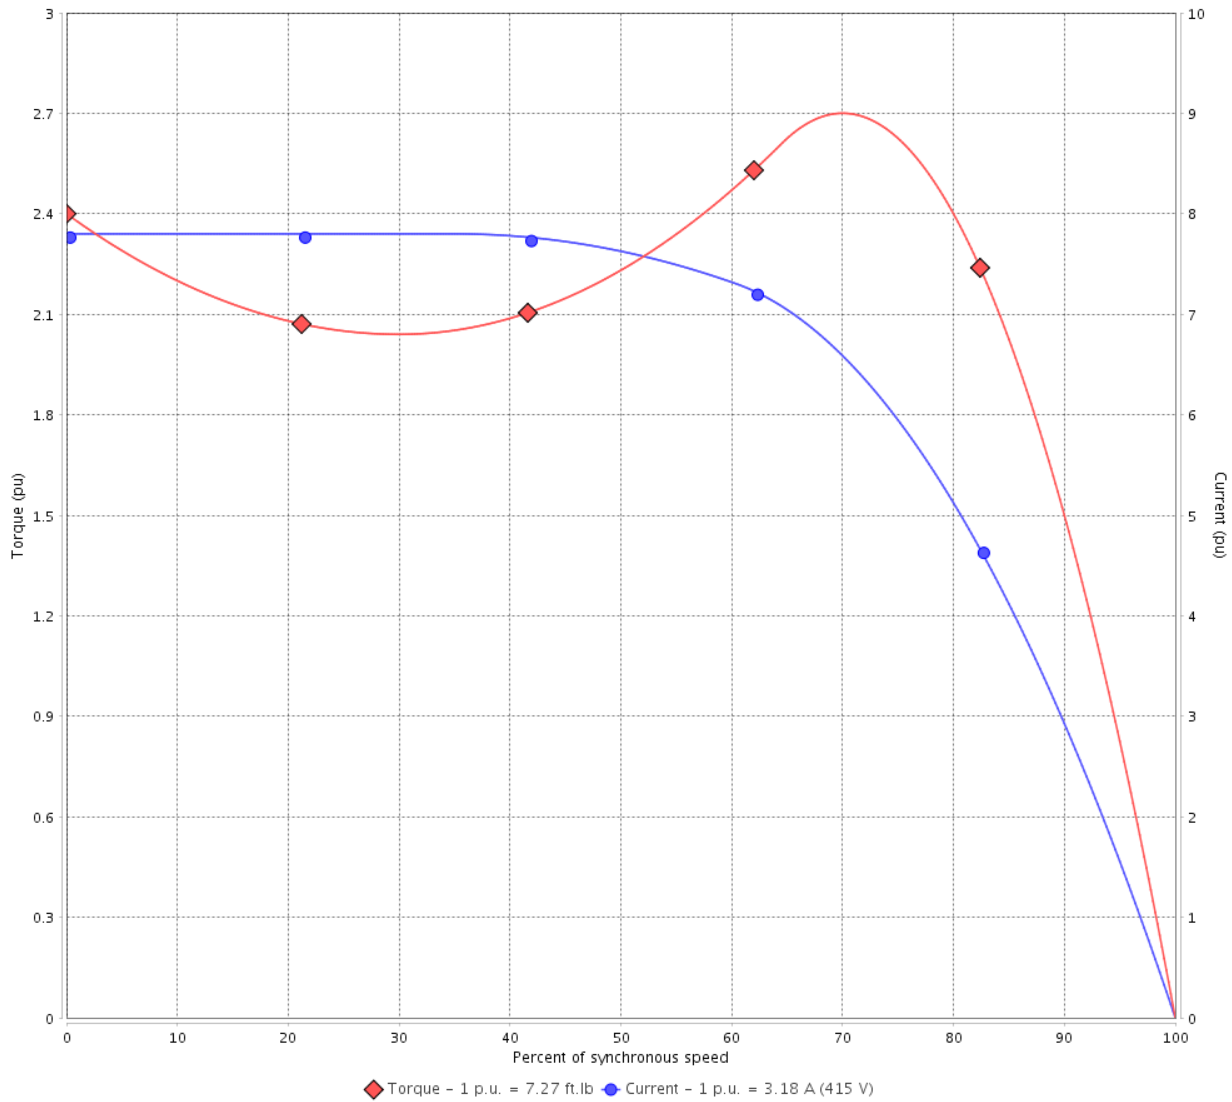

Performance : 415 V 50 Hz 4P IE2

Rated current	: 3.18 A	Moment of inertia (J)	: 0.1595 sq.ft.lb
LRC	: 7.8	Duty cycle	: Cont.(S1)
Rated torque	: 7.27 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1445 rpm	Design	: B

Locked rotor time : 21s (cold) 12s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 22	Revision
Checked by				
Date	14/04/2022			

# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer : \_\_\_\_\_

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

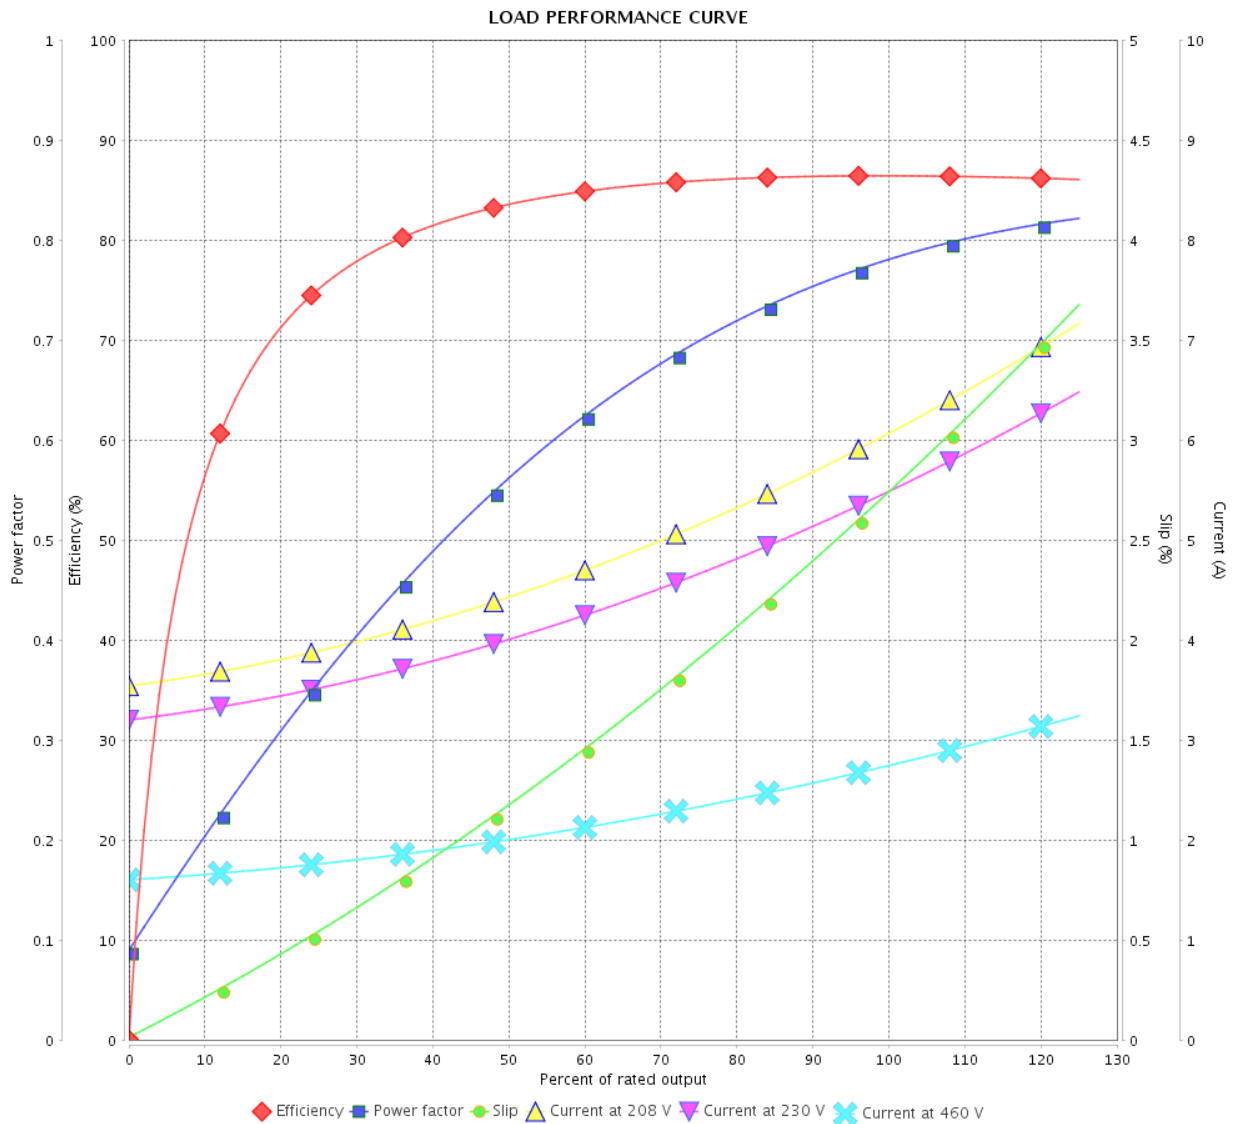

Performance : 230/460 V 60 Hz 4P

Rated current : 5.58/2.79 A  
 LRC : 8.9  
 Rated torque : 6.00 ft.lb  
 Locked rotor torque : 270 %  
 Breakdown torque : 320 %  
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.1595 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		7 / 22		
Date		14/04/2022		

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

LOAD PERFORMANCE CURVE

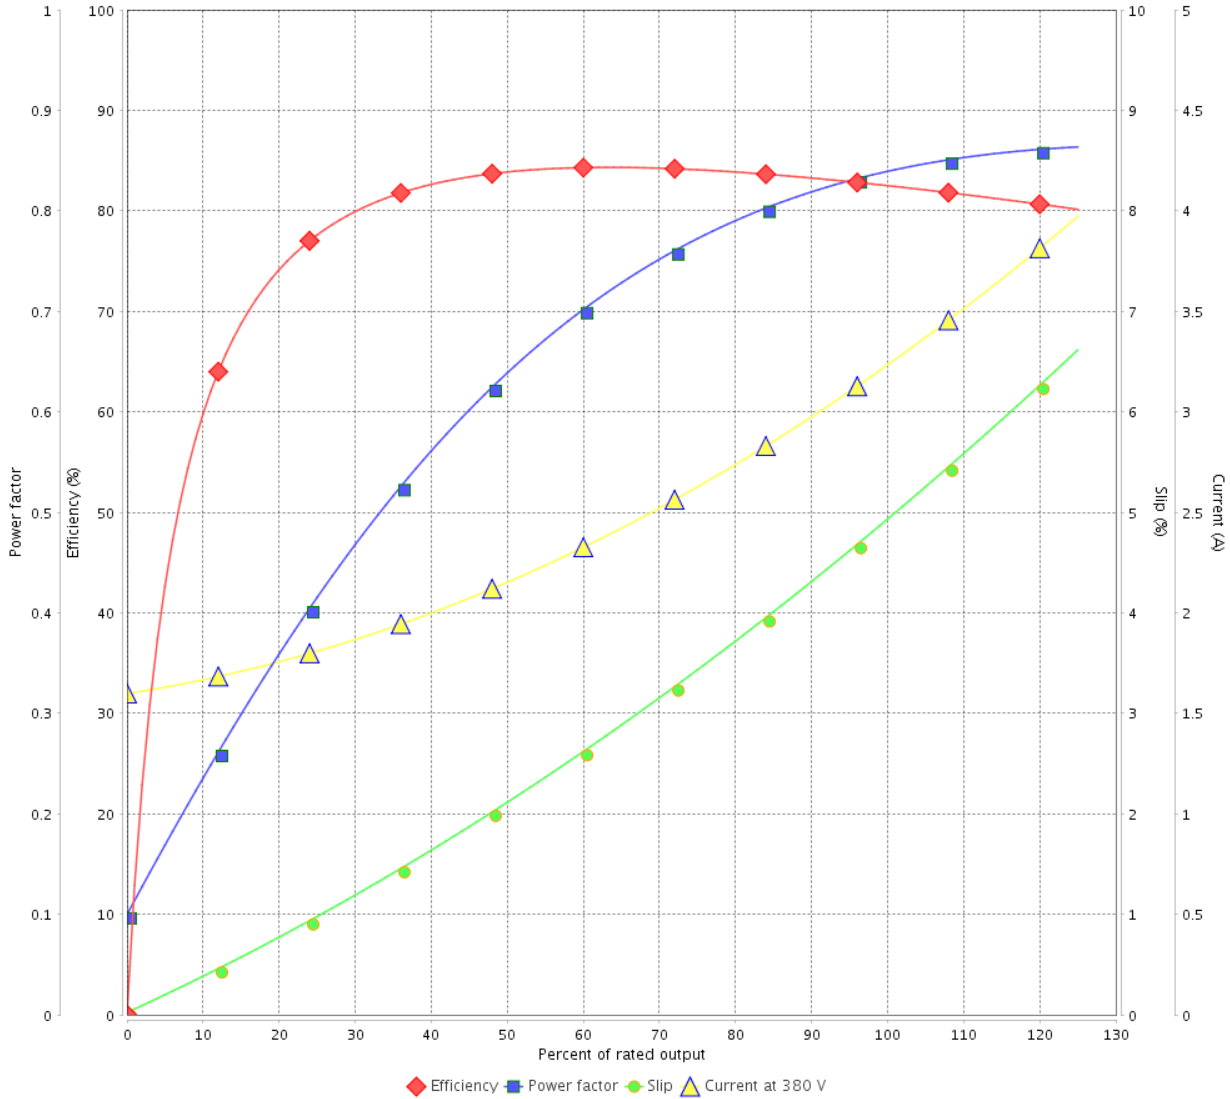

Performance : 380 V 50 Hz 4P IE1

Rated current : 3.29 A  
 LRC : 7.6  
 Rated torque : 7.37 ft.lb  
 Locked rotor torque : 190 %  
 Breakdown torque : 220 %  
 Rated speed : 1425 rpm

Moment of inertia (J) : 0.1595 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			8 / 22	
Date	14/04/2022			



# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

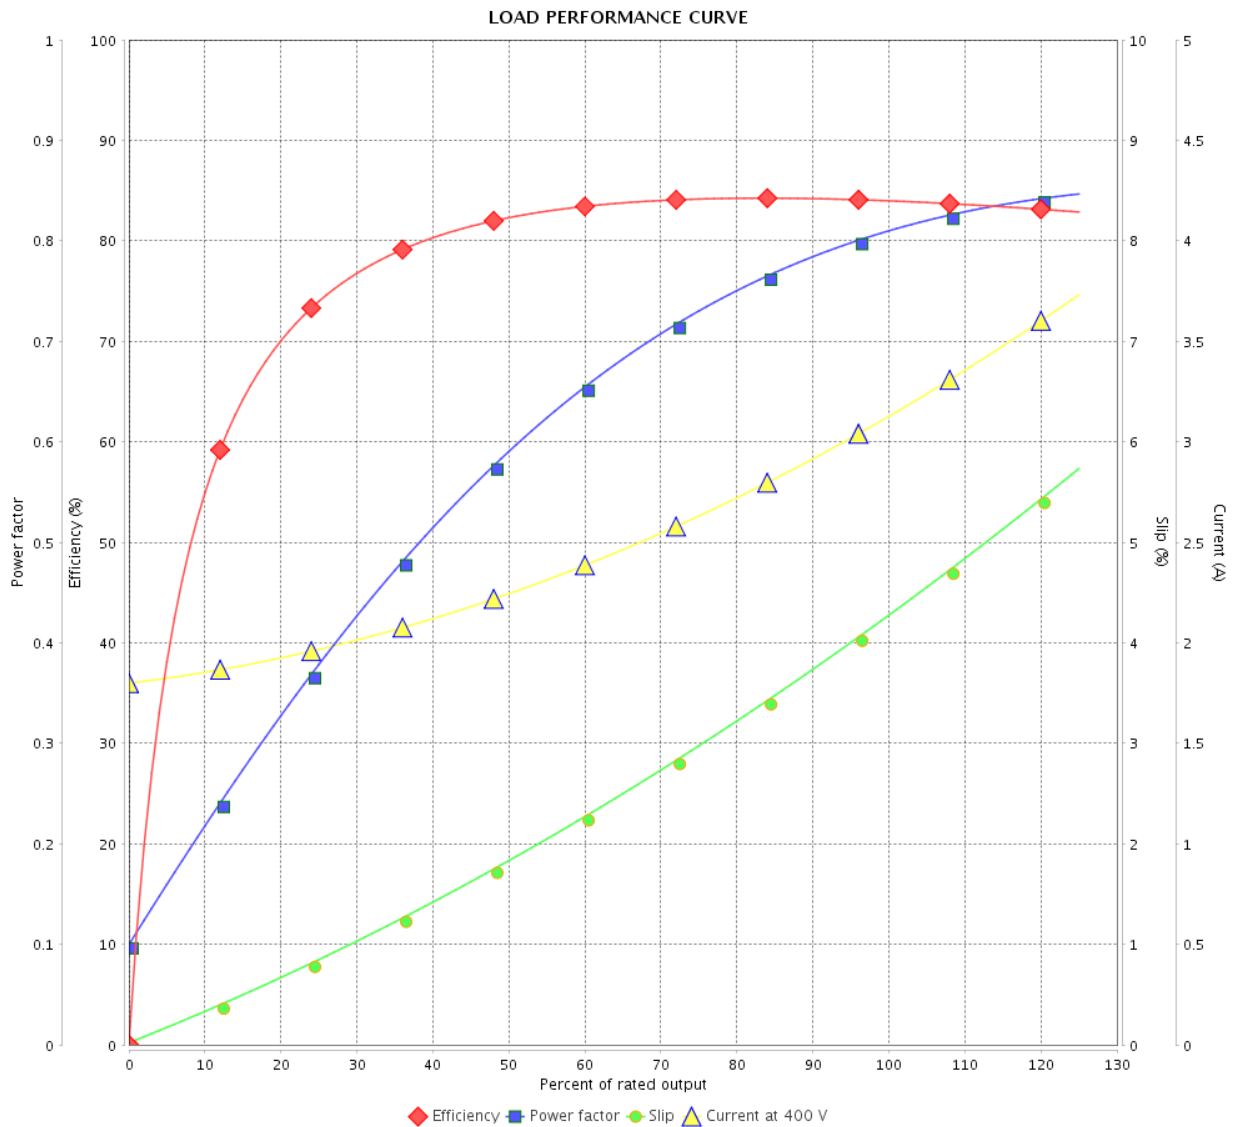

Performance : 400 V 50 Hz 4P IE2

Rated current : 3.18 A  
 LRC : 7.8  
 Rated torque : 7.32 ft.lb  
 Locked rotor torque : 220 %  
 Breakdown torque : 250 %  
 Rated speed : 1435 rpm

Moment of inertia (J) : 0.1595 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			9 / 22	
Date	14/04/2022			

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

LOAD PERFORMANCE CURVE

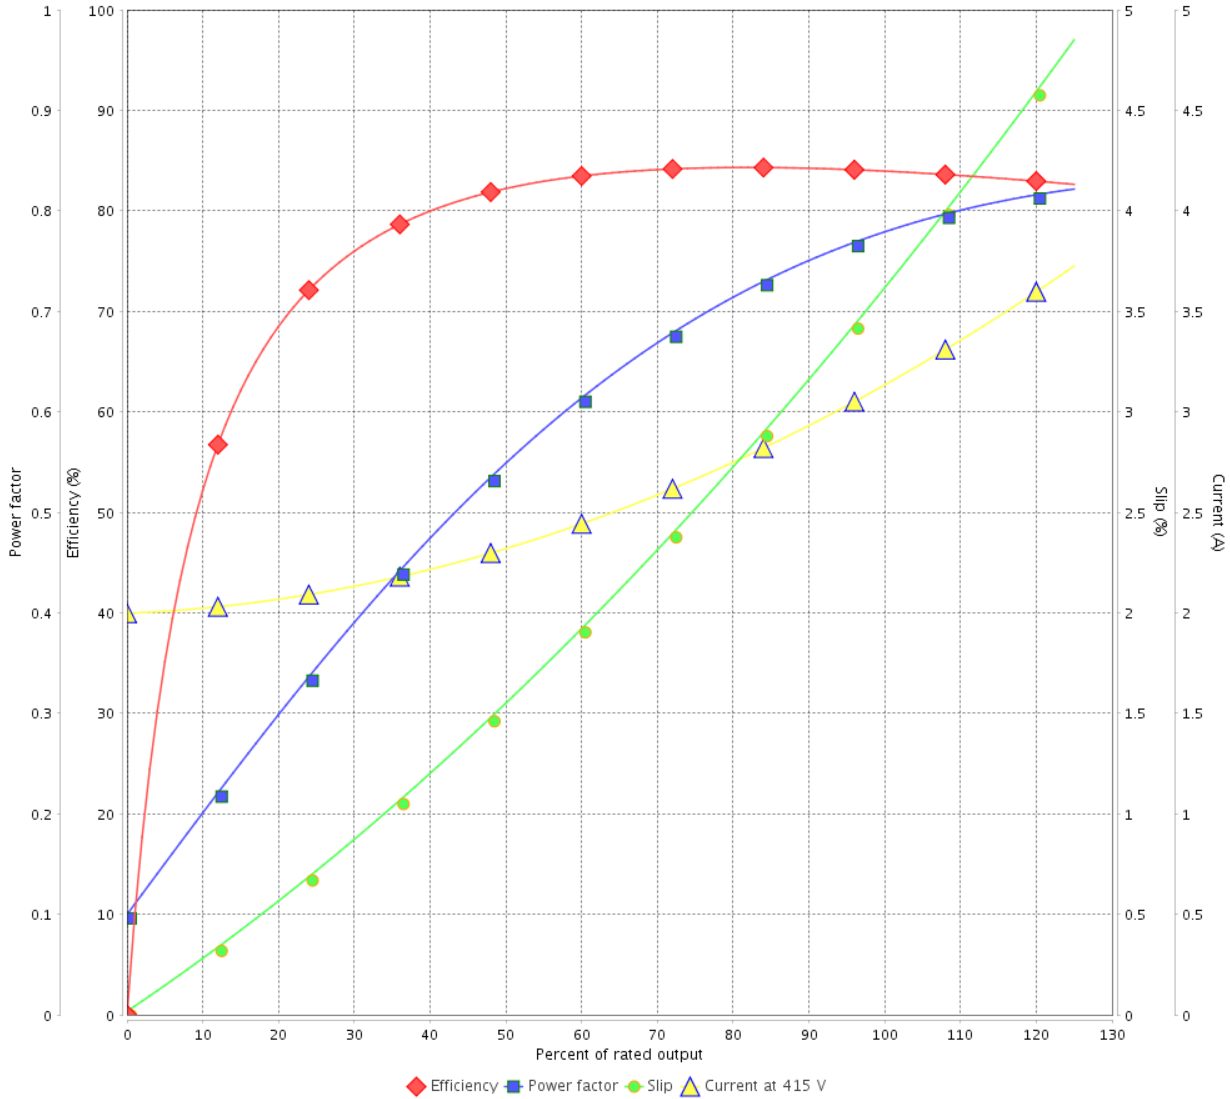

Performance : 415 V 50 Hz 4P IE2

Rated current : 3.18 A  
 LRC : 7.8  
 Rated torque : 7.27 ft.lb  
 Locked rotor torque : 240 %  
 Breakdown torque : 270 %  
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.1595 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			10 / 22	
Date	14/04/2022			

# THERMAL LIMIT CURVE



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase  
 Product code : 14325085  
 Catalog # : 00218XT3E145T

Performance : 230/460 V 60 Hz 4P

Rated current : 5.58/2.79 A	Moment of inertia (J) : 0.1595 sq.ft.lb
LRC : 8.9	Duty cycle : Cont.(S1)
Rated torque : 6.00 ft.lb	Insulation class : F
Locked rotor torque : 270 %	Service factor : 1.15
Breakdown torque : 320 %	Temperature rise : 80 K
Rated speed : 1750 rpm	Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 11 / 22	Revision
Checked by				
Date	14/04/2022			

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

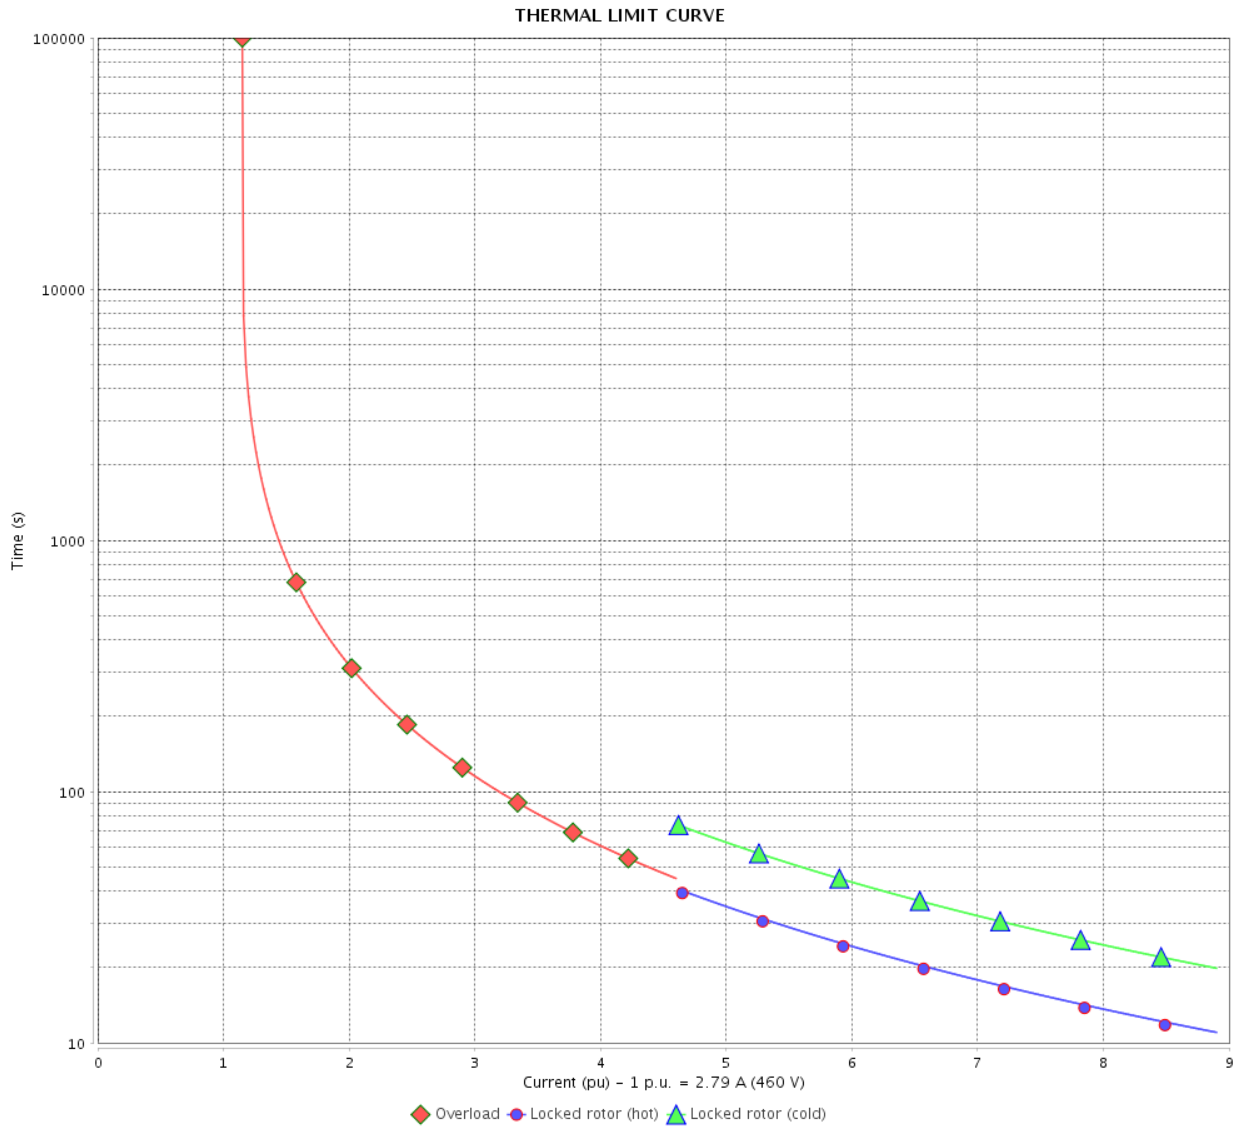

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		12 / 22		
Date		14/04/2022		

# THERMAL LIMIT CURVE



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase  
 Product code : 14325085  
 Catalog # : 00218XT3E145T

Performance : 380 V 50 Hz 4P IE1

Rated current : 3.29 A	Moment of inertia (J) : 0.1595 sq.ft.lb
LRC : 7.6	Duty cycle : Cont.(S1)
Rated torque : 7.37 ft.lb	Insulation class : F
Locked rotor torque : 190 %	Service factor : 1.00
Breakdown torque : 220 %	Temperature rise : 80 K
Rated speed : 1425 rpm	Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 13 / 22	Revision
Checked by				
Date	14/04/2022			

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

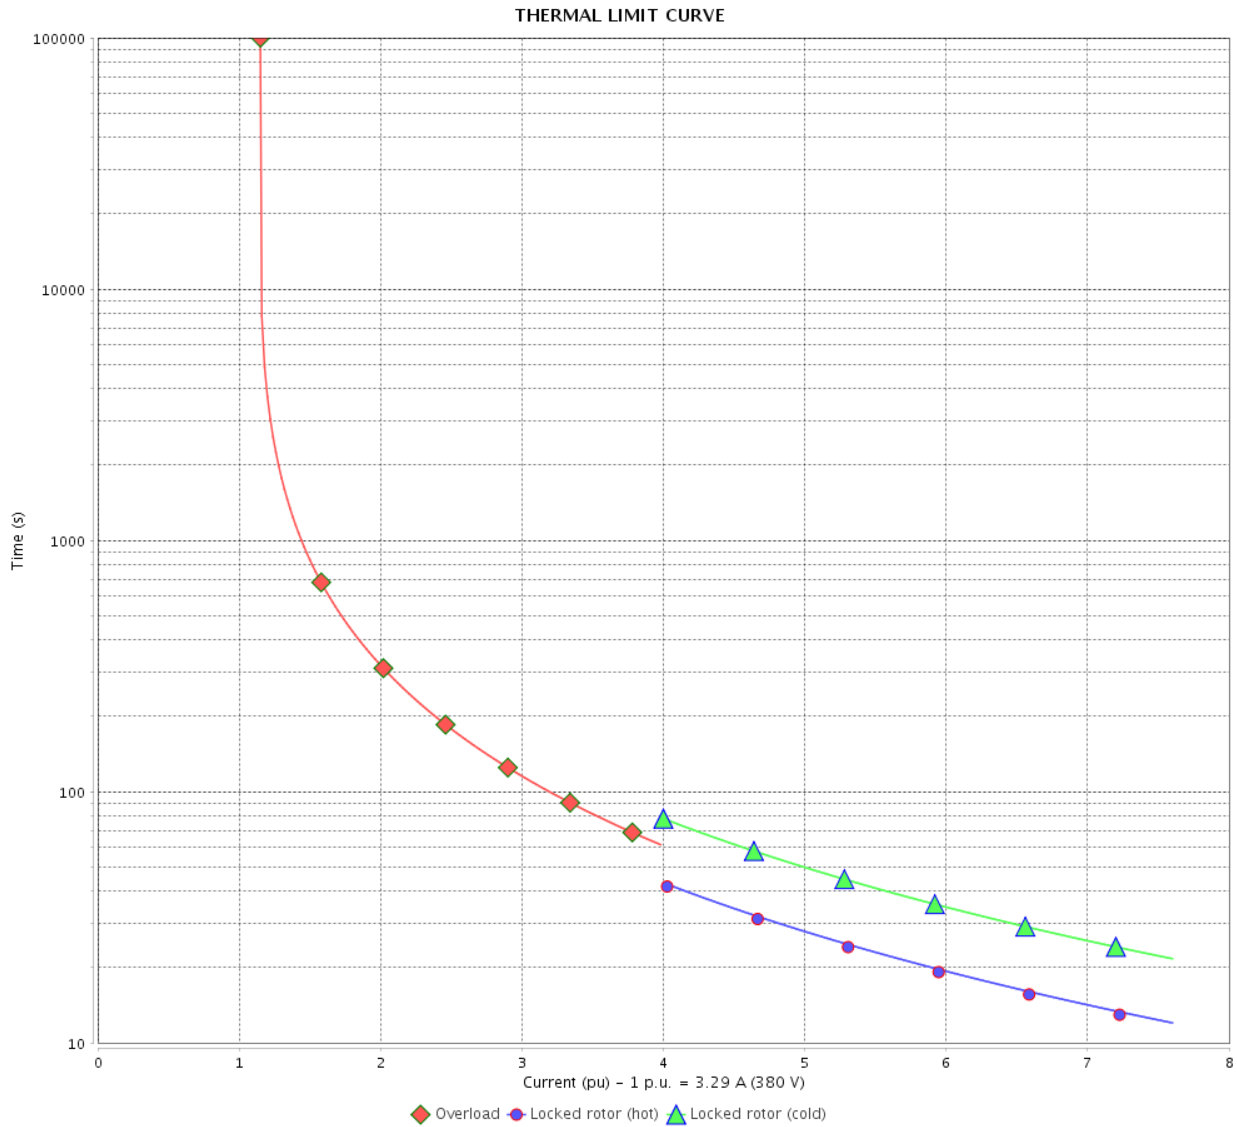

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		14 / 22		
Date		14/04/2022		

# THERMAL LIMIT CURVE



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase  
 Product code : 14325085  
 Catalog # : 00218XT3E145T

Performance : 400 V 50 Hz 4P IE2

Rated current : 3.18 A	Moment of inertia (J) : 0.1595 sq.ft.lb
LRC : 7.8	Duty cycle : Cont.(S1)
Rated torque : 7.32 ft.lb	Insulation class : F
Locked rotor torque : 220 %	Service factor : 1.00
Breakdown torque : 250 %	Temperature rise : 80 K
Rated speed : 1435 rpm	Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 15 / 22	Revision
Checked by				
Date	14/04/2022			

# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

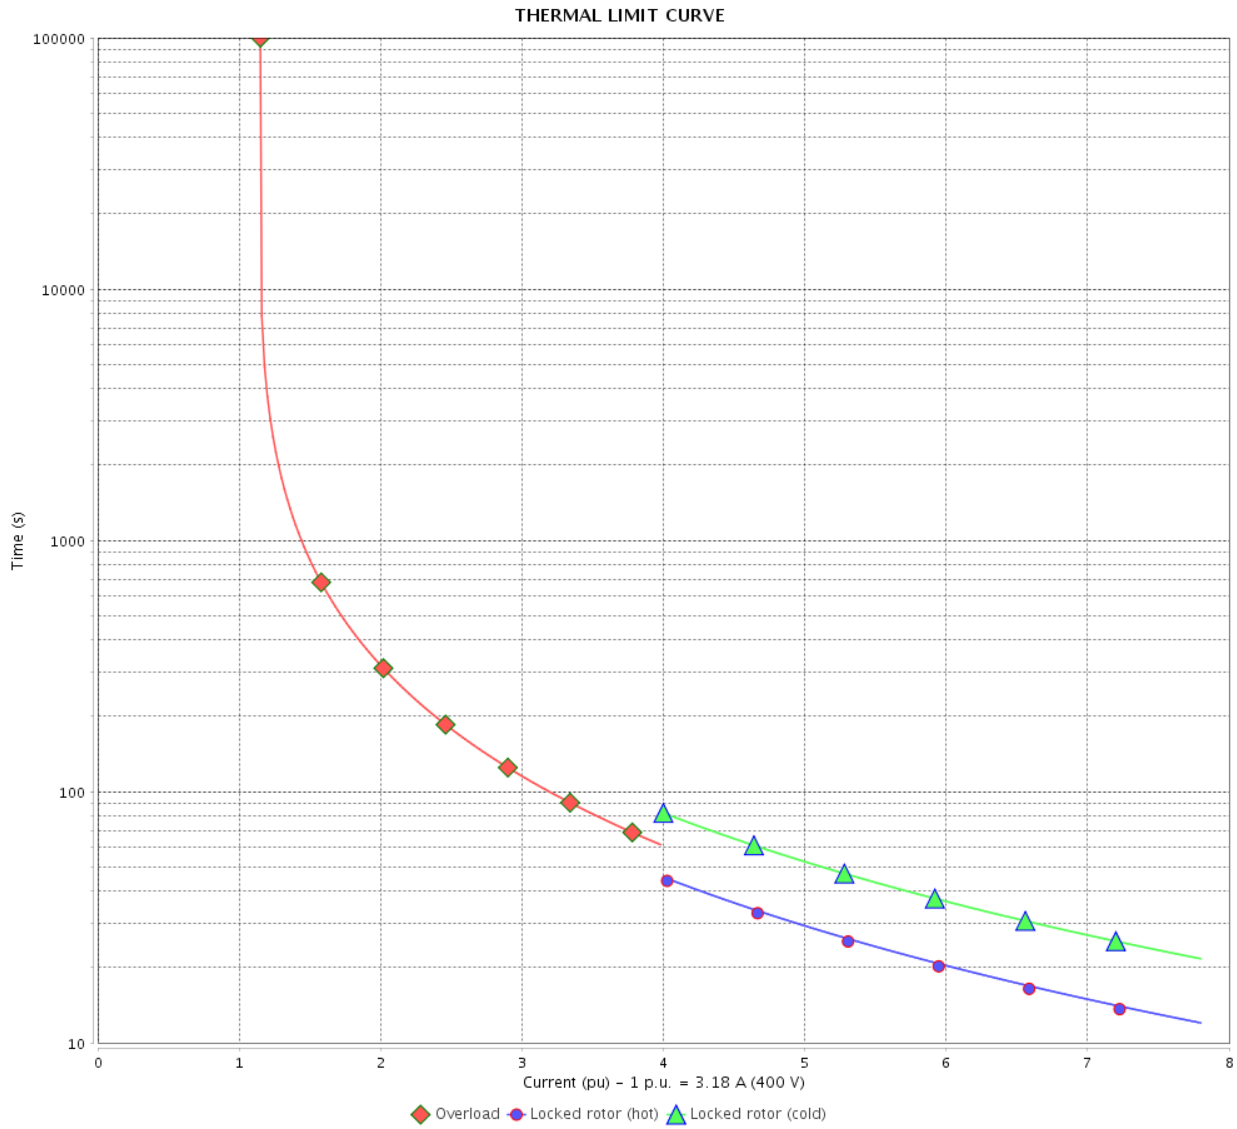

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		16 / 22		
Date		14/04/2022		



# THERMAL LIMIT CURVE



## Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase  
 Product code : 14325085  
 Catalog # : 00218XT3E145T

Performance : 415 V 50 Hz 4P IE2

Rated current : 3.18 A	Moment of inertia (J) : 0.1595 sq.ft.lb
LRC : 7.8	Duty cycle : Cont.(S1)
Rated torque : 7.27 ft.lb	Insulation class : F
Locked rotor torque : 240 %	Service factor : 1.00
Breakdown torque : 270 %	Temperature rise : 80 K
Rated speed : 1445 rpm	Design : B

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 17 / 22	Revision
Checked by				
Date	14/04/2022			


# THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

THERMAL LIMIT CURVE

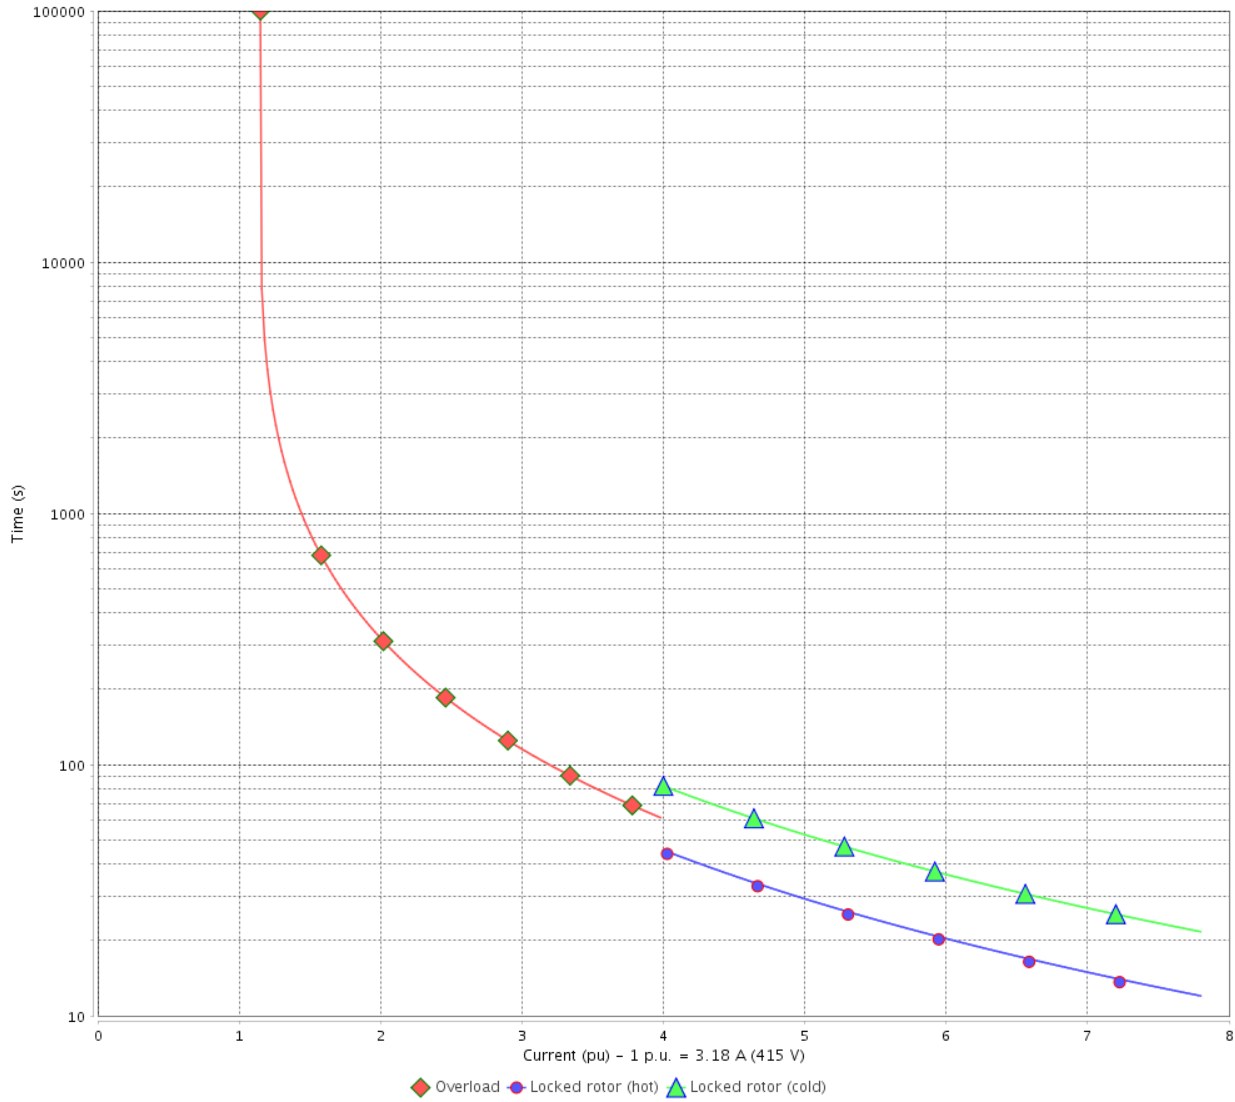

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		18 / 22		
Date		14/04/2022		

# VFD OPERATION CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

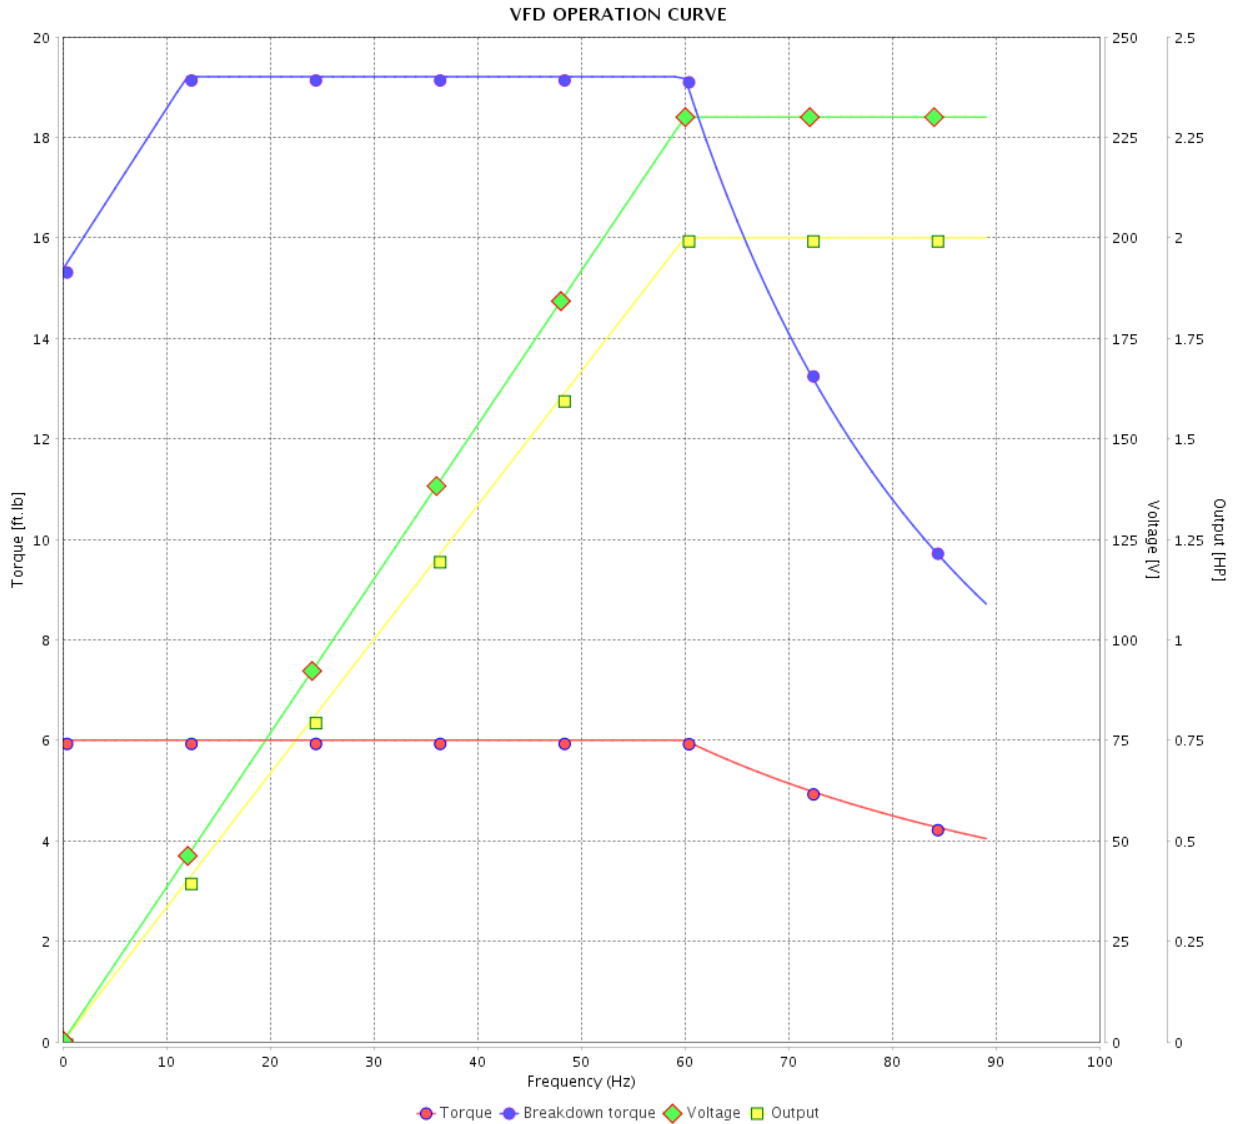

Performance : 230/460 V 60 Hz 4P

Rated current : 5.58/2.79 A  
 LRC : 8.9  
 Rated torque : 6.00 ft.lb  
 Locked rotor torque : 270 %  
 Breakdown torque : 320 %  
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.1595 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 19 / 22
Checked by				
Date	14/04/2022			

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

VFD OPERATION CURVE

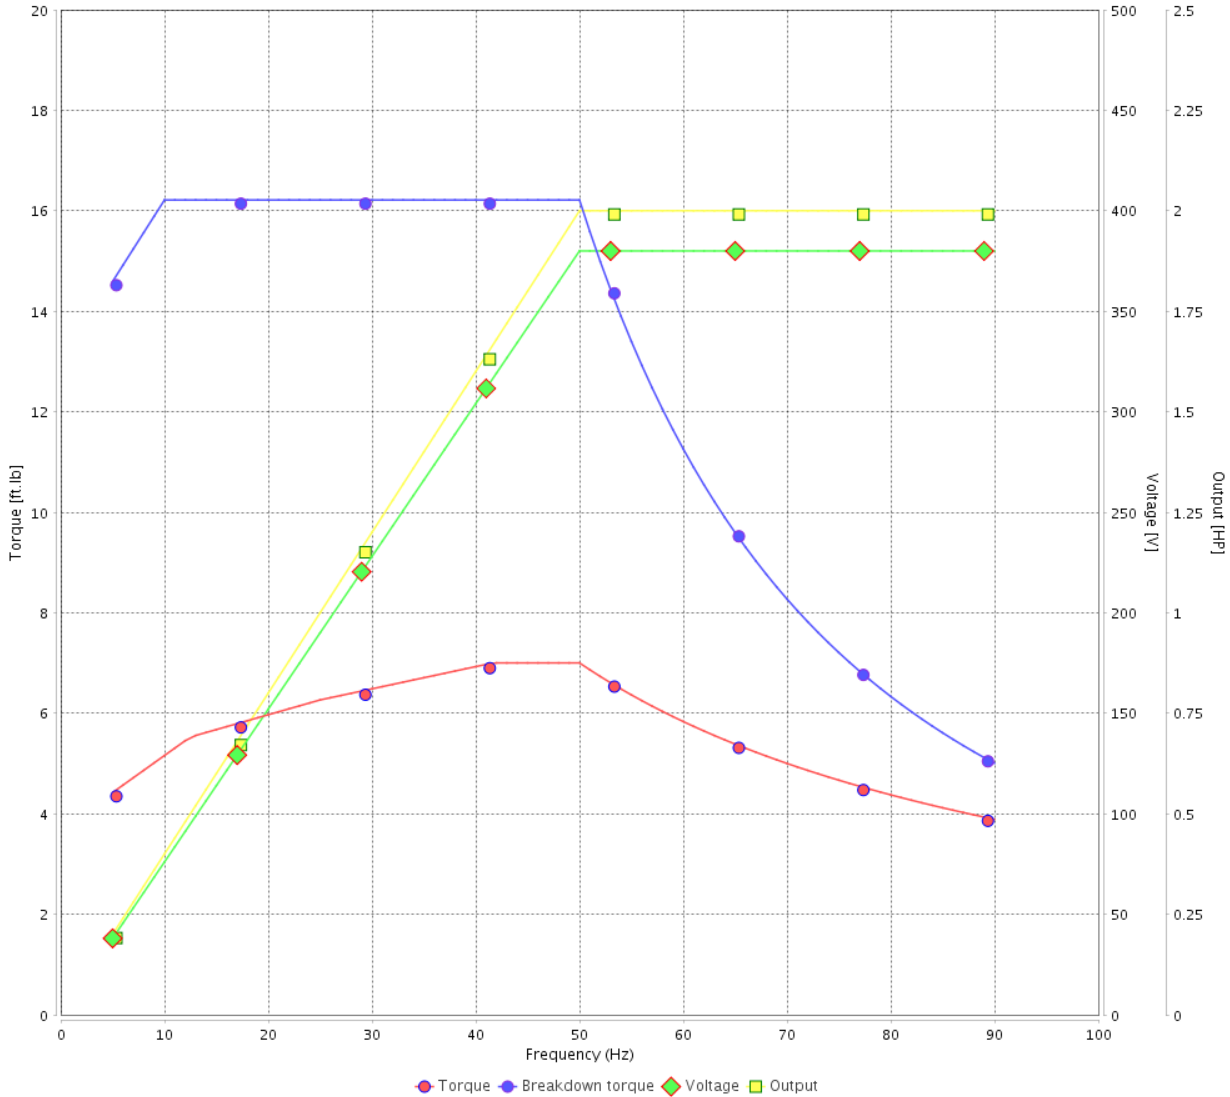

Performance : 380 V 50 Hz 4P IE1

Rated current : 3.29 A  
 LRC : 7.6  
 Rated torque : 7.37 ft.lb  
 Locked rotor torque : 190 %  
 Breakdown torque : 220 %  
 Rated speed : 1425 rpm

Moment of inertia (J) : 0.1595 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# VFD OPERATION CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T

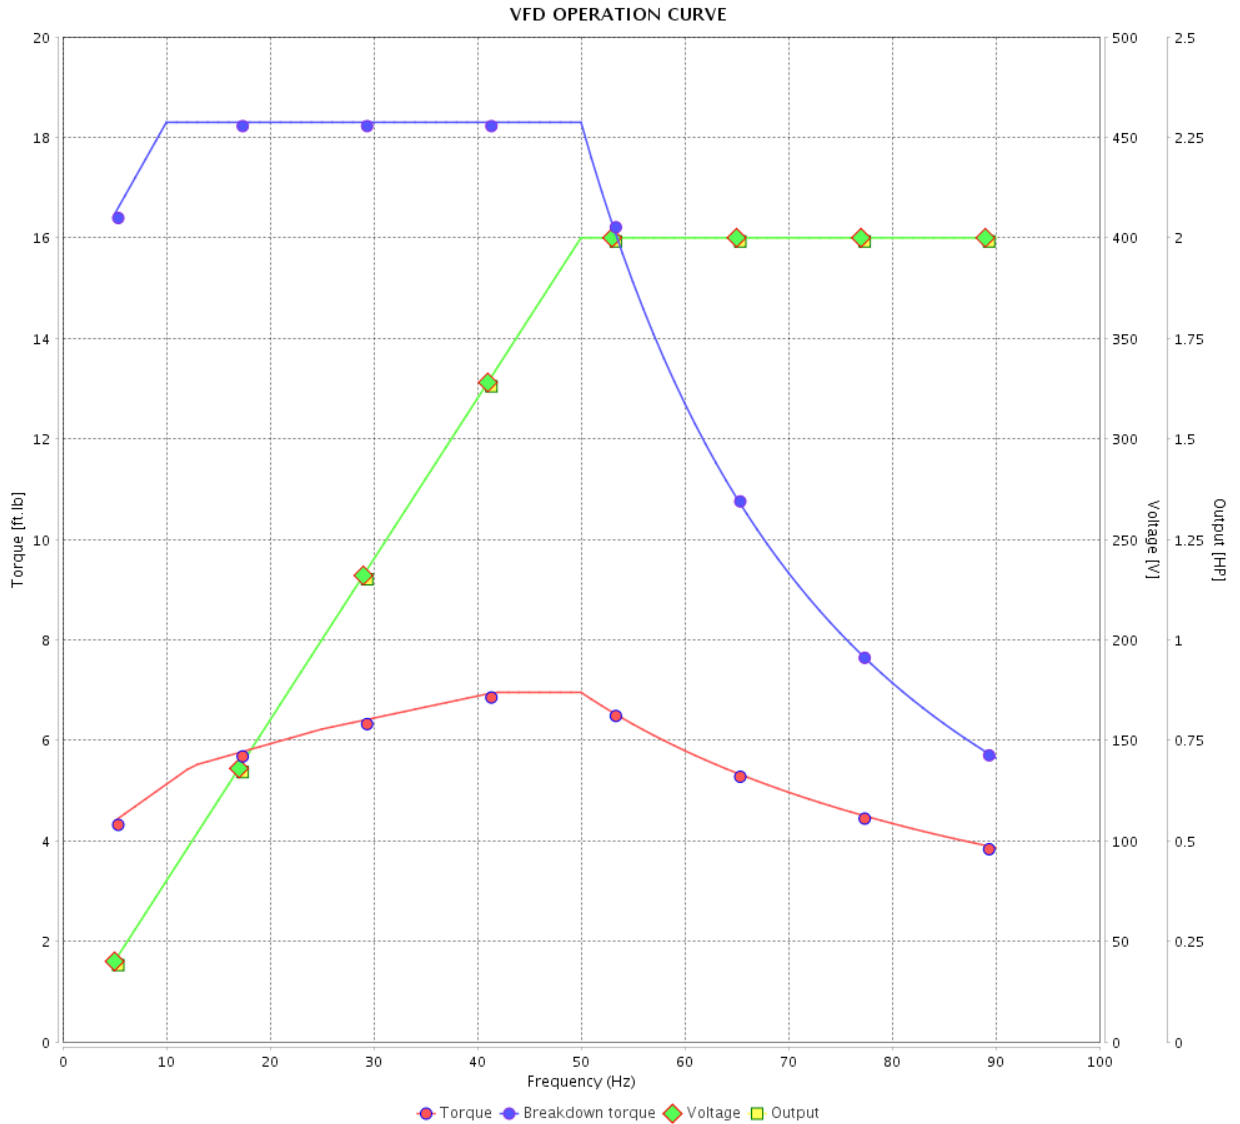

Performance : 400 V 50 Hz 4P IE2

Rated current : 3.18 A  
 LRC : 7.8  
 Rated torque : 7.32 ft.lb  
 Locked rotor torque : 220 %  
 Breakdown torque : 250 %  
 Rated speed : 1435 rpm

Moment of inertia (J) : 0.1595 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		21 / 22		
Date		14/04/2022		

# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14325085

Catalog # : 00218XT3E145T



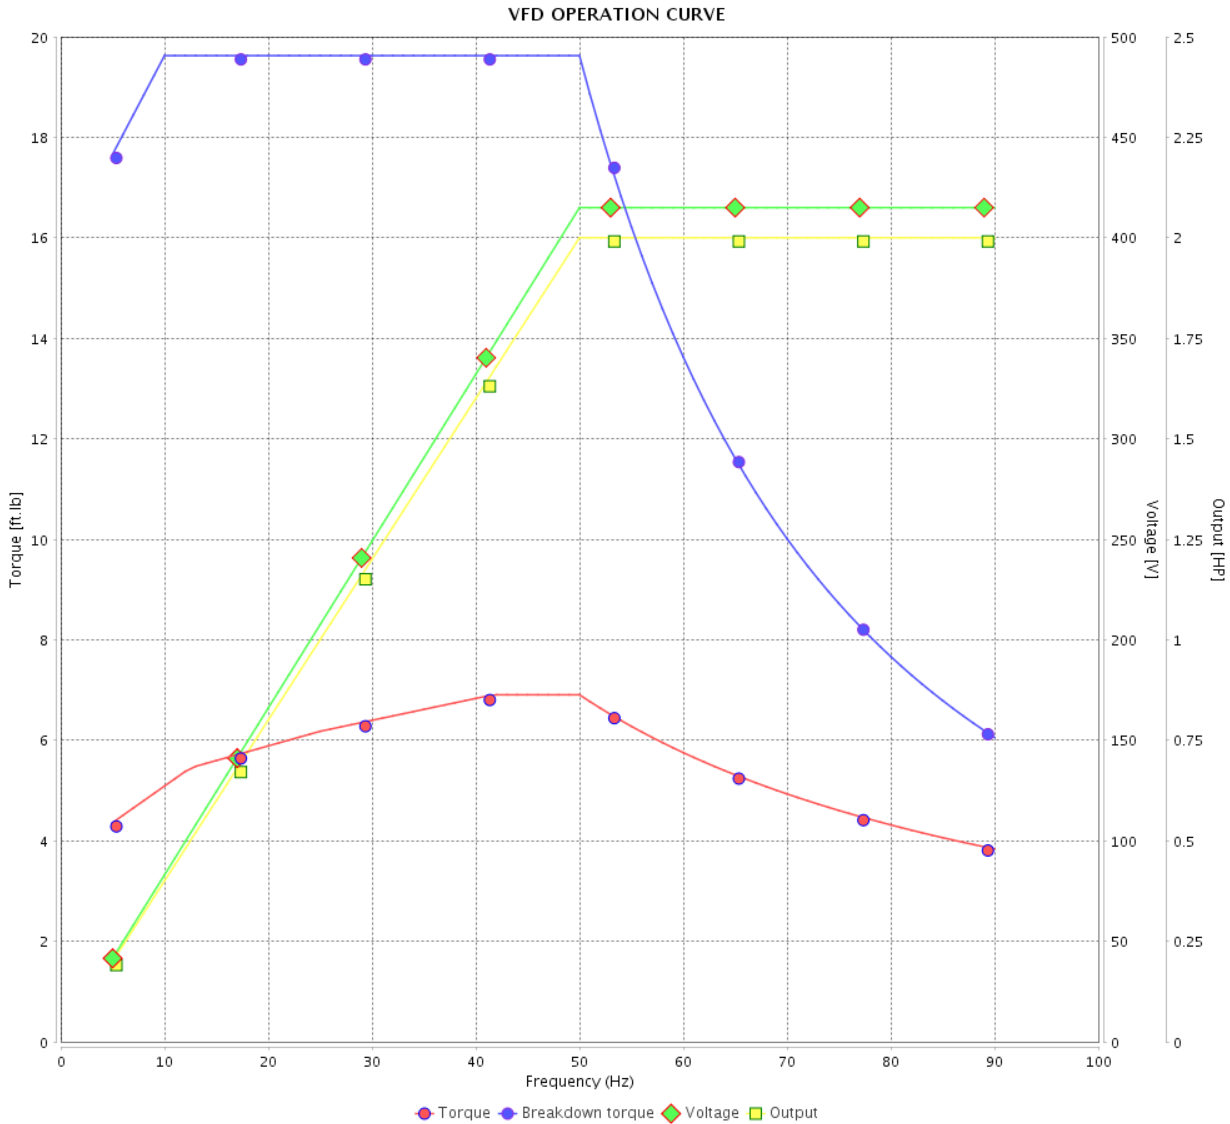


Performance : 415 V 50 Hz 4P IE2

Rated current : 3.18 A  
 LRC : 7.8  
 Rated torque : 7.27 ft.lb  
 Locked rotor torque : 240 %  
 Breakdown torque : 270 %  
 Rated speed : 1445 rpm

Moment of inertia (J) : 0.1595 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.00  
 Temperature rise : 80 K  
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 22 / 22	Revision
Checked by				
Date	14/04/2022			

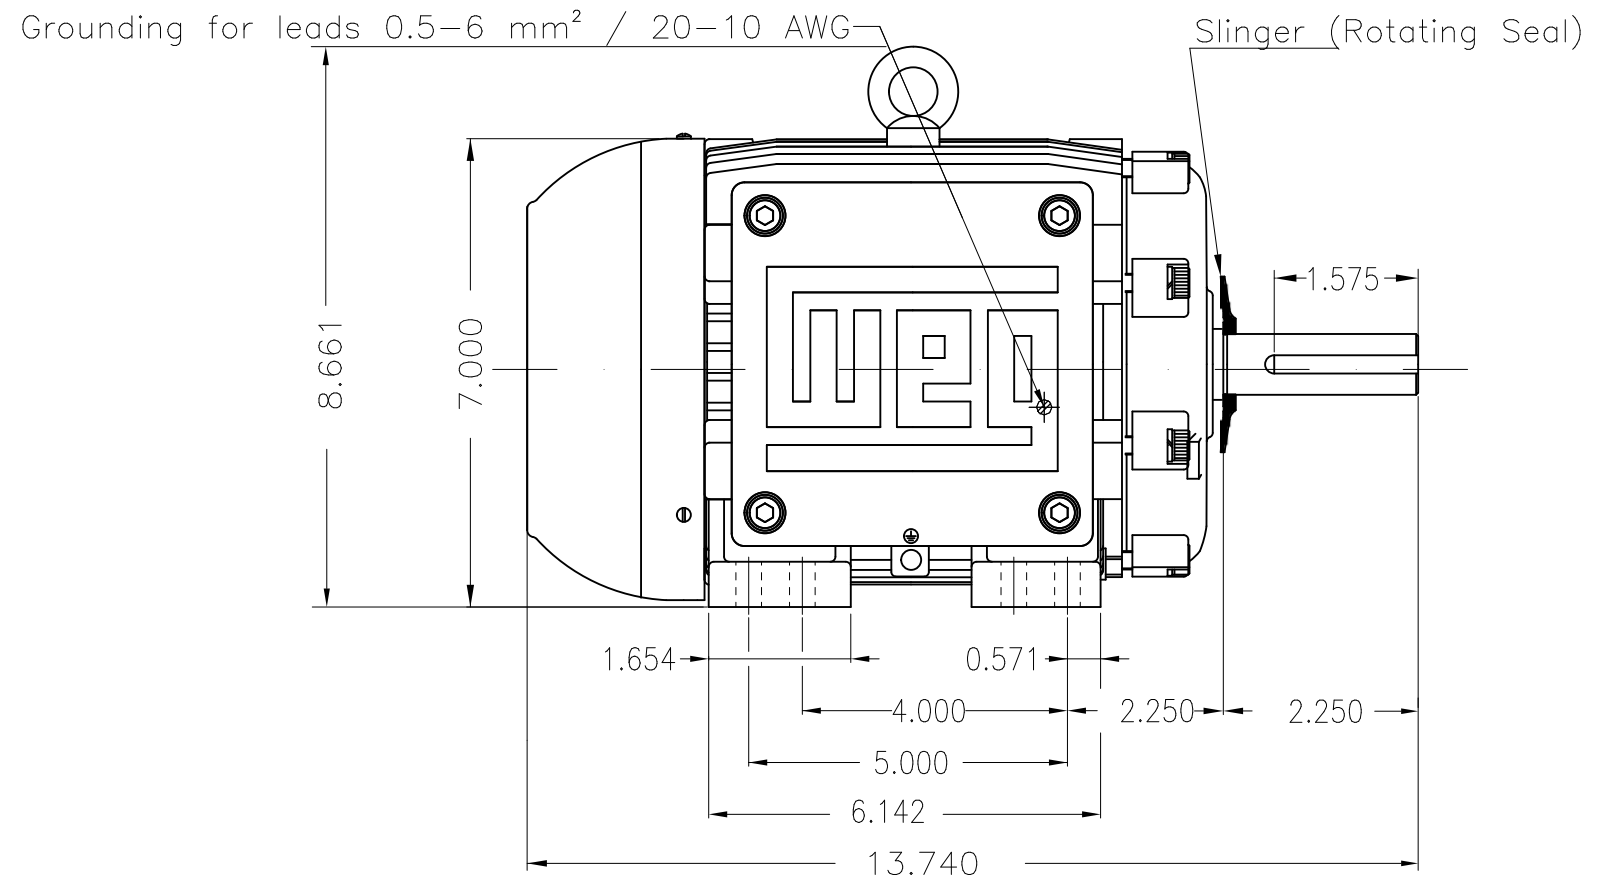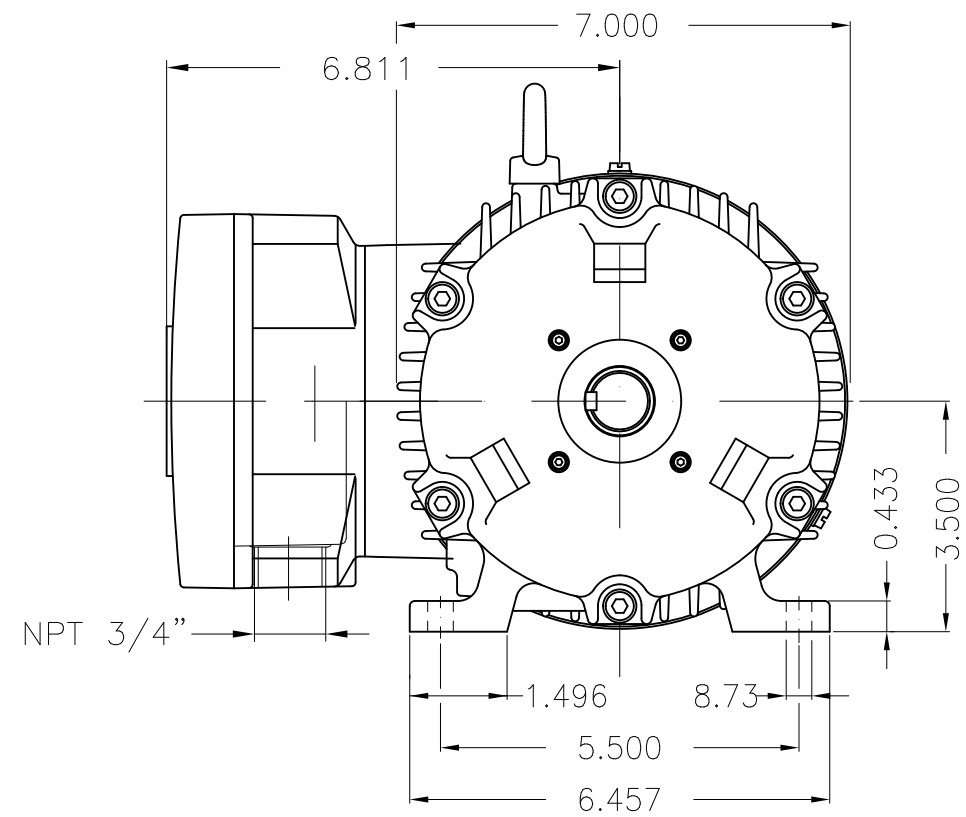

Color RAL 5009  
Painting plan 202P  
Mounting NEMA F-1  
Mounting B3R(D)

2 HP 04 Poles 60 Hz

Dimensions in inches

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PH. MOTOR EXPLOSION PROOF PREM. EFF.					
CHECKED		FRAME 143/5T IP55 TEFC					
RELEASED							
REL DT.	WMO	Jaragua do Sul	Product Engineering				

**PREVIEW**  
WDD



SHEET 1 / 1

MADE IN BRAZIL

**W21X NEMA**  
**Premium**

14325085





LISTED

CC029A

*Inverter Duty Motor*  
*Severe Duty*

MODEL 00218XT3E145T

PH 3	FR 143/5T		
HP(kW) 2.0(1.5)		HZ 60	IP55
V 230/460		A 5.58/2.79	
RPM 1750		NEMA NOM EFF 86.5%	
PF 0.78		SFA 6.42/3.21	DES B
INS CL F $\Delta$ T 80 K		SF 1.15	ENCL TEFC
DUTY CONT.		CODE L	ALT 1000 m.a.s.l.
AMB 40°C	USABLE @208V	6.02 A	SF 1.15 SFA 6.92
AMB 55°C SF1.0			
2.0HP 1.5kW 50Hz 380V 3.29A 1425RPM SF1.00 EFF 82.5% (IE1)			



→ 6205-2RS MOBIL POLYREX EM  
→ 6204-2RS

73 Lbs



TEMP CODE T3C  
CSA/UL: Class I - Div. 1 - Groups C and D  
CSA: Class II - Div. 1 - Groups F and G  
CSA: Class I - Zone 1 - IIB

EXPLOSION PROOF MOTOR

FOR USE ON VPWM VFD 1000:1VT, 20:1CT, 1.0SF, T3C, AMB 40°C.