

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : JM Pump NEMA Premium Efficiency Three-Phase		Product code : 12676979				
		Catalog # : 00518OT3H184JM-S				
Frame : 182/4JM		Locked rotor time : 21s (cold) 12s (hot)				
Output : 5 HP (3.7 kW)		Temperature rise : 80 K				
Poles : 4		Duty cycle : Cont.(S1)				
Frequency : 60 Hz		Ambient temperature : -20°C to +40°C				
Rated voltage : 575 V		Altitude : 1000 m.a.s.l.				
Rated current : 5.06 A		Cooling method : IC01 - ODP				
L. R. Amperes : 36.5 A		Mounting : F-1				
LRC : 7.2x(Code J)		Rotation ¹ : Both (CW and CCW)				
No load current : 2.52 A		Noise level ² : 55.0 dB(A)				
Rated speed : 1760 rpm		Starting method : Direct On Line				
Slip : 2.22 %		Approx. weight ³ : 88.7 lb				
Rated torque : 14.9 ft.lb						
Locked rotor torque : 200 %						
Breakdown torque : 310 %						
Insulation class : F						
Service factor : 1.15						
Moment of inertia (J) : 0.4003 sq.ft.lb						
Design : B						
Output	50%	75%	100%	Foundation loads		
Efficiency (%)	88.5	88.5	89.5	Max. traction : 251 lb		
Power Factor	0.63	0.76	0.82	Max. compression : 340 lb		
Bearing type :		<u>Drive end</u> 6207 ZZ	<u>Non drive end</u> 6205 ZZ			
Sealing :		Without Bearing Seal	Without Bearing Seal			
Lubrication interval :		-	-			
Lubricant amount :		-	-			
Lubricant type :		Mobil Polyrex EM				
Notes						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	12/04/2022				1 / 6	

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 12676979

Catalog # : 00518OT3H184JM-S

TORQUE AND CURRENT VS SPEED CURVE

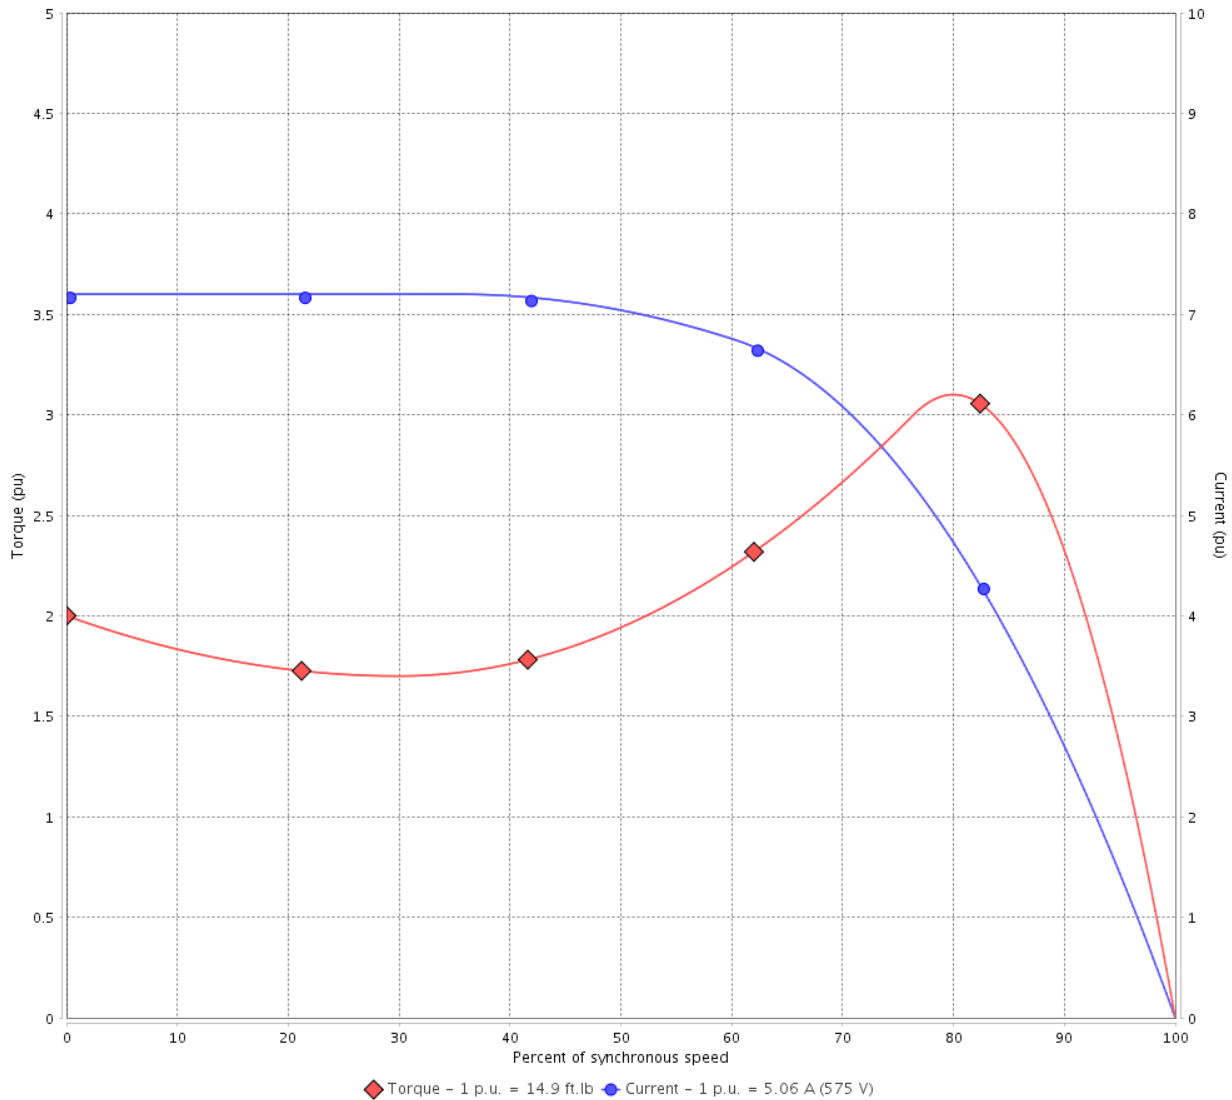

Performance : 575 V 60 Hz 4P

Rated current	: 5.06 A	Moment of inertia (J)	: 0.4003 sq.ft.lb
LRC	: 7.2	Duty cycle	: Cont.(S1)
Rated torque	: 14.9 ft.lb	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.15
Breakdown torque	: 310 %	Temperature rise	: 80 K
Rated speed	: 1760 rpm	Design	: B

Locked rotor time : 21s (cold) 12s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 6	Revision
Checked by				
Date	12/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 12676979

Catalog # : 00518OT3H184JM-S

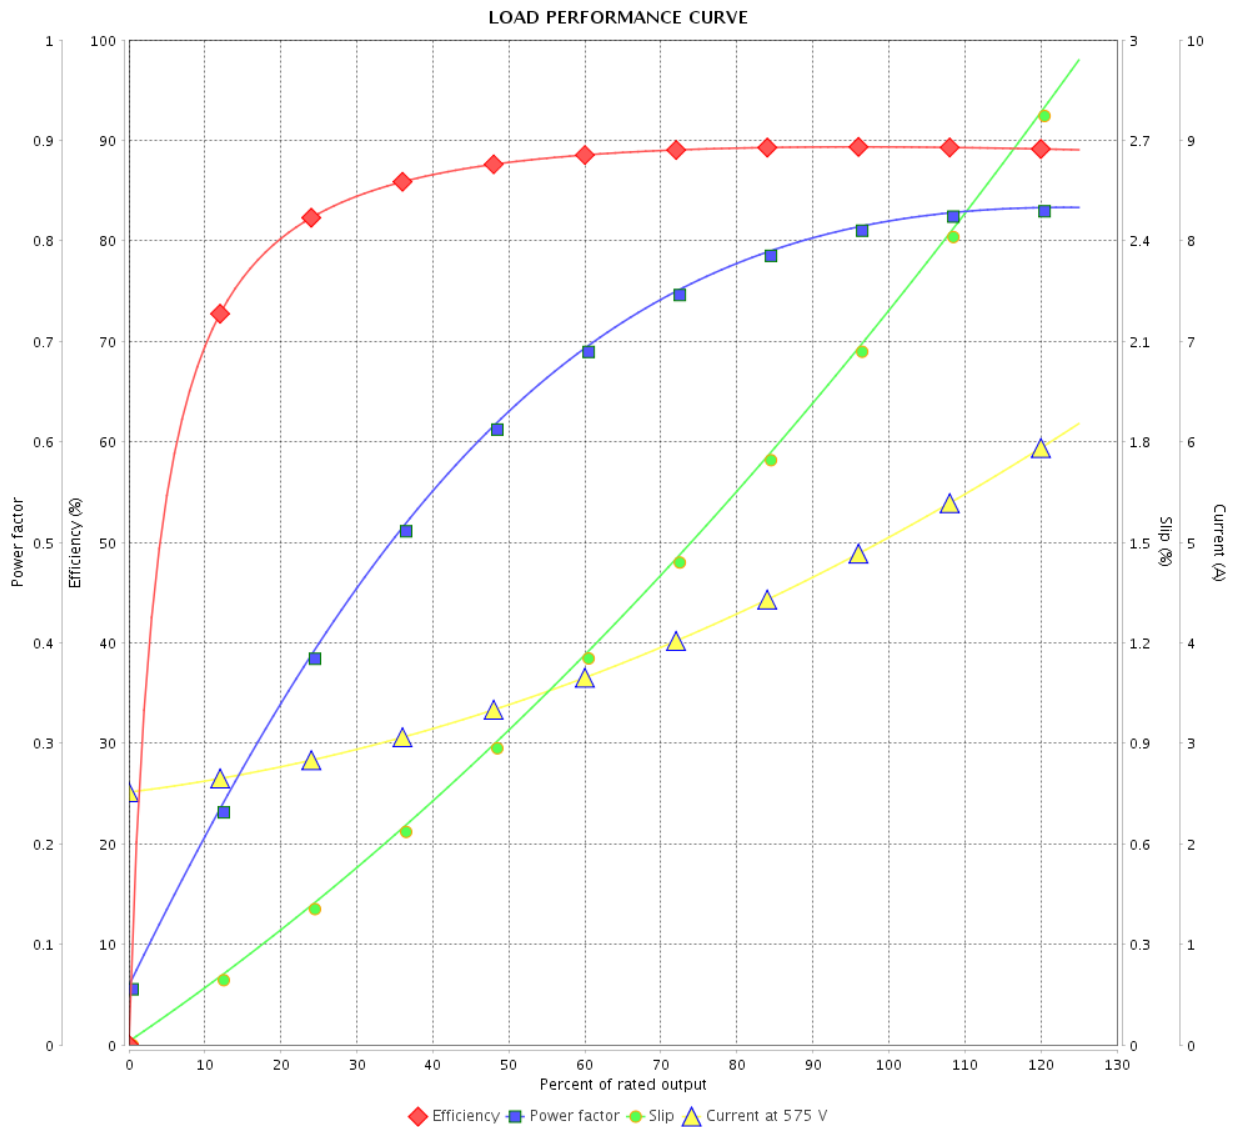

Performance : 575 V 60 Hz 4P

Rated current : 5.06 A
 LRC : 7.2
 Rated torque : 14.9 ft.lb
 Locked rotor torque : 200 %
 Breakdown torque : 310 %
 Rated speed : 1760 rpm

Moment of inertia (J) : 0.4003 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			3 / 6	
Date	12/04/2022			

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 12676979

Catalog # : 00518OT3H184JM-S

Performance : 575 V 60 Hz 4P

Rated current : 5.06 A
LRC : 7.2
Rated torque : 14.9 ft.lb
Locked rotor torque : 200 %
Breakdown torque : 310 %
Rated speed : 1760 rpm

Moment of inertia (J) : 0.4003 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		4 / 6	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

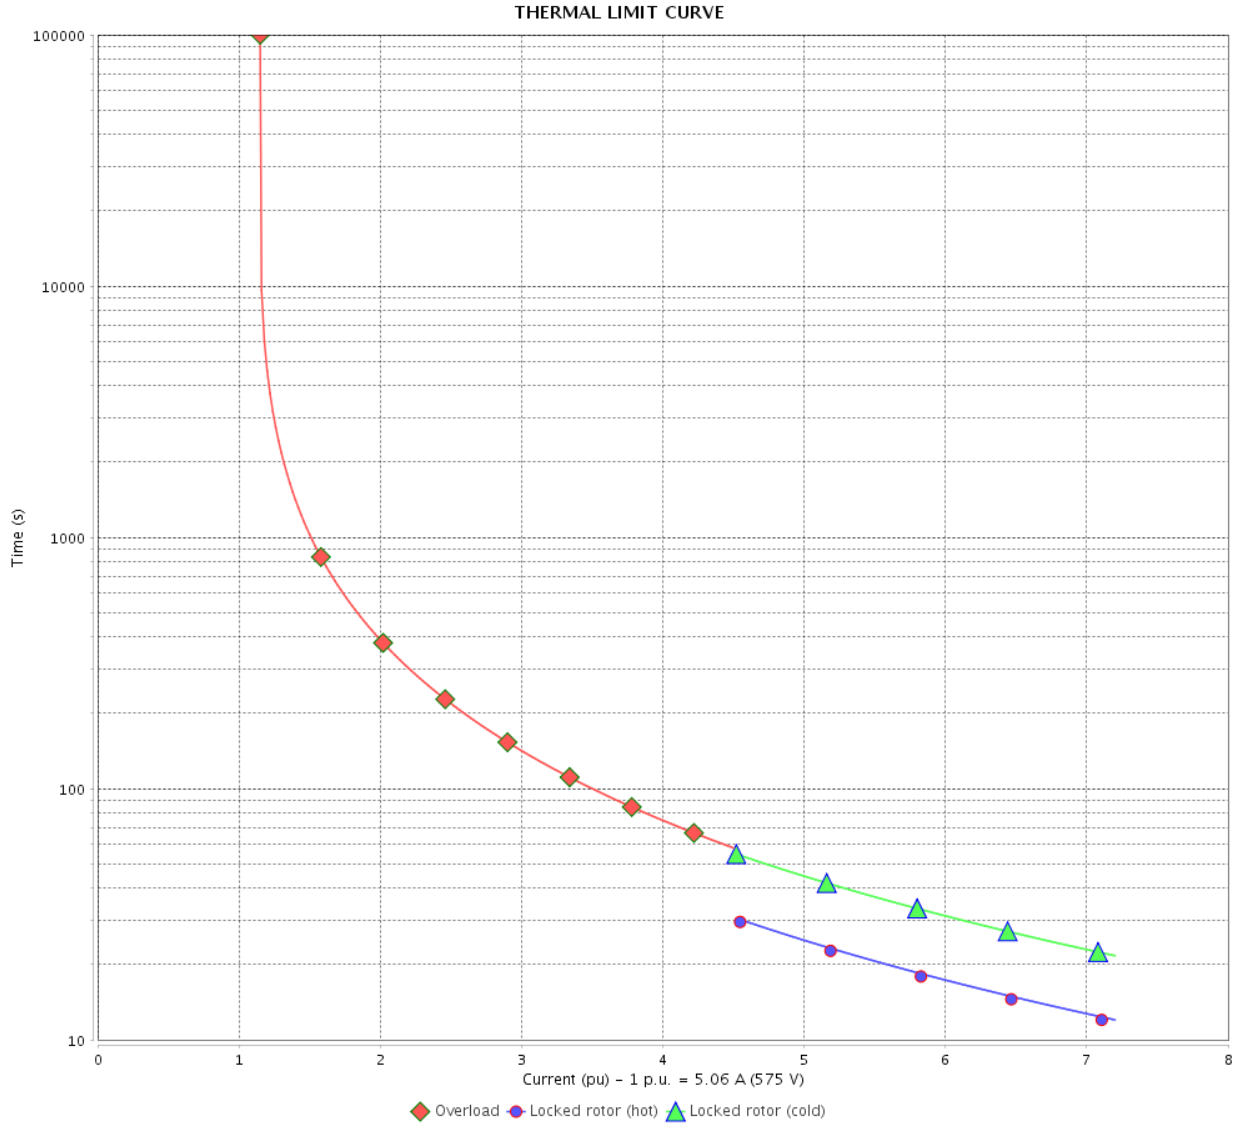

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 6		
Date		12/04/2022		

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : JM Pump NEMA Premium
Efficiency Three-Phase

Product code : 12676979

Catalog # : 00518OT3H184JM-S

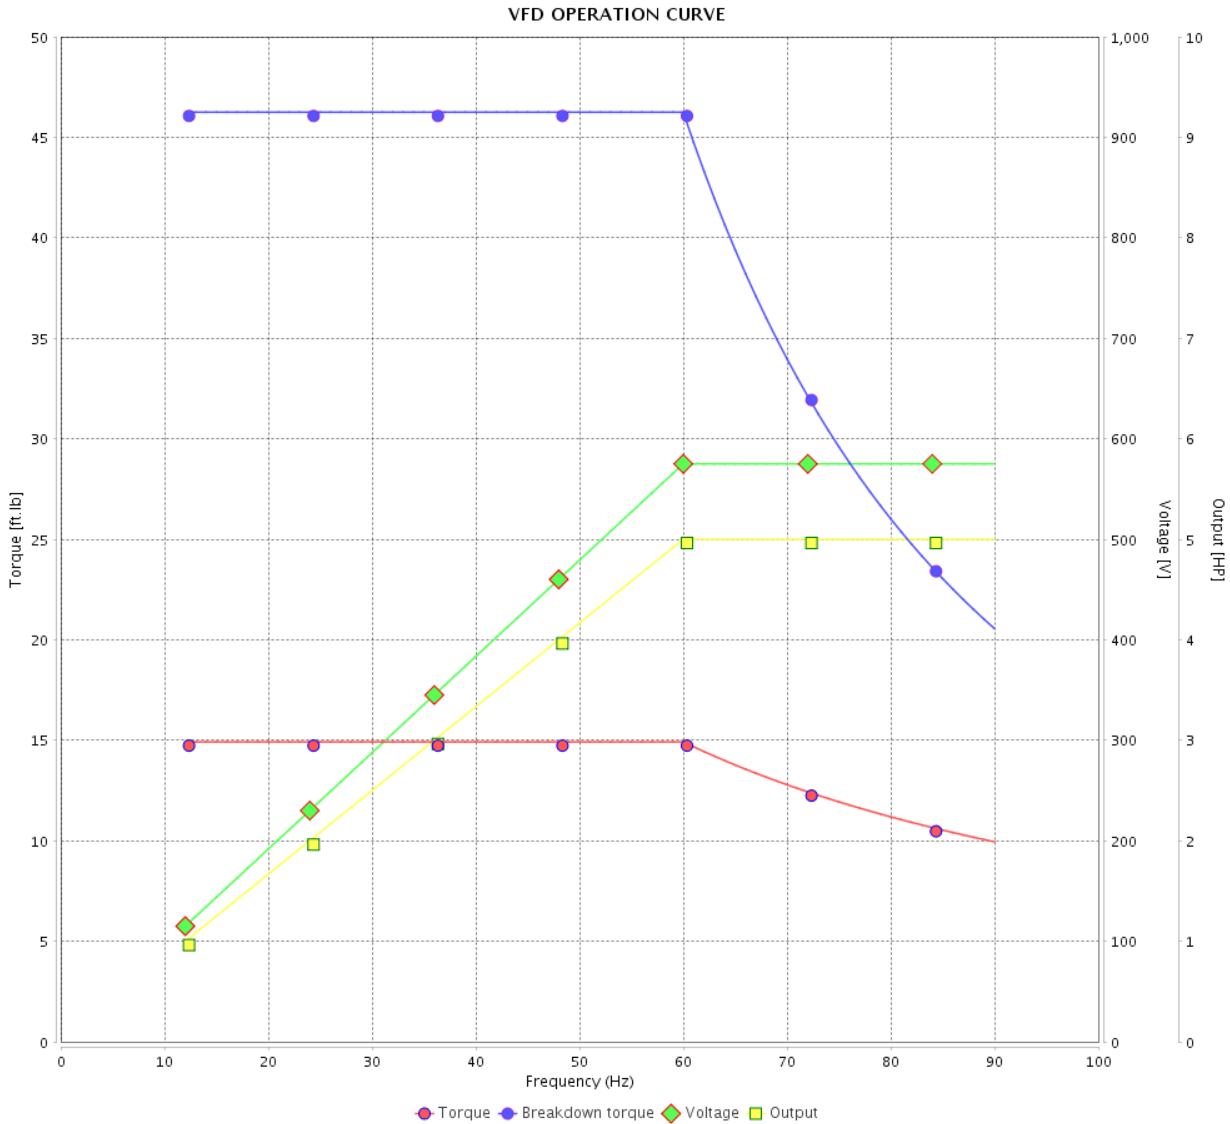

Performance : 575 V 60 Hz 4P

Rated current : 5.06 A
LRC : 7.2
Rated torque : 14.9 ft.lb
Locked rotor torque : 200 %
Breakdown torque : 310 %
Rated speed : 1760 rpm

Moment of inertia (J) : 0.4003 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

1 2 3 4 5 6





A

B

C

D

E

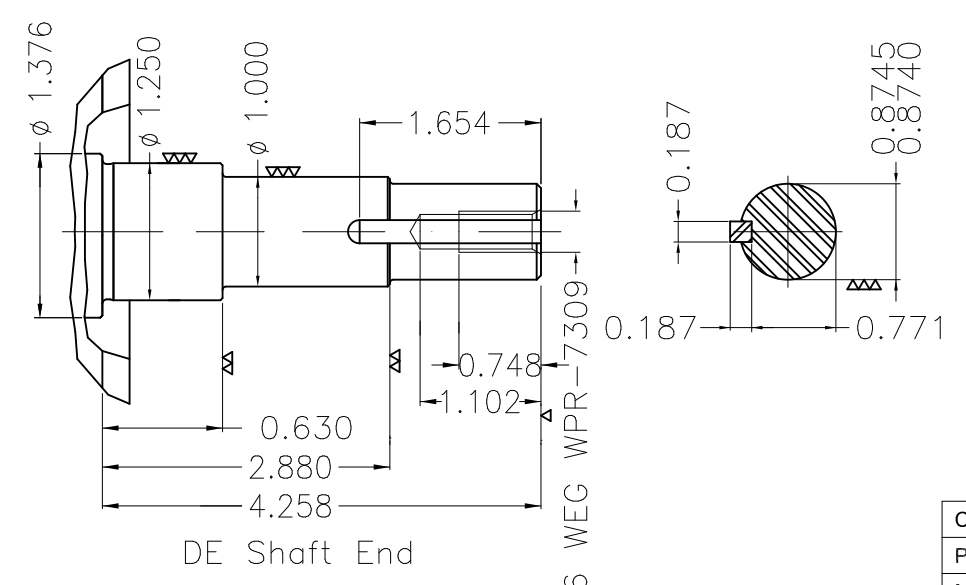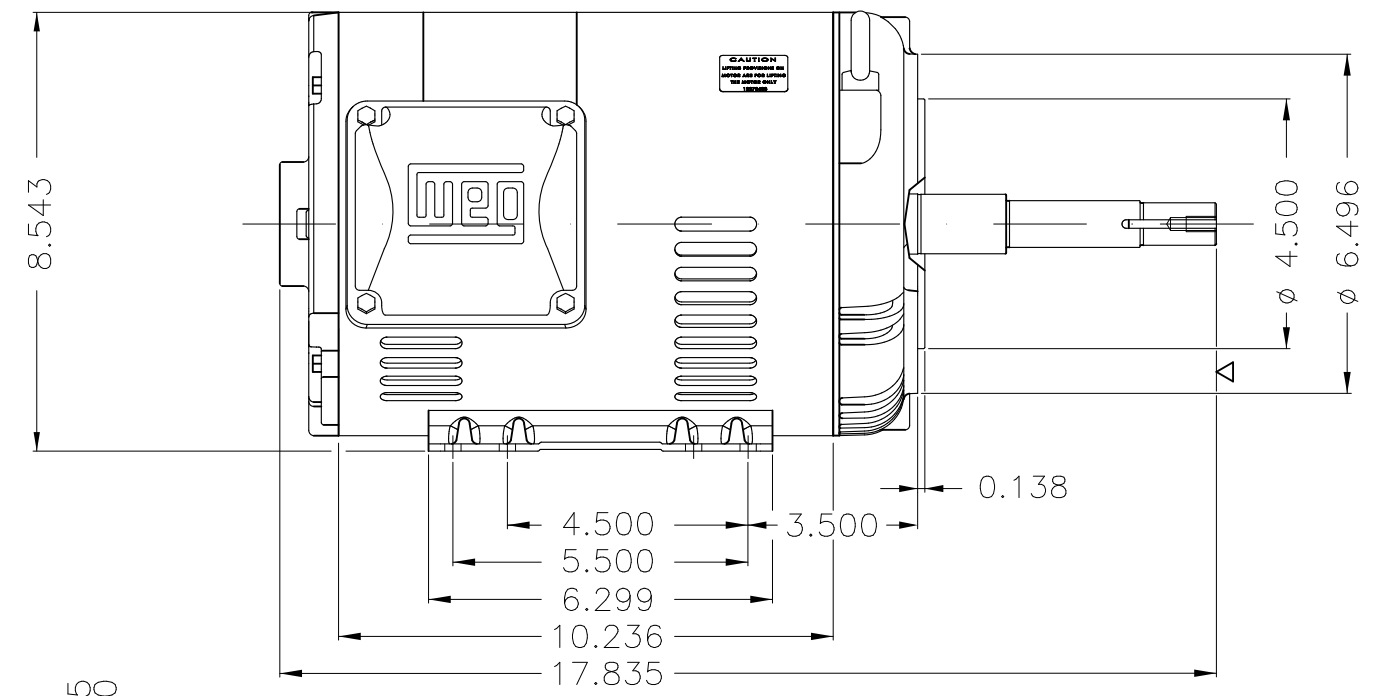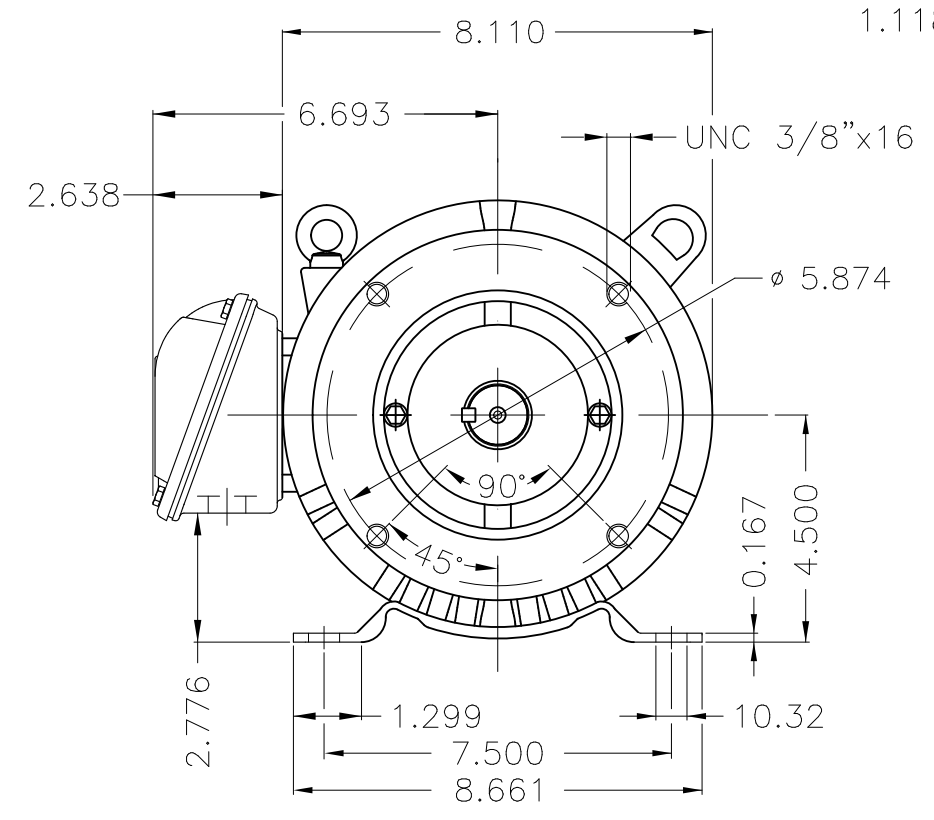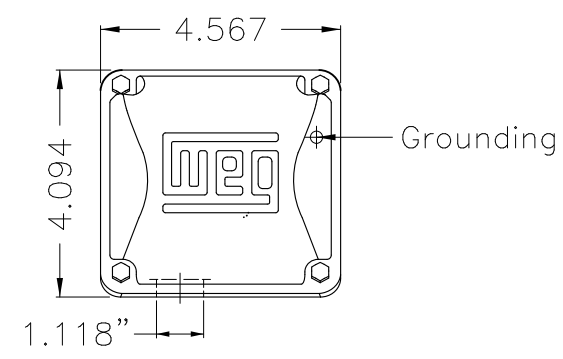

EUNC 3/8"-16 WEG WPR-7309

DE Shaft End

Color Munsell N 1 matte black
 Painting plan 207N
 Mounting F-1/B34R(D)

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PH. MOTOR ROLLED STEEL CLOSE COUPLED PUMP JN TYPE PSEF 107					
CHECKED		FRAME 182/4JM IP21 ODP					
RELEASED							
REL DT.	WMO	Jaragua do Sul	Product Engineering	WDD	SHEET	1 / 1	

5 HP 04 Poles 60 Hz





NEMA
Premium



MADE IN MEXICO

MAT: 12676979 CC029A

W01.T00IC0X0N

MODEL 005180T3H184JM-S

01APR2022 S/N:

PH 3	Hz 60	HP 5.0
FR 182/4JM		KW 3.7
DUTY CONT.		V 575
ALT 1000 m.a.s.l.		A 5.06
INS CL F AT 80K		SFA 5.82
AMB 40°C	DES B	SF 1.15
ENCL ODP	CODE J	PF 0.82
		RPM 1760
		NEMA
		NOM. EFF 89.5%

Inverter duty motor For use on VPWM 1000:1 VT, 5:1 CT

DE 6207-ZZ ODE 6205-ZZ MOBIL POLYREX EM



T1-BLU
T2-WHT
T3-ORG
T4-YEL
T5-BLK
T6-GRY



INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION

WARNING: Motor must be grounded in accordance with local and national electrical codes to prevent serious electrical shocks. Disconnect power source before servicing unit.



AVERTISSEMENT: Le moteur doit être mis à la terre

conformément aux codes électriques locaux et nationaux afin d'éviter tout choc électrique grave. Déconnectez l'alimentation avant l'entretien de la machine.

