

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	11431955		
		Catalog # :	01012ST3QIE256T-W22		
Frame	: 254/6T	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 308 lb		
Protection degree	: IP55	Moment of inertia (J)	: 4.43 sq.ft.lb		
Design	: B				
Output [HP]	10	10	10	10	
Poles	6	6	6	6	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	460	380	400	415	
Rated current [A]	12.9	15.4	14.8	14.4	
L. R. Amperes [A]	80.0	73.9	79.9	83.5	
LRC [A]	6.2x(Code H)	4.8x(Code E)	5.4x(Code F)	5.8x(Code G)	
No load current [A]	6.00	4.90	6.30	6.60	
Rated speed [RPM]	1175	965	970	975	
Slip [%]	2.08	3.50	3.00	2.50	
Rated torque [ft.lb]	44.7	54.4	54.1	53.9	
Locked rotor torque [%]	220	160	190	210	
Breakdown torque [%]	270	210	229	250	
Service factor	1.25	1.00	1.15	1.15	
Temperature rise	80 K	105 K	105 K	80 K	
Locked rotor time	46s (cold) 26s (hot)	39s (cold) 22s (hot)	39s (cold) 22s (hot)	39s (cold) 22s (hot)	
Noise level ²	59.0 dB(A)	57.0 dB(A)	57.0 dB(A)	57.0 dB(A)	
Efficiency (%)	25%				
	50%	90.2	90.2	90.2	89.5
	75%	91.0	89.5	90.2	90.2
	100%	91.0	89.1	89.5	89.5
Power Factor	25%				
	50%	0.63	0.70	0.66	0.64
	75%	0.74	0.79	0.77	0.75
	100%	0.80	0.83	0.82	0.81
Bearing type	: <u>Drive end</u> 6309 C3 <u>Non drive end</u> 6209 C3	Foundation loads			
Sealing	: Inpro/Seal Inpro/Seal	Max. traction	: 492 lb		
Lubrication interval	: 20000 h 20000 h	Max. compression	: 800 lb		
Lubricant amount	: 13 g 9 g				
Lubricant type	: Mobil Polyrex EM				
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by			Page	Revision	
Date	12/04/2022		1 / 21		

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

TORQUE AND CURRENT VS SPEED CURVE

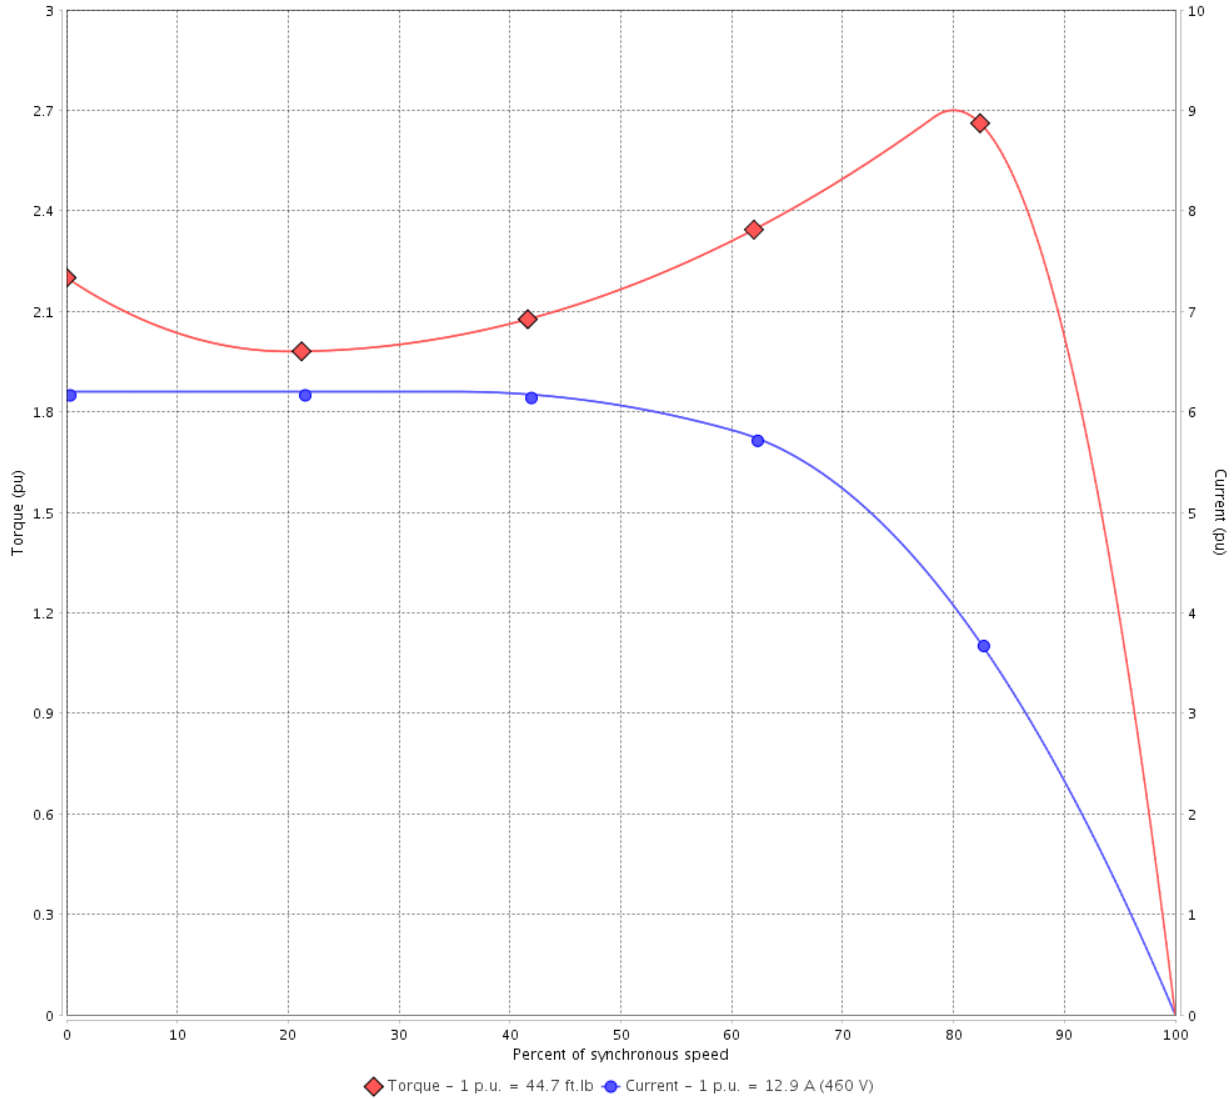

Performance : 460 V 60 Hz 6P

Rated current	: 12.9 A	Moment of inertia (J)	: 4.43 sq.ft.lb
LRC	: 6.2	Duty cycle	: Cont.(S1)
Rated torque	: 44.7 ft.lb	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1175 rpm	Design	: B

Locked rotor time : 46s (cold) 26s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 21	Revision
Checked by				
Date	12/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

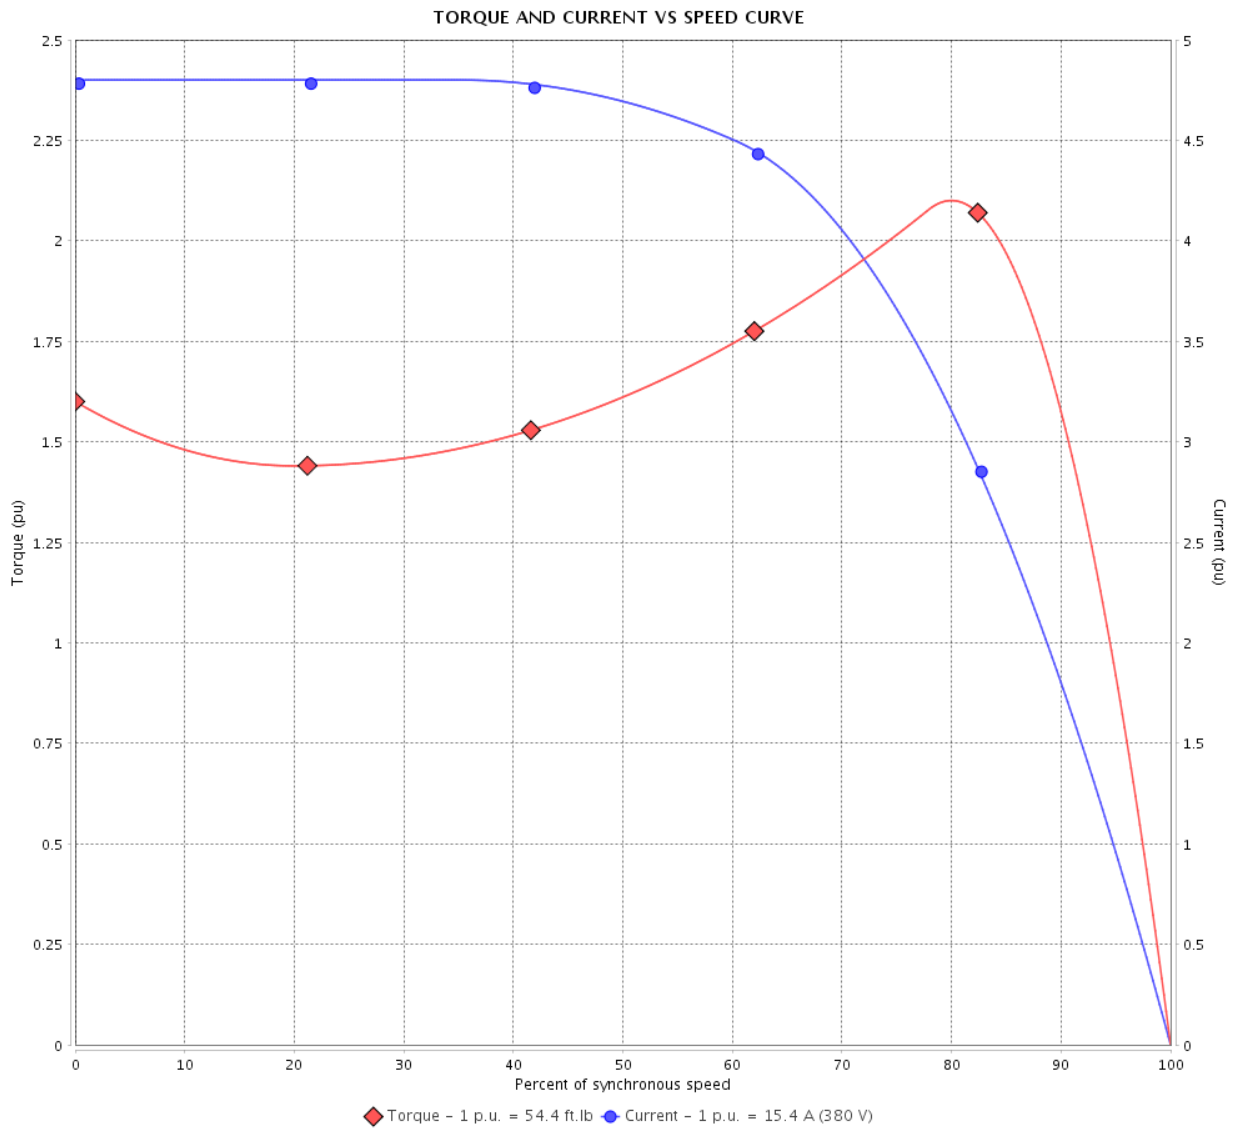

Performance : 380 V 50 Hz 6P IE3

Rated current	: 15.4 A	Moment of inertia (J)	: 4.43 sq.ft.lb
LRC	: 4.8	Duty cycle	: Cont.(S1)
Rated torque	: 54.4 ft.lb	Insulation class	: F
Locked rotor torque	: 160 %	Service factor	: 1.00
Breakdown torque	: 210 %	Temperature rise	: 105 K
Rated speed	: 965 rpm	Design	: B

Locked rotor time : 39s (cold) 22s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		3 / 21		
Date	12/04/2022			

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

TORQUE AND CURRENT VS SPEED CURVE

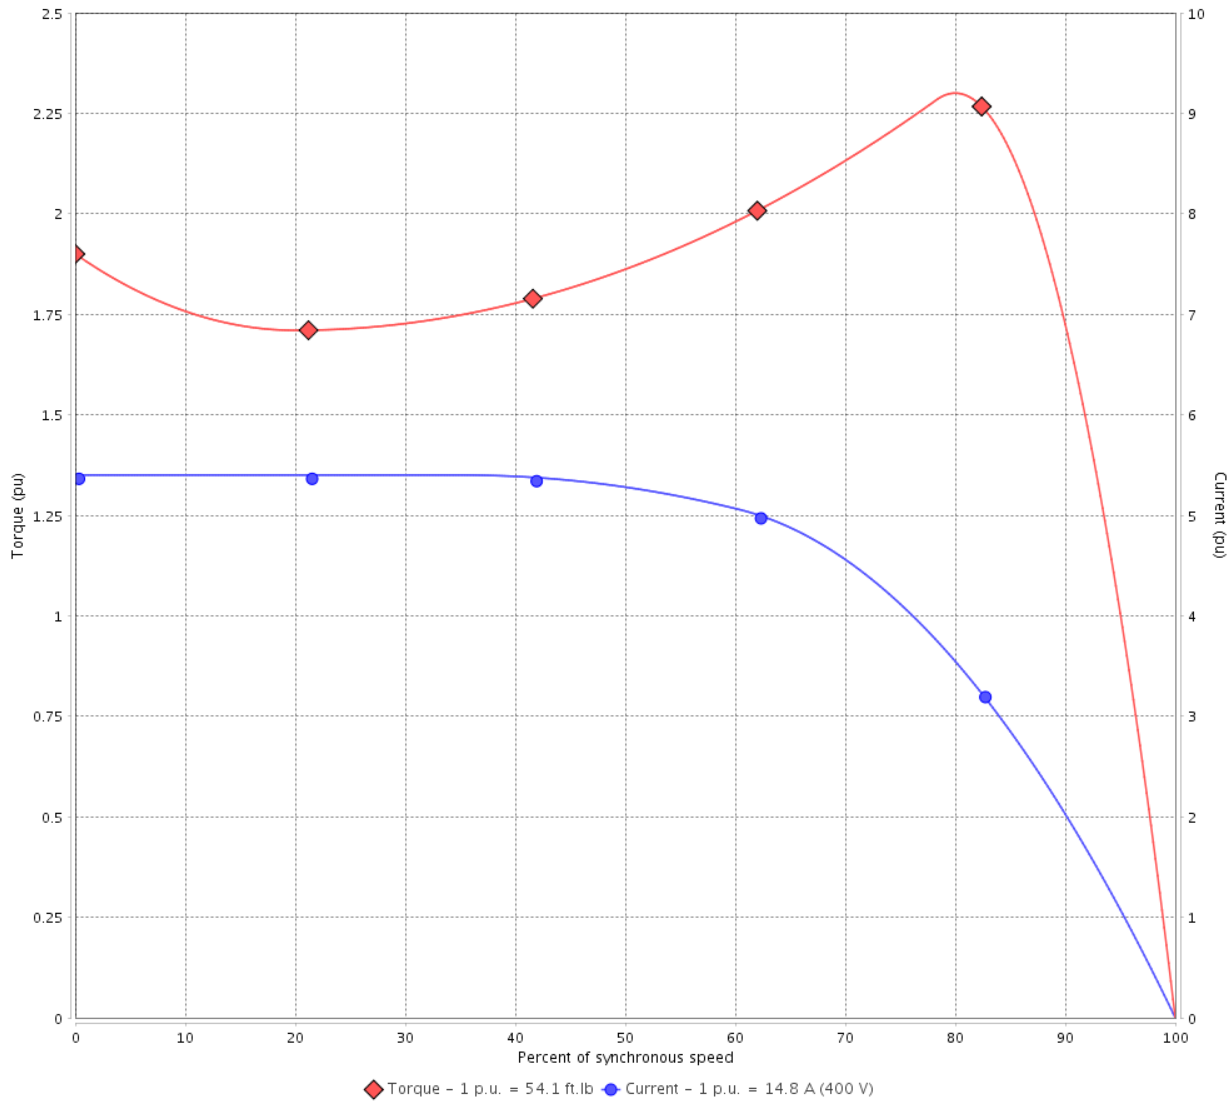

Performance : 400 V 50 Hz 6P IE3

Rated current	: 14.8 A	Moment of inertia (J)	: 4.43 sq.ft.lb
LRC	: 5.4	Duty cycle	: Cont.(S1)
Rated torque	: 54.1 ft.lb	Insulation class	: F
Locked rotor torque	: 190 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 105 K
Rated speed	: 970 rpm	Design	: B

Locked rotor time : 39s (cold) 22s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 21	Revision
Checked by				
Date	12/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

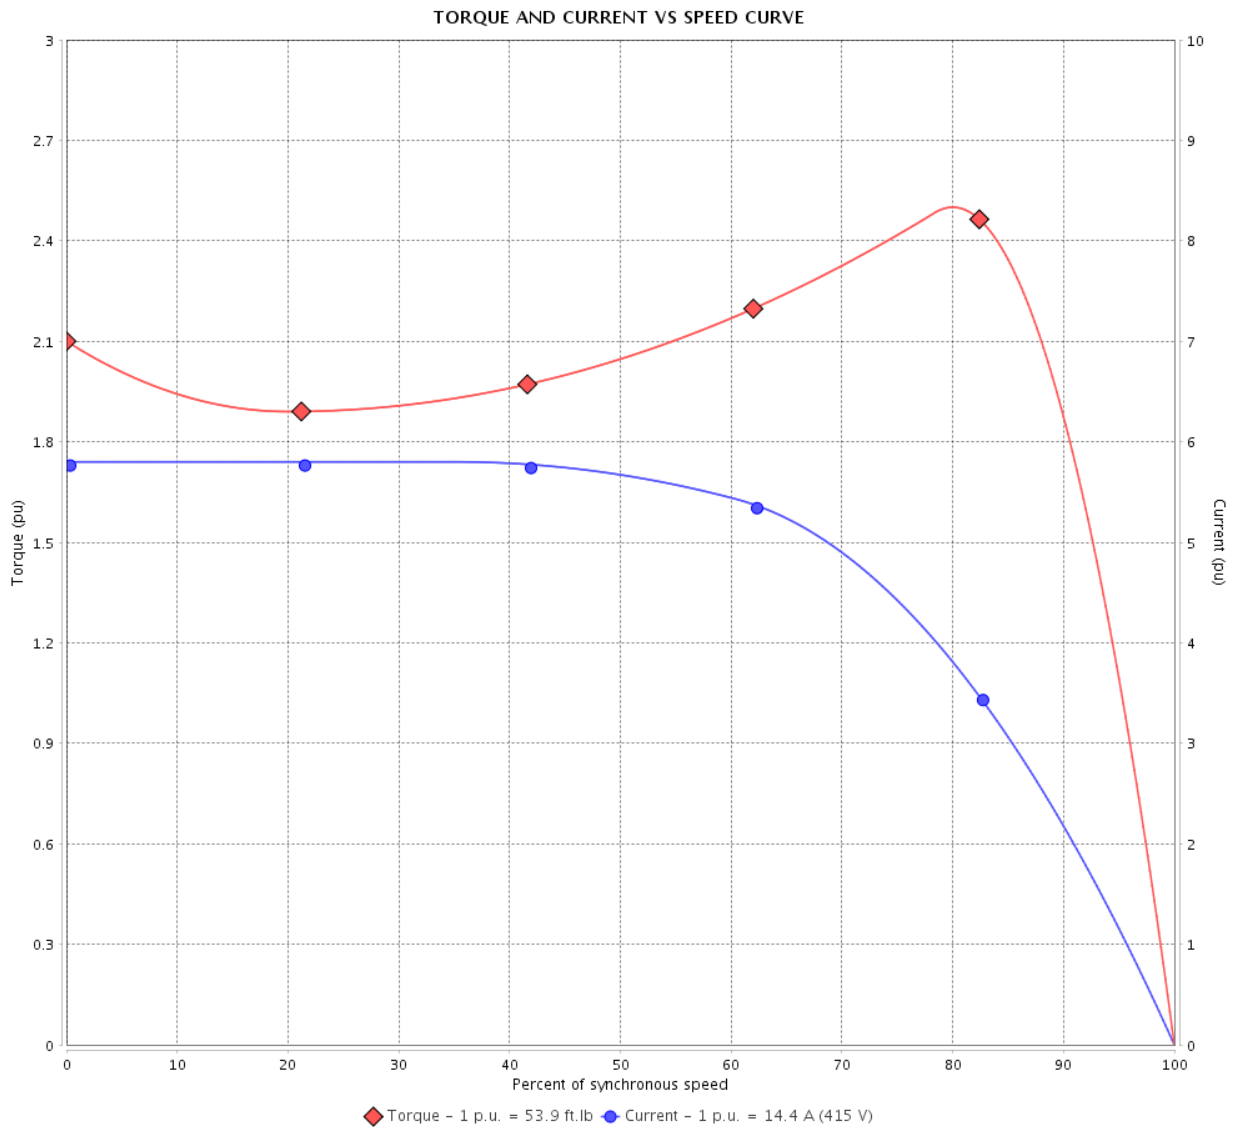

Performance : 415 V 50 Hz 6P IE3

Rated current	: 14.4 A	Moment of inertia (J)	: 4.43 sq.ft.lb
LRC	: 5.8	Duty cycle	: Cont.(S1)
Rated torque	: 53.9 ft.lb	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 975 rpm	Design	: B

Locked rotor time : 39s (cold) 22s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 21	Revision
Checked by				
Date	12/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

LOAD PERFORMANCE CURVE

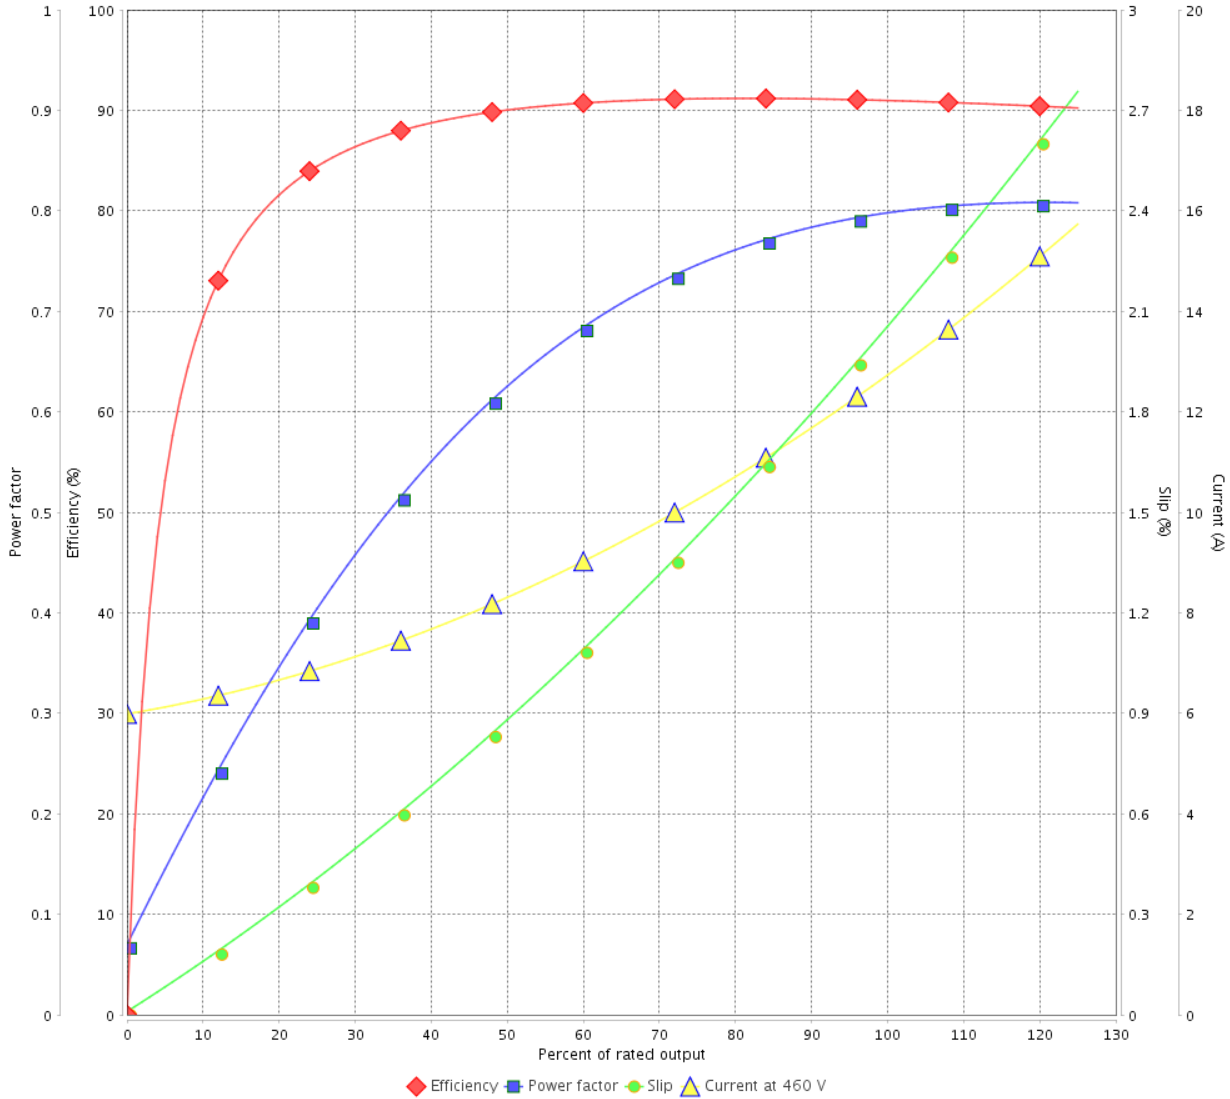

Performance : 460 V 60 Hz 6P

Rated current : 12.9 A
 LRC : 6.2
 Rated torque : 44.7 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 270 %
 Rated speed : 1175 rpm

Moment of inertia (J) : 4.43 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 21	Revision
Checked by				
Date	12/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

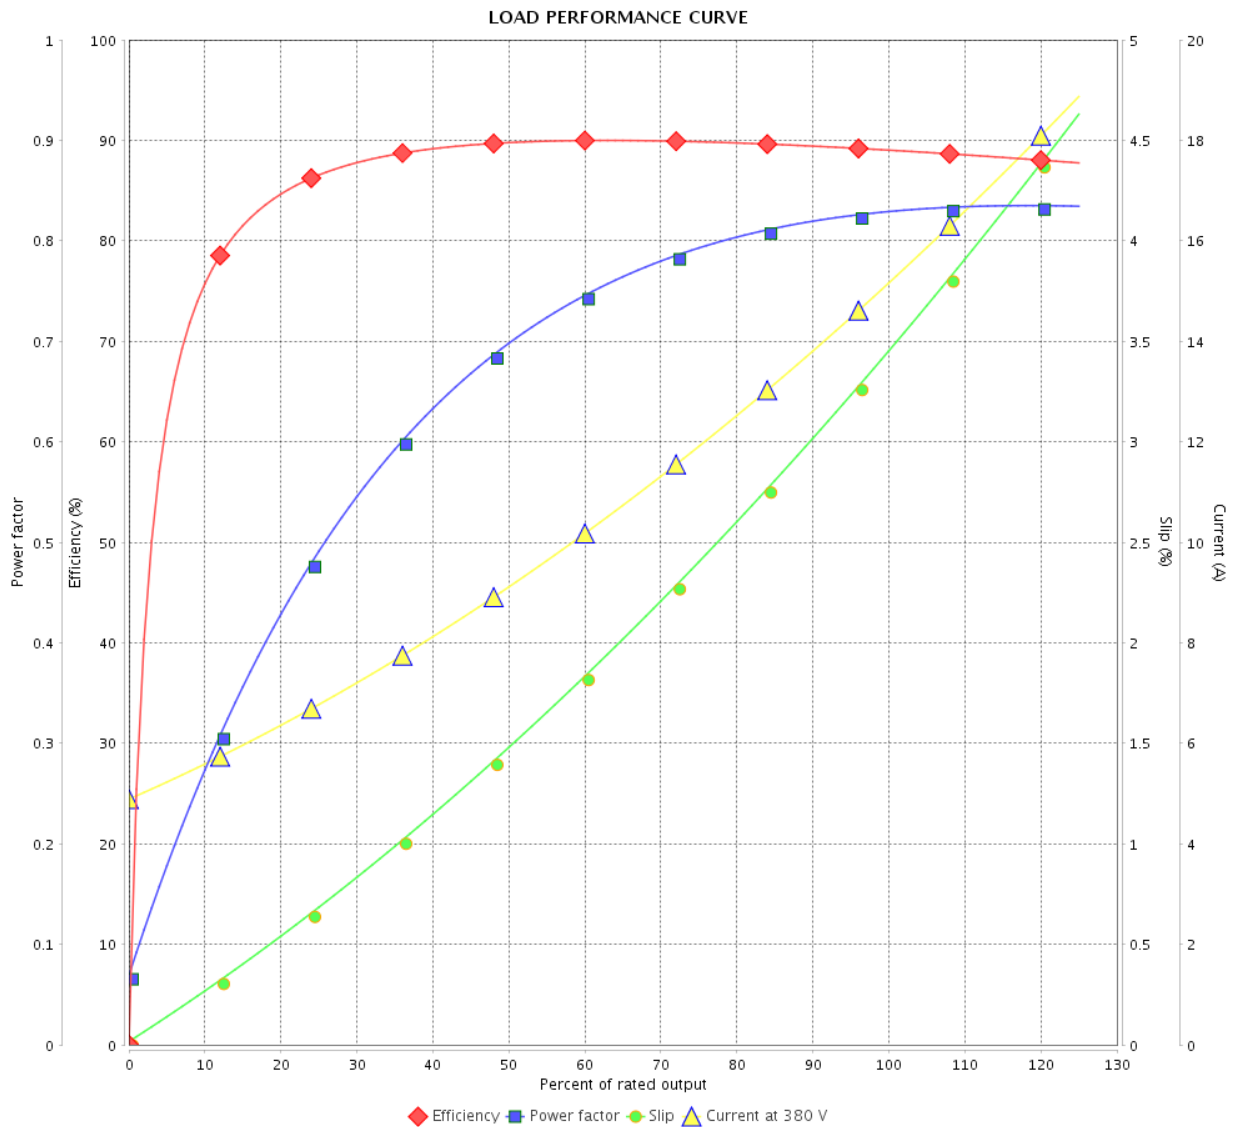

Performance : 380 V 50 Hz 6P IE3

Rated current : 15.4 A
 LRC : 4.8
 Rated torque : 54.4 ft.lb
 Locked rotor torque : 160 %
 Breakdown torque : 210 %
 Rated speed : 965 rpm

Moment of inertia (J) : 4.43 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by					
Date					12/04/2022
		Page	Revision		
		7 / 21			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

LOAD PERFORMANCE CURVE

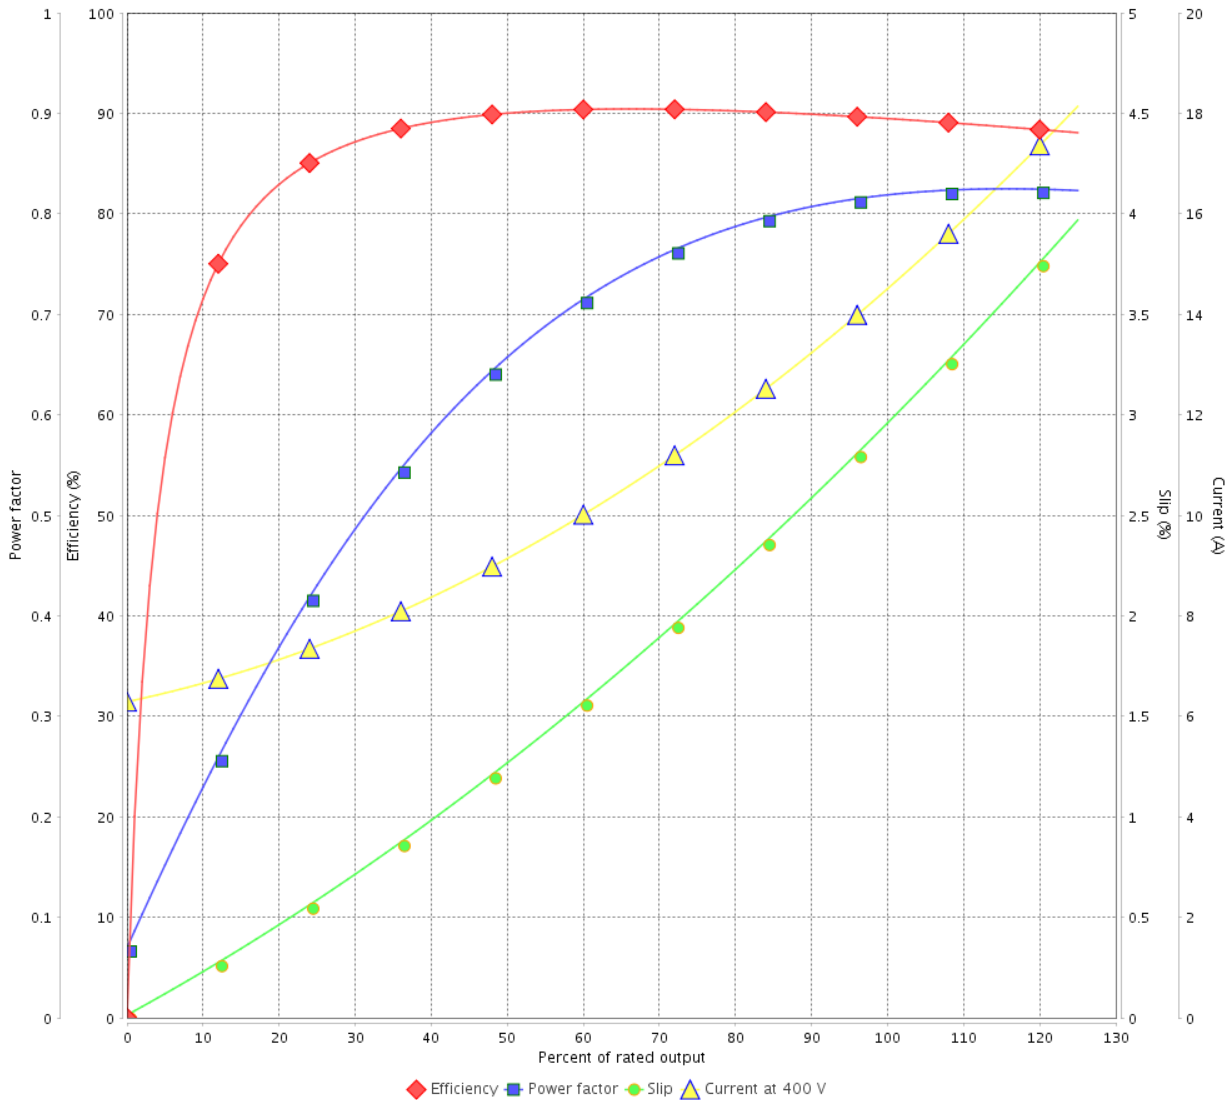

Performance : 400 V 50 Hz 6P IE3

Rated current : 14.8 A
 LRC : 5.4
 Rated torque : 54.1 ft.lb
 Locked rotor torque : 190 %
 Breakdown torque : 229 %
 Rated speed : 970 rpm

Moment of inertia (J) : 4.43 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

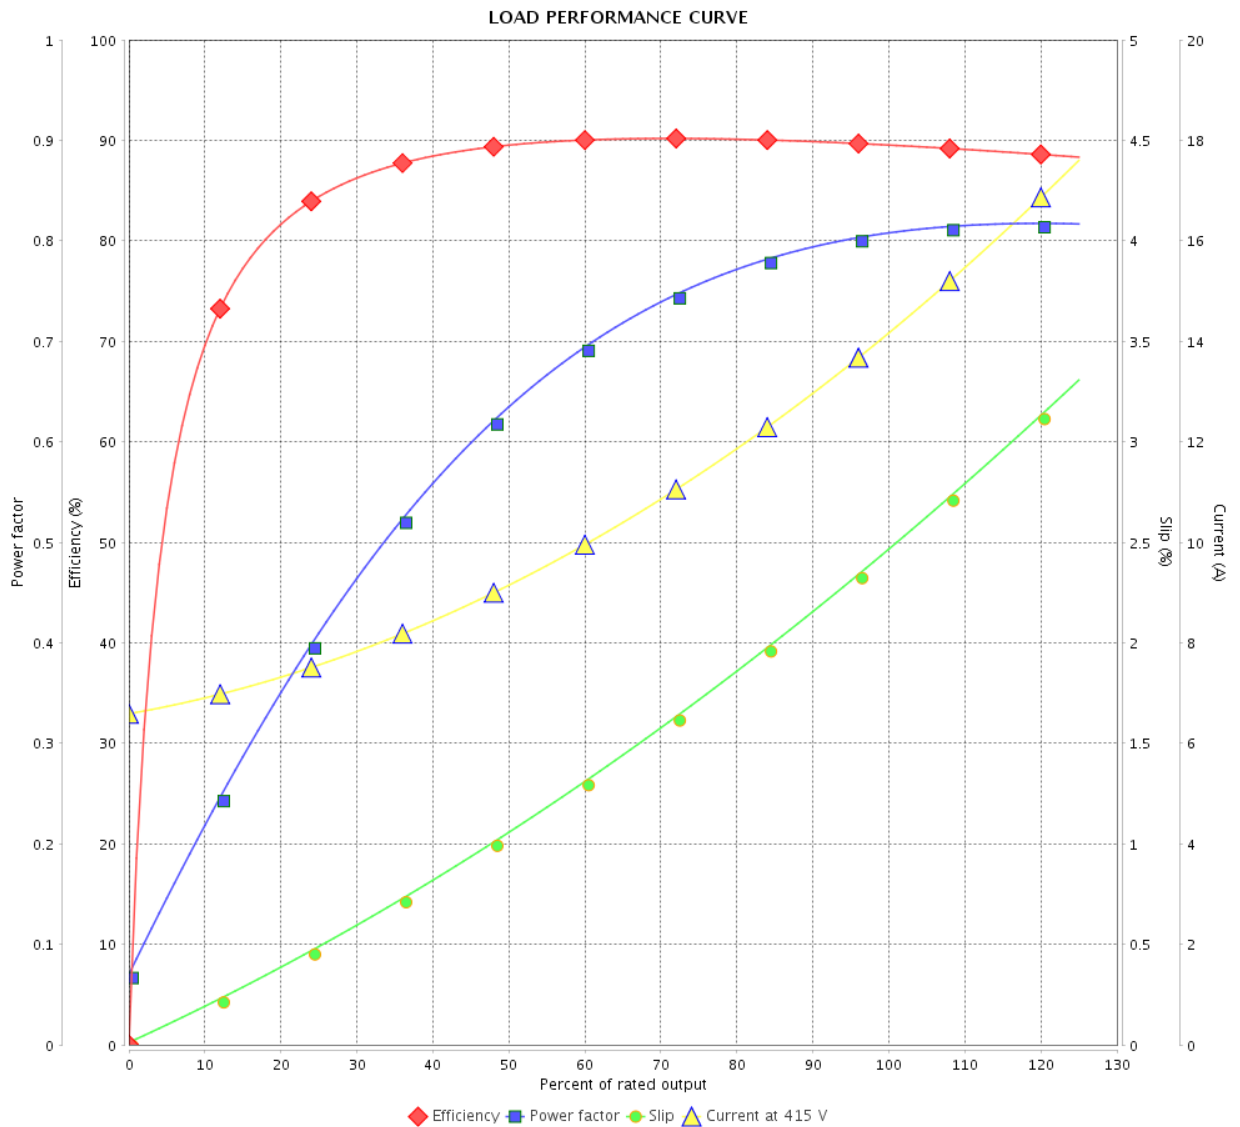

Performance : 415 V 50 Hz 6P IE3

Rated current : 14.4 A
 LRC : 5.8
 Rated torque : 53.9 ft.lb
 Locked rotor torque : 210 %
 Breakdown torque : 250 %
 Rated speed : 975 rpm

Moment of inertia (J) : 4.43 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 21		
Date		12/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase
Product code : 11431955
Catalog # : 01012ST3QIE256T-W22

Performance : 460 V 60 Hz 6P

Rated current	: 12.9 A	Moment of inertia (J)	: 4.43 sq.ft.lb
LRC	: 6.2	Duty cycle	: Cont.(S1)
Rated torque	: 44.7 ft.lb	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1175 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		10 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

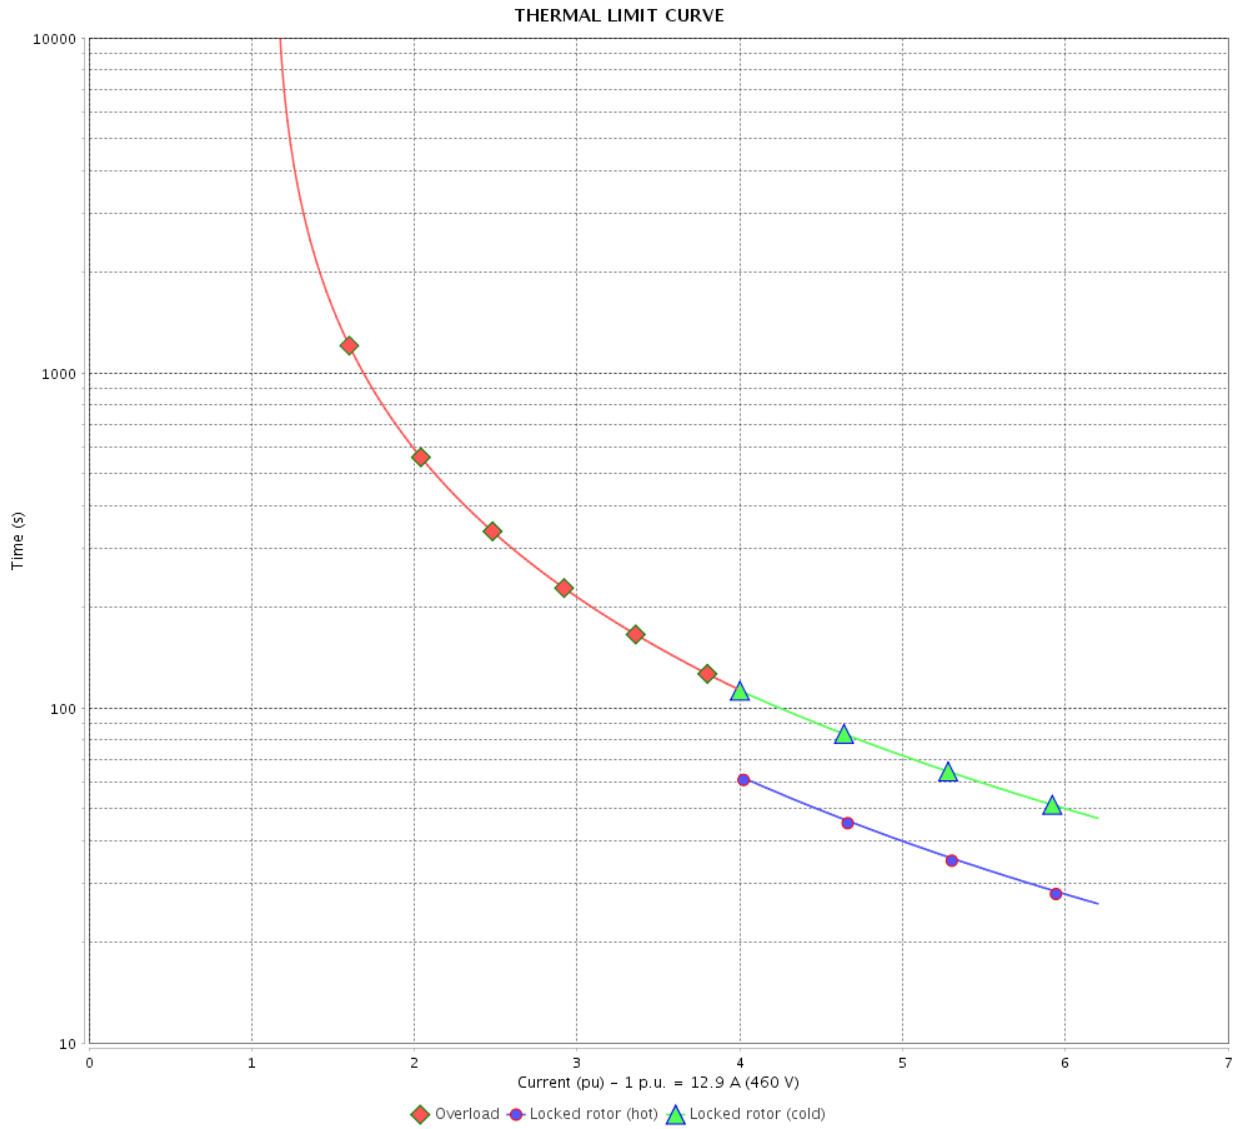

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		11 / 21		
Date		12/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase
Product code : 11431955
Catalog # : 01012ST3QIE256T-W22

Performance : 380 V 50 Hz 6P IE3

Rated current	: 15.4 A	Moment of inertia (J)	: 4.43 sq.ft.lb
LRC	: 4.8	Duty cycle	: Cont.(S1)
Rated torque	: 54.4 ft.lb	Insulation class	: F
Locked rotor torque	: 160 %	Service factor	: 1.00
Breakdown torque	: 210 %	Temperature rise	: 105 K
Rated speed	: 965 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		12 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

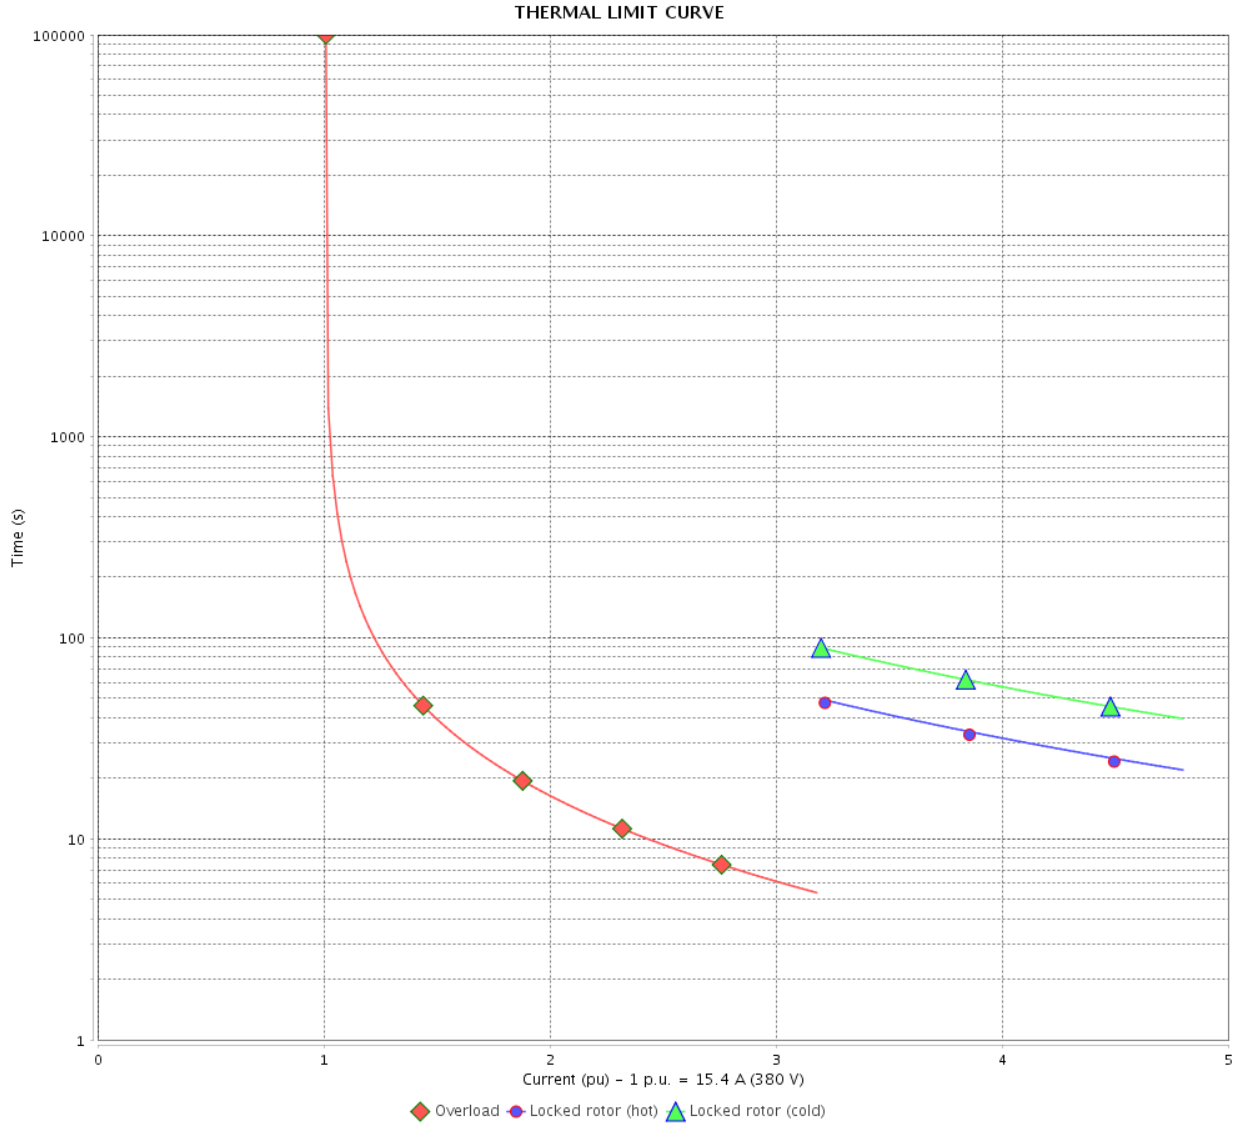

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		13 / 21		
Date		12/04/2022		

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

Performance : 400 V 50 Hz 6P IE3

Rated current	: 14.8 A	Moment of inertia (J)	: 4.43 sq.ft.lb
LRC	: 5.4	Duty cycle	: Cont.(S1)
Rated torque	: 54.1 ft.lb	Insulation class	: F
Locked rotor torque	: 190 %	Service factor	: 1.15
Breakdown torque	: 229 %	Temperature rise	: 105 K
Rated speed	: 970 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		14 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

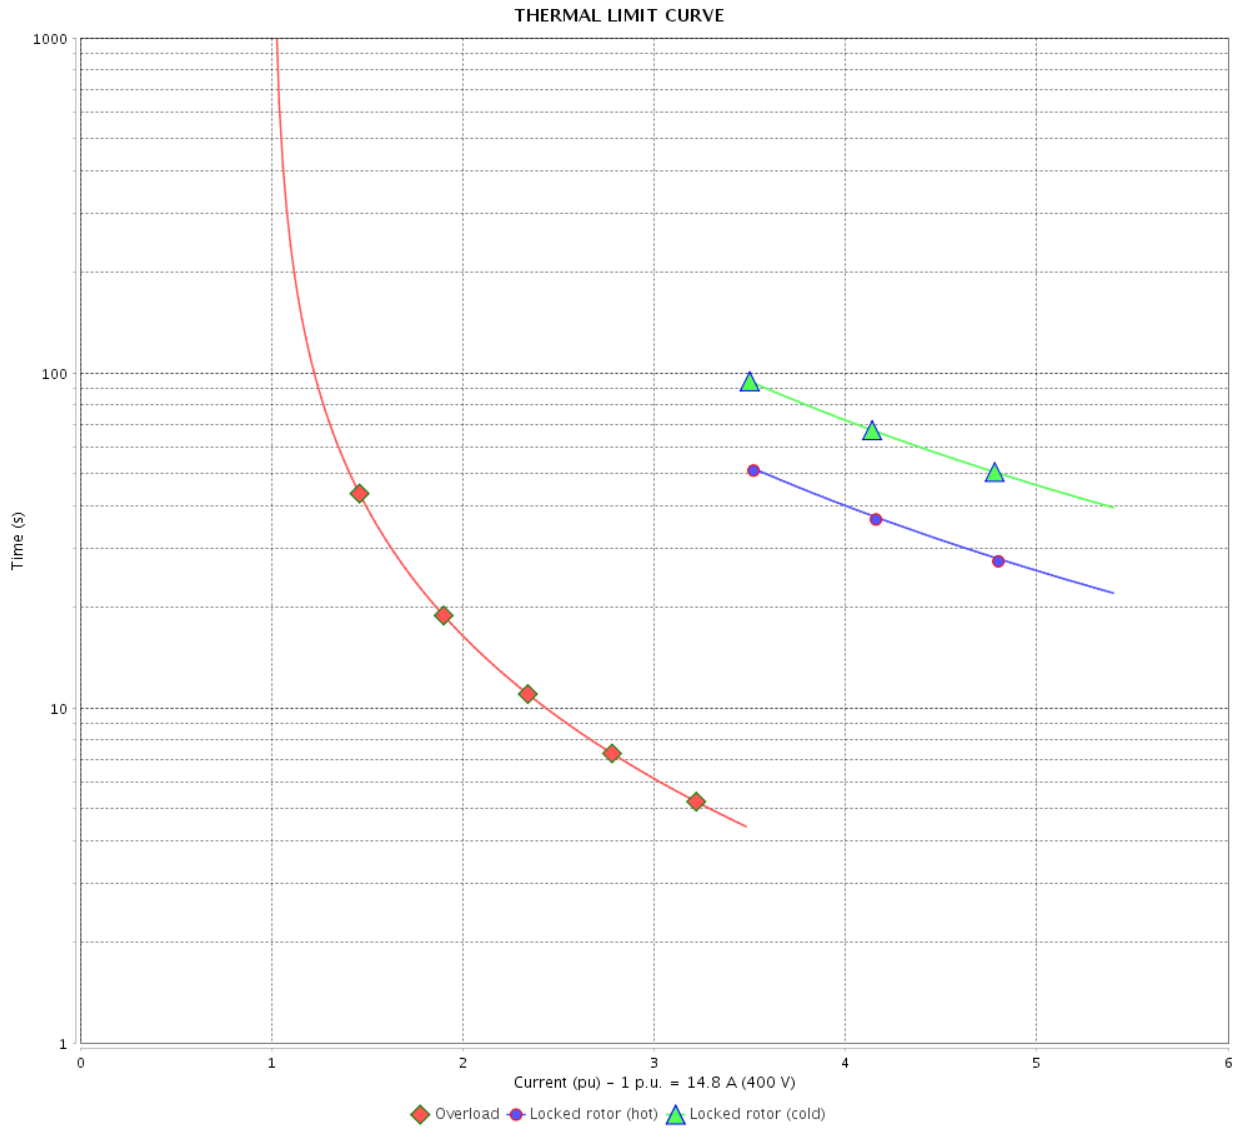

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		15 / 21		
Date		12/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase
Product code : 11431955
Catalog # : 01012ST3QIE256T-W22

Performance : 415 V 50 Hz 6P IE3

Rated current	: 14.4 A	Moment of inertia (J)	: 4.43 sq.ft.lb
LRC	: 5.8	Duty cycle	: Cont.(S1)
Rated torque	: 53.9 ft.lb	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.15
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 975 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		16 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

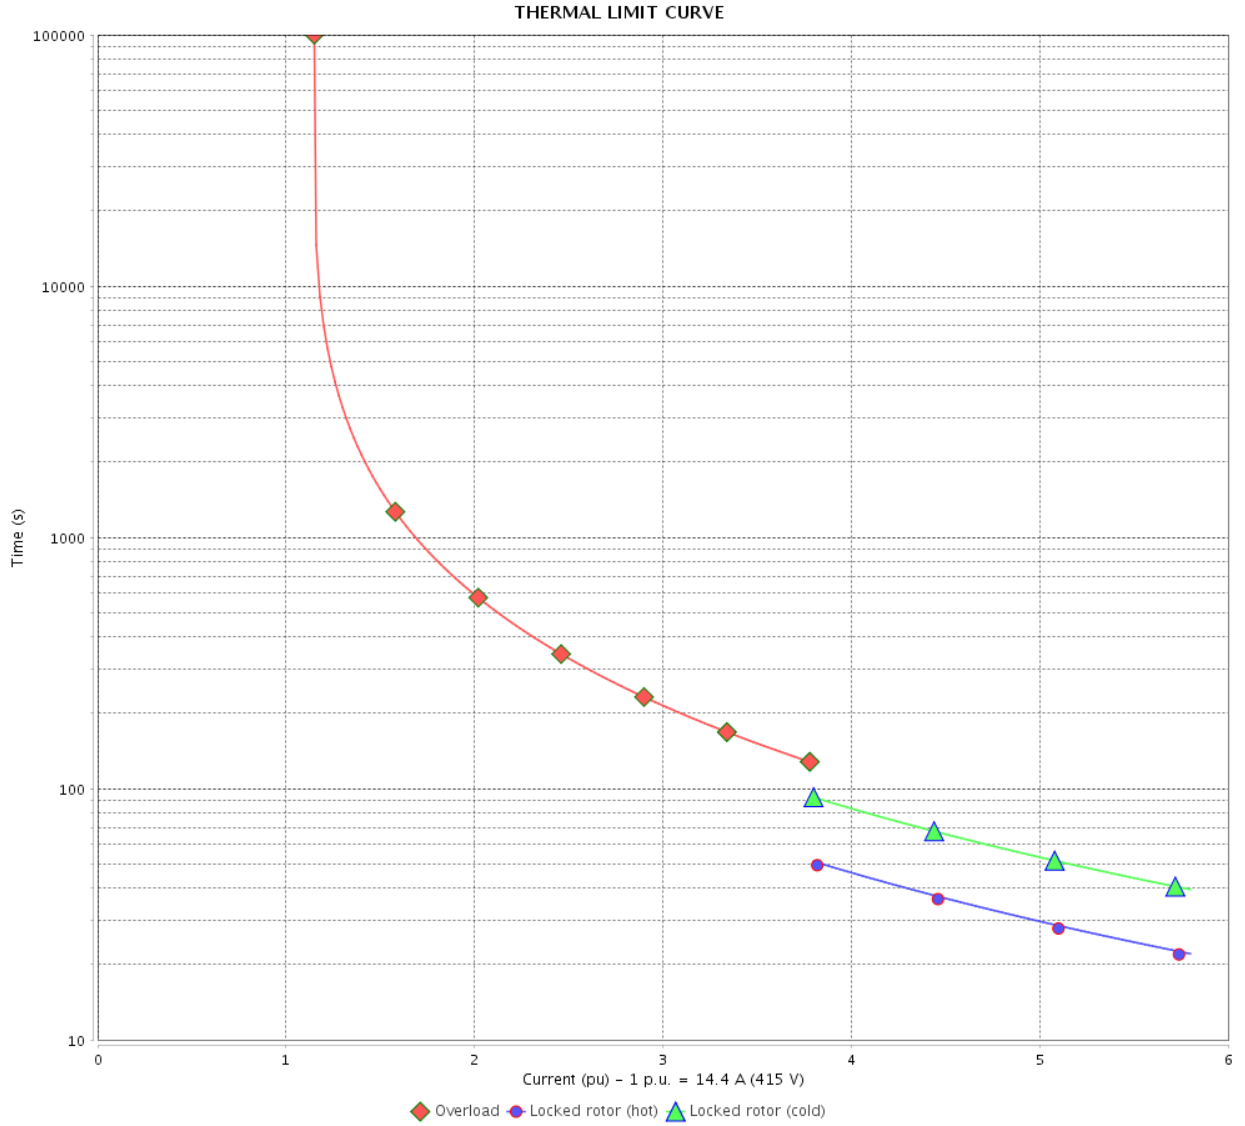

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		17 / 21		
Date		12/04/2022		

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

VFD OPERATION CURVE

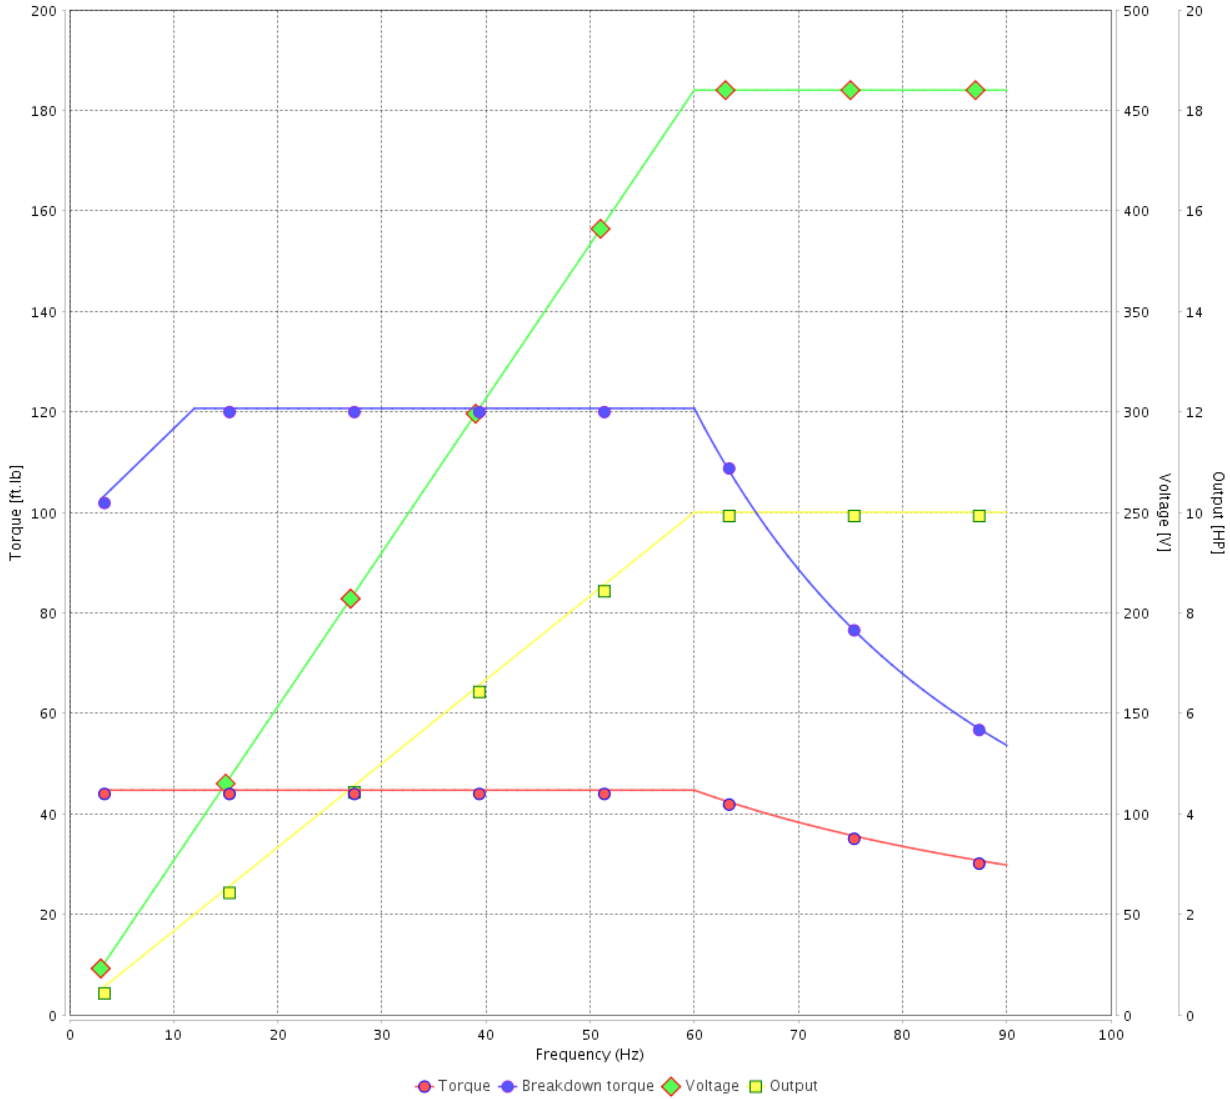

Performance : 460 V 60 Hz 6P

Rated current : 12.9 A
 LRC : 6.2
 Rated torque : 44.7 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 270 %
 Rated speed : 1175 rpm

Moment of inertia (J) : 4.43 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 18 / 21	Revision
Checked by				
Date	12/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

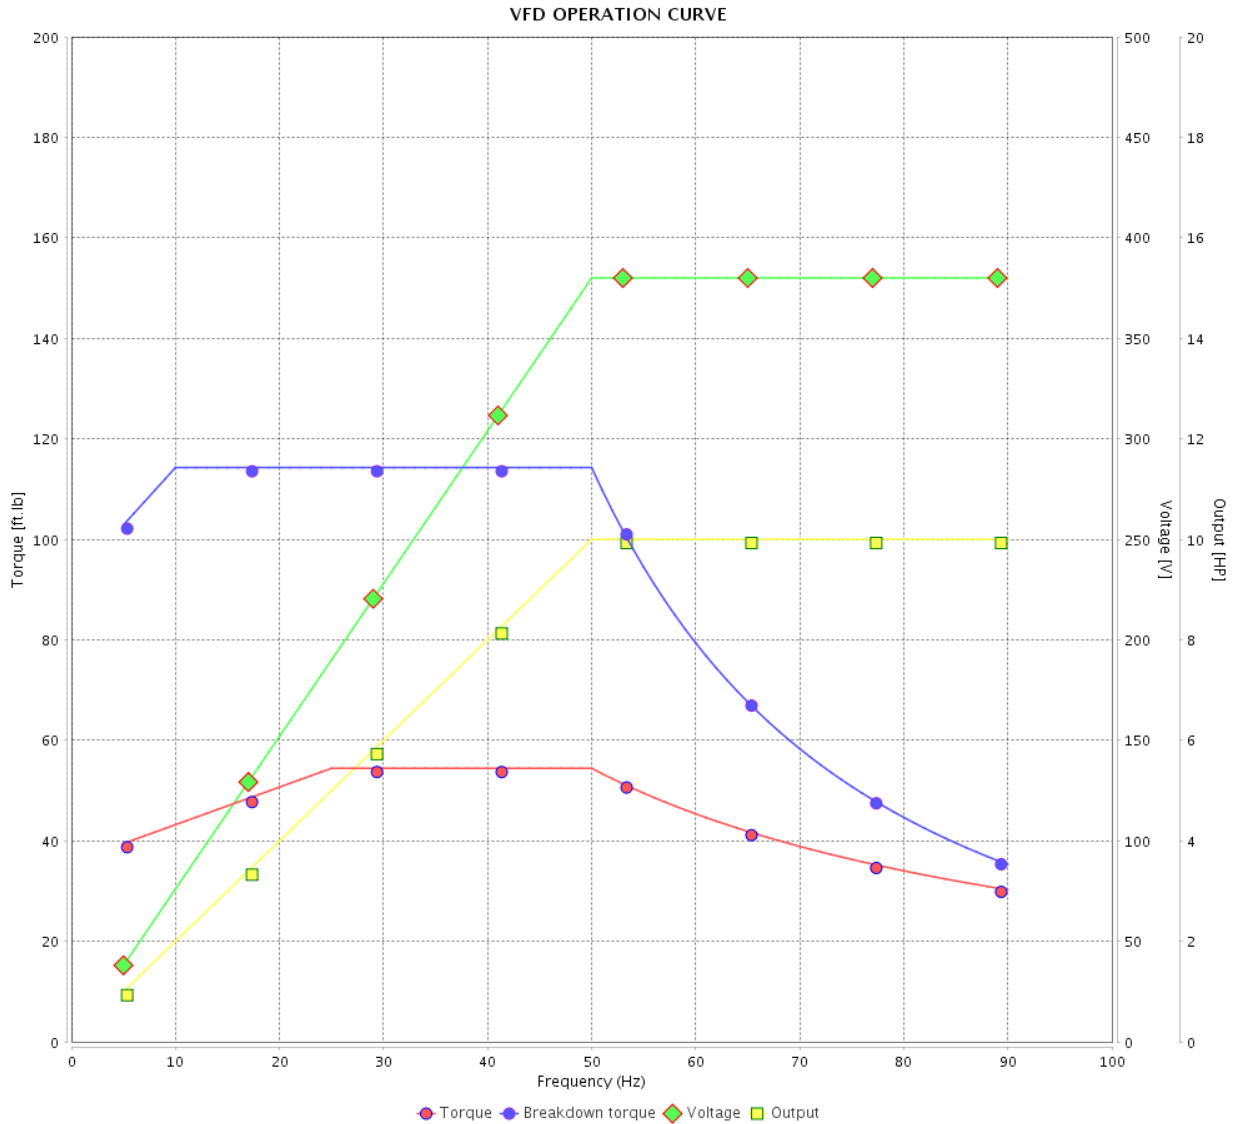

Performance : 380 V 50 Hz 6P IE3

Rated current : 15.4 A
 LRC : 4.8
 Rated torque : 54.4 ft.lb
 Locked rotor torque : 160 %
 Breakdown torque : 210 %
 Rated speed : 965 rpm

Moment of inertia (J) : 4.43 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 19 / 21
Checked by				
Date	12/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

VFD OPERATION CURVE

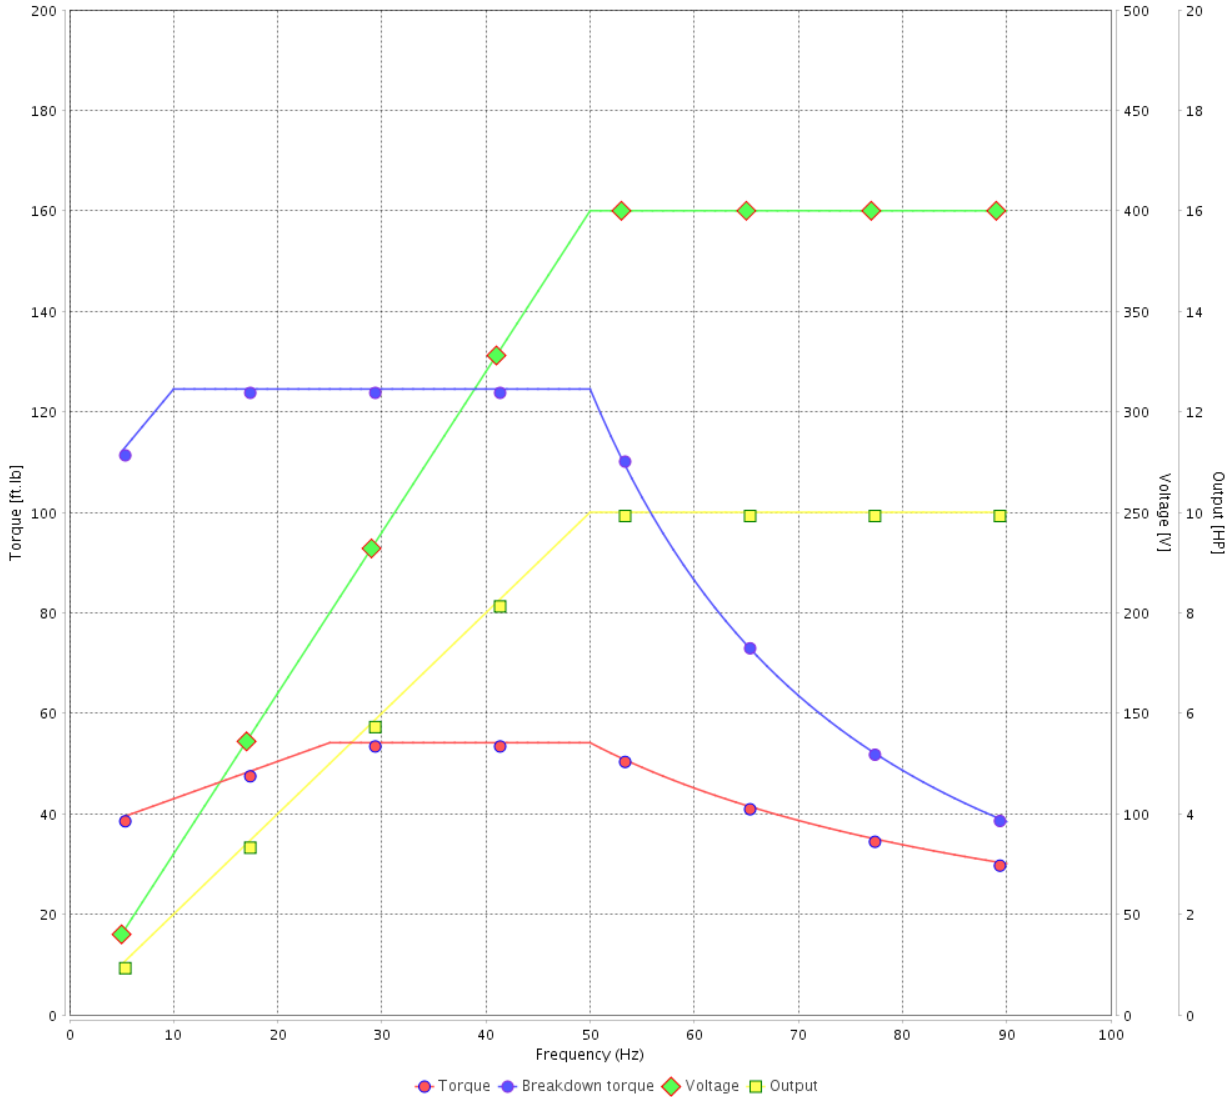

Performance : 400 V 50 Hz 6P IE3

Rated current : 14.8 A
 LRC : 5.4
 Rated torque : 54.1 ft.lb
 Locked rotor torque : 190 %
 Breakdown torque : 229 %
 Rated speed : 970 rpm

Moment of inertia (J) : 4.43 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 20 / 21	Revision
Checked by				
Date	12/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 11431955

Catalog # : 01012ST3QIE256T-W22

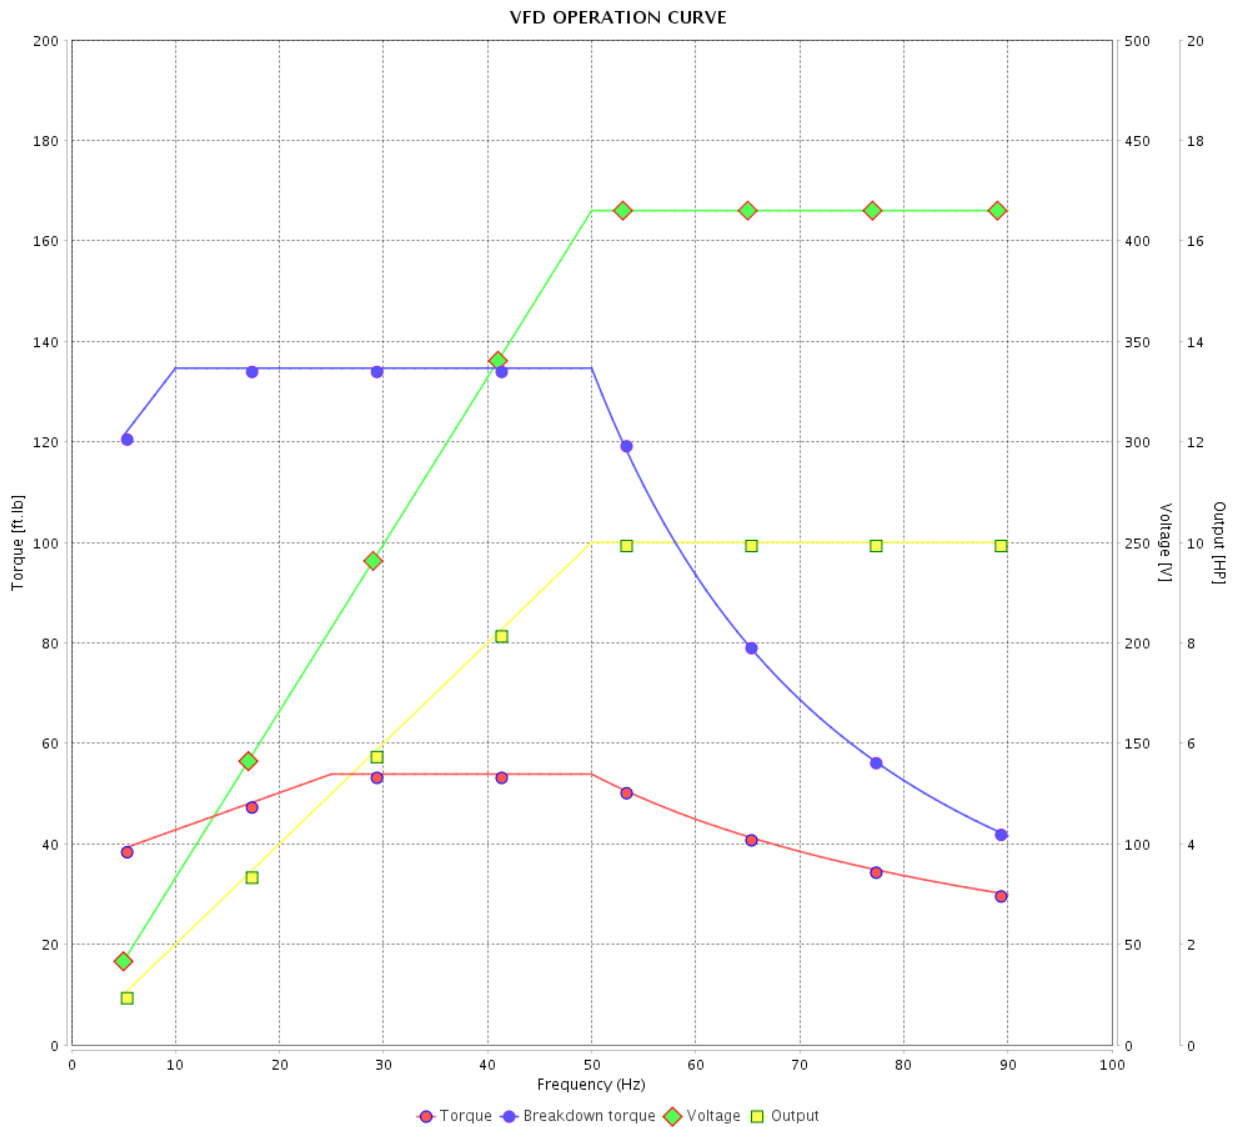

Performance : 415 V 50 Hz 6P IE3

Rated current : 14.4 A
 LRC : 5.8
 Rated torque : 53.9 ft.lb
 Locked rotor torque : 210 %
 Breakdown torque : 250 %
 Rated speed : 975 rpm

Moment of inertia (J) : 4.43 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B



Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 21 / 21
Checked by				
Date	12/04/2022			
				Revision

1 2 3 4 5 6

A

B


C

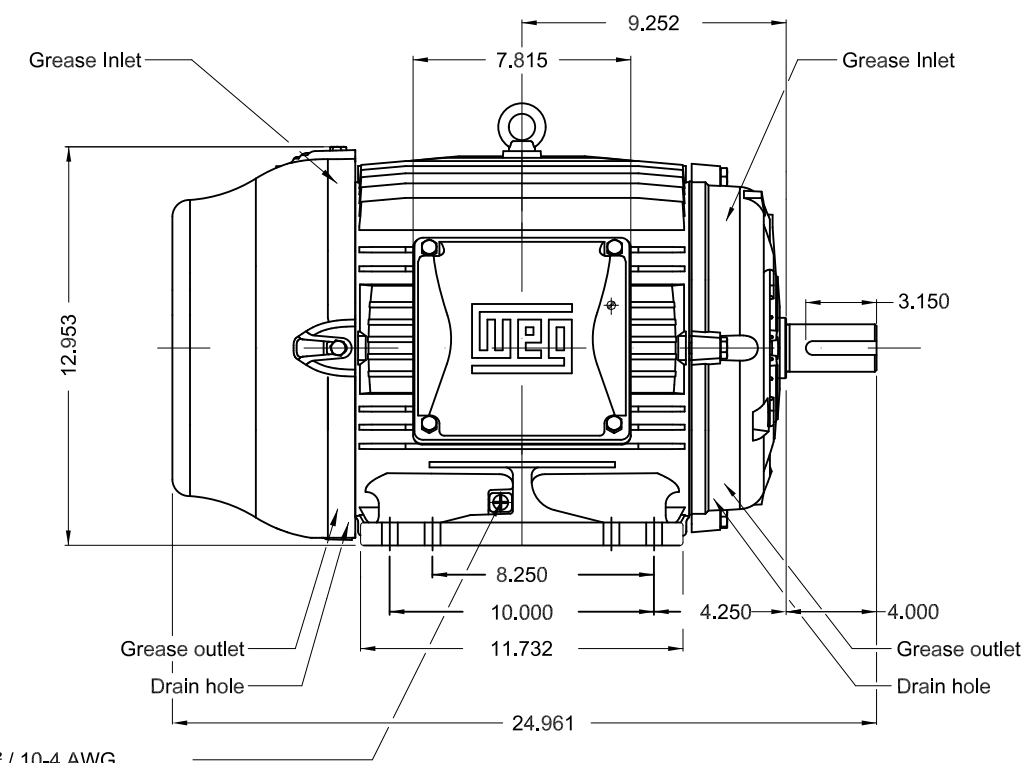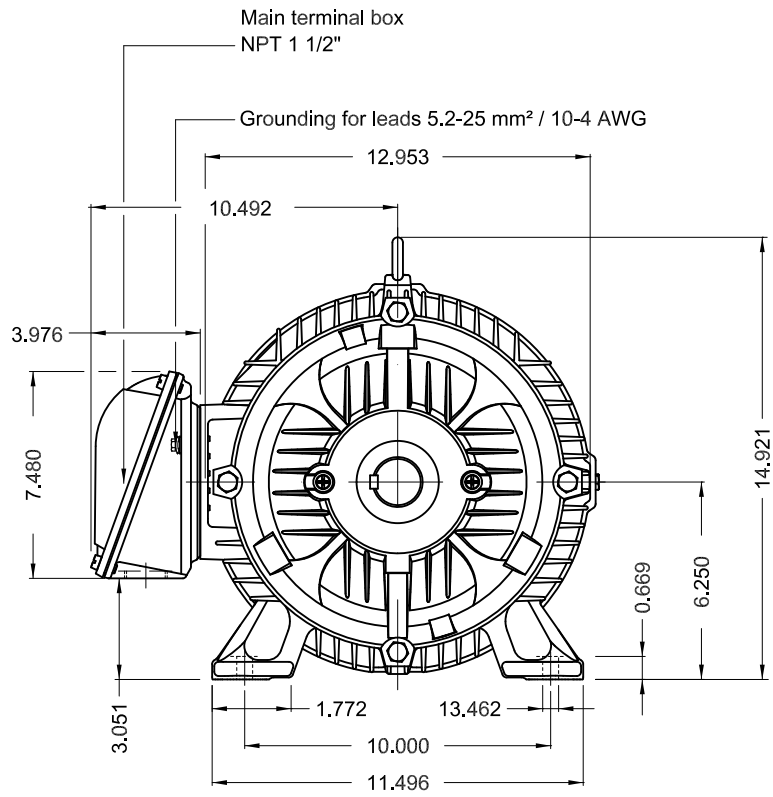

D

E

Color RAL 5009
 Painting plan 202E
 Mounting NEMA F-1
 Mounting B3R(D)

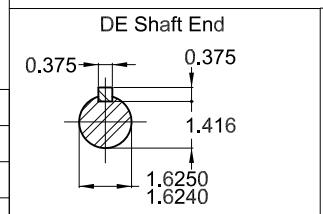

10 HP 06 Poles 60 Hz A

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PH. MOTOR IEEE 841 W22 PREM. EFF.					
CHECKED		FRAME 254/6T IP55 TEFC					
RELEASED							
REL DT.	WMO	Jaragua do Sul	Product Engineering				

PREVIEW
 WDD



Dimensions in inches XME A3