

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :				
Product line	: NEMA Premium Efficiency Three-Phase			
Product code :	12674693			
Catalog # :	01036OT3H213TC-S			
Frame	: 213/5TC			
Output	: 10 HP (7.5 kW)			
Poles	: 2			
Frequency	: 60 Hz			
Rated voltage	: 575 V			
Rated current	: 9.60 A			
L. R. Amperes	: 65.3 A			
LRC	: 6.8x(Code H)			
No load current	: 3.73 A			
Rated speed	: 3535 rpm			
Slip	: 1.81 %			
Rated torque	: 14.9 ft.lb			
Locked rotor torque	: 200 %			
Breakdown torque	: 280 %			
Insulation class	: F			
Service factor	: 1.15			
Moment of inertia (J)	: 0.4651 sq.ft.lb			
Design	: B			
Locked rotor time	: 19s (cold) 11s (hot)			
Temperature rise	: 80 K			
Duty cycle	: Cont.(S1)			
Ambient temperature	: -20°C to +40°C			
Altitude	: 1000 m.a.s.l.			
Cooling method	: IC01 - ODP			
Mounting	: F-1			
Rotation ¹	: Both (CW and CCW)			
Noise level ²	: 66.0 dB(A)			
Starting method	: Direct On Line			
Approx. weight ³	: 127 lb			
Output	25% 50% 75% 100%			
Efficiency (%)	88.3 88.5 89.5 89.5			
Power Factor	0.47 0.74 0.84 0.88			
Foundation loads				
Max. traction	: 171 lb			
Max. compression	: 298 lb			
Bearing type	: <u>Drive end</u> 6208 ZZ <u>Non drive end</u> 6206 ZZ			
Sealing	: Without Bearing Seal Without Bearing Seal			
Lubrication interval	: - -			
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				
These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.				
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		1 / 6	

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 12674693

Catalog # : 010360T3H213TC-S

TORQUE AND CURRENT VS SPEED CURVE

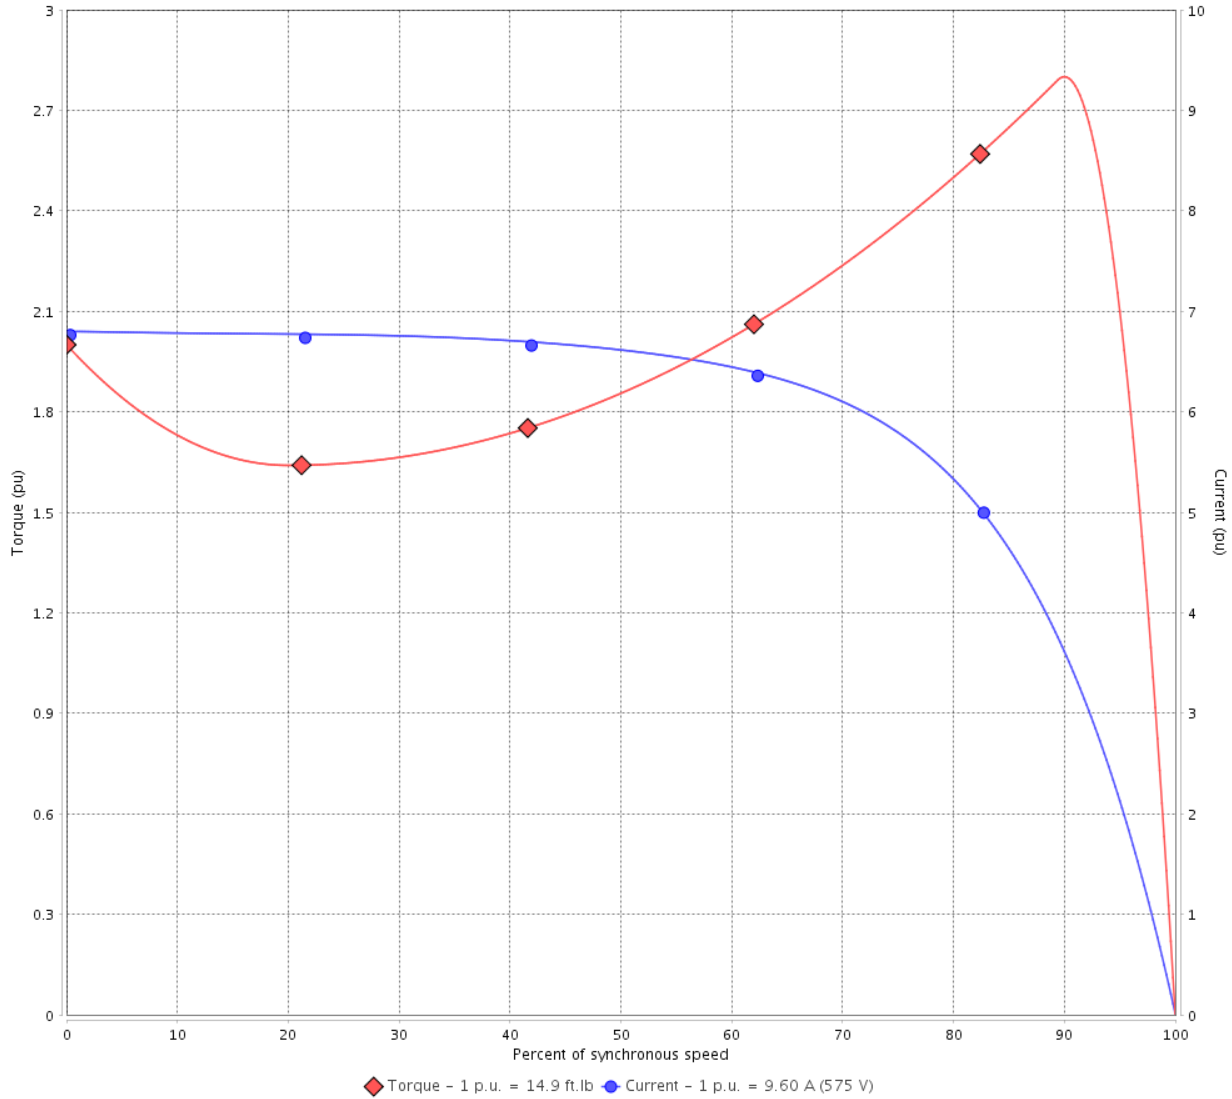

Performance : 575 V 60 Hz 2P

Rated current	: 9.60 A	Moment of inertia (J)	: 0.4651 sq.ft.lb
LRC	: 6.8	Duty cycle	: Cont.(S1)
Rated torque	: 14.9 ft.lb	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.15
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 3535 rpm	Design	: B

Locked rotor time : 19s (cold) 11s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 6	Revision
Checked by				
Date	12/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 12674693

Catalog # : 01036OT3H213TC-S

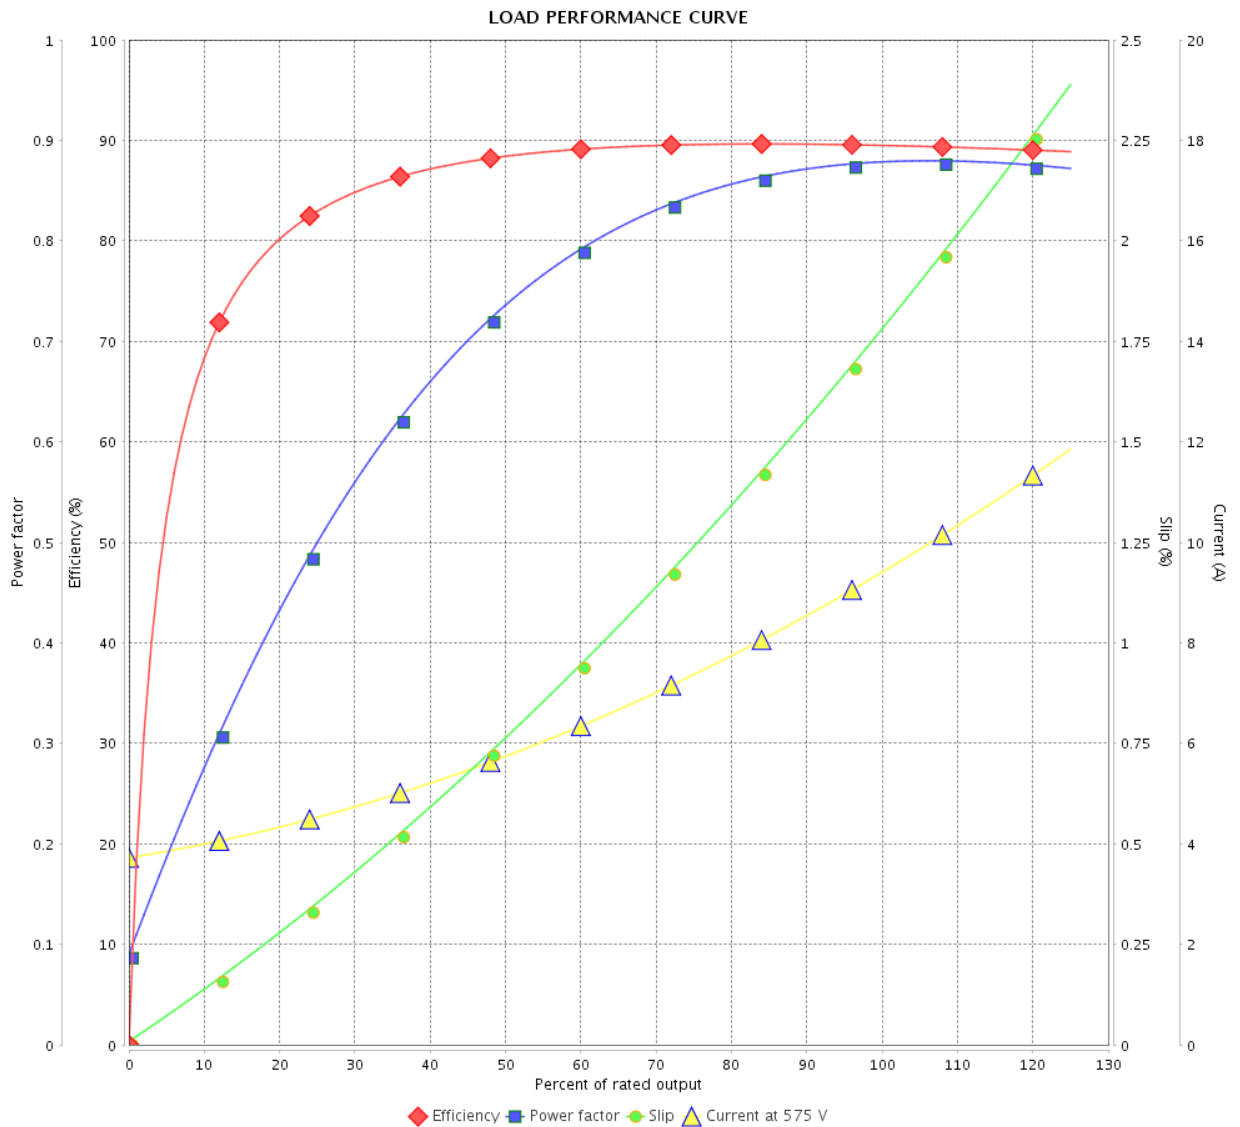

Performance : 575 V 60 Hz 2P

Rated current : 9.60 A
 LRC : 6.8
 Rated torque : 14.9 ft.lb
 Locked rotor torque : 200 %
 Breakdown torque : 280 %
 Rated speed : 3535 rpm

Moment of inertia (J) : 0.4651 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			3 / 6	
Date	12/04/2022			

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase
Product code : 12674693
Catalog # : 01036OT3H213TC-S

Performance : 575 V 60 Hz 2P

Rated current : 9.60 A	Moment of inertia (J) : 0.4651 sq.ft.lb
LRC : 6.8	Duty cycle : Cont.(S1)
Rated torque : 14.9 ft.lb	Insulation class : F
Locked rotor torque : 200 %	Service factor : 1.15
Breakdown torque : 280 %	Temperature rise : 80 K
Rated speed : 3535 rpm	Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	12/04/2022		4 / 6	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

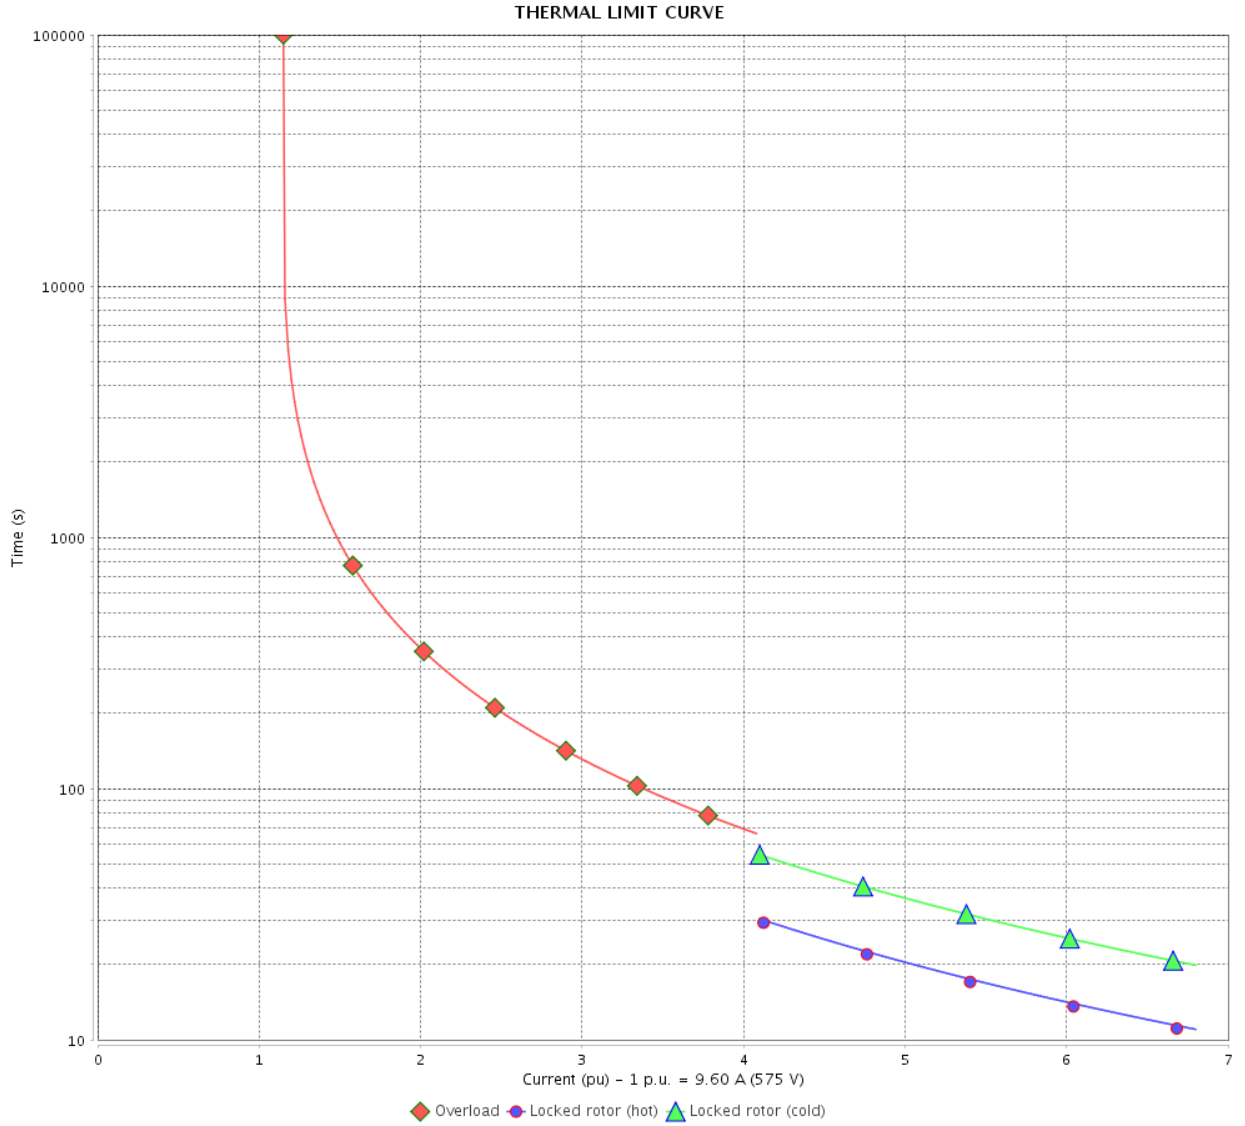

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 5 / 6		Revision
Checked by				
Date				

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 12674693

Catalog # : 01036OT3H213TC-S

VFD OPERATION CURVE

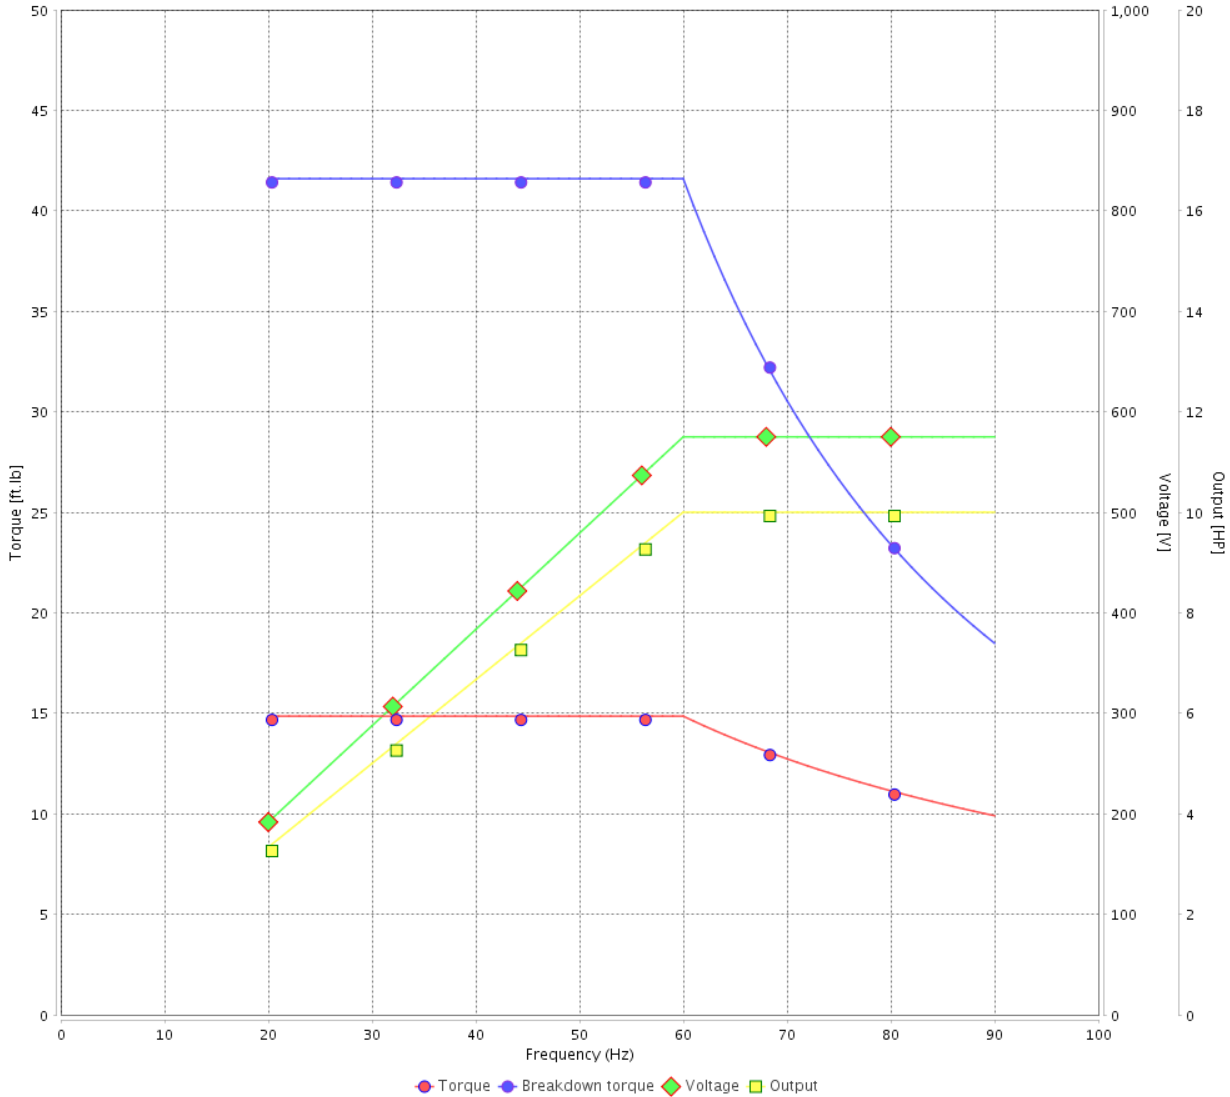

Performance : 575 V 60 Hz 2P

Rated current : 9.60 A
 LRC : 6.8
 Rated torque : 14.9 ft.lb
 Locked rotor torque : 200 %
 Breakdown torque : 280 %
 Rated speed : 3535 rpm

Moment of inertia (J) : 0.4651 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 6	Revision
Checked by				
Date	12/04/2022			

1 2 3 4 5 6





A

B

C

D

E

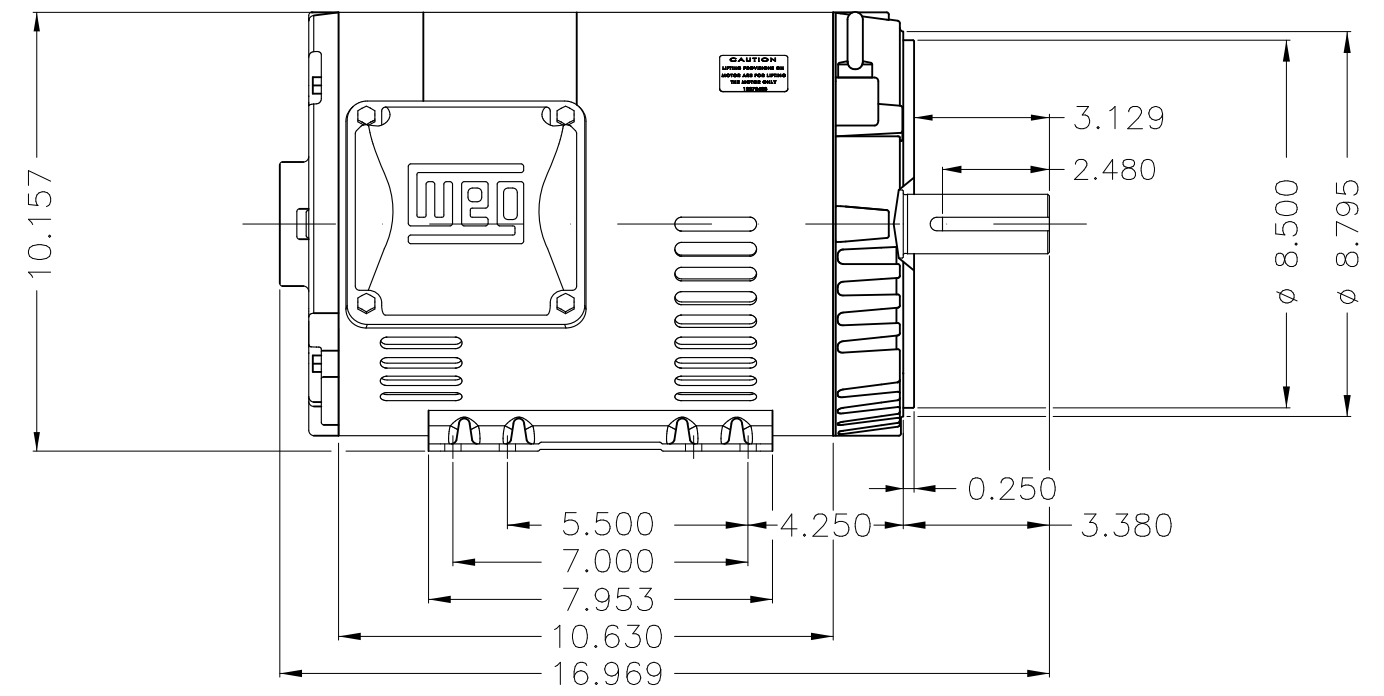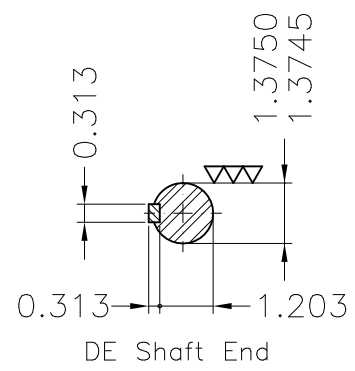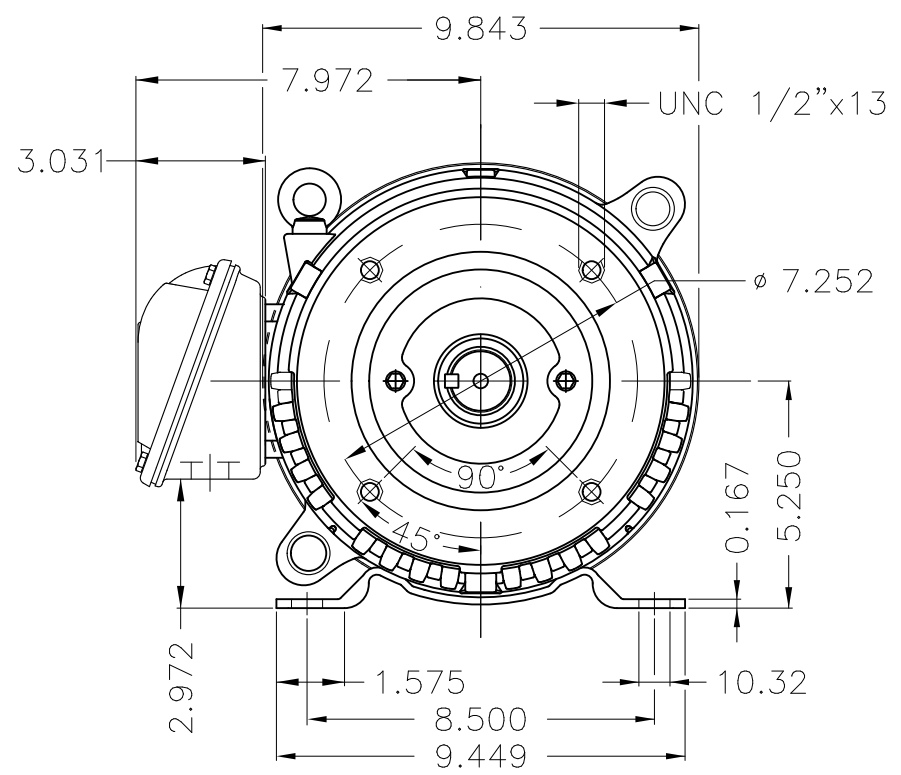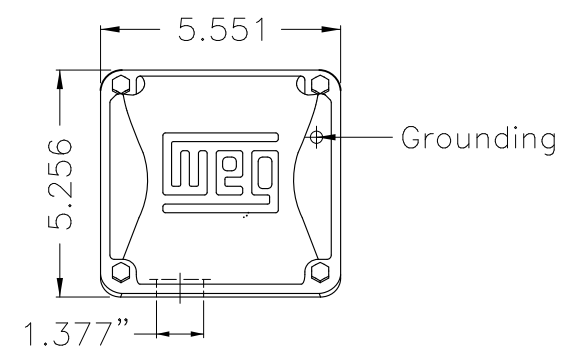

Color Munsell N 1 matte black											
Painting plan 207N											
Mounting F-1/B34R(D)											
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PH. MOTOR ROLLED STEEL PREM. EFF.					PREVIEW	WDD	SHEET	1 / 1	
CHECKED		FRAME 213/5TC IP21 ODP									
RELEASED											
REL DT.	WMO	Jaragua do Sul	Product Engineering								

10 HP 02 Poles 60 Hz

Dimensions in inches XME A3



NEMA
Premium



3PT9



Energy Verified

MADE IN MEXICO

MAT: 12674693 CC029A

W01.T00IC0X0N


CP010502NPW01

01FEB2022 S/N:

PH 3	Hz 60	HP 10
FR 213/5TC		KW 7.5
DUTY CONT.		V 575
ALT 1000 m.a.s.l		A 9.60
INS CL F AT 80K		SFA 11.0
AMB 40°C	DES B	SF 1.15
ENCL ODP	CODE H	PF 0.88
		RPM 3535
		NEMA NOM. EFF 89.5%

Inverter duty motor For use on VPWM 1000:1 VT, 3:1 CT

DE 6208-ZZ ODE 6206-ZZ MOBIL POLYREX EM



T1-BLU
T2-WHT
T3-ORG
T4-YEL
T5-BLK
T6-GRY



INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION

WARNING: Motor must be grounded in accordance with local and national electrical codes to prevent serious electrical shocks. Disconnect power source before servicing unit.



AVERTISSEMENT: Le moteur doit être mis à la terre

conformément aux codes électriques locaux et nationaux afin d'éviter tout choc électrique grave. Déconnectez l'alimentation avant l'entretien de la machine.

