

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer					
Product line		: W40 NEMA Premium Efficiency Three-Phase		Product code : 14446706 Catalog # : 02018OT3E256T-W40	
Frame		: 254/6T		Cooling method : IC01 - ODP	
Insulation class		: F		Mounting : F-1	
Duty cycle		: Cont.(S1)		Rotation ¹ : Both (CW and CCW)	
Ambient temperature		: -20°C to +40°C		Starting method : Direct On Line	
Altitude		: 1000 m.a.s.l.		Approx. weight ² : 277 lb	
Protection degree		: IP23		Moment of inertia (J) : 3.13 sq.ft.lb	
Design		: B			
Output [HP]	20	15	15	15	15
Poles	4	4	4	4	4
Frequency [Hz]	60	50	50	50	50
Rated voltage [V]	230/460	380	400	415	415
Rated current [A]	48.2/24.1	22.0	21.4	21.2	21.2
L. R. Amperes [A]	308/154	154	156	155	155
LRC [A]	6.4x(Code G)	7.0x(Code H)	7.3x(Code J)	7.3x(Code J)	7.3x(Code J)
No load current [A]	20.0/10.0	9.90	10.7	11.3	11.3
Rated speed [RPM]	1770	1475	1480	1480	1480
Slip [%]	1.67	1.67	1.33	1.33	1.33
Rated torque [ft.lb]	59.3	53.4	53.2	53.2	53.2
Locked rotor torque [%]	220	250	240	290	290
Breakdown torque [%]	250	270	300	330	330
Service factor	1.25	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	80 K
Locked rotor time	46s (cold) 26s (hot)	61s (cold) 34s (hot)	52s (cold) 29s (hot)	46s (cold) 26s (hot)	46s (cold) 26s (hot)
Noise level ²	62.0 dB(A)				
Efficiency (%)	25%	92.2	90.9	91.0	91.0
	50%	92.4	91.1	91.1	91.1
	75%	93.0	91.5	91.5	91.5
	100%	93.0	91.5	91.5	91.5
Power Factor	25%	0.43	0.40	0.37	0.34
	50%	0.69	0.66	0.62	0.59
	75%	0.79	0.77	0.74	0.72
	100%	0.84	0.83	0.81	0.79
Bearing type	Drive end : 6309 Z C3	Non drive end : 6209 Z C3	Foundation loads		
Sealing	Without	Without	Max. traction		
	Bearing Seal	Bearing Seal	Max. compression		
Lubrication interval	: 20000 h				
Lubricant amount	: 13 g				
Lubricant type	: Mobil Polyrex EM				
Notes USABLE @208V 53.3A SF 1.15 SFA 61.3A					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	14/04/2022			1 / 21	

TORQUE AND CURRENT VS SPEED CURVE



Three Phase Induction Motor - Squirrel Cage


Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

TORQUE AND CURRENT VS SPEED CURVE

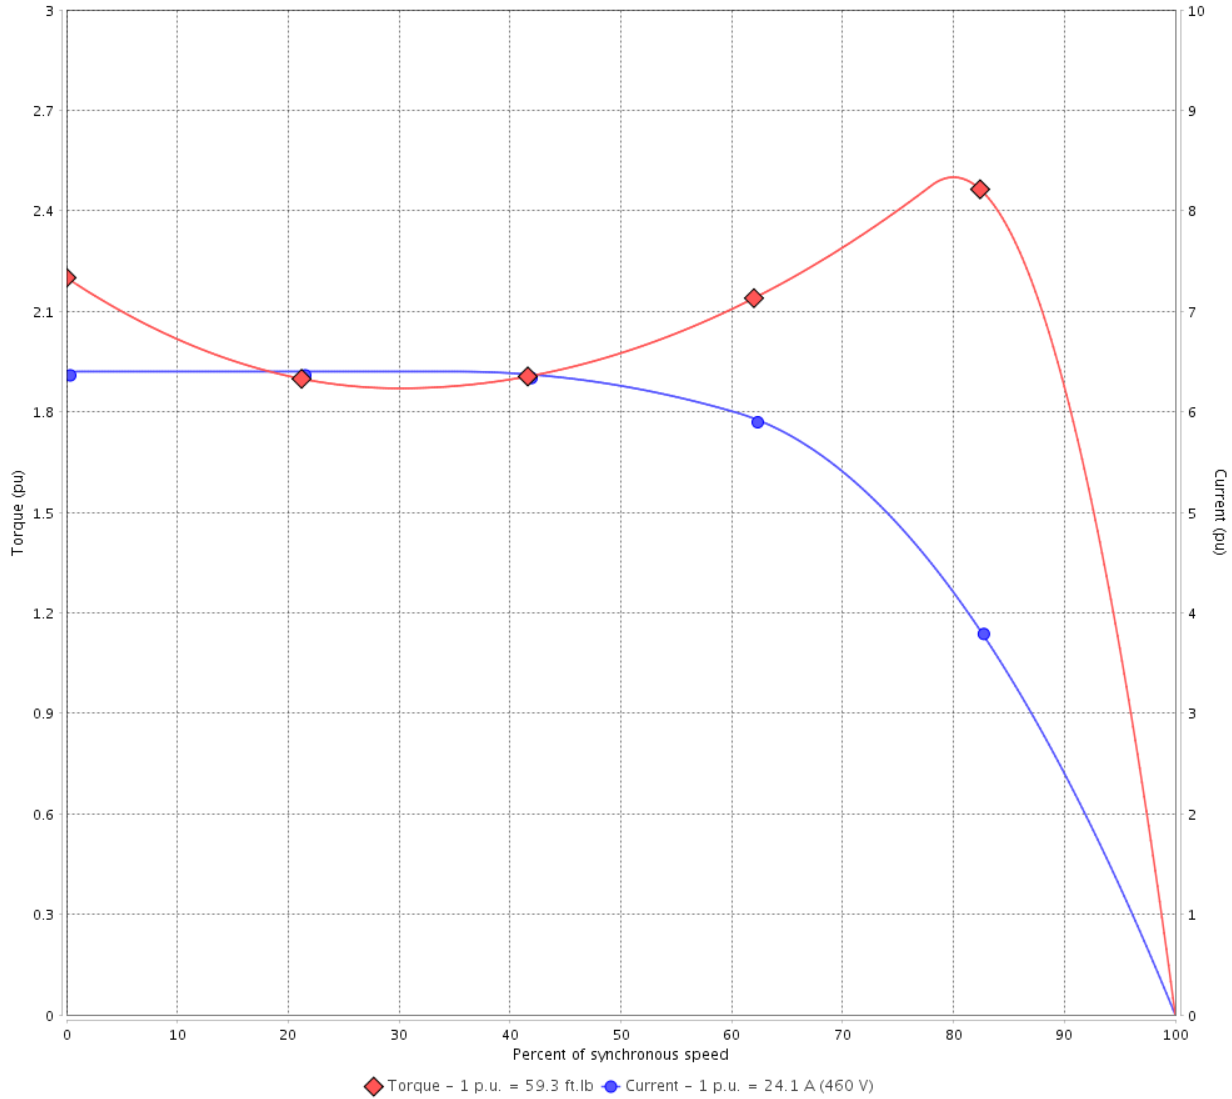

Performance : 230/460 V 60 Hz 4P

Rated current	: 48.2/24.1 A	Moment of inertia (J)	: 3.13 sq.ft.lb
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 59.3 ft.lb	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1770 rpm	Design	: B

Locked rotor time : 46s (cold) 26s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 21	Revision
Checked by				
Date	14/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

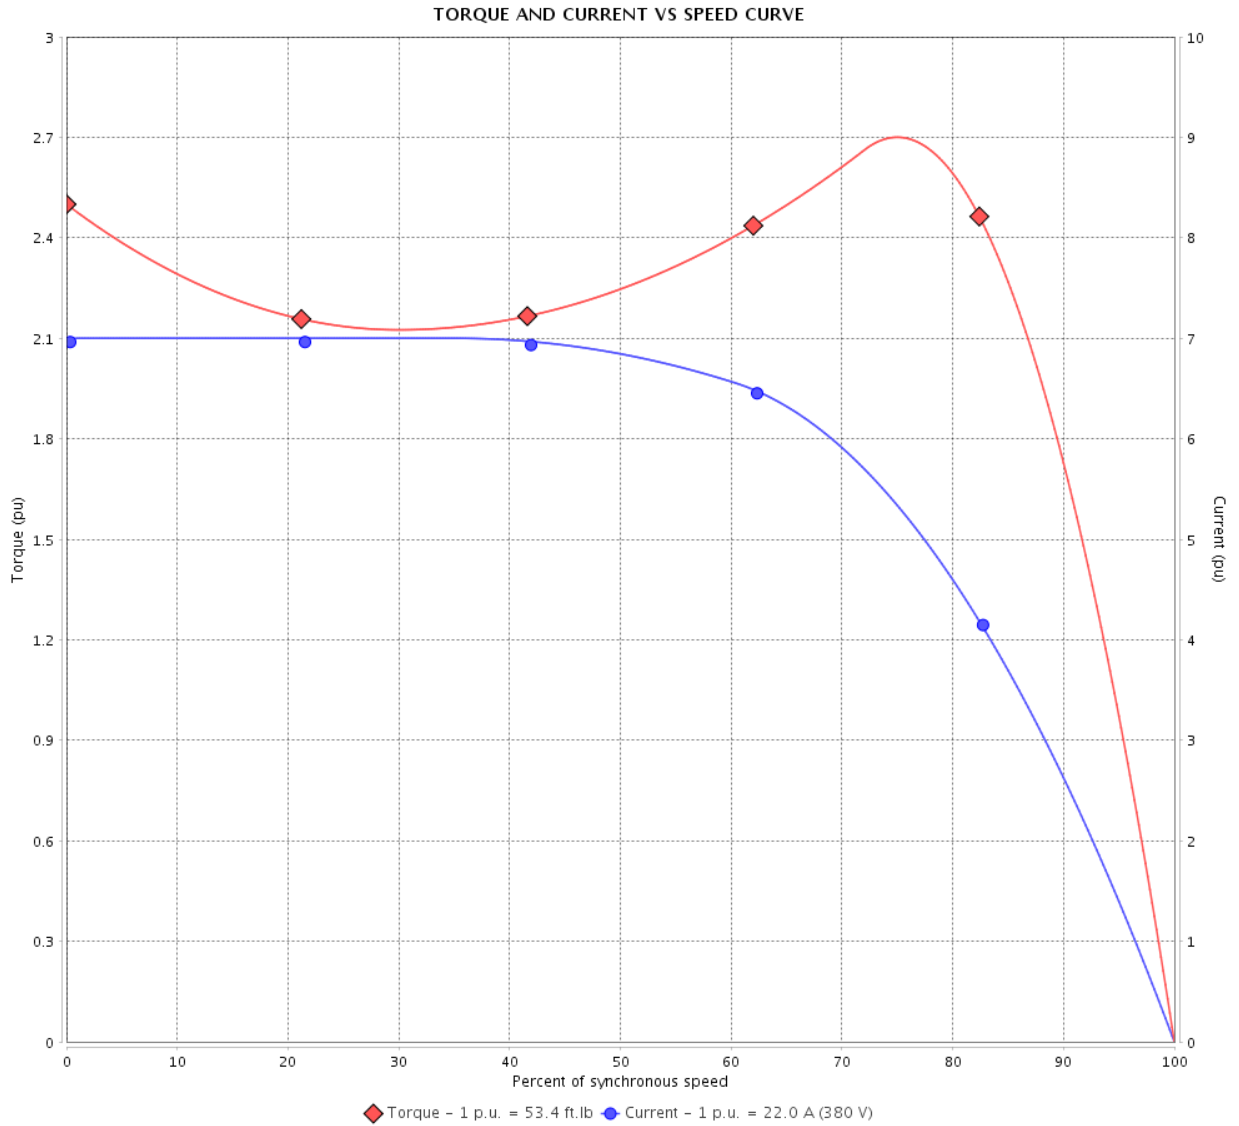

Performance : 380 V 50 Hz 4P IE3

Rated current	: 22.0 A	Moment of inertia (J)	: 3.13 sq.ft.lb
LRC	: 7.0	Duty cycle	: Cont.(S1)
Rated torque	: 53.4 ft.lb	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	: 1.00
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 1475 rpm	Design	: B

Locked rotor time : 61s (cold) 34s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 21	Revision
Checked by				
Date	14/04/2022			

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

TORQUE AND CURRENT VS SPEED CURVE

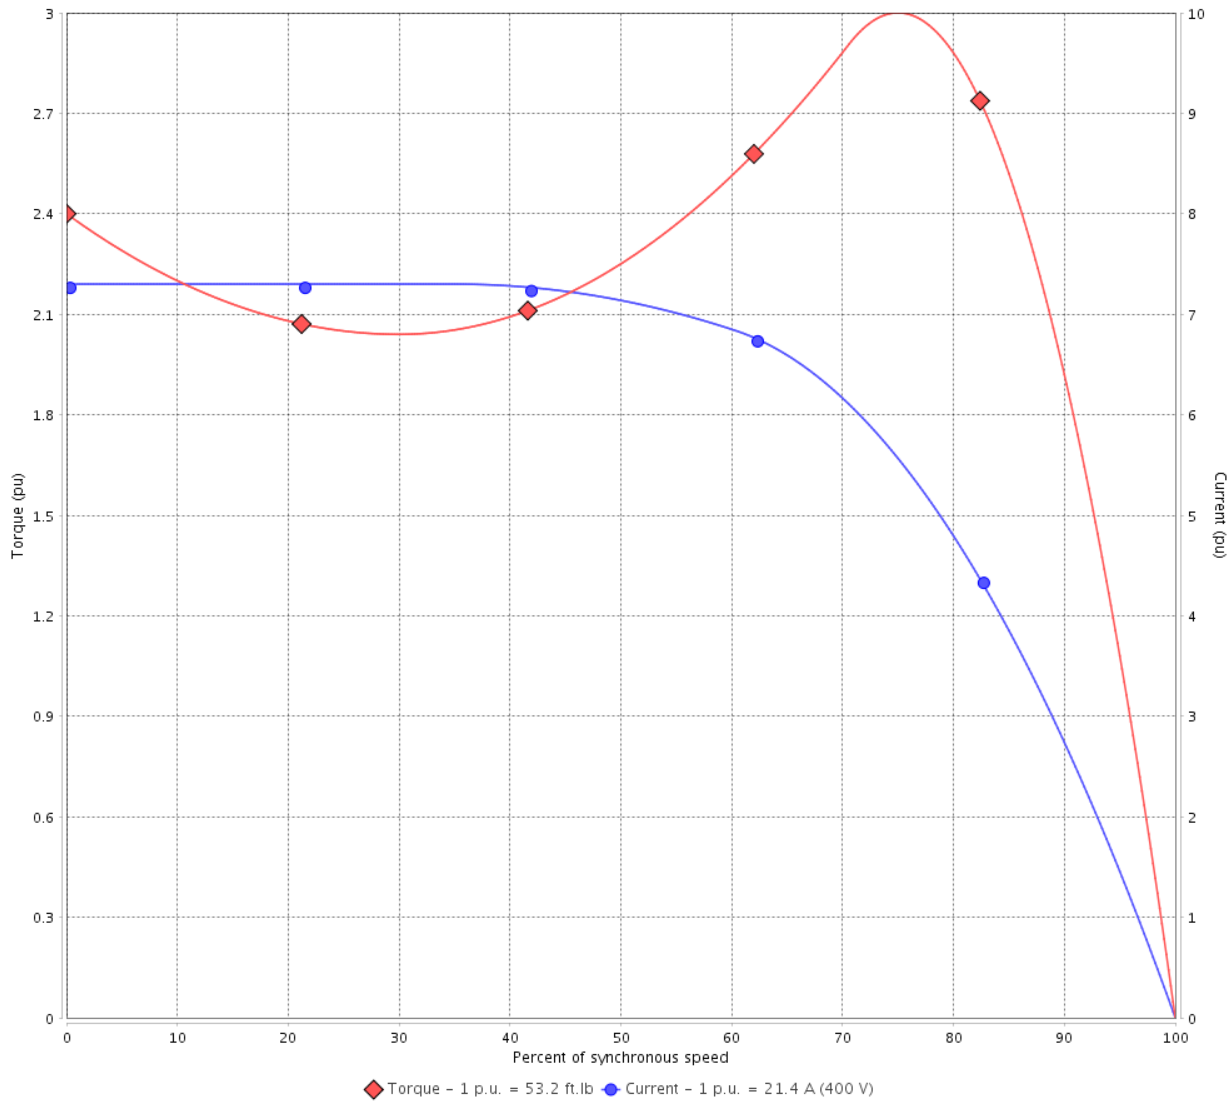

Performance : 400 V 50 Hz 4P IE3

Rated current	: 21.4 A	Moment of inertia (J)	: 3.13 sq.ft.lb
LRC	: 7.3	Duty cycle	: Cont.(S1)
Rated torque	: 53.2 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1480 rpm	Design	: B

Locked rotor time : 52s (cold) 29s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 21	Revision
Checked by				
Date	14/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

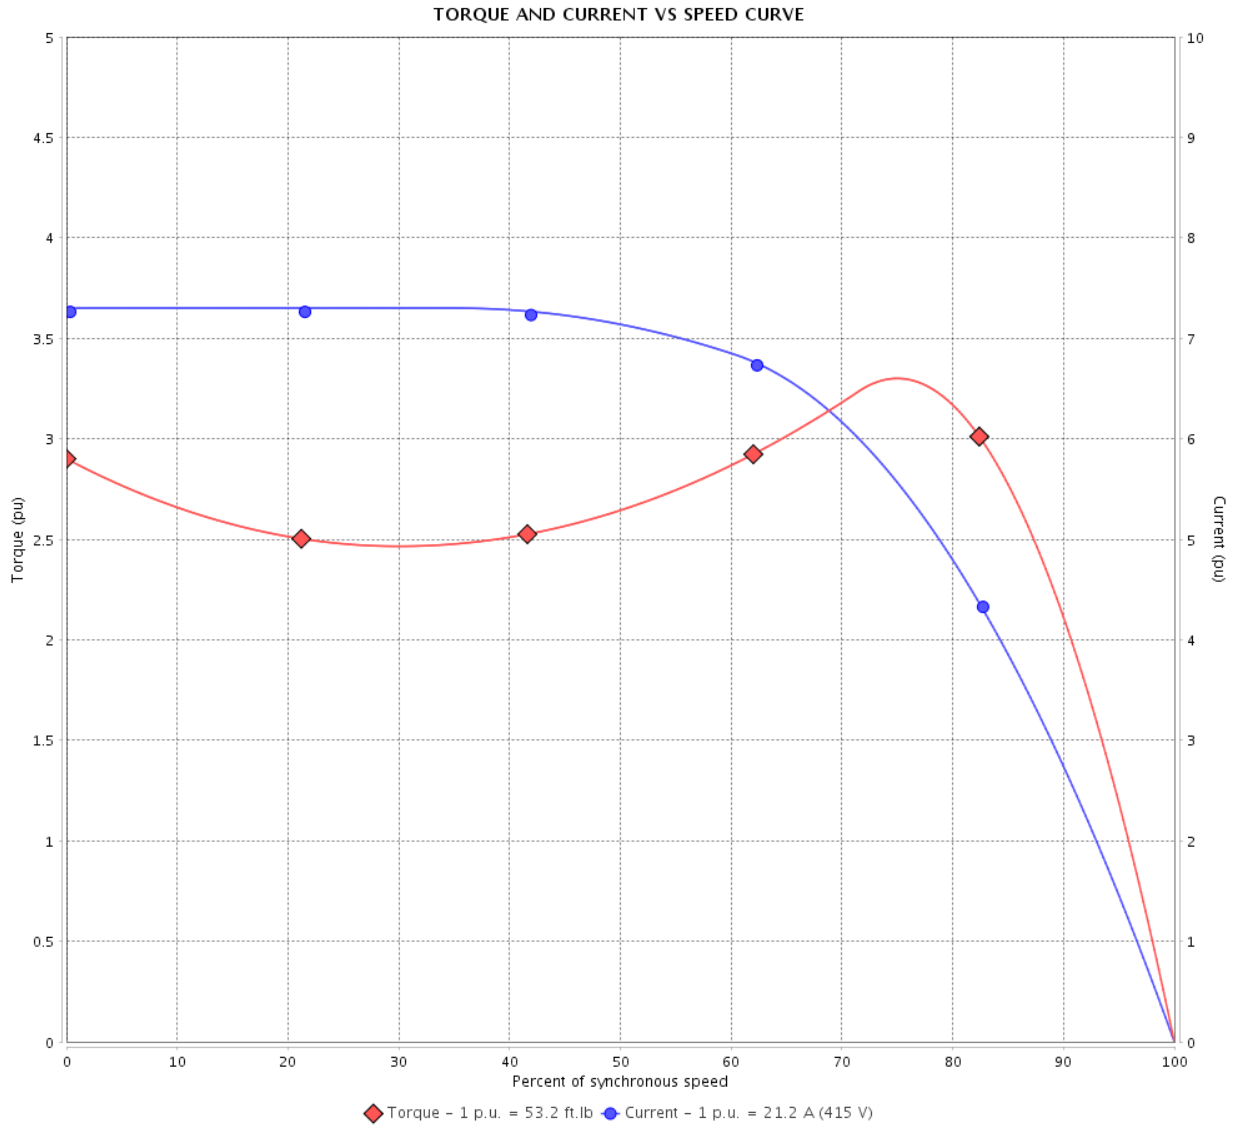

Performance : 415 V 50 Hz 4P IE3

Rated current	: 21.2 A	Moment of inertia (J)	: 3.13 sq.ft.lb
LRC	: 7.3	Duty cycle	: Cont.(S1)
Rated torque	: 53.2 ft.lb	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.00
Breakdown torque	: 330 %	Temperature rise	: 80 K
Rated speed	: 1480 rpm	Design	: B

Locked rotor time : 46s (cold) 26s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 21	Revision
Checked by				
Date	14/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

LOAD PERFORMANCE CURVE

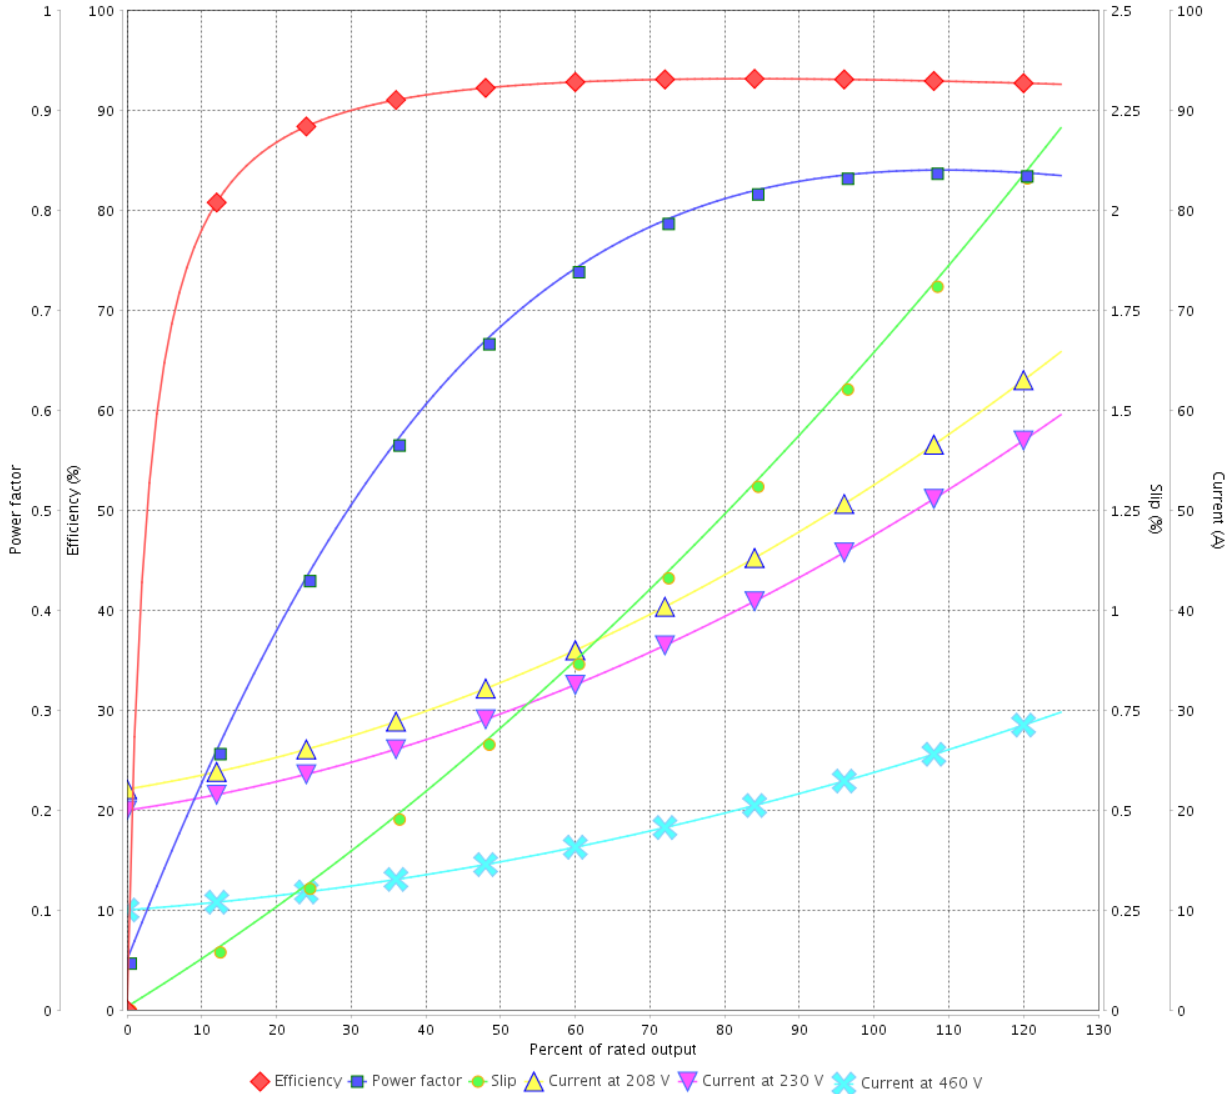

Performance : 230/460 V 60 Hz 4P

Rated current : 48.2/24.1 A
 LRC : 6.4
 Rated torque : 59.3 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 250 %
 Rated speed : 1770 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 21	Revision
Checked by				
Date	14/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

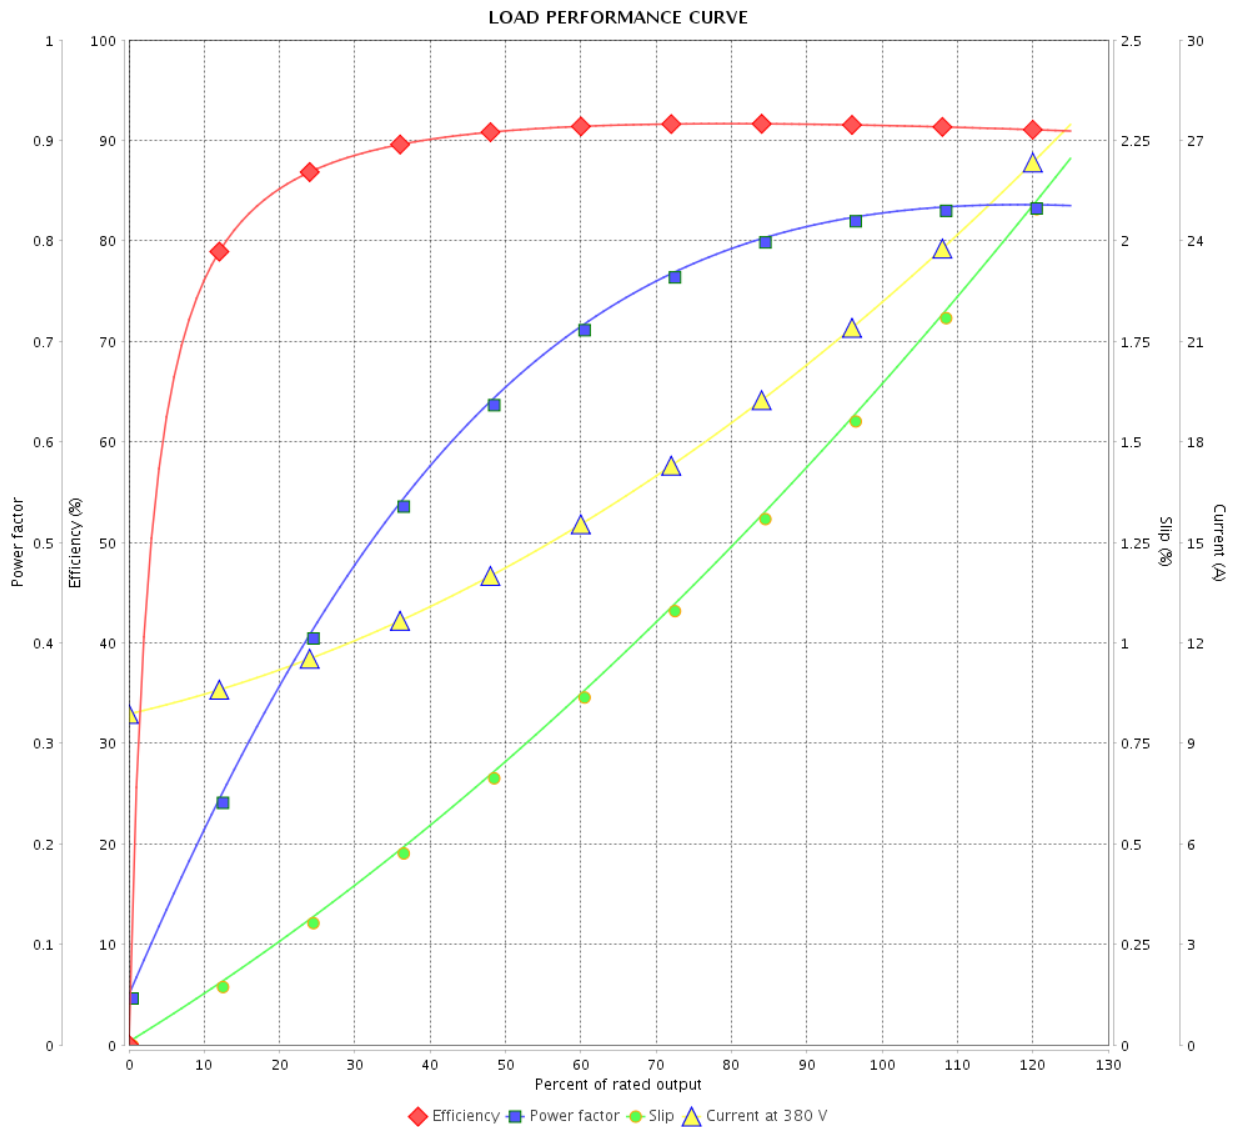

Performance : 380 V 50 Hz 4P IE3

Rated current : 22.0 A
 LRC : 7.0
 Rated torque : 53.4 ft.lb
 Locked rotor torque : 250 %
 Breakdown torque : 270 %
 Rated speed : 1475 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		7 / 21		
Date		14/04/2022		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

LOAD PERFORMANCE CURVE

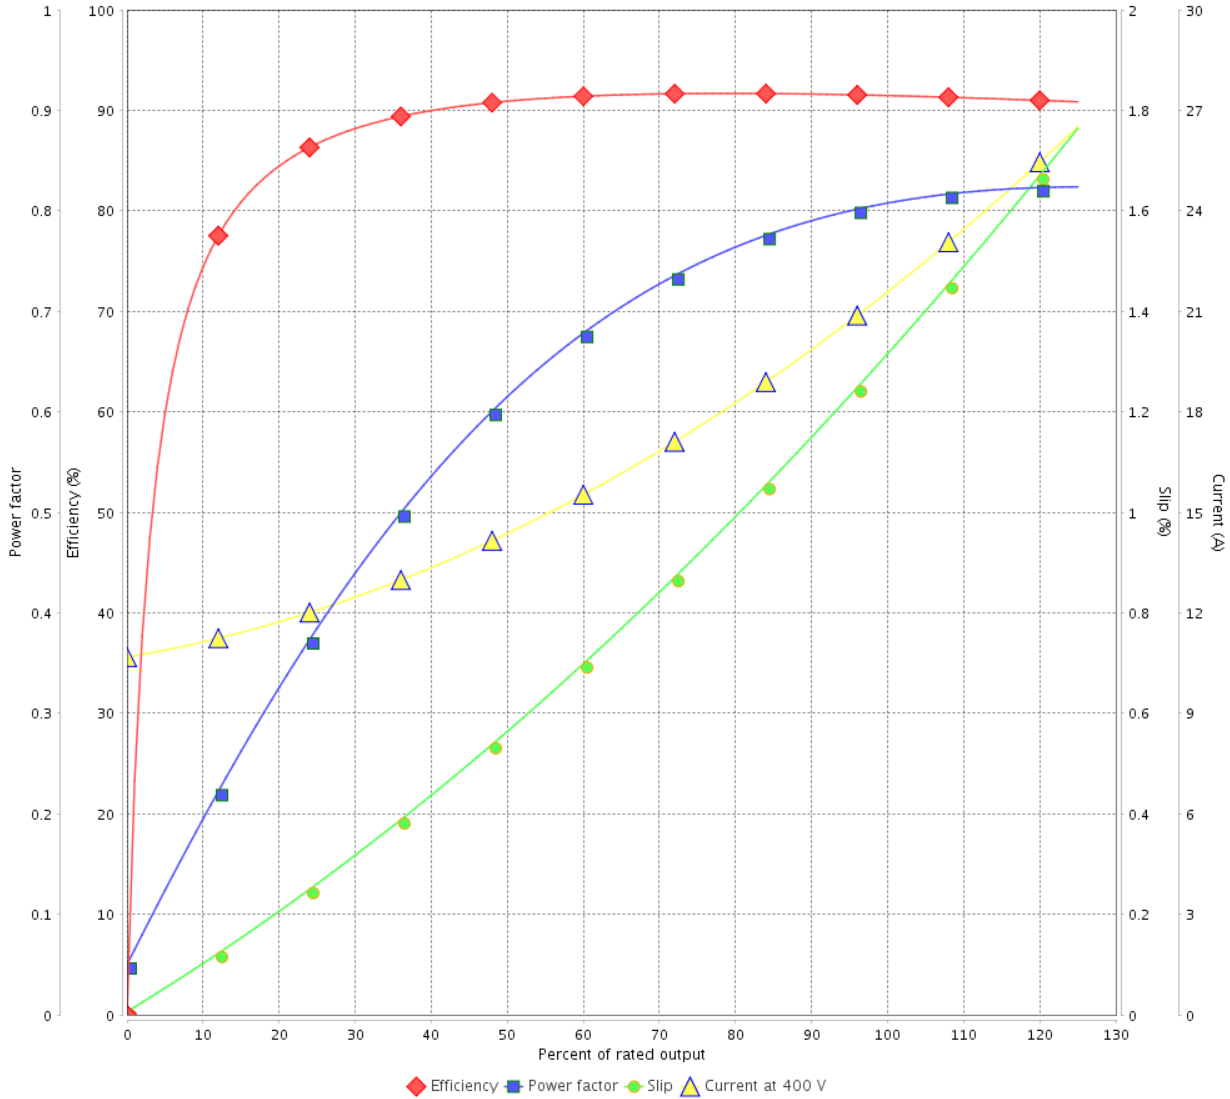

Performance : 400 V 50 Hz 4P IE3

Rated current : 21.4 A
LRC : 7.3
Rated torque : 53.2 ft.lb
Locked rotor torque : 240 %
Breakdown torque : 300 %
Rated speed : 1480 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		8 / 21		
Date	14/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

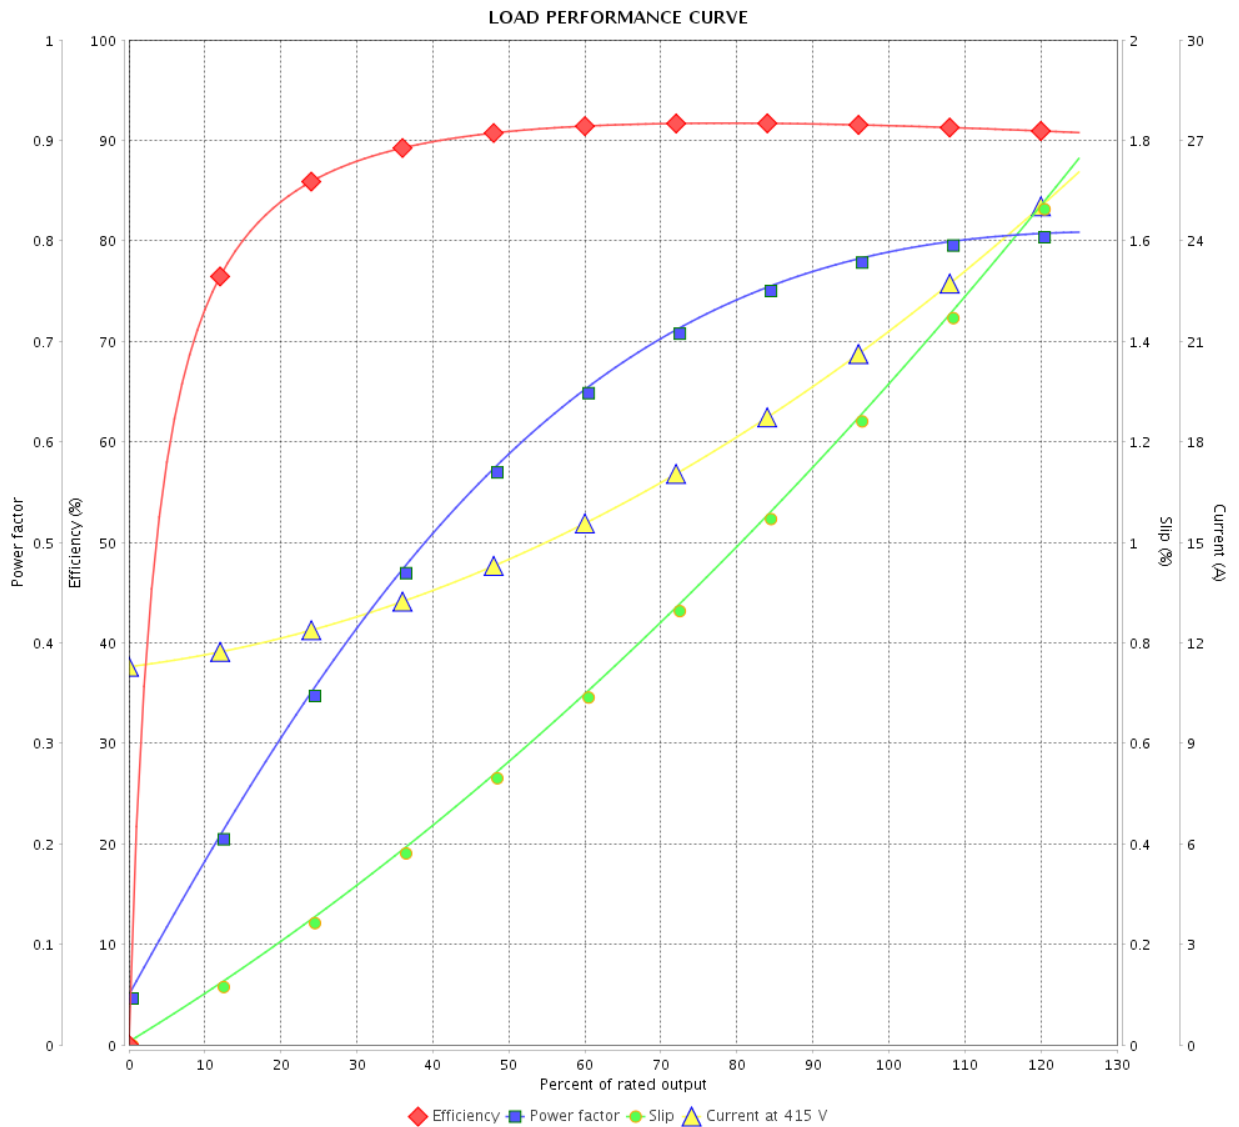

Performance : 415 V 50 Hz 4P IE3

Rated current : 21.2 A
 LRC : 7.3
 Rated torque : 53.2 ft.lb
 Locked rotor torque : 290 %
 Breakdown torque : 330 %
 Rated speed : 1480 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				
			9 / 21	

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

Performance : 230/460 V 60 Hz 4P

Rated current : 48.2/24.1 A
LRC : 6.4
Rated torque : 59.3 ft.lb
Locked rotor torque : 220 %
Breakdown torque : 250 %
Rated speed : 1770 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/04/2022		10 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

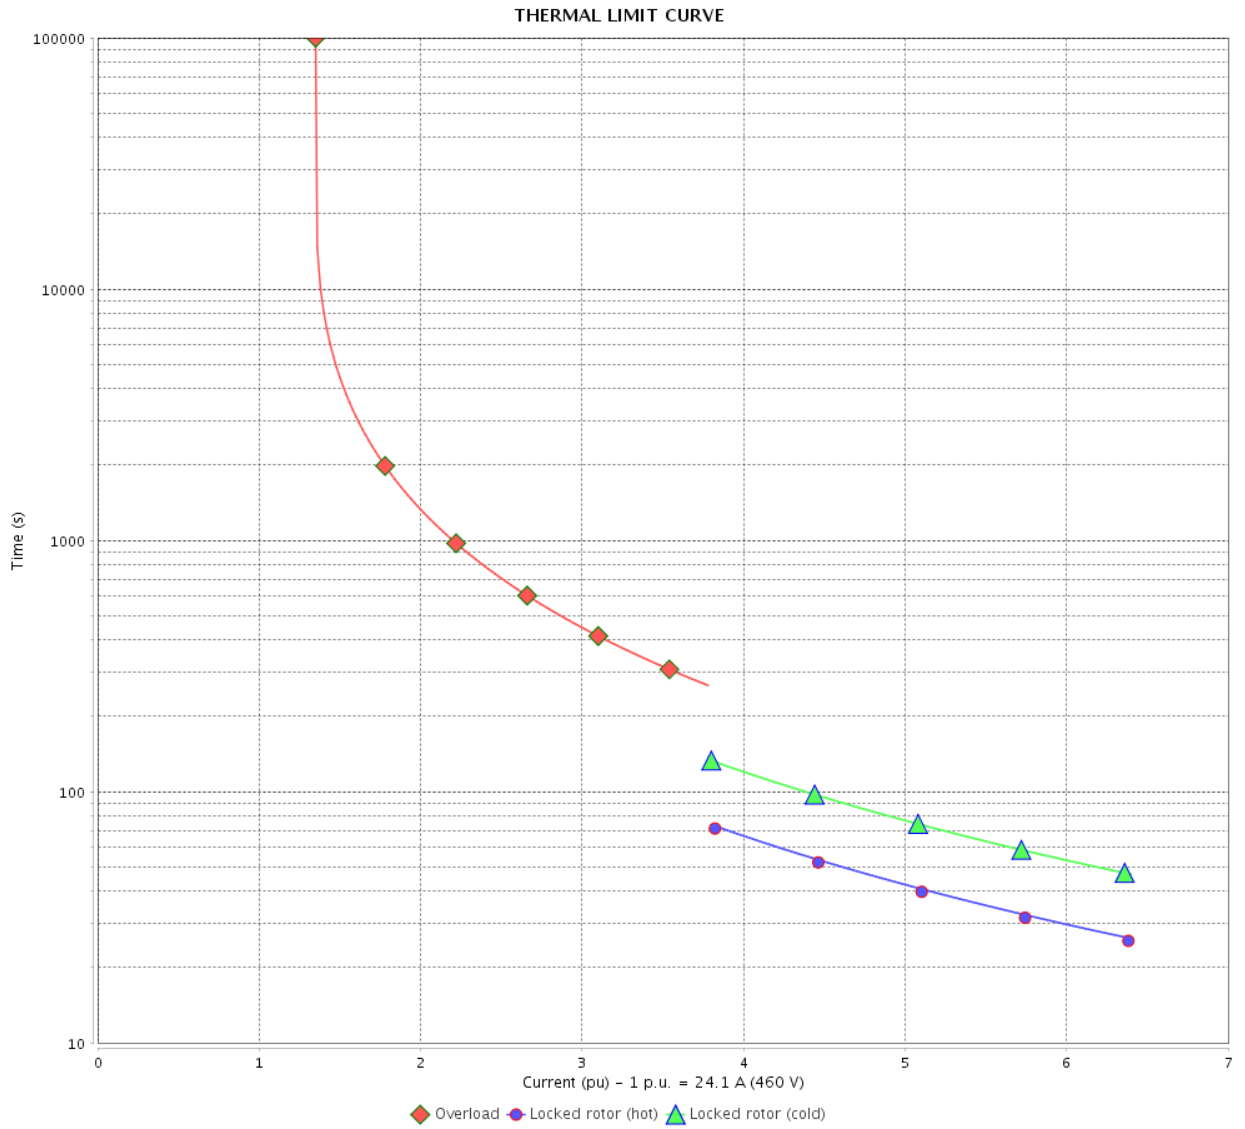

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		11 / 21		
Date		14/04/2022		

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

Performance : 380 V 50 Hz 4P IE3

Rated current : 22.0 A
LRC : 7.0
Rated torque : 53.4 ft.lb
Locked rotor torque : 250 %
Breakdown torque : 270 %
Rated speed : 1475 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/04/2022		12 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

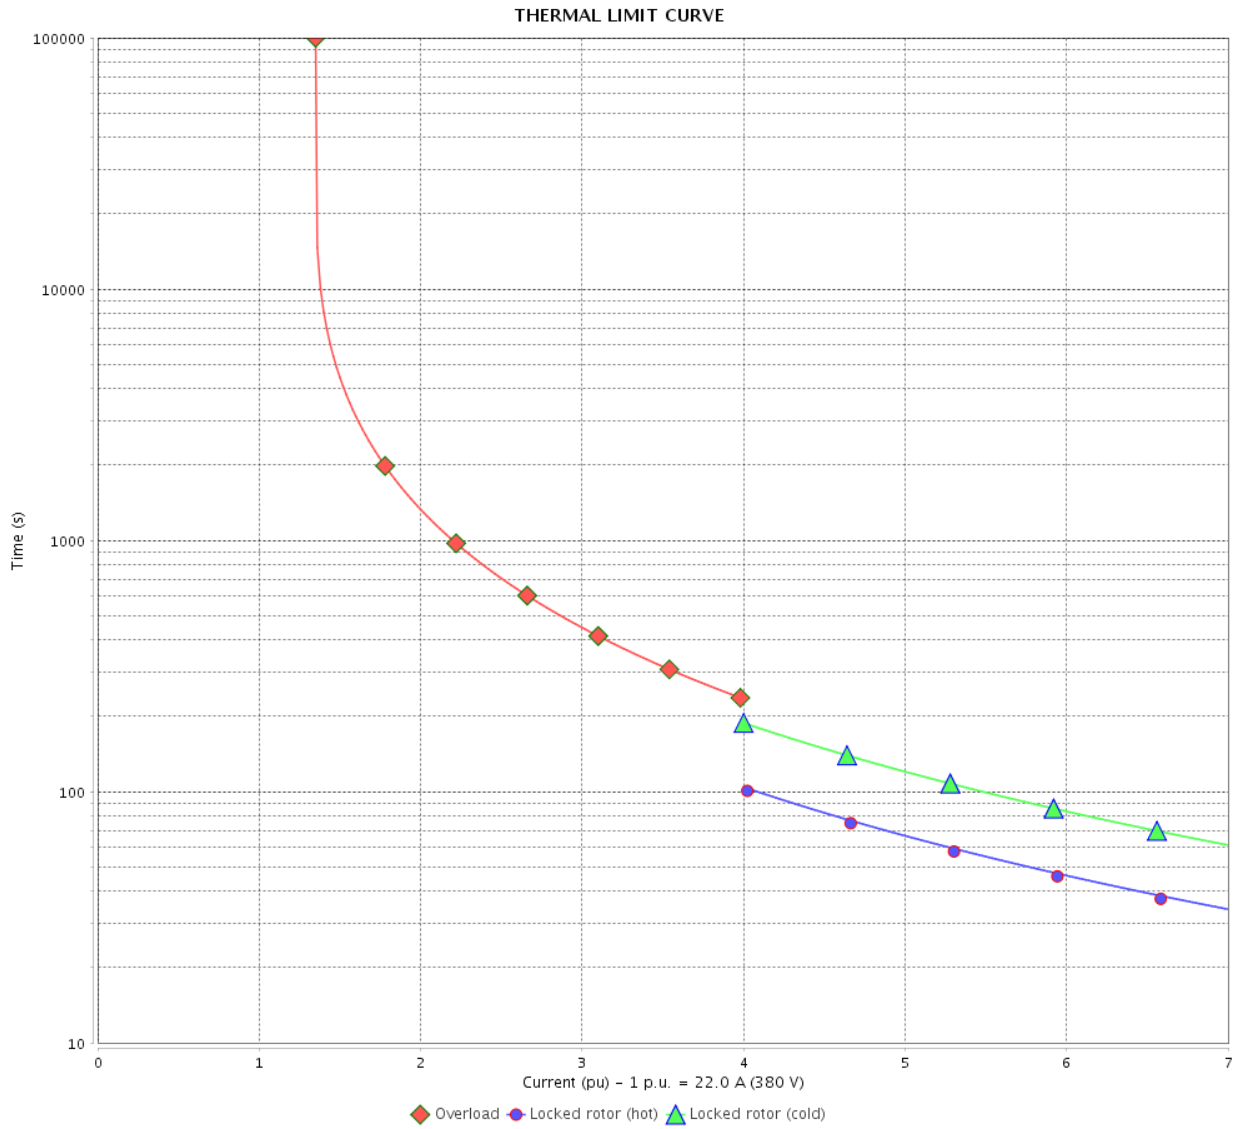

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		13 / 21		
Date		14/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

Performance : 400 V 50 Hz 4P IE3

Rated current	: 21.4 A	Moment of inertia (J)	: 3.13 sq.ft.lb
LRC	: 7.3	Duty cycle	: Cont.(S1)
Rated torque	: 53.2 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1480 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/04/2022		14 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

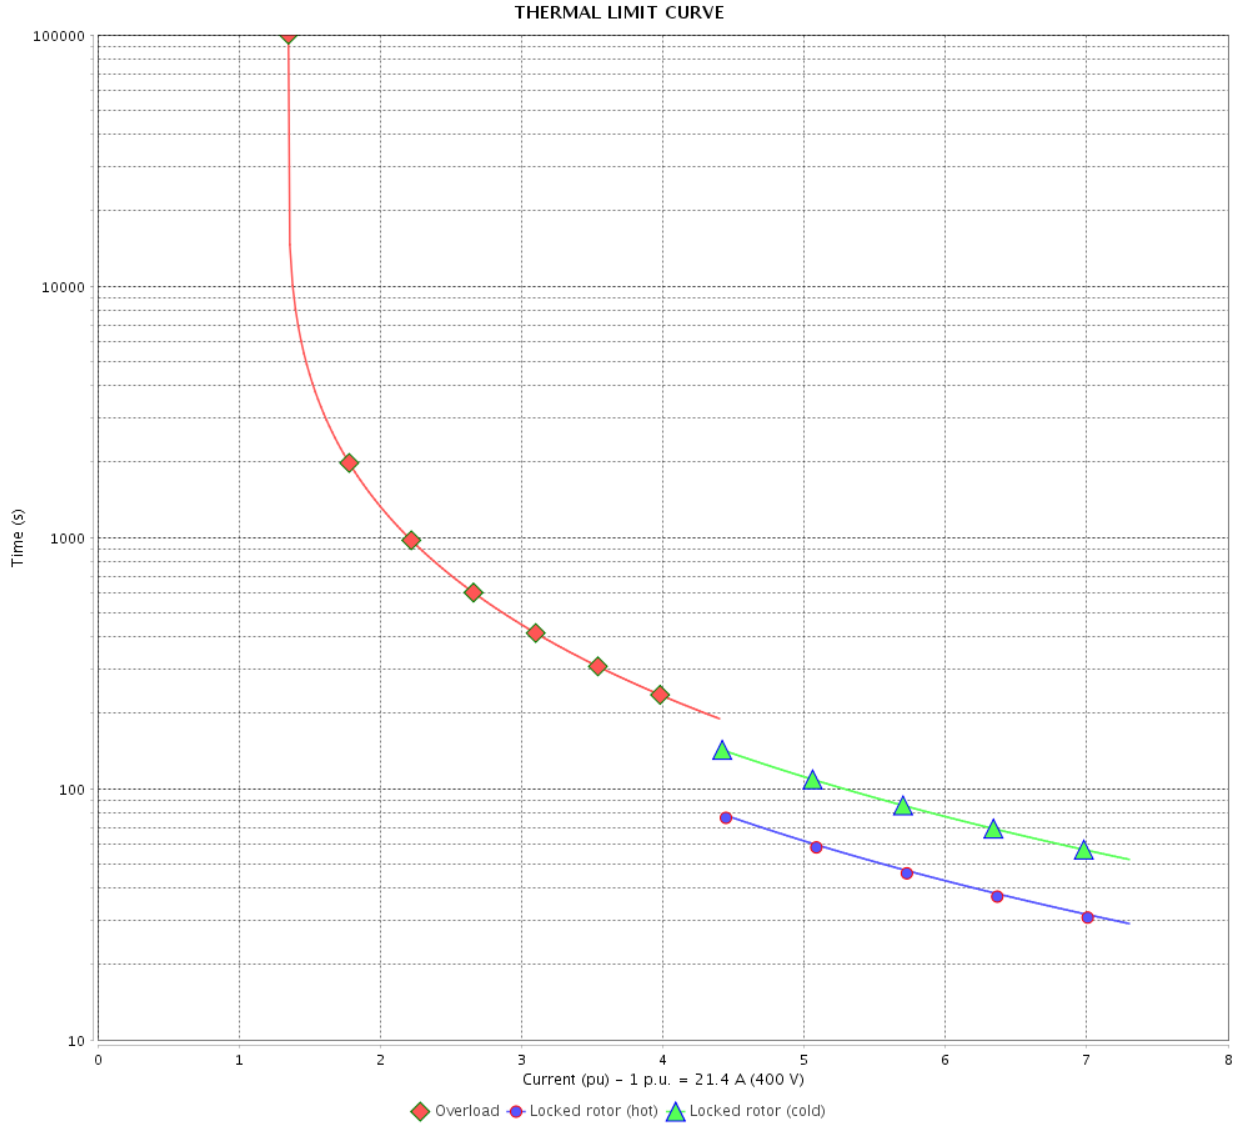

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		15 / 21		
Date		14/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency Three-Phase
 Product code : 14446706
 Catalog # : 02018OT3E256T-W40

Performance : 415 V 50 Hz 4P IE3

Rated current : 21.2 A	Moment of inertia (J) : 3.13 sq.ft.lb
LRC : 7.3	Duty cycle : Cont.(S1)
Rated torque : 53.2 ft.lb	Insulation class : F
Locked rotor torque : 290 %	Service factor : 1.00
Breakdown torque : 330 %	Temperature rise : 80 K
Rated speed : 1480 rpm	Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 16 / 21	Revision
Checked by				
Date	14/04/2022			

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

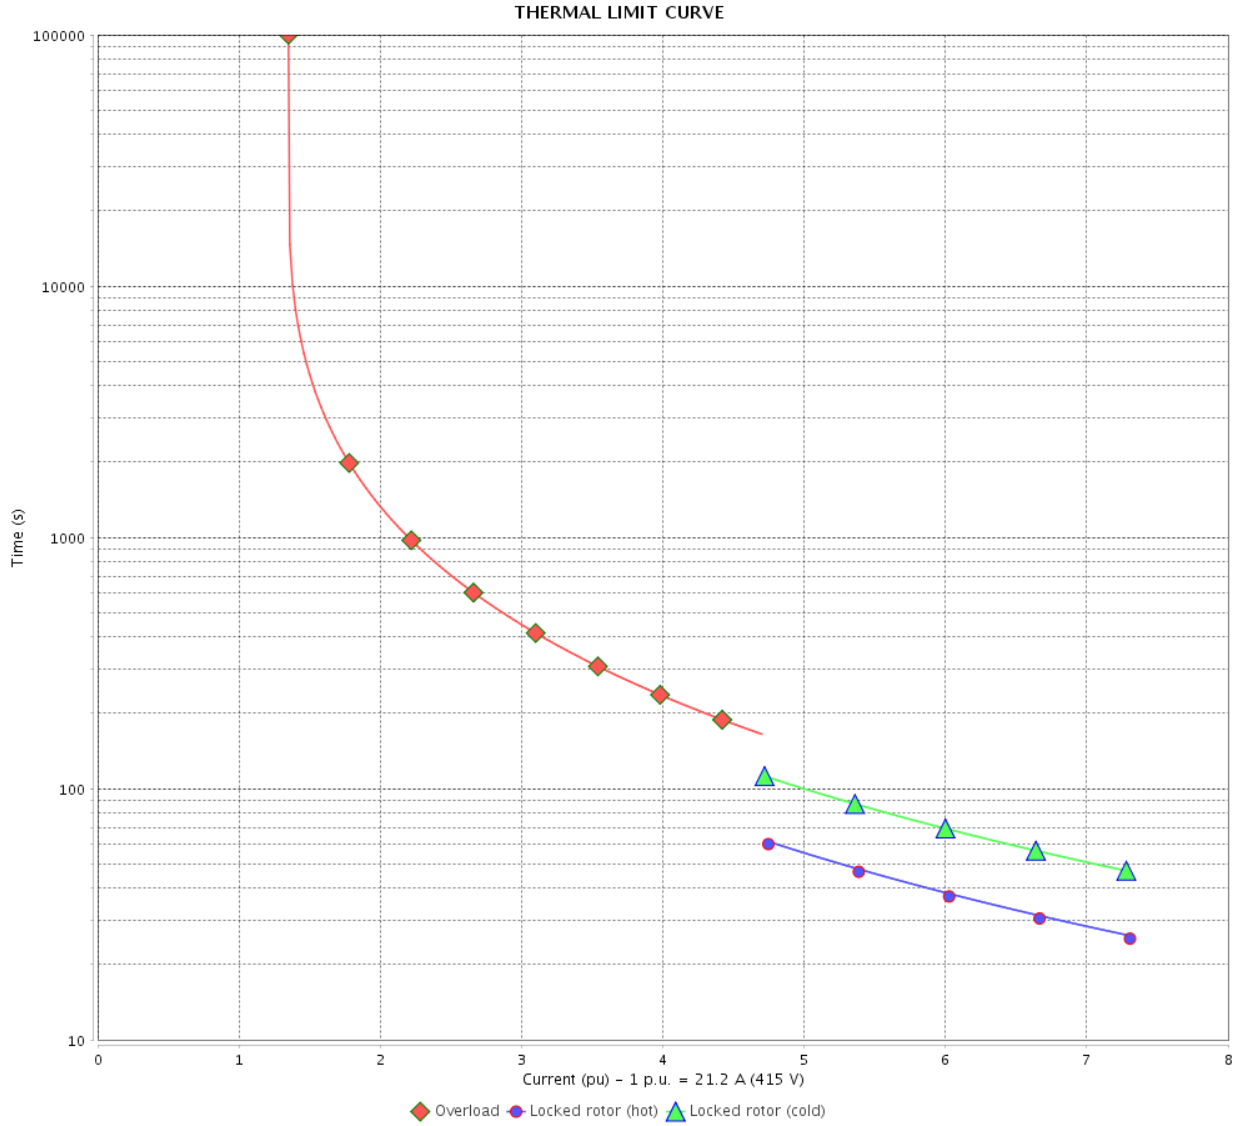

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 17 / 21		Revision
Checked by				
Date				

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

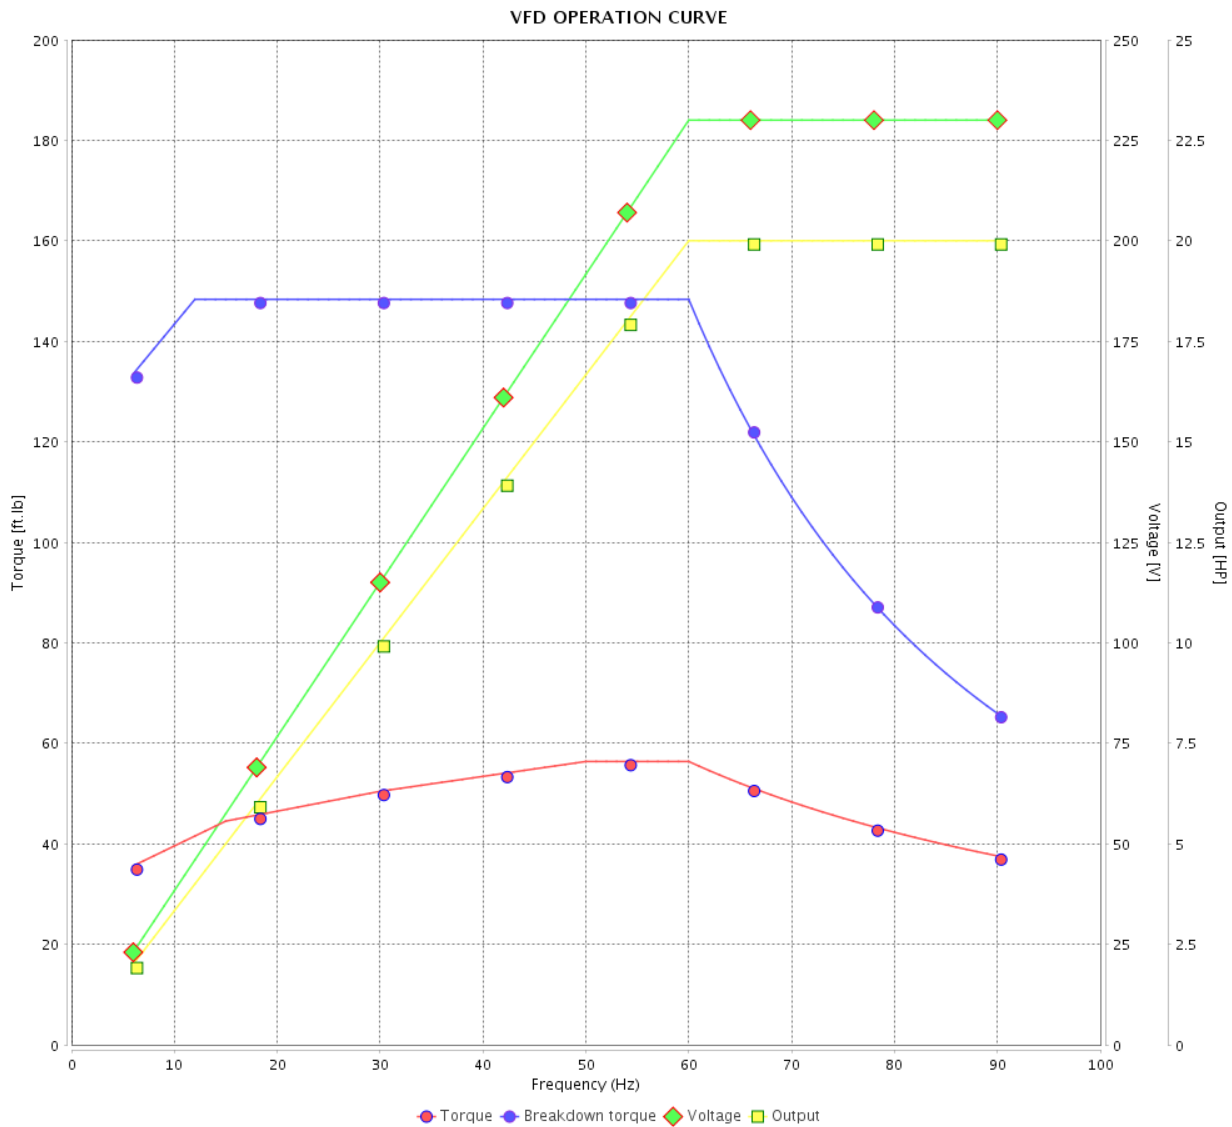

Performance : 230/460 V 60 Hz 4P

Rated current : 48.2/24.1 A
 LRC : 6.4
 Rated torque : 59.3 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 250 %
 Rated speed : 1770 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 18 / 21	Revision
Checked by				
Date	14/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

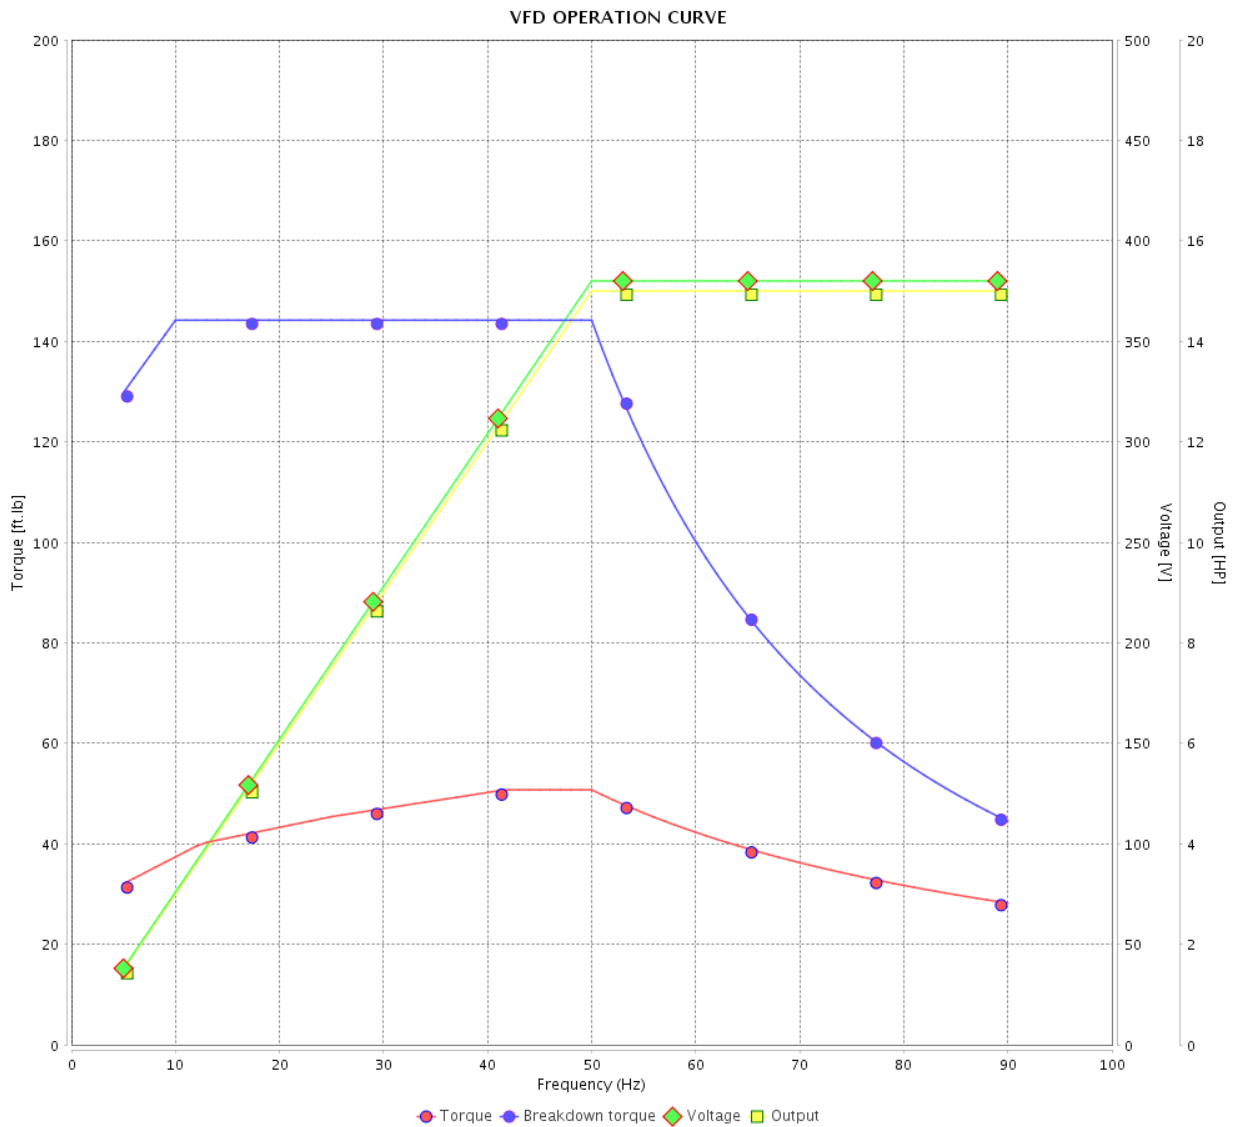

Performance : 380 V 50 Hz 4P IE3

Rated current : 22.0 A
LRC : 7.0
Rated torque : 53.4 ft.lb
Locked rotor torque : 250 %
Breakdown torque : 270 %
Rated speed : 1475 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		19 / 21		
Date	14/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : W40 NEMA Premium Efficiency Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40

VFD OPERATION CURVE

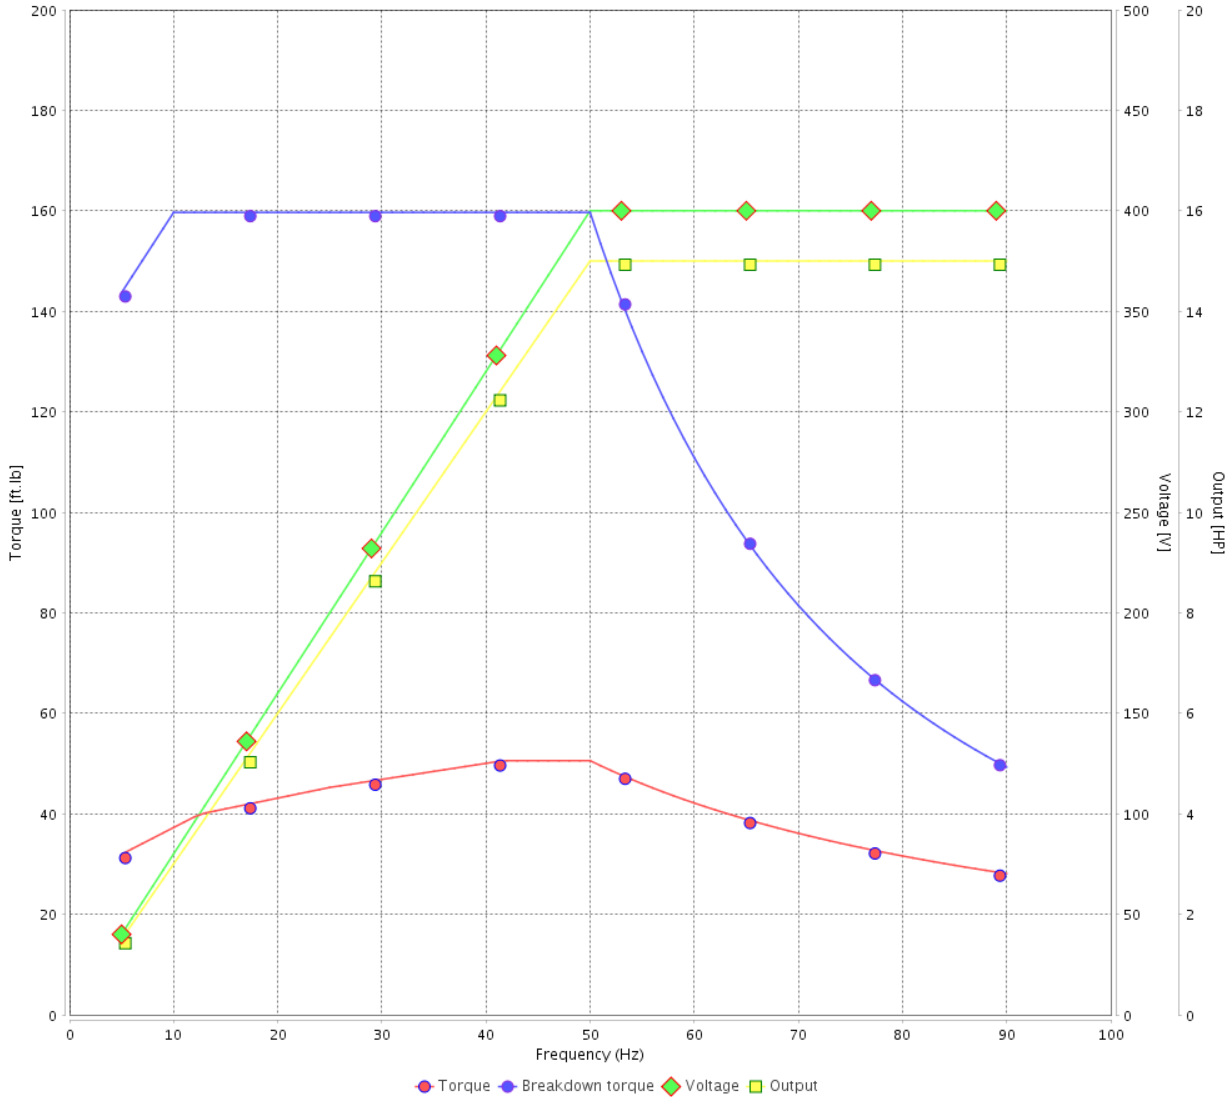

Performance : 400 V 50 Hz 4P IE3

Rated current : 21.4 A
 LRC : 7.3
 Rated torque : 53.2 ft.lb
 Locked rotor torque : 240 %
 Breakdown torque : 300 %
 Rated speed : 1480 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 20 / 21	Revision
Checked by				
Date	14/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14446706

Catalog # : 02018OT3E256T-W40


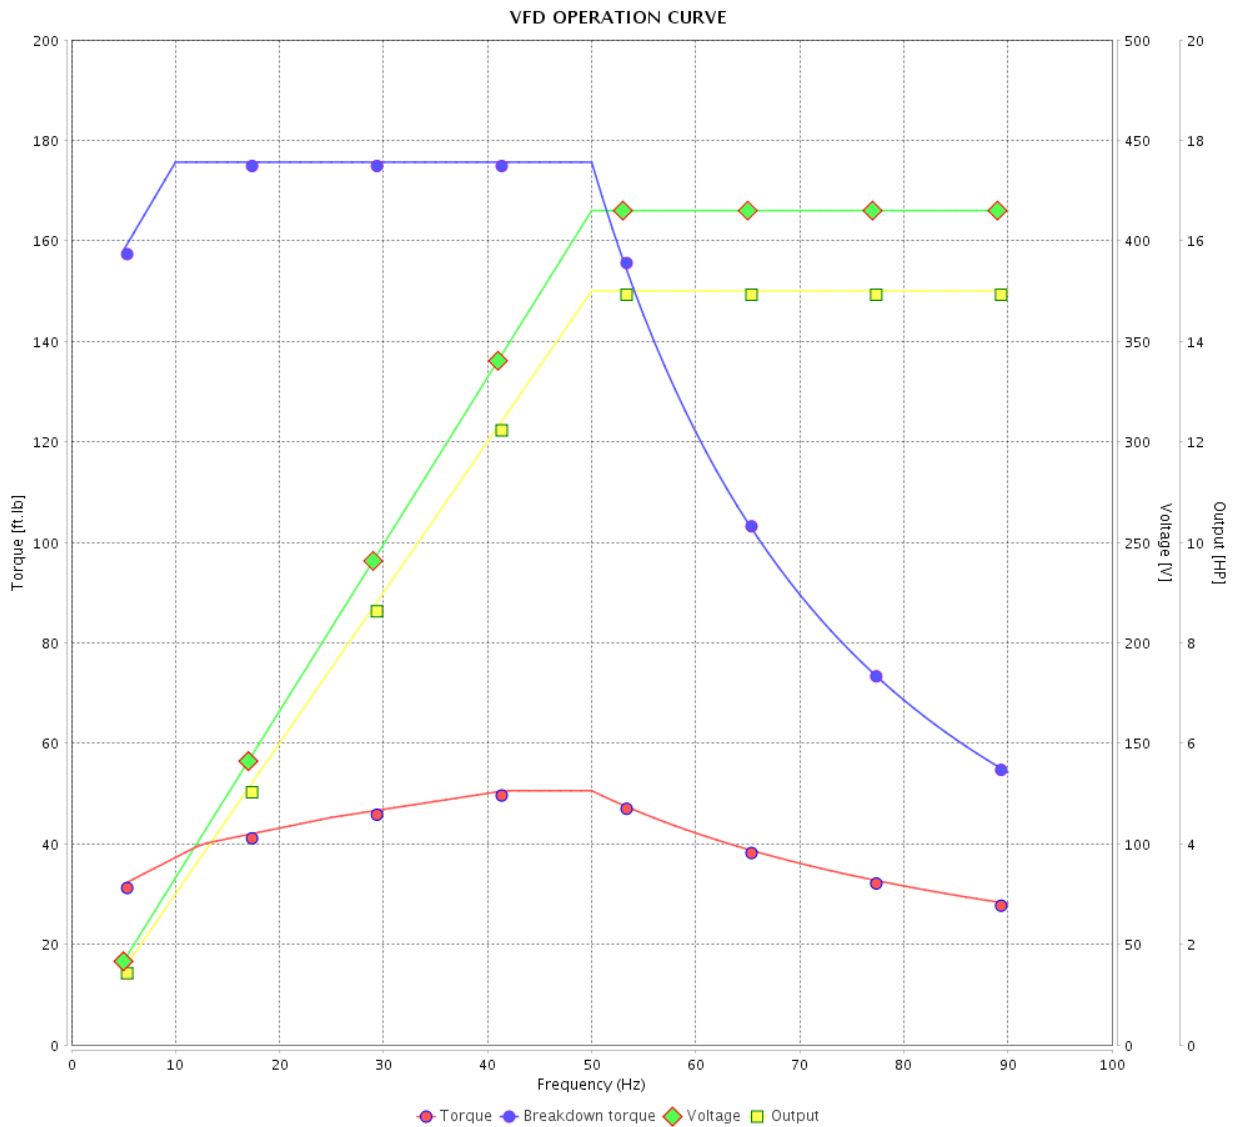


Performance : 415 V 50 Hz 4P IE3


Rated current : 21.2 A
 LRC : 7.3
 Rated torque : 53.2 ft.lb
 Locked rotor torque : 290 %
 Breakdown torque : 330 %
 Rated speed : 1480 rpm

Moment of inertia (J) : 3.13 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 21 / 21	Revision
Checked by				
Date	14/04/2022			

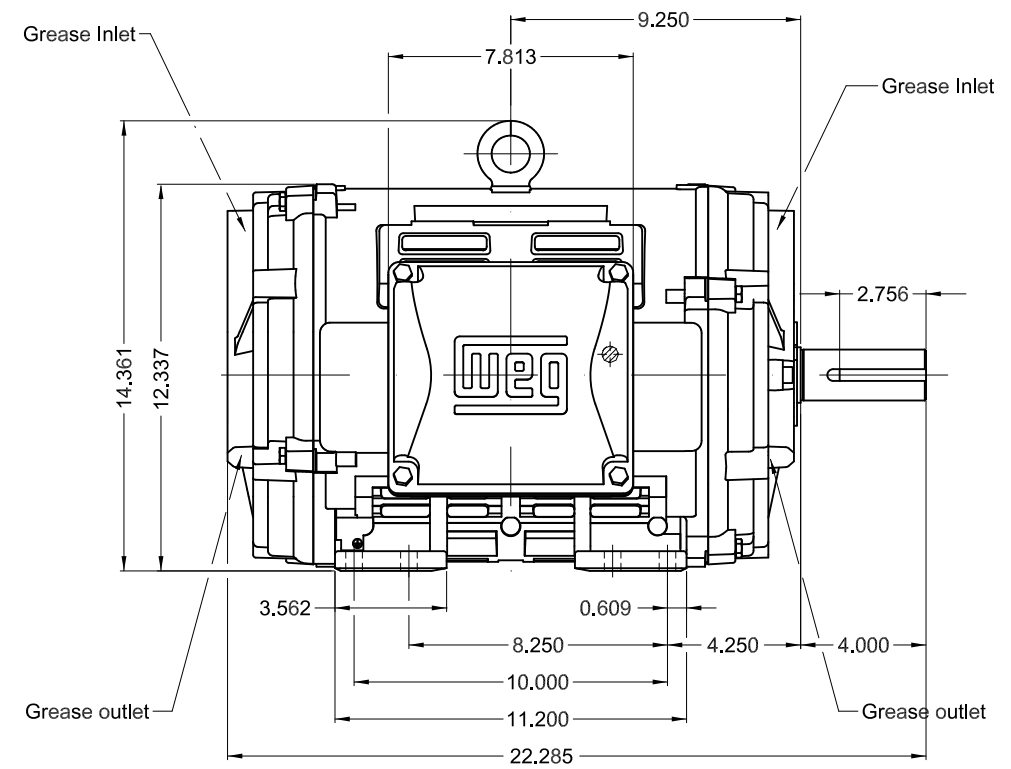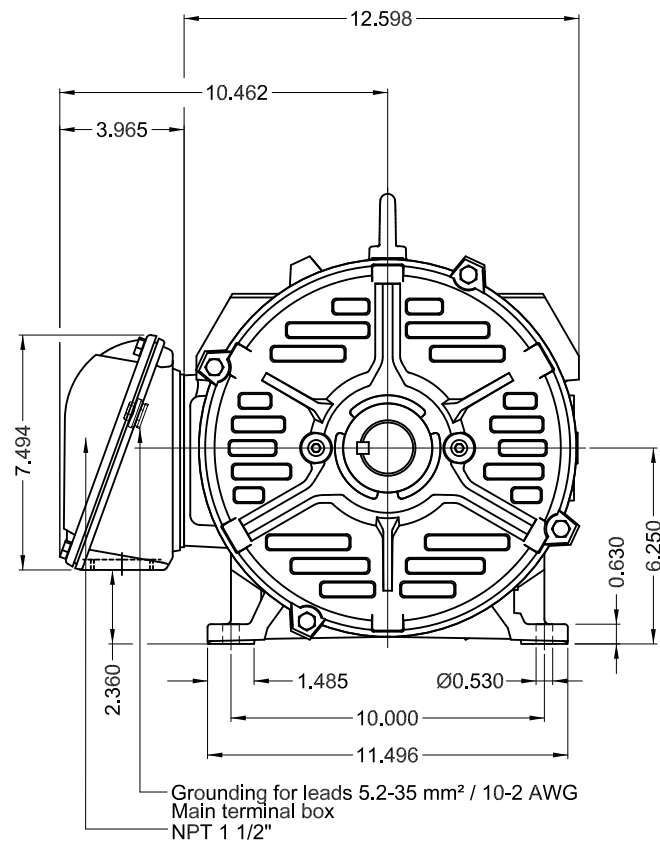

Color RAL 5009
Painting plan 203A
Mounting NEMA F-1
Mounting B3R(D)



20 HP 04 Poles 60 Hz

A

1:6

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWUSER	THREE PH. MOTOR W40 PREM. EFF.					
CHECKED		FRAME 254/6T IP23 ODP					
RELEASED							
REL DT.		WMO Jaragua do Sul					

PREVIEW
WDD



SHEET 1 / 1

Dimensions in inches

XME A3

WEG **W40 NEMA**
CC029A Premium
Inverter Duty Motor






IEC 60034-1
 MOD.T01#FOXON



For 60Hz use on PWM, VT 1000:1, CT 3:1, 1.0SF

MODEL 020180T3E256T-W40
 MADE IN BRAZIL
 14446706

PH 3	FR 254/6T	HP(kW) 20.0(15.0)	Hz 60
V 230/460	A 48.2/24.1	RPM 1770	DES B
NEMA NOM EFF 93.0 %	INS. CL. F Δ T 80 K	IP23	
ENCL ODP	DUTY CONT.	AMB. 40°C	
CODE G	PF 0.84	SF 1.25	SFA 60.3/30.1
USABLE @208V	53.3 A	SF 1.15	SFA 61.3
15HP 11kW 50Hz 380V 22.0A 1475RPM SF1.00 EFF 91.5% (IE3)	ALT 1000 m.a.s.l.		



MOBIL POLYREX EM
 13 g 20000 h

ALT 1000 m.a.s.l. 276 Lbs