

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	14407501		
		Catalog # :	02018XT3ER256TC		
Frame	: 256TC	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: W-6		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 394 lb		
Protection degree	: IP55	Moment of inertia (J)	: 2.89 sq.ft.lb		
Design	: B				
Output [HP]	20	20	20	20	
Poles	4	4	4	4	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	50.0/25.0	29.8	29.0	28.4	
L. R. Amperes [A]	375/188	173	186	199	
LRC [A]	7.5x(Code J)	5.8x(Code G)	6.4x(Code H)	7.0x(Code J)	
No load current [A]	23.6/11.8	11.7	12.8	13.8	
Rated speed [RPM]	1770	1455	1460	1465	
Slip [%]	1.67	3.00	2.67	2.33	
Rated torque [ft.lb]	59.3	72.2	71.9	71.7	
Locked rotor torque [%]	300	210	240	260	
Breakdown torque [%]	300	220	240	260	
Service factor	1.15	1.00	1.00	1.00	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	36s (cold) 20s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)	36s (cold) 20s (hot)	
Noise level ²	69.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	
Efficiency (%)	25%	91.0	92.9	92.1	91.5
	50%	91.7	92.4	91.7	91.7
	75%	92.4	91.7	91.7	91.7
	100%	93.0	91.0	91.0	91.7
Power Factor	25%	0.38	0.43	0.40	0.37
	50%	0.63	0.69	0.65	0.62
	75%	0.75	0.79	0.77	0.74
	100%	0.81	0.84	0.82	0.80
Bearing type	: <u>Drive end</u> 6309 C3 <u>Non drive end</u> 6209 C3	Foundation loads			
Sealing	: Oil Seal Lip Seal	Max. traction	: 697 lb		
Lubrication interval	: 14395 h 15700 h	Max. compression	: 1091 lb		
Lubricant amount	: 13 g 9 g				
Lubricant type	: Mobil Polyrex EM				
Notes USABLE @208V 55.3A SF 1.15 SFA 63.6A					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	14/04/2022			1 / 22	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/04/2022		2 / 22	

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

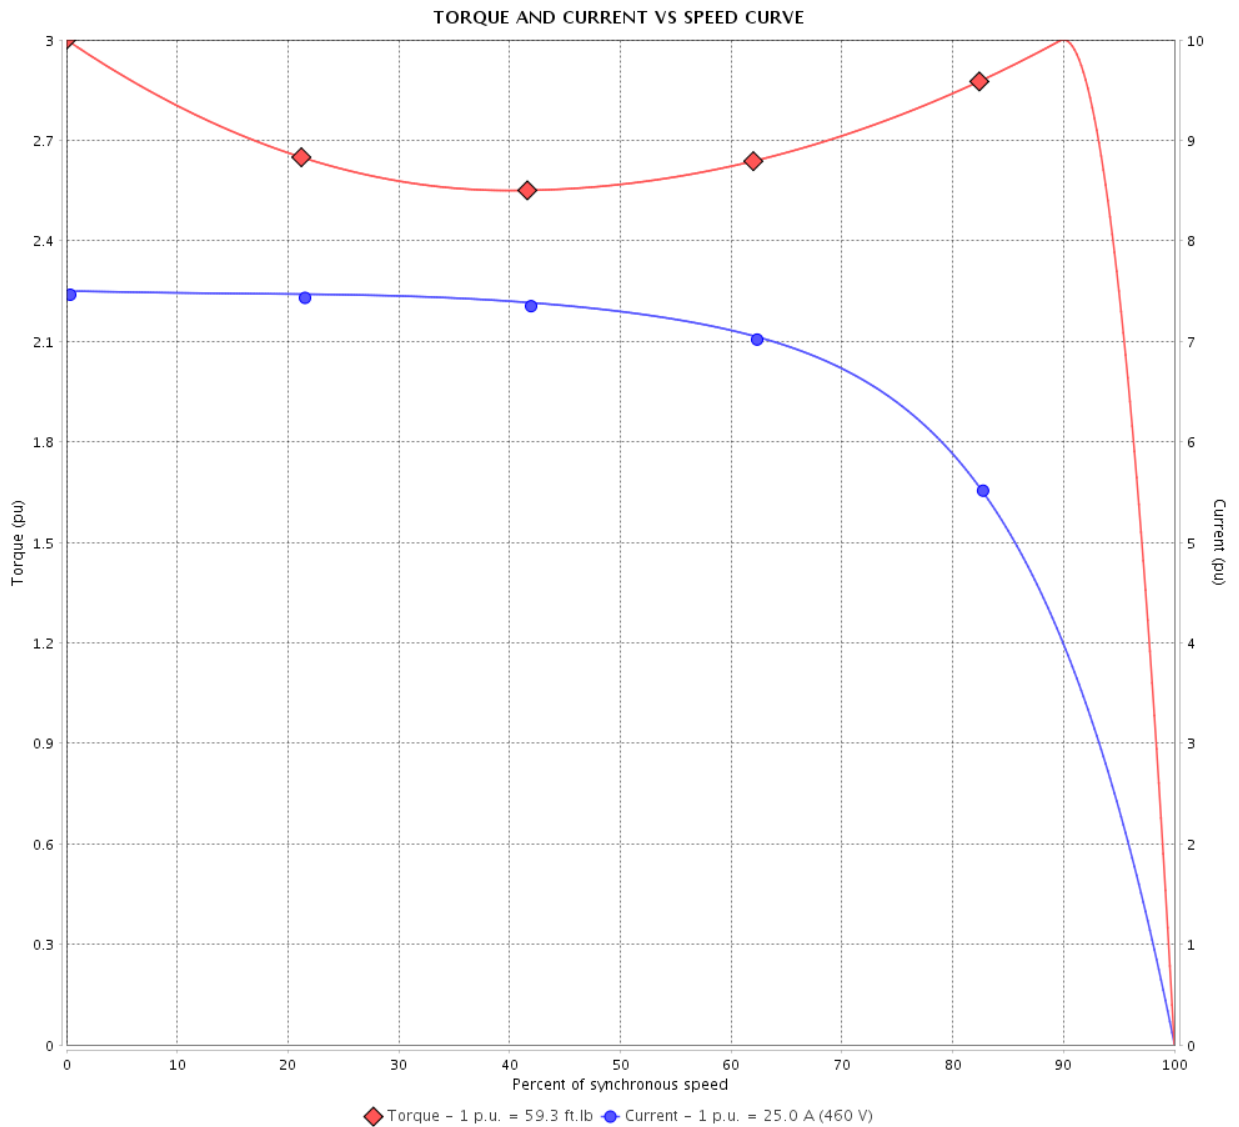

Performance : 230/460 V 60 Hz 4P

Rated current : 50.0/25.0 A
 LRC : 7.5
 Rated torque : 59.3 ft.lb
 Locked rotor torque : 300 %
 Breakdown torque : 300 %
 Rated speed : 1770 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Locked rotor time : 36s (cold) 20s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 22	Revision
Checked by				
Date	14/04/2022			

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

TORQUE AND CURRENT VS SPEED CURVE

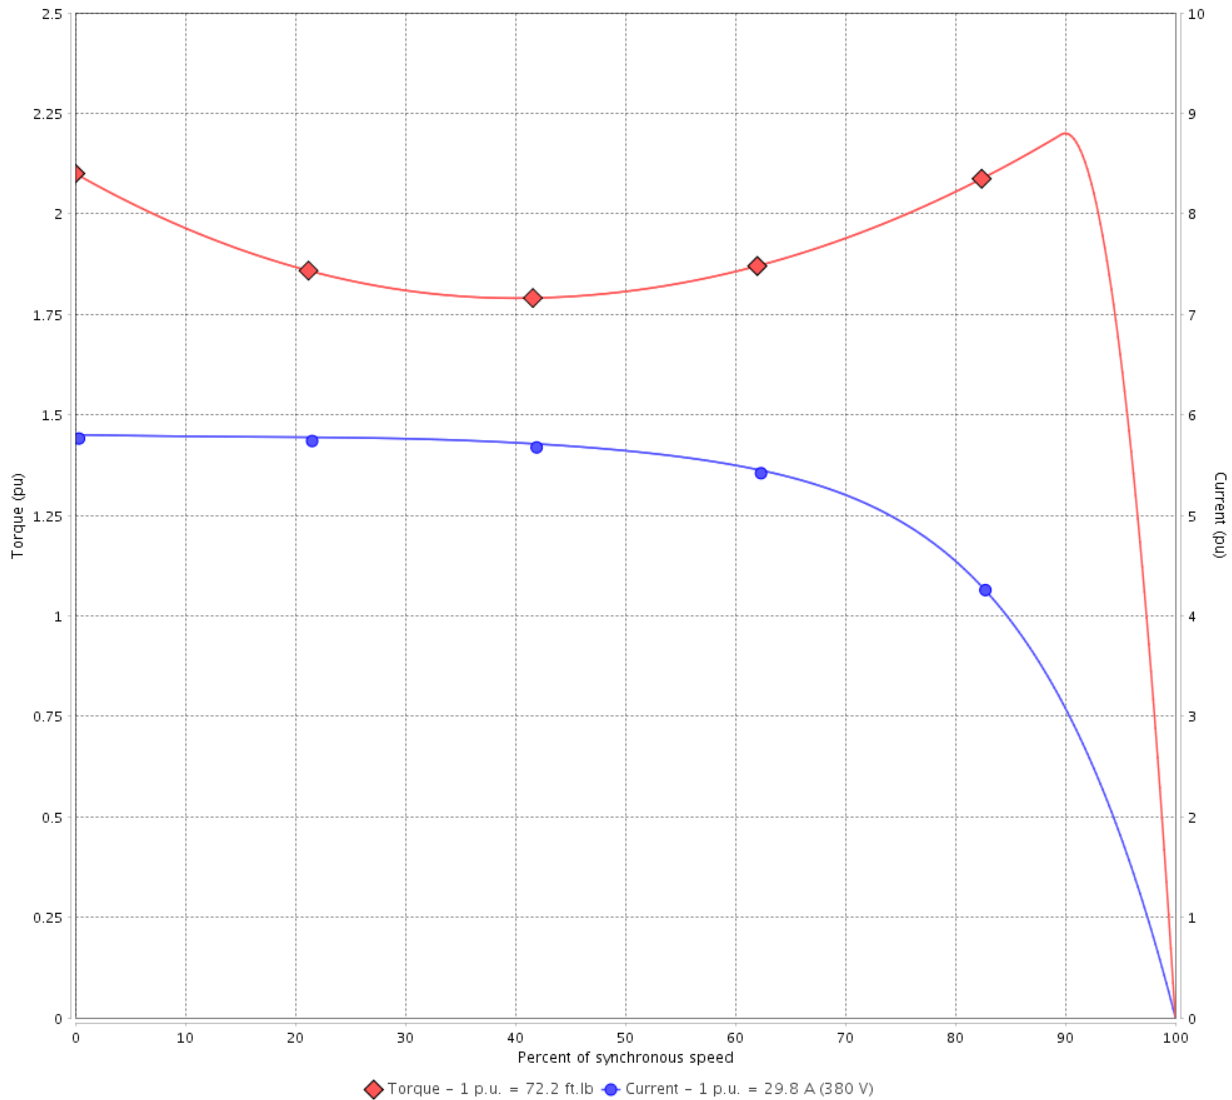

Performance : 380 V 50 Hz 4P IE2

Rated current	: 29.8 A	Moment of inertia (J)	: 2.89 sq.ft.lb
LRC	: 5.8	Duty cycle	: Cont.(S1)
Rated torque	: 72.2 ft.lb	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.00
Breakdown torque	: 220 %	Temperature rise	: 80 K
Rated speed	: 1455 rpm	Design	: B

Locked rotor time : 36s (cold) 20s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 22	Revision
Checked by				
Date	14/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

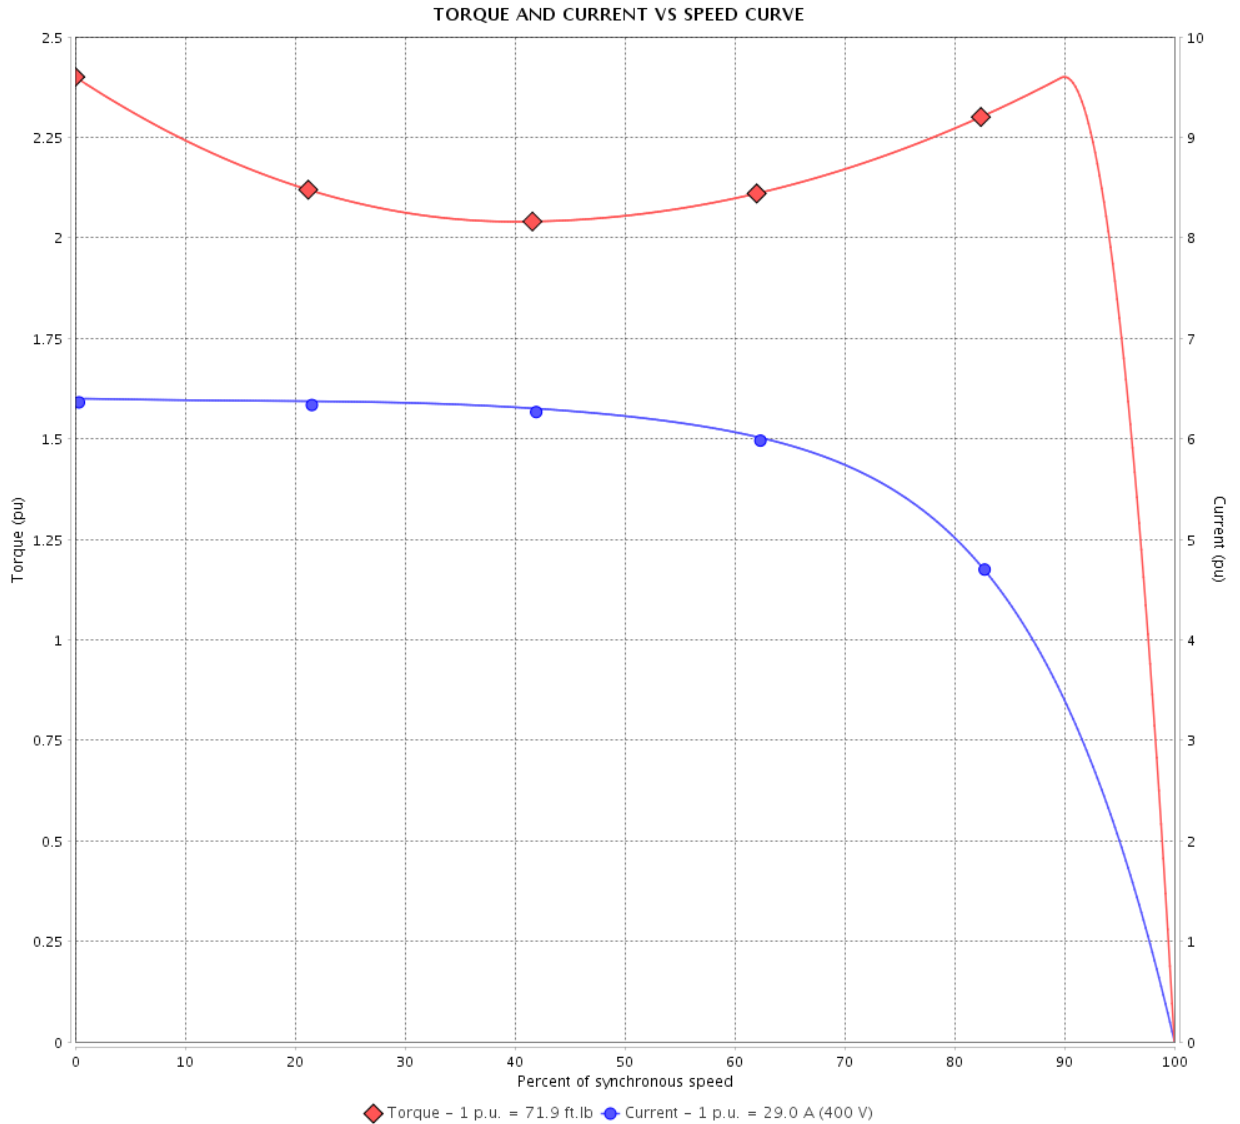

Performance : 400 V 50 Hz 4P IE2

Rated current : 29.0 A
 LRC : 6.4
 Rated torque : 71.9 ft.lb
 Locked rotor torque : 240 %
 Breakdown torque : 240 %
 Rated speed : 1460 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Locked rotor time : 36s (cold) 20s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 22	Revision
Checked by				
Date	14/04/2022			

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

TORQUE AND CURRENT VS SPEED CURVE

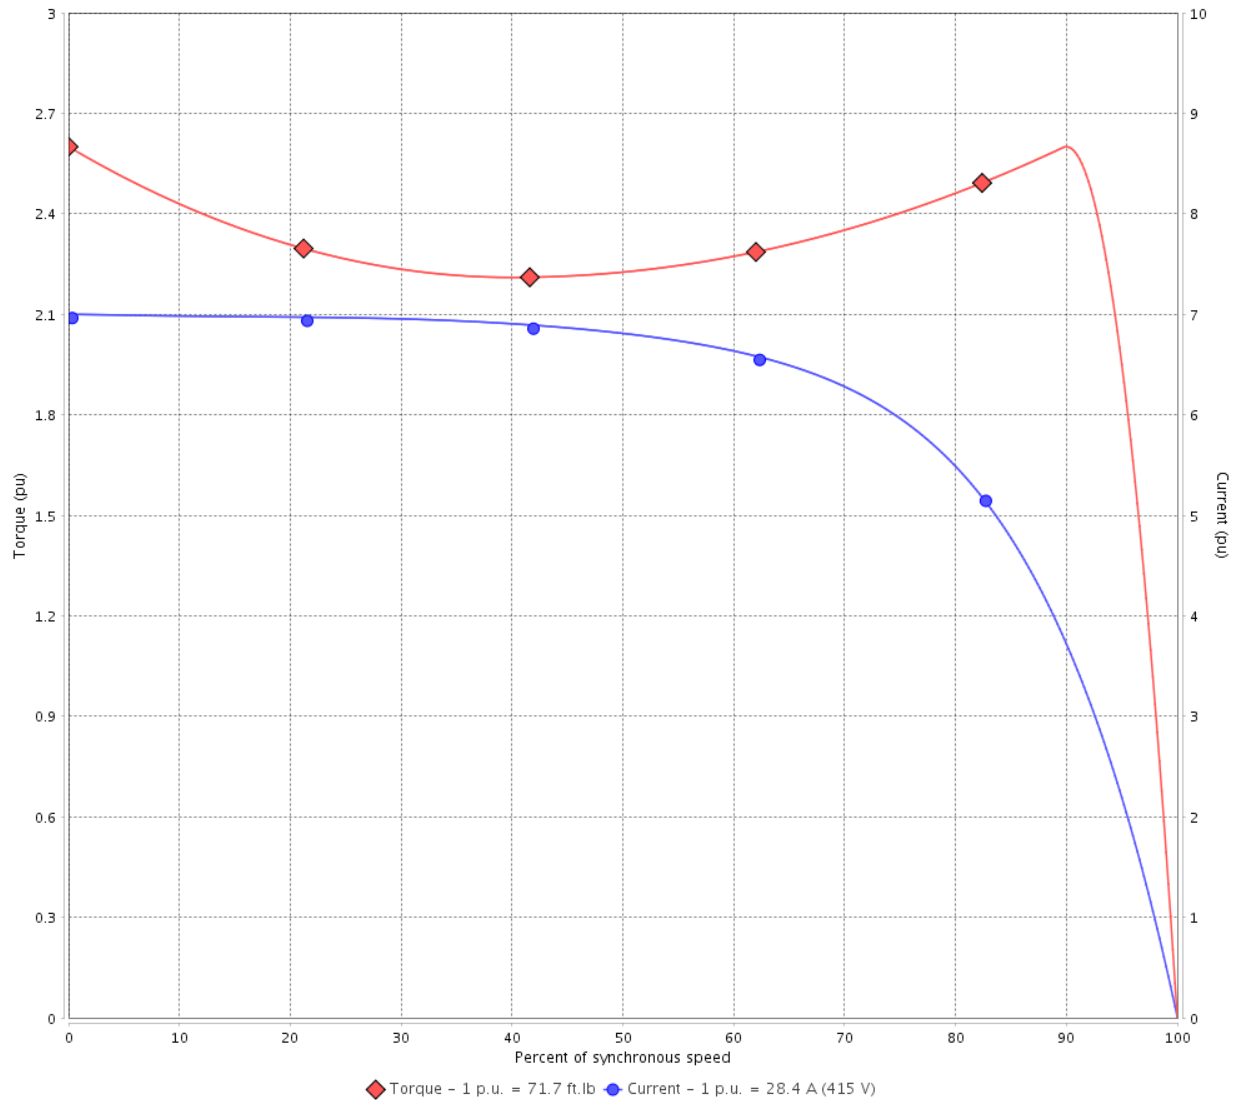

Performance : 415 V 50 Hz 4P IE2

Rated current	: 28.4 A	Moment of inertia (J)	: 2.89 sq.ft.lb
LRC	: 7.0	Duty cycle	: Cont.(S1)
Rated torque	: 71.7 ft.lb	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.00
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 1465 rpm	Design	: B

Locked rotor time : 36s (cold) 20s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 22	Revision
Checked by				
Date	14/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

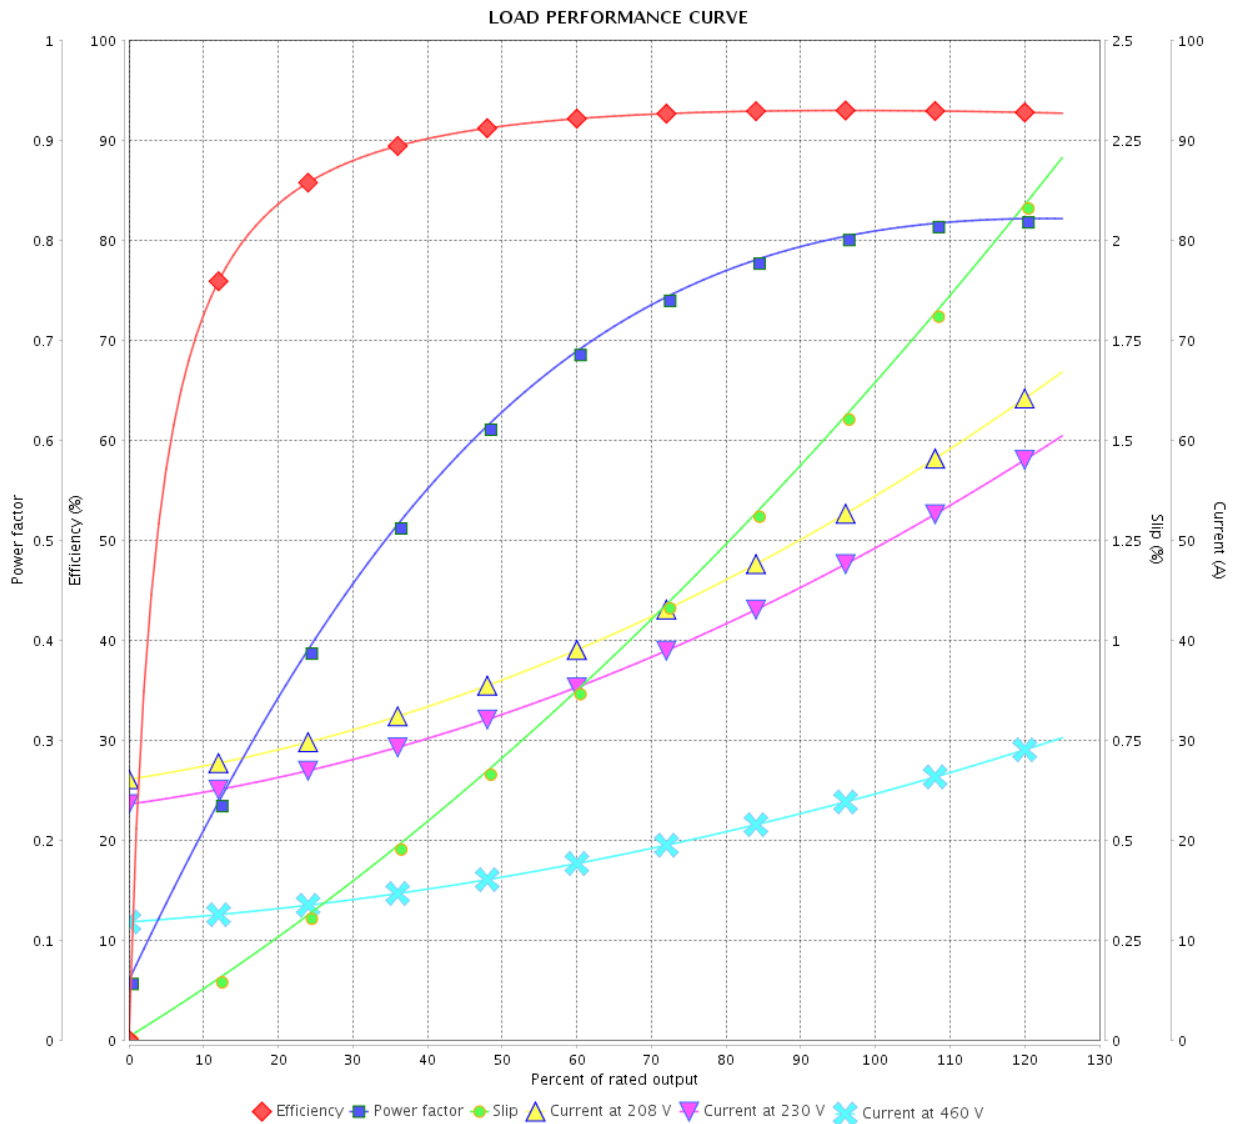

Performance : 230/460 V 60 Hz 4P

Rated current : 50.0/25.0 A
 LRC : 7.5
 Rated torque : 59.3 ft.lb
 Locked rotor torque : 300 %
 Breakdown torque : 300 %
 Rated speed : 1770 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		7 / 22		
Date		14/04/2022		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

LOAD PERFORMANCE CURVE

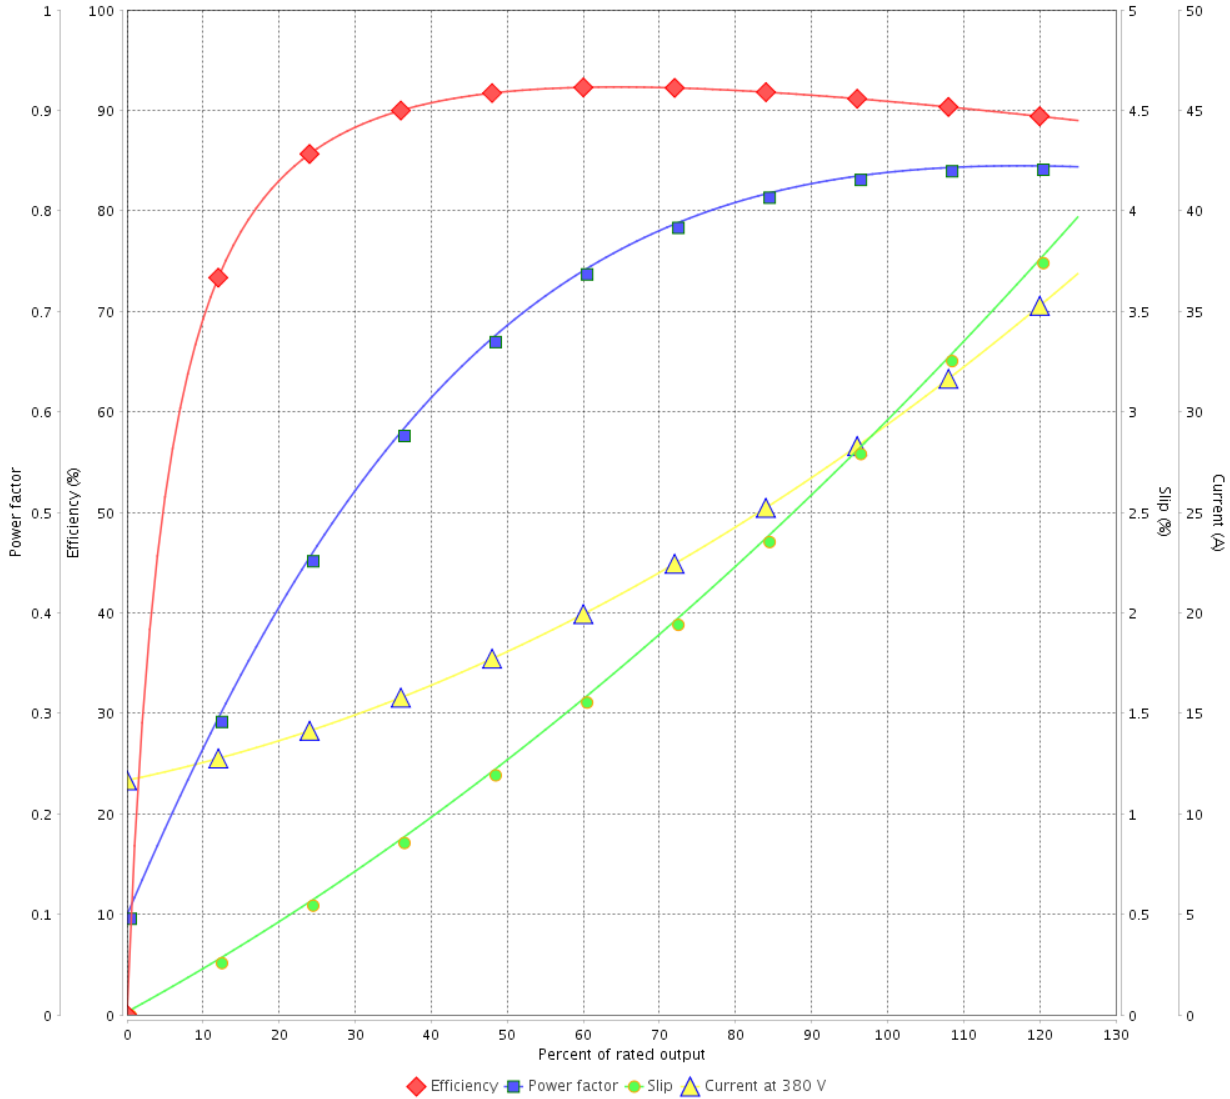

Performance : 380 V 50 Hz 4P IE2

Rated current : 29.8 A
 LRC : 5.8
 Rated torque : 72.2 ft.lb
 Locked rotor torque : 210 %
 Breakdown torque : 220 %
 Rated speed : 1455 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		8 / 22		
Date		14/04/2022		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

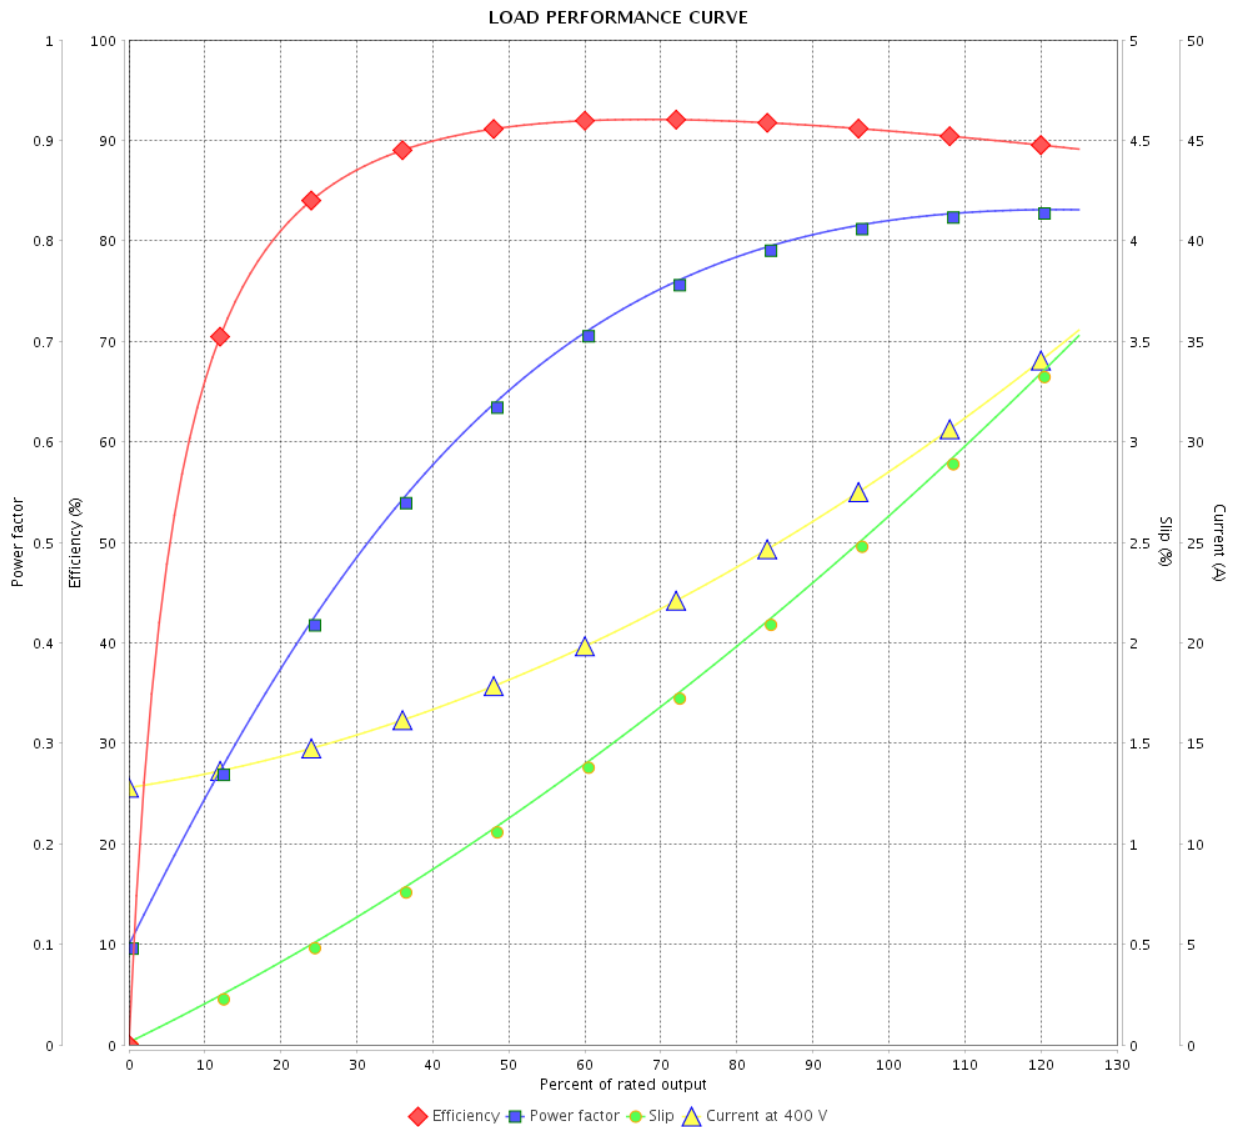

Performance : 400 V 50 Hz 4P IE2

Rated current : 29.0 A
 LRC : 6.4
 Rated torque : 71.9 ft.lb
 Locked rotor torque : 240 %
 Breakdown torque : 240 %
 Rated speed : 1460 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 22		
Date		14/04/2022		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

LOAD PERFORMANCE CURVE

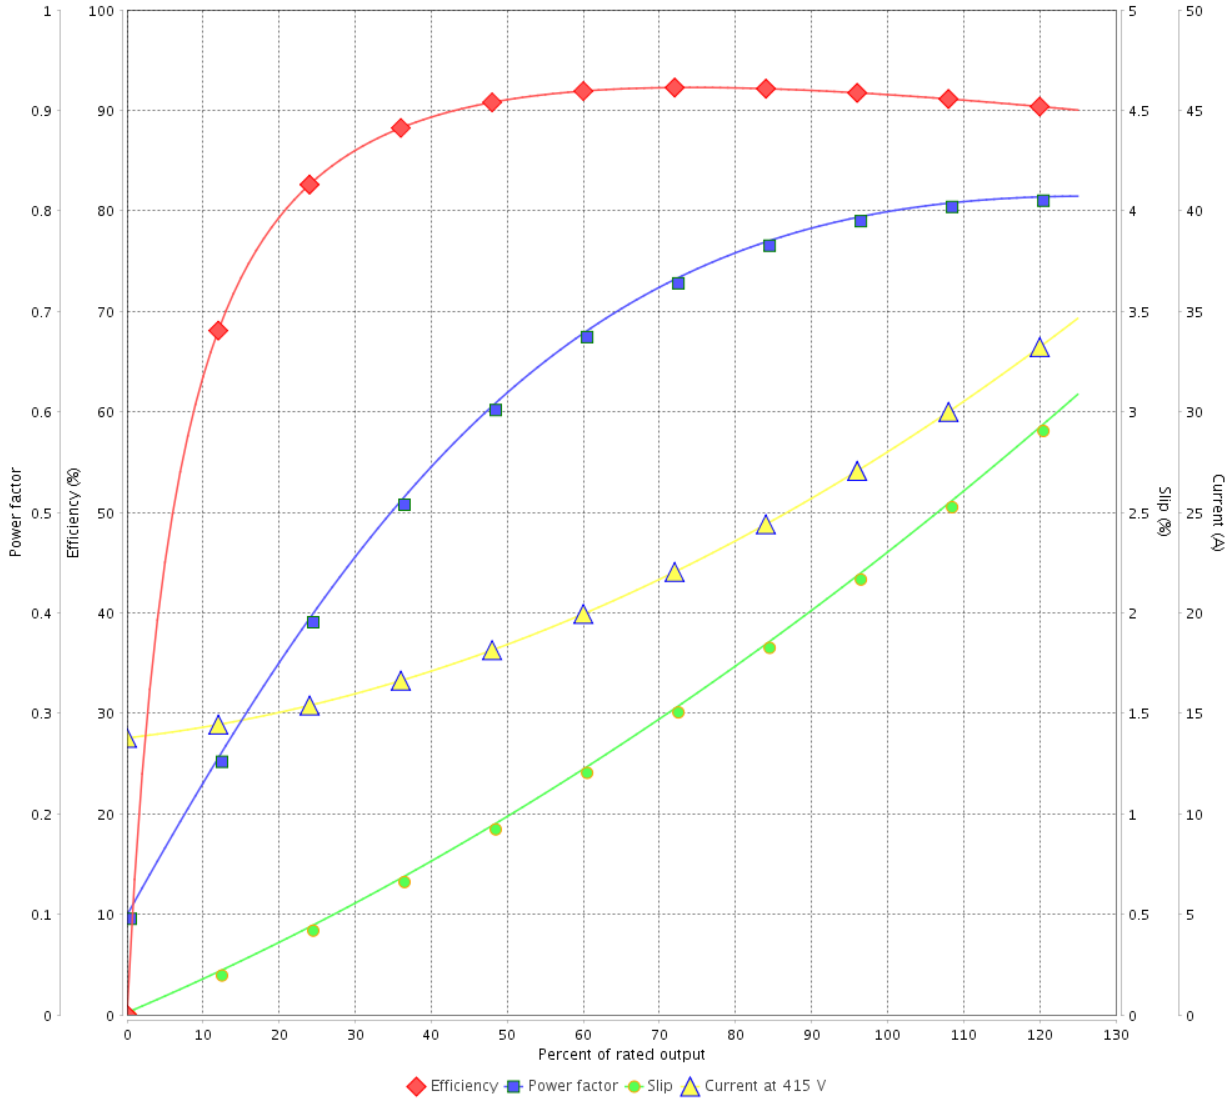

Performance : 415 V 50 Hz 4P IE2

Rated current : 28.4 A
 LRC : 7.0
 Rated torque : 71.7 ft.lb
 Locked rotor torque : 260 %
 Breakdown torque : 260 %
 Rated speed : 1465 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 10 / 22	Revision
Checked by				
Date	14/04/2022			

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase
 Product code : 14407501
 Catalog # : 02018XT3ER256TC

Performance : 230/460 V 60 Hz 4P

Rated current : 50.0/25.0 A	Moment of inertia (J) : 2.89 sq.ft.lb
LRC : 7.5	Duty cycle : Cont.(S1)
Rated torque : 59.3 ft.lb	Insulation class : F
Locked rotor torque : 300 %	Service factor : 1.15
Breakdown torque : 300 %	Temperature rise : 80 K
Rated speed : 1770 rpm	Design : B

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 11 / 22	Revision
Checked by				
Date	14/04/2022			


THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

THERMAL LIMIT CURVE

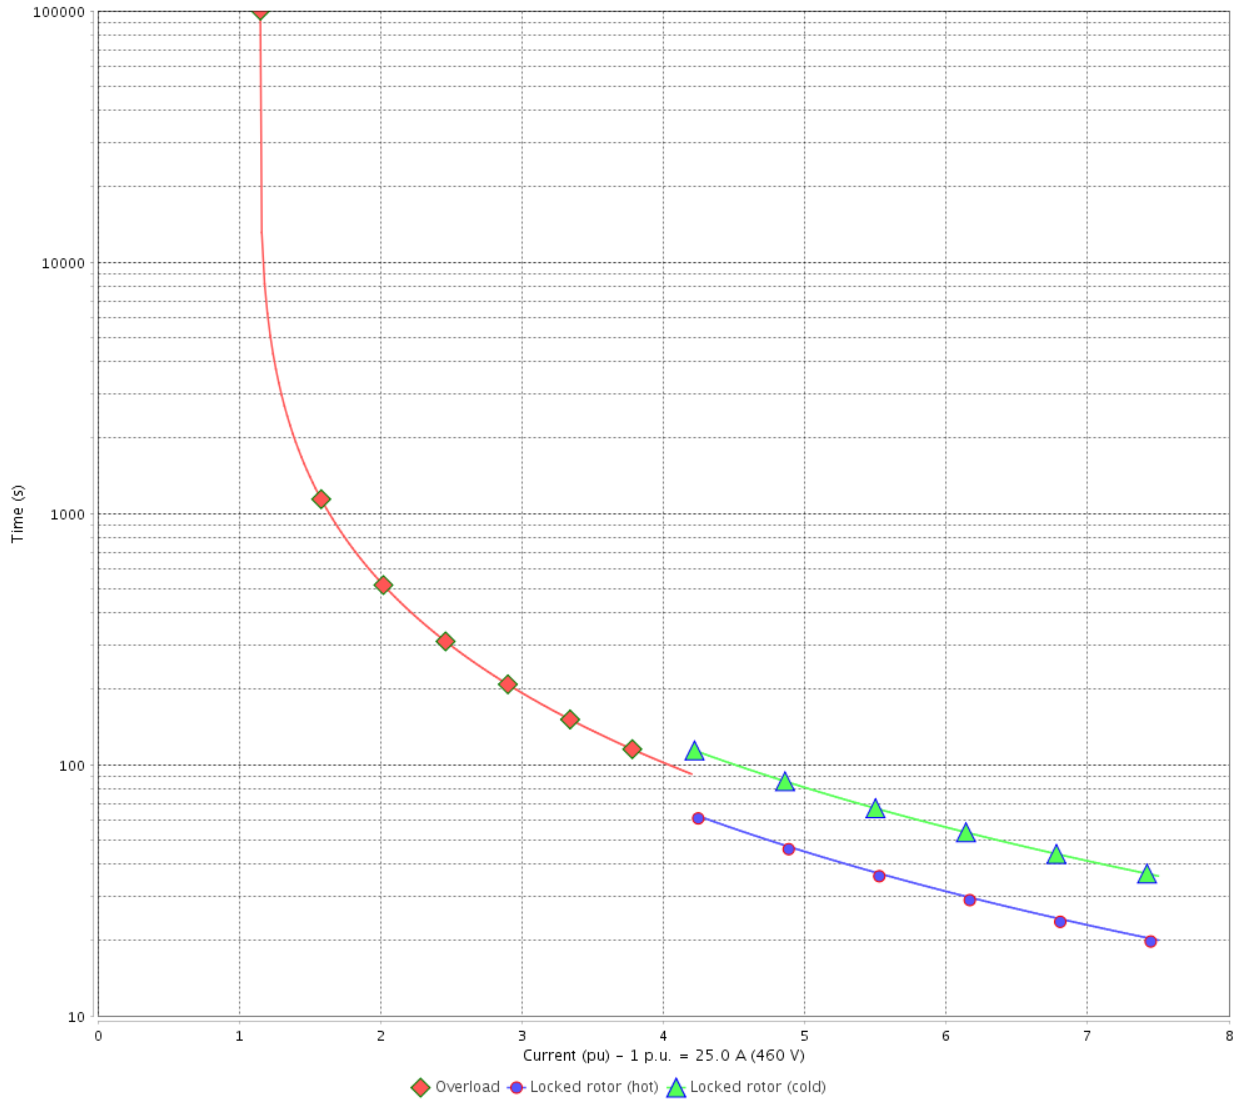

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		12 / 22		
Date	14/04/2022			

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

Performance : 380 V 50 Hz 4P IE2

Rated current : 29.8 A
 LRC : 5.8
 Rated torque : 72.2 ft.lb
 Locked rotor torque : 210 %
 Breakdown torque : 220 %
 Rated speed : 1455 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 13 / 22	Revision
Checked by				
Date	14/04/2022			

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

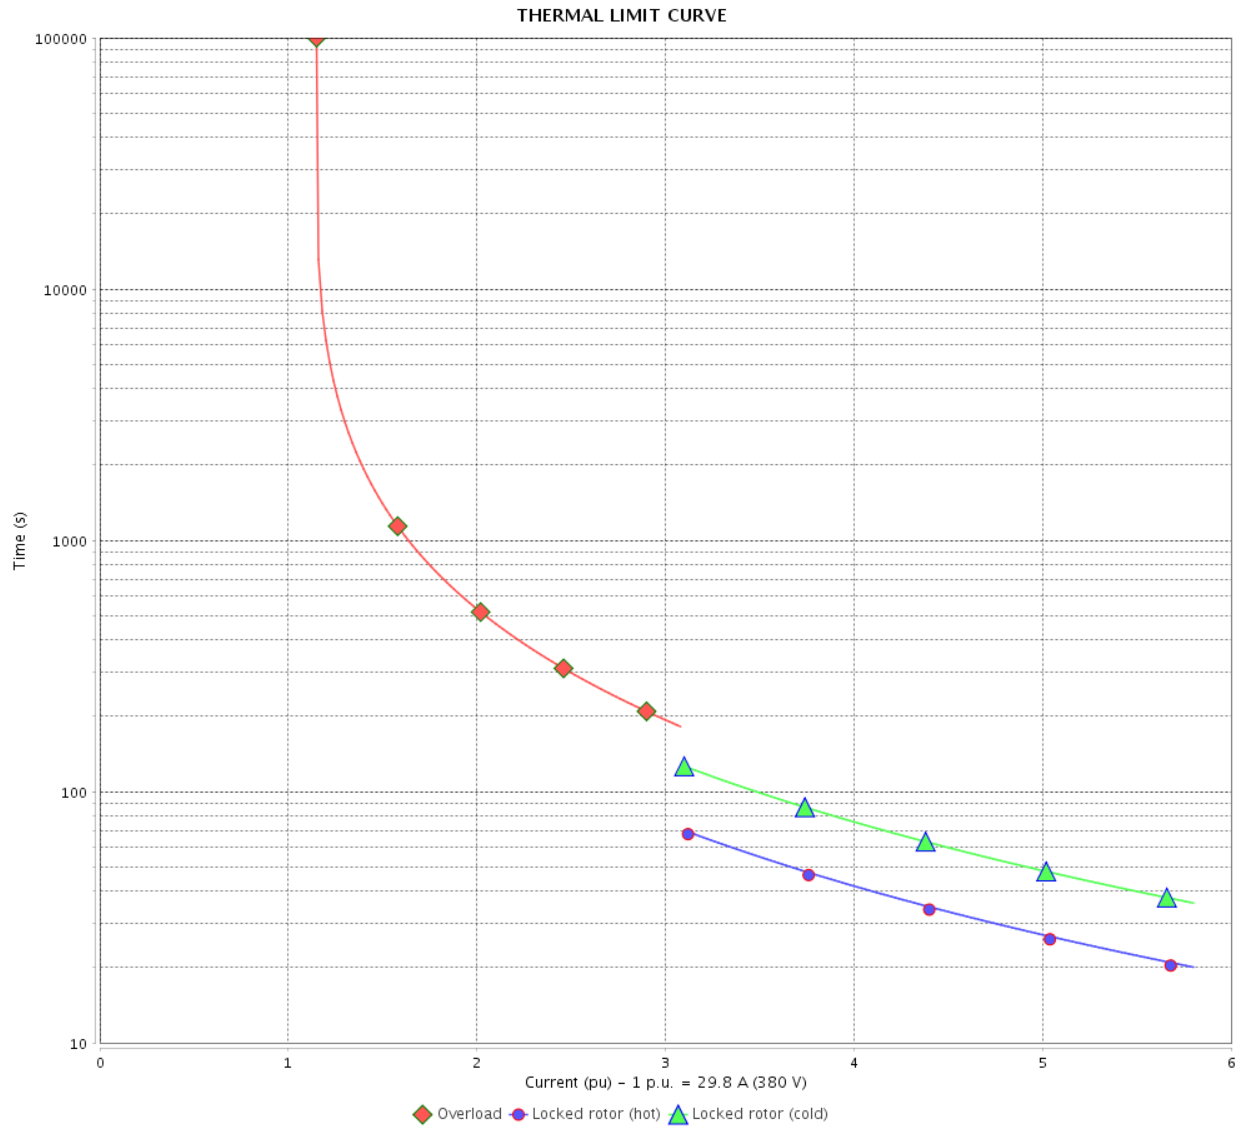

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 14 / 22		Revision
Checked by				
Date				

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

Performance : 400 V 50 Hz 4P IE2

Rated current : 29.0 A
 LRC : 6.4
 Rated torque : 71.9 ft.lb
 Locked rotor torque : 240 %
 Breakdown torque : 240 %
 Rated speed : 1460 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 15 / 22	Revision
Checked by				
Date	14/04/2022			


THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

THERMAL LIMIT CURVE

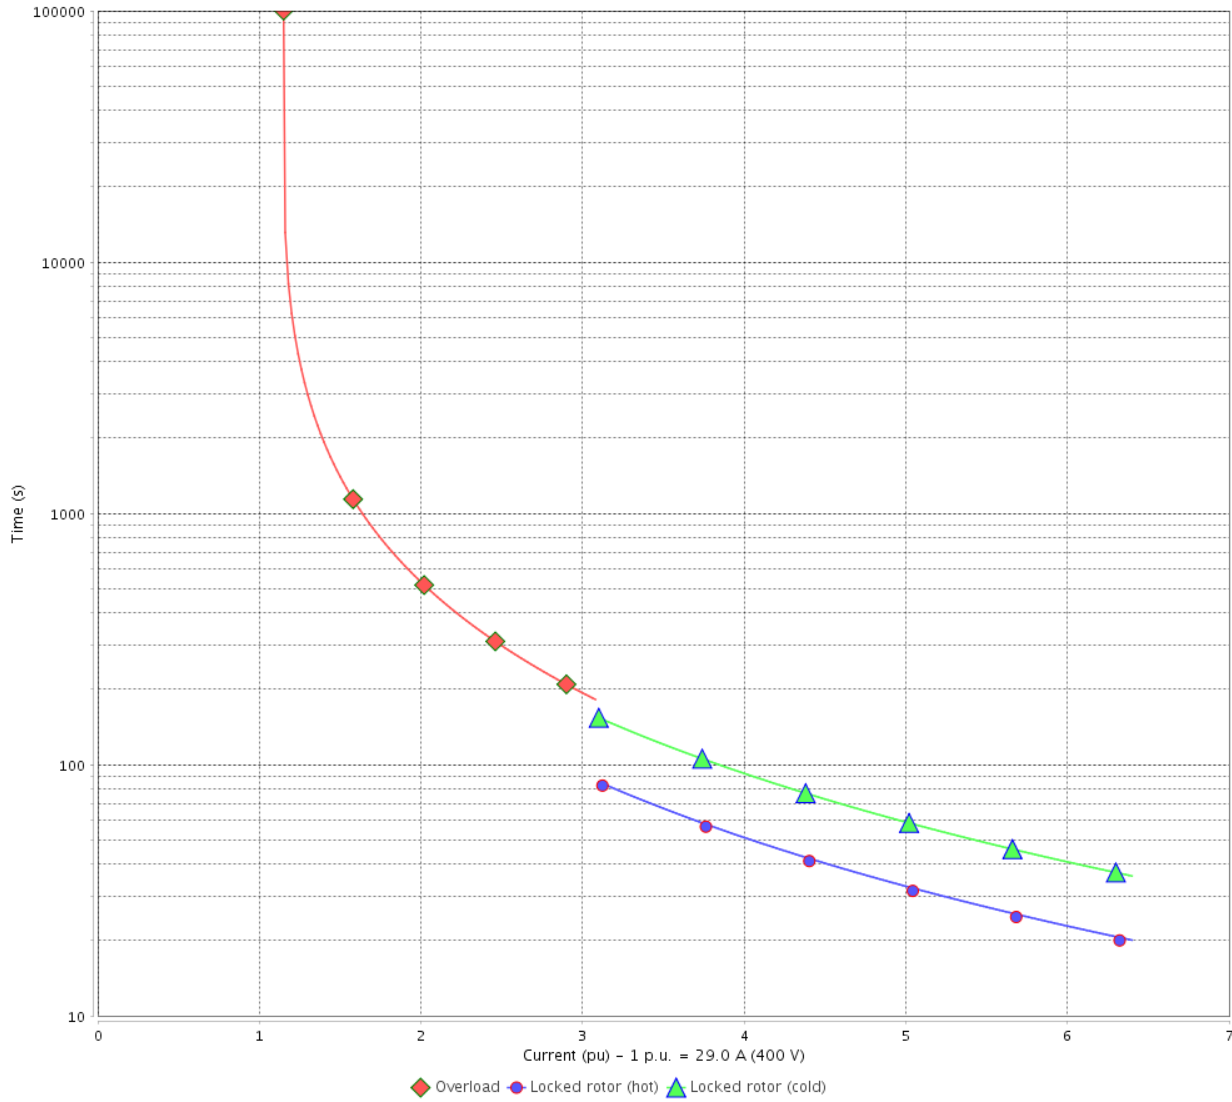

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 16 / 22	Revision
Checked by				
Date				

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : NEMA Premium Efficiency Three-Phase
 Product code : 14407501
 Catalog # : 02018XT3ER256TC

Performance : 415 V 50 Hz 4P IE2

Rated current : 28.4 A	Moment of inertia (J) : 2.89 sq.ft.lb
LRC : 7.0	Duty cycle : Cont.(S1)
Rated torque : 71.7 ft.lb	Insulation class : F
Locked rotor torque : 260 %	Service factor : 1.00
Breakdown torque : 260 %	Temperature rise : 80 K
Rated speed : 1465 rpm	Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 17 / 22	Revision
Checked by				
Date	14/04/2022			

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

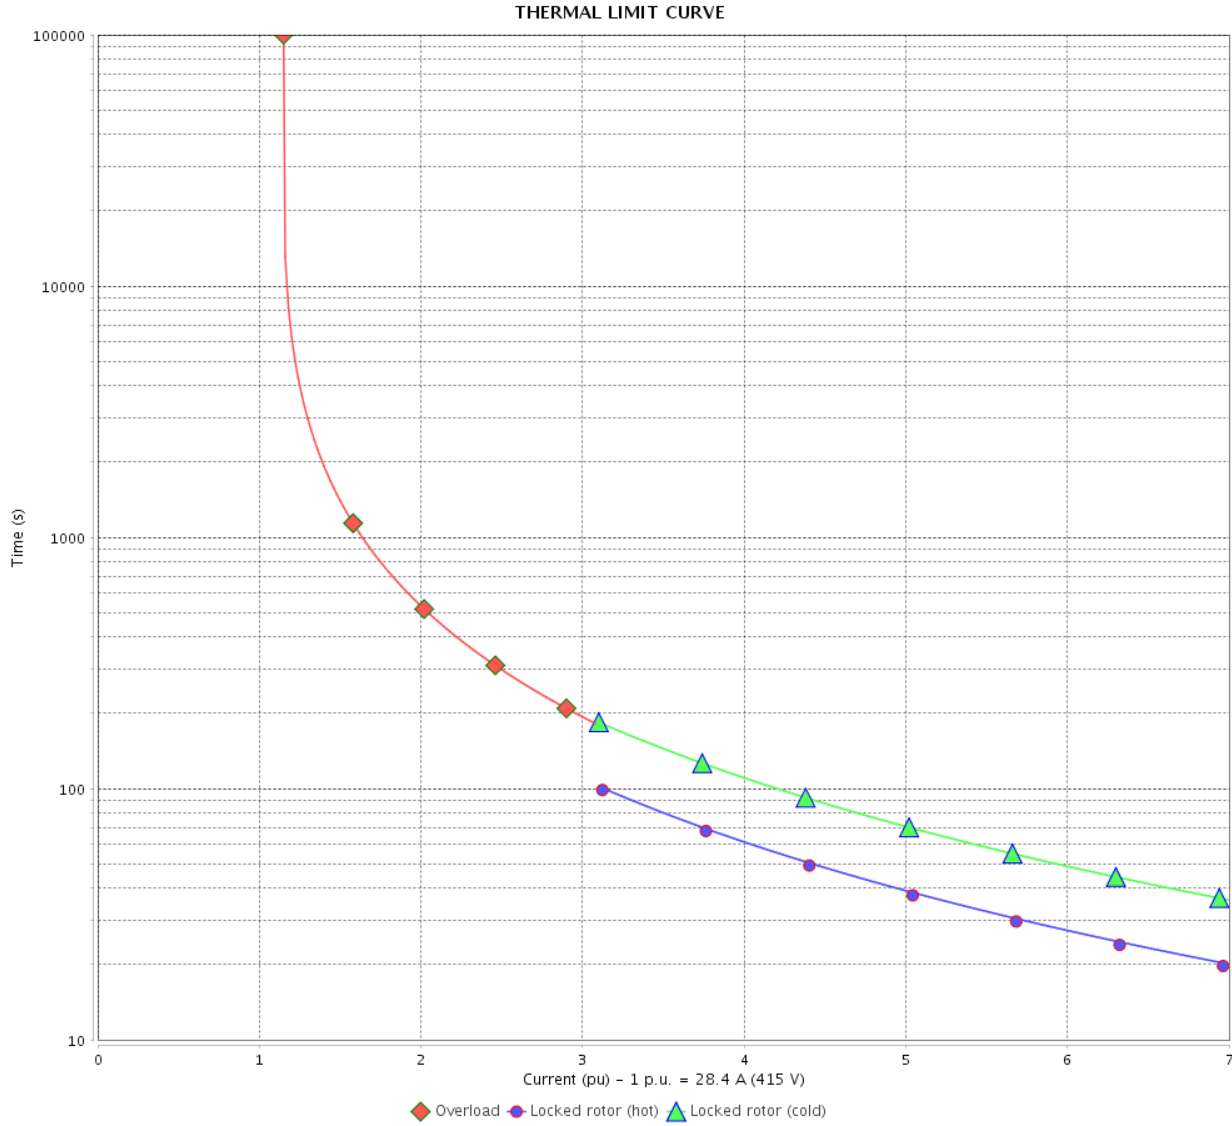

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		18 / 22		
Date		14/04/2022		

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

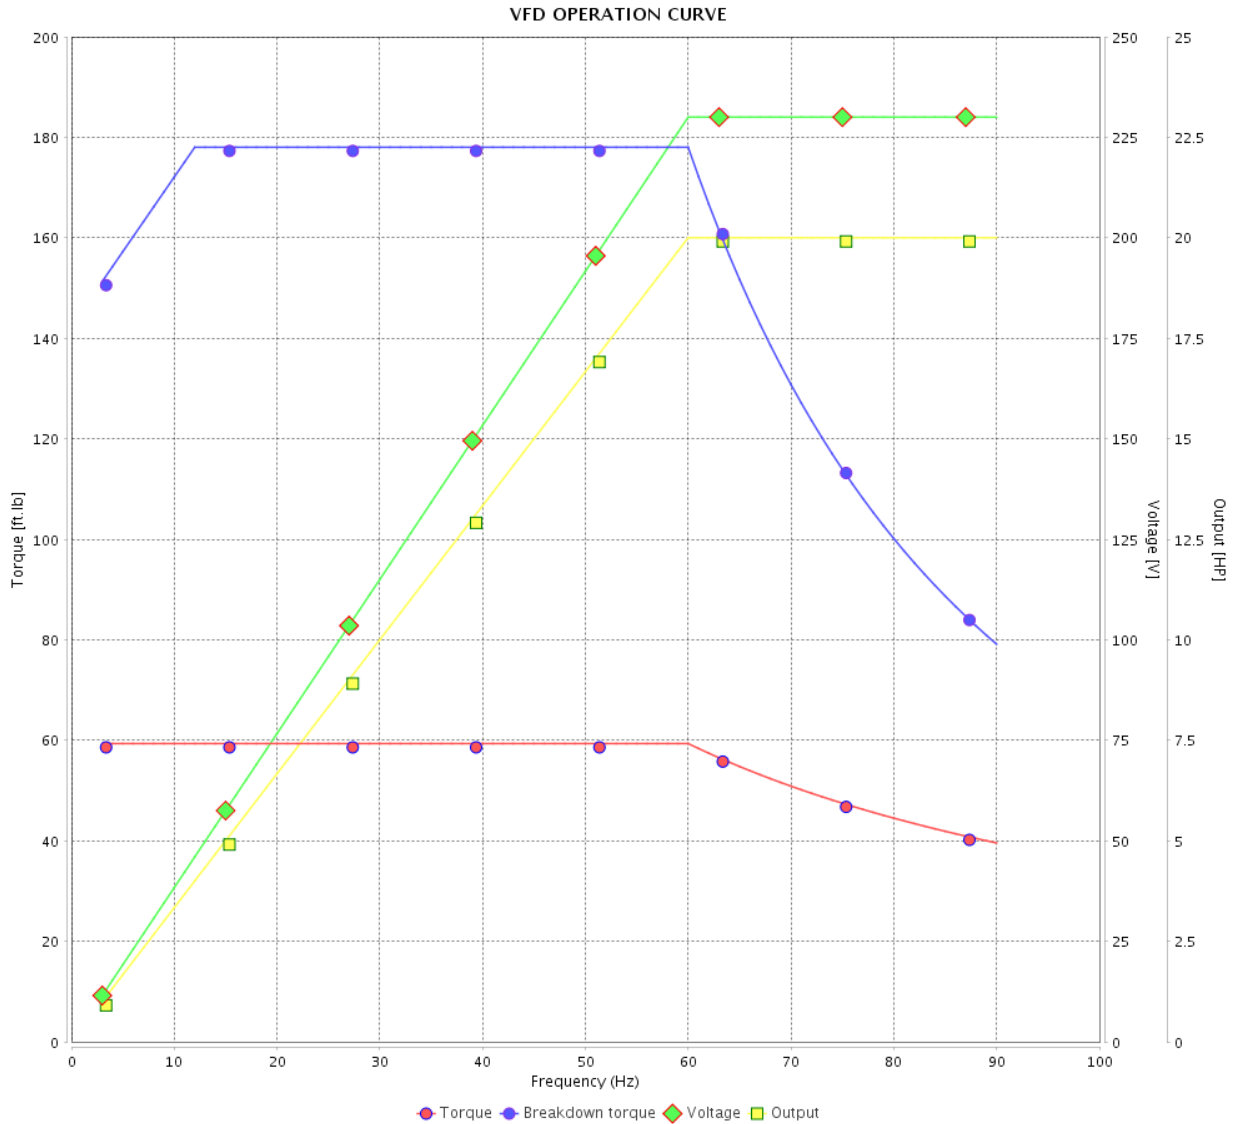

Performance : 230/460 V 60 Hz 4P

Rated current : 50.0/25.0 A
 LRC : 7.5
 Rated torque : 59.3 ft.lb
 Locked rotor torque : 300 %
 Breakdown torque : 300 %
 Rated speed : 1770 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 19 / 22
Checked by				
Date	14/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

VFD OPERATION CURVE

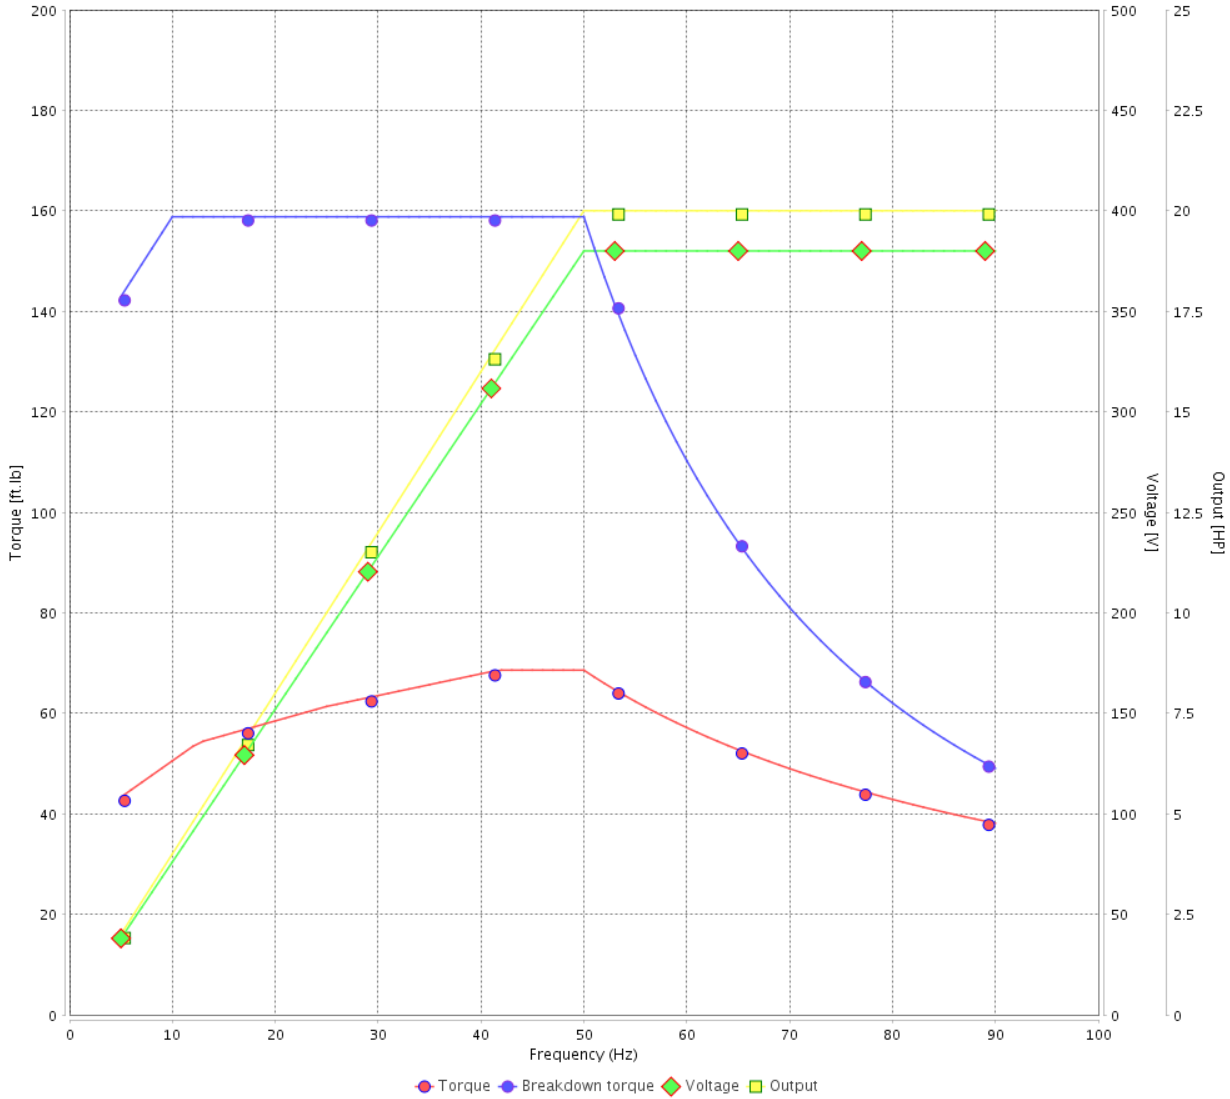

Performance : 380 V 50 Hz 4P IE2

Rated current	: 29.8 A	Moment of inertia (J)	: 2.89 sq.ft.lb
LRC	: 5.8	Duty cycle	: Cont.(S1)
Rated torque	: 72.2 ft.lb	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.00
Breakdown torque	: 220 %	Temperature rise	: 80 K
Rated speed	: 1455 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			20 / 22	
Date	14/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501

Catalog # : 02018XT3ER256TC

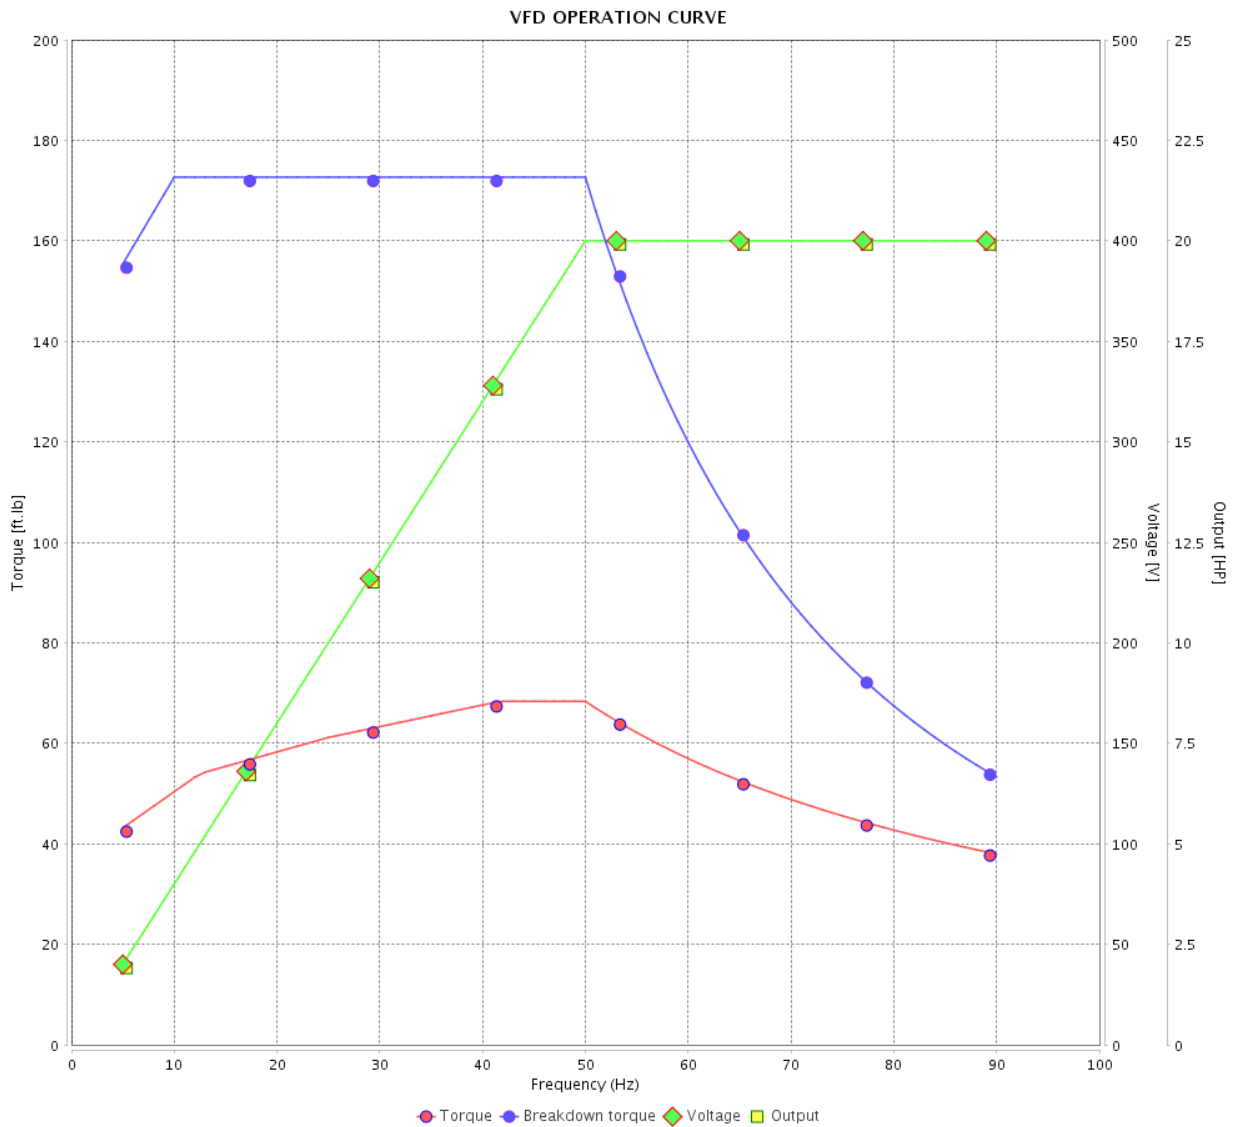

Performance : 400 V 50 Hz 4P IE2

Rated current : 29.0 A
 LRC : 6.4
 Rated torque : 71.9 ft.lb
 Locked rotor torque : 240 %
 Breakdown torque : 240 %
 Rated speed : 1460 rpm

Moment of inertia (J) : 2.89 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 21 / 22
Checked by				
Date	14/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : NEMA Premium Efficiency Three-Phase

Product code : 14407501


Catalog # : 02018XT3ER256TC

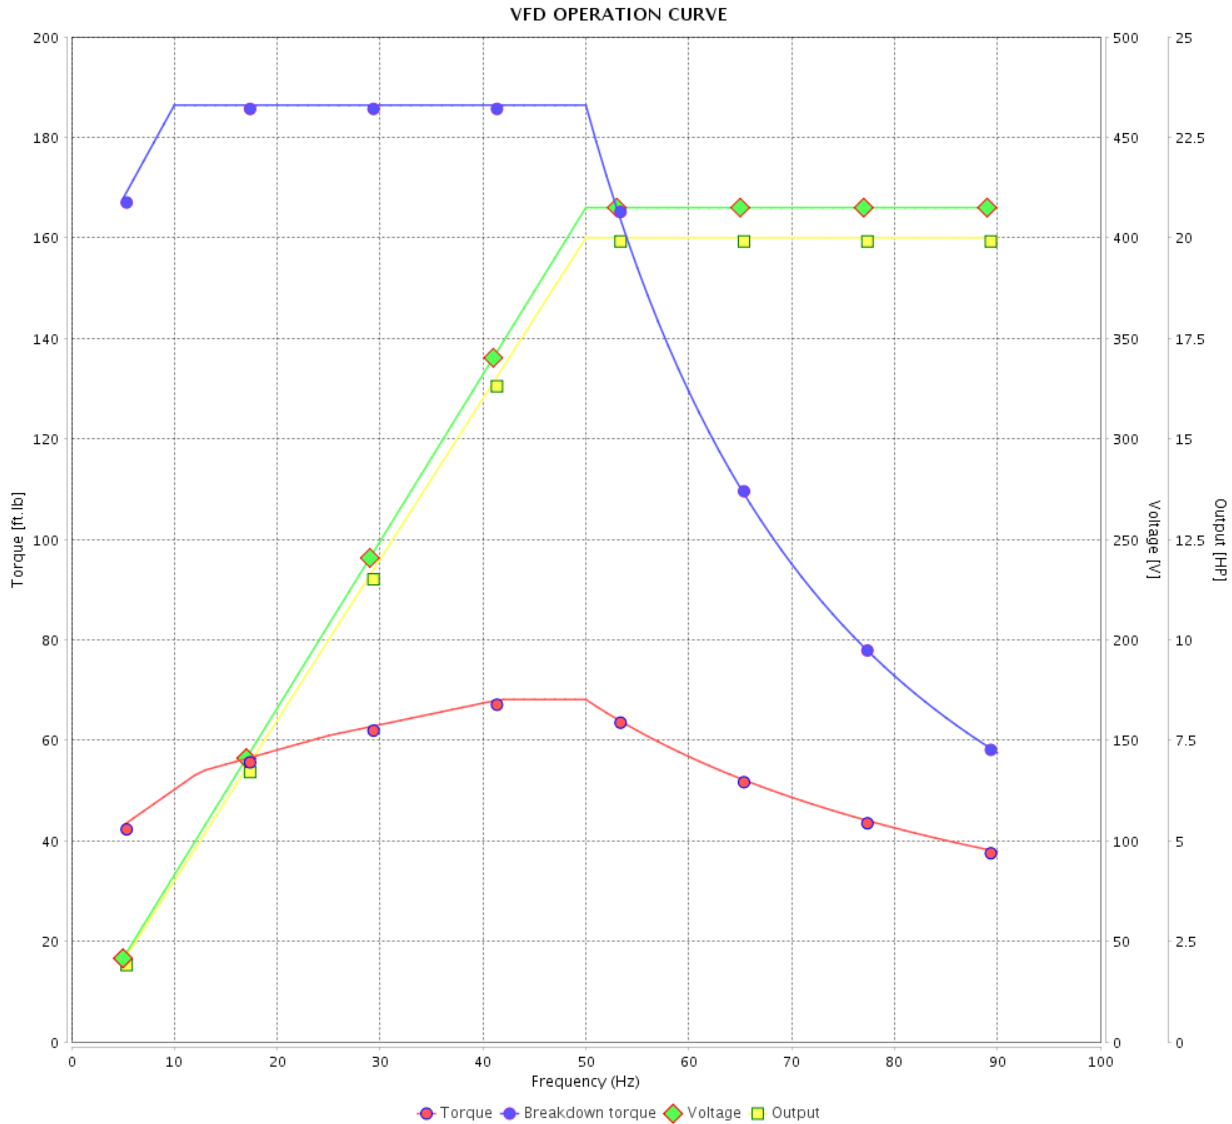

Performance : 415 V 50 Hz 4P IE2

Rated current	: 28.4 A	Moment of inertia (J)	: 2.89 sq.ft.lb
LRC	: 7.0	Duty cycle	: Cont.(S1)
Rated torque	: 71.7 ft.lb	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.00
Breakdown torque	: 260 %	Temperature rise	: 80 K
Rated speed	: 1465 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 22 / 22	Revision
Checked by				
Date	14/04/2022			

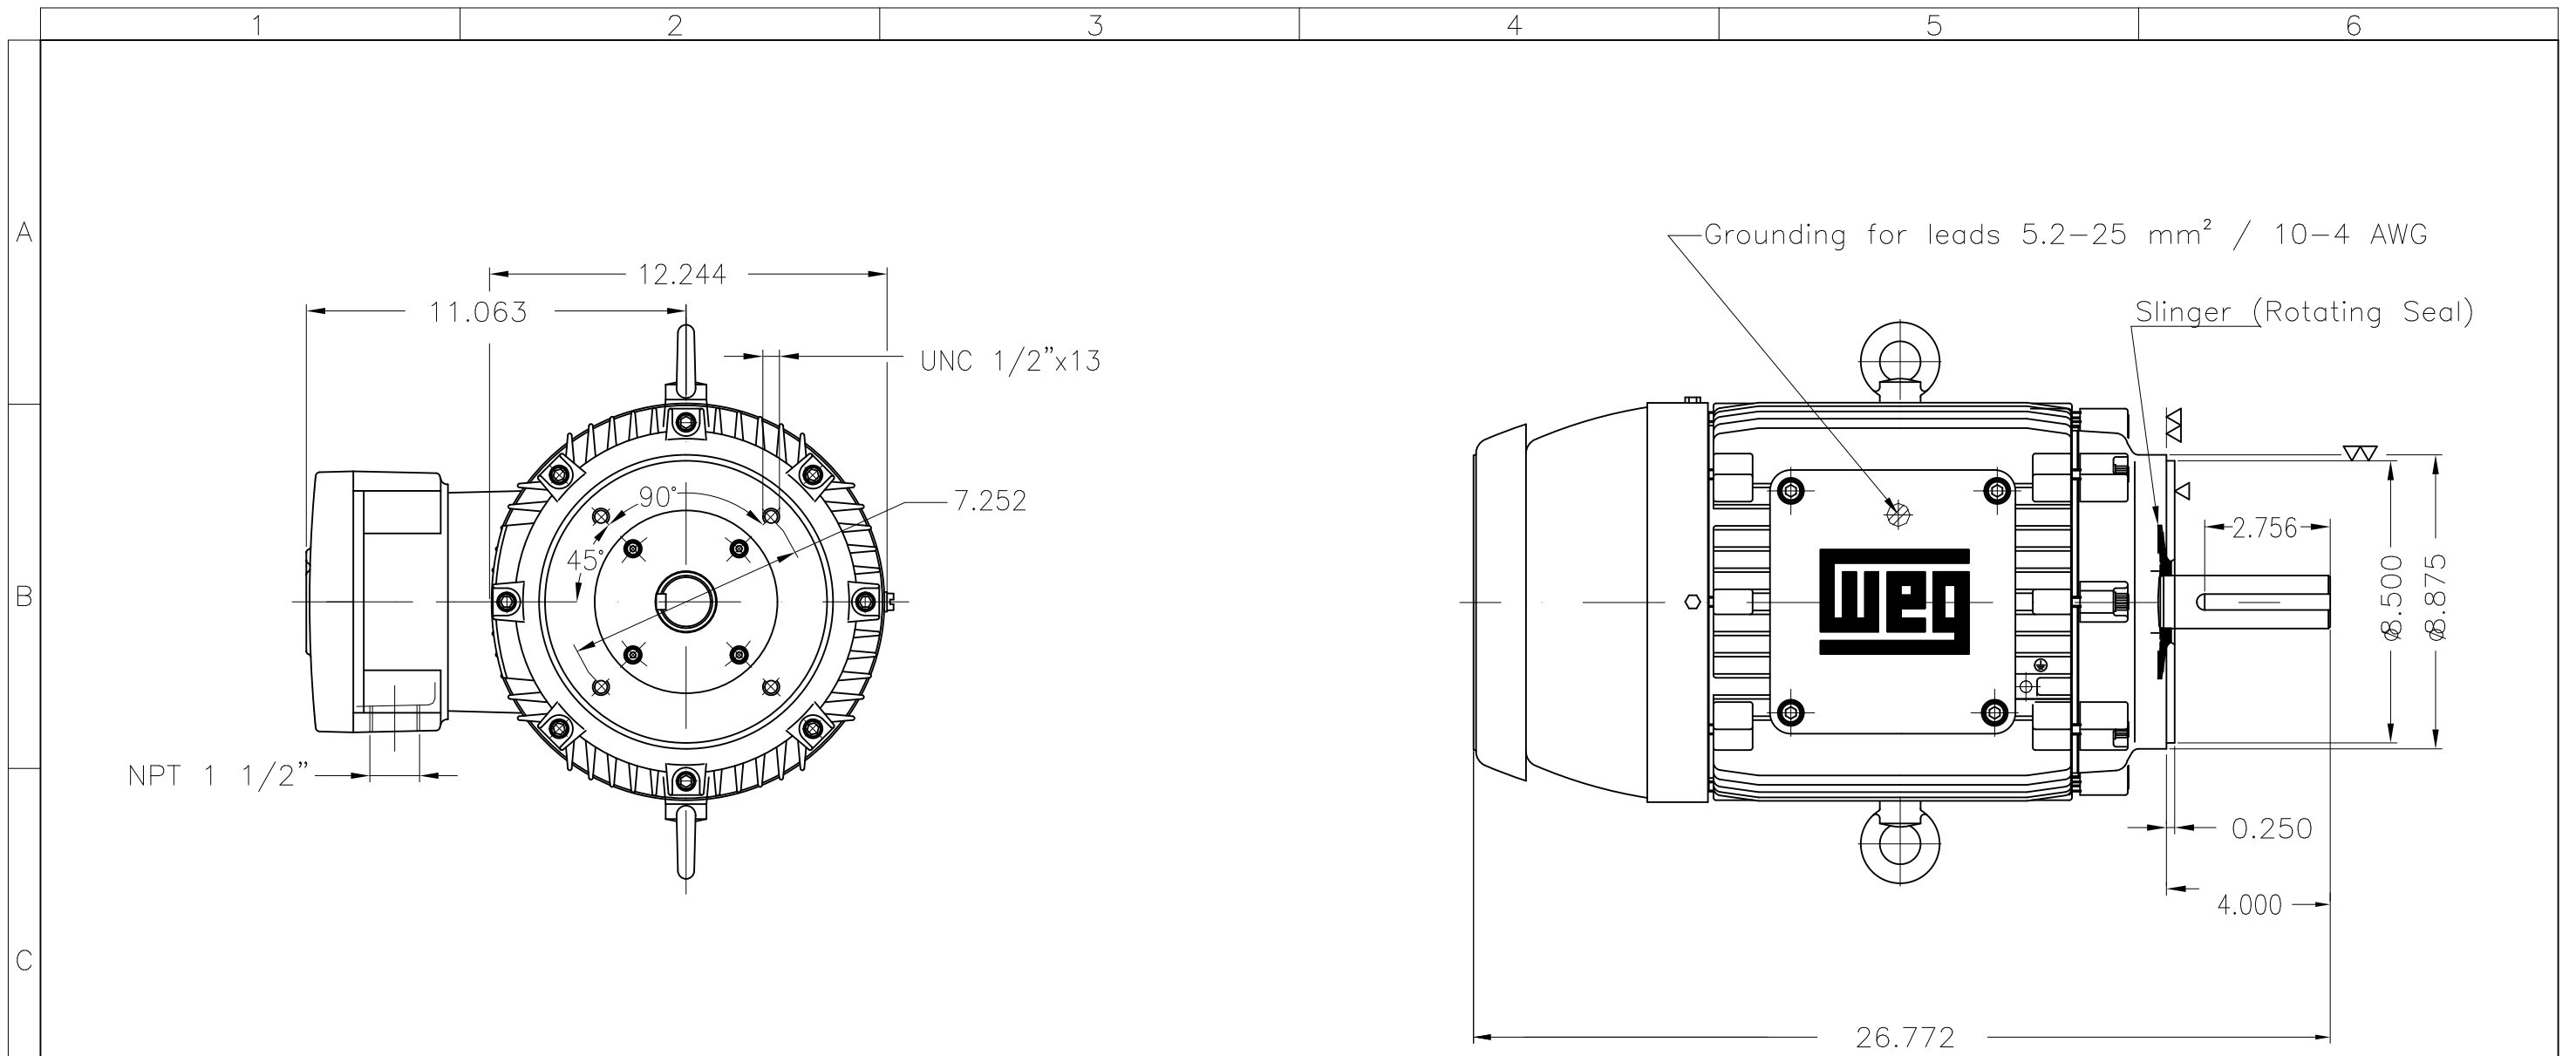


A

B

C

D

E



20 HP 04 Poles 60 Hz										A						
ECM										LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER		THREE PH. MOTOR EXPLOSION PROOF PREM. EFF.		PREVIEW											
CHECKED			FRAME 256TC IP55 TEFC		WDD											
RELEASED					SHEET											
REL DT.			WMO Jaragua do Sul		Product Engineering		1 / 1									

With grease fitting

Color RAL 5009

Painting plan 202P

Mounting NEMA W-6

Mounting V18

Dimensions in inches XME A3

MADE IN BRAZIL


W21X NEMA
Premium

14407501





LISTED

CC029A

Inverter Duty Motor
Severe Duty

MODEL 02018XT3ER256TC

PH 3	FR 256TC		
HP(kW) 20.0(15.0)		HZ 60	IP55
V 230/460		A 50.0/25.0	
RPM 1770		NEMA NOM EFF 93.0%	
PF 0.81		SFA 57.5/28.7	DES B
INS CL F Δ T 80 K		SF 1.15	ENCL TEFC
DUTY CONT.		CODE J	ALT 1000 m.a.s.l.
AMB 40°C	USABLE @208V	55.3 A	SF 1.15 SFA 63.6
AMB 55°C SF1.0			
20HP 15kW 50Hz 380V 29.8A 1455RPM SF1.00 EFF 91.0% (IE2)			



→ 6309-C3 MOBIL POLYREX EM
 → 6209-C3 13 g 14395 h

395 Lbs



TEMP CODE T3C
 CSA/UL: Class I - Div. 1 - Groups C and D
 CSA: Class II - Div. 1 - Groups F and G
 CSA: Class I - Zone 1 - IIB

EXPLOSION PROOF MOTOR

FOR USE ON VPWM VFD 1000:1VT, 6:1CT, 1.0SF, T3C, AMB 40°C.