

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line	: W40 JP Pump NEMA Premium Efficiency Three-Phase	Product code :	14490328		
		Catalog # :	06036OT3E326JP-W40		
Frame	: 324/6JP	Cooling method	: IC01 - ODP		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 490 lb		
Protection degree	: IP23	Moment of inertia (J)	: 3.82 sq.ft.lb		
Design	: B				
Output [HP]	60	50	50	50	
Poles	2	2	2	2	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	142/71.0	69.8	68.7	69.5	
L. R. Amperes [A]	895/447	482	460	473	
LRC [A]	6.3x(Code G)	6.9x(Code H)	6.7x(Code H)	6.8x(Code H)	
No load current [A]	50.0/25.0	23.0	27.0	30.0	
Rated speed [RPM]	3560	2960	2960	2965	
Slip [%]	1.11	1.33	1.33	1.17	
Rated torque [ft.lb]	88.5	88.7	88.7	88.6	
Locked rotor torque [%]	220	220	240	260	
Breakdown torque [%]	229	229	250	270	
Service factor	1.25	1.00	1.00	1.00	
Temperature rise	80 K	80 K	80 K	80 K	
Locked rotor time	27s (cold) 15s (hot)	28s (cold) 16s (hot)	25s (cold) 14s (hot)	23s (cold) 13s (hot)	
Noise level ²	75.0 dB(A)				
Efficiency (%)	25%	91.7	88.9	89.0	89.2
	50%	92.4	90.5	90.6	90.7
	75%	93.0	92.0	92.1	92.2
	100%	93.6	93.7	93.7	93.7
Power Factor	25%	0.48	0.50	0.43	0.38
	50%	0.73	0.73	0.67	0.60
	75%	0.82	0.82	0.77	0.72
	100%	0.85	0.86	0.83	0.79
Bearing type	: Drive end : 6312 Z C3	Non drive end : 6211 Z C3	Foundation loads		
Sealing	: Without	Without	Max. traction		
	Bearing Seal	Bearing Seal	Max. compression		
Lubrication interval	: 19658 h	20000 h			
Lubricant amount	: 21 g	11 g			
Lubricant type	: Mobil Polyrex EM				
Notes USABLE @208V 157A SF 1.15 SFA 181A					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	13/04/2022			1 / 21	

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

TORQUE AND CURRENT VS SPEED CURVE

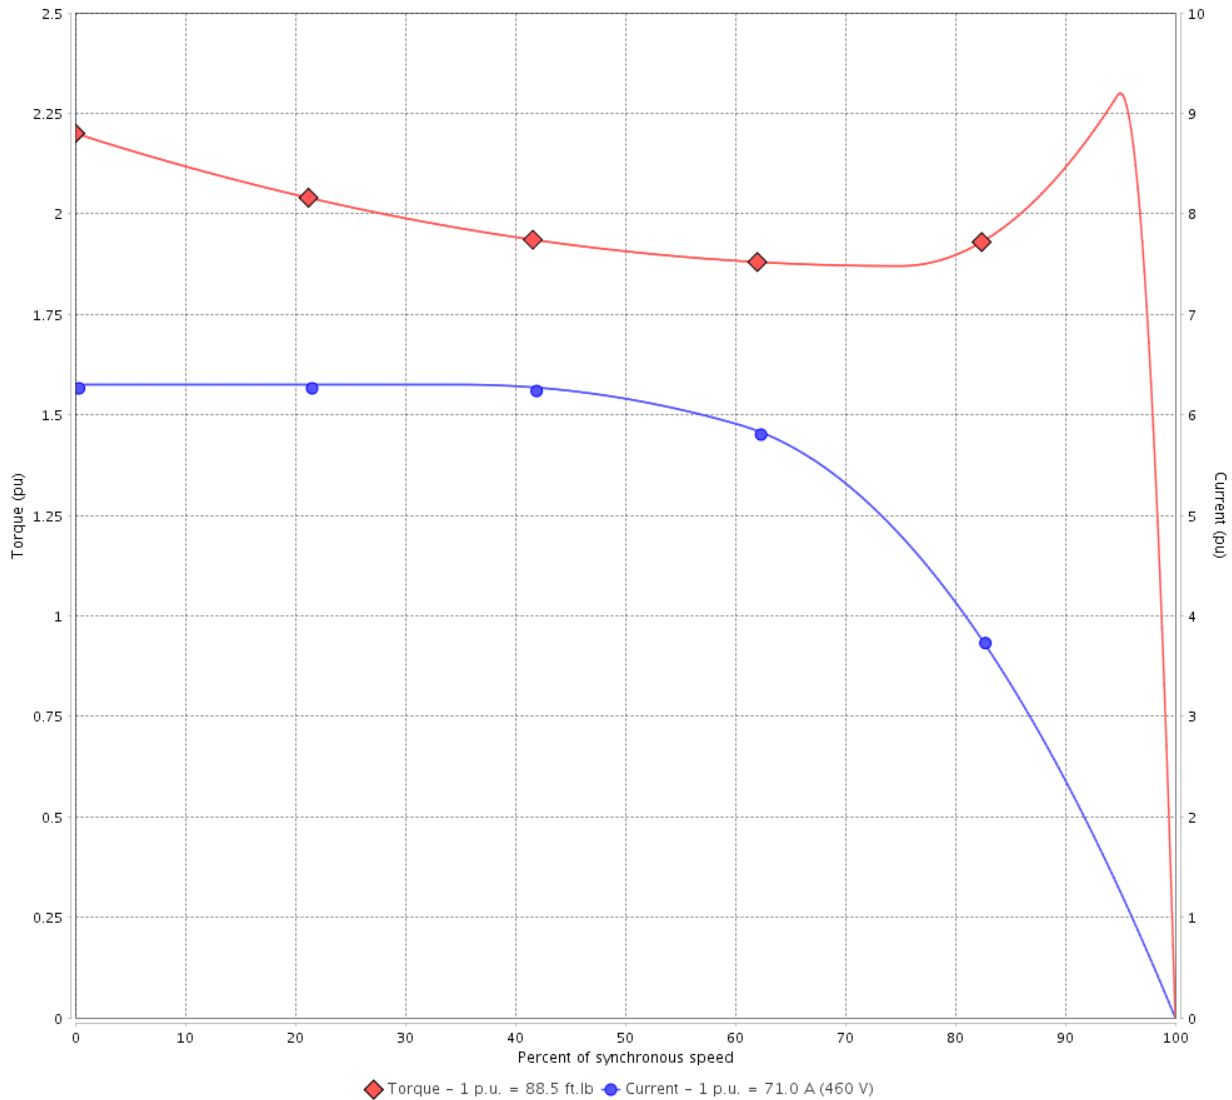

Performance : 230/460 V 60 Hz 2P

Rated current	: 142/71.0 A	Moment of inertia (J)	: 3.82 sq.ft.lb
LRC	: 6.3	Duty cycle	: Cont.(S1)
Rated torque	: 88.5 ft.lb	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 3560 rpm	Design	: B

Locked rotor time : 27s (cold) 15s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 21	Revision
Checked by				
Date	13/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

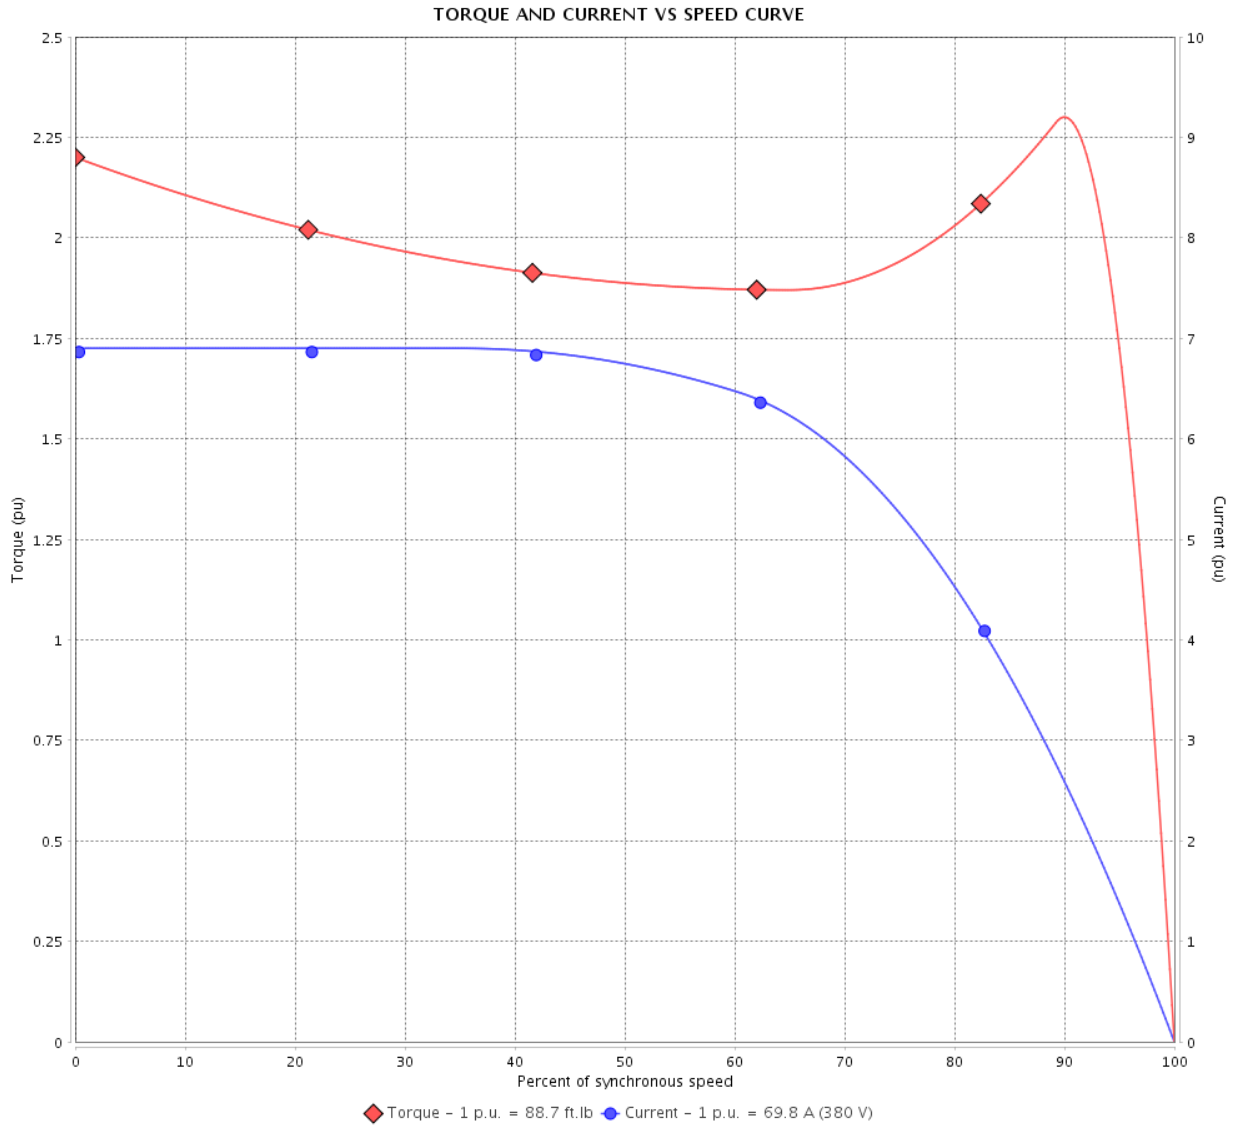

Performance : 380 V 50 Hz 2P IE3

Rated current : 69.8 A
 LRC : 6.9
 Rated torque : 88.7 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 229 %
 Rated speed : 2960 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Locked rotor time : 28s (cold) 16s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 21	Revision
Checked by				
Date	13/04/2022			

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

TORQUE AND CURRENT VS SPEED CURVE

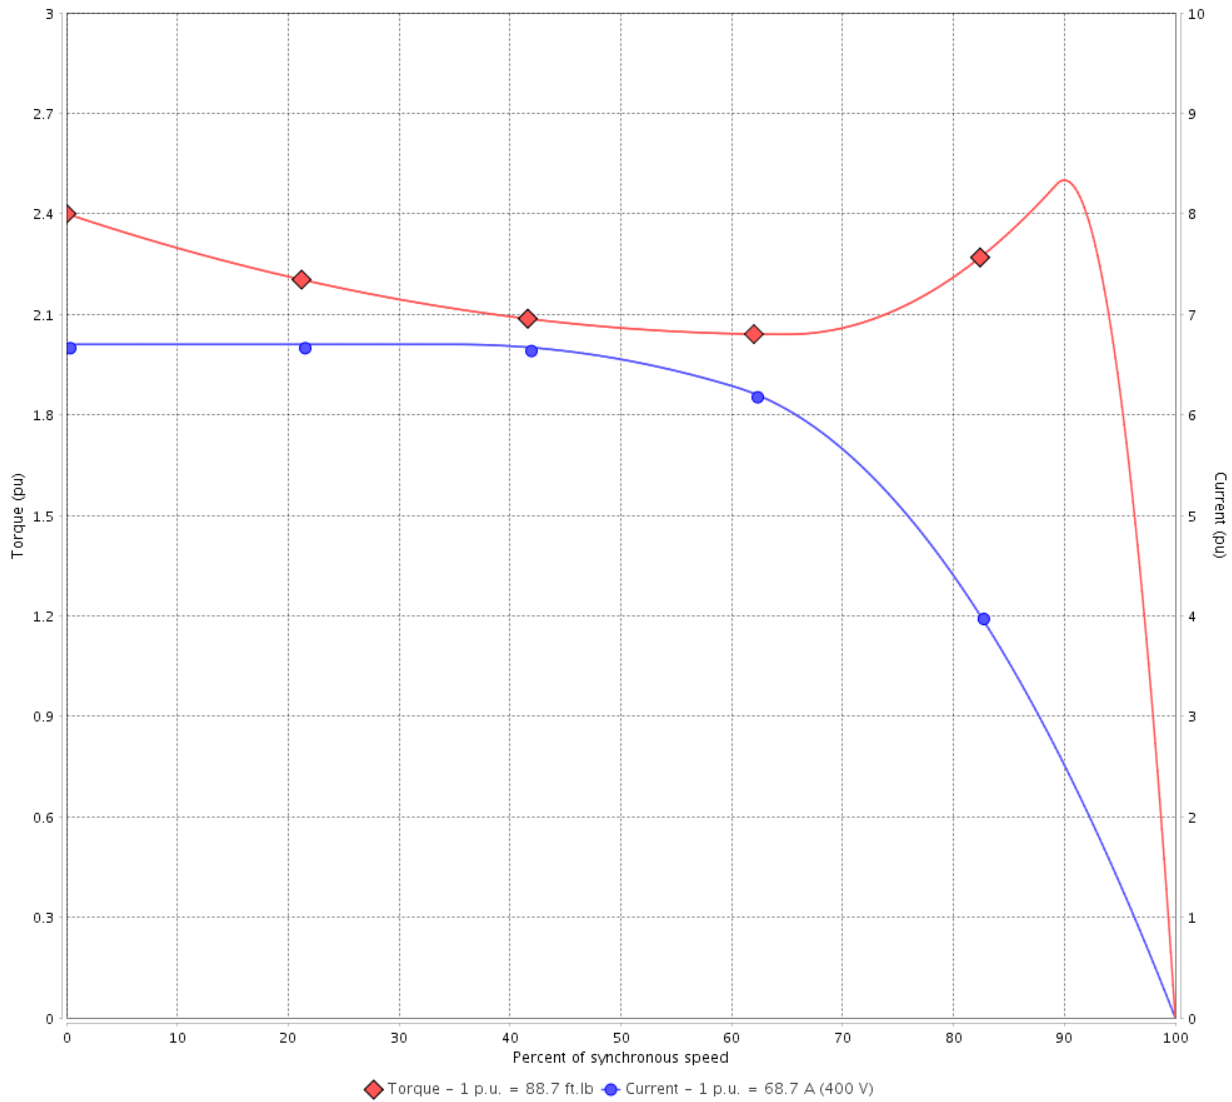

Performance : 400 V 50 Hz 2P IE3

Rated current	: 68.7 A	Moment of inertia (J)	: 3.82 sq.ft.lb
LRC	: 6.7	Duty cycle	: Cont.(S1)
Rated torque	: 88.7 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 2960 rpm	Design	: B

Locked rotor time : 25s (cold) 14s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 21	Revision
Checked by				
Date	13/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

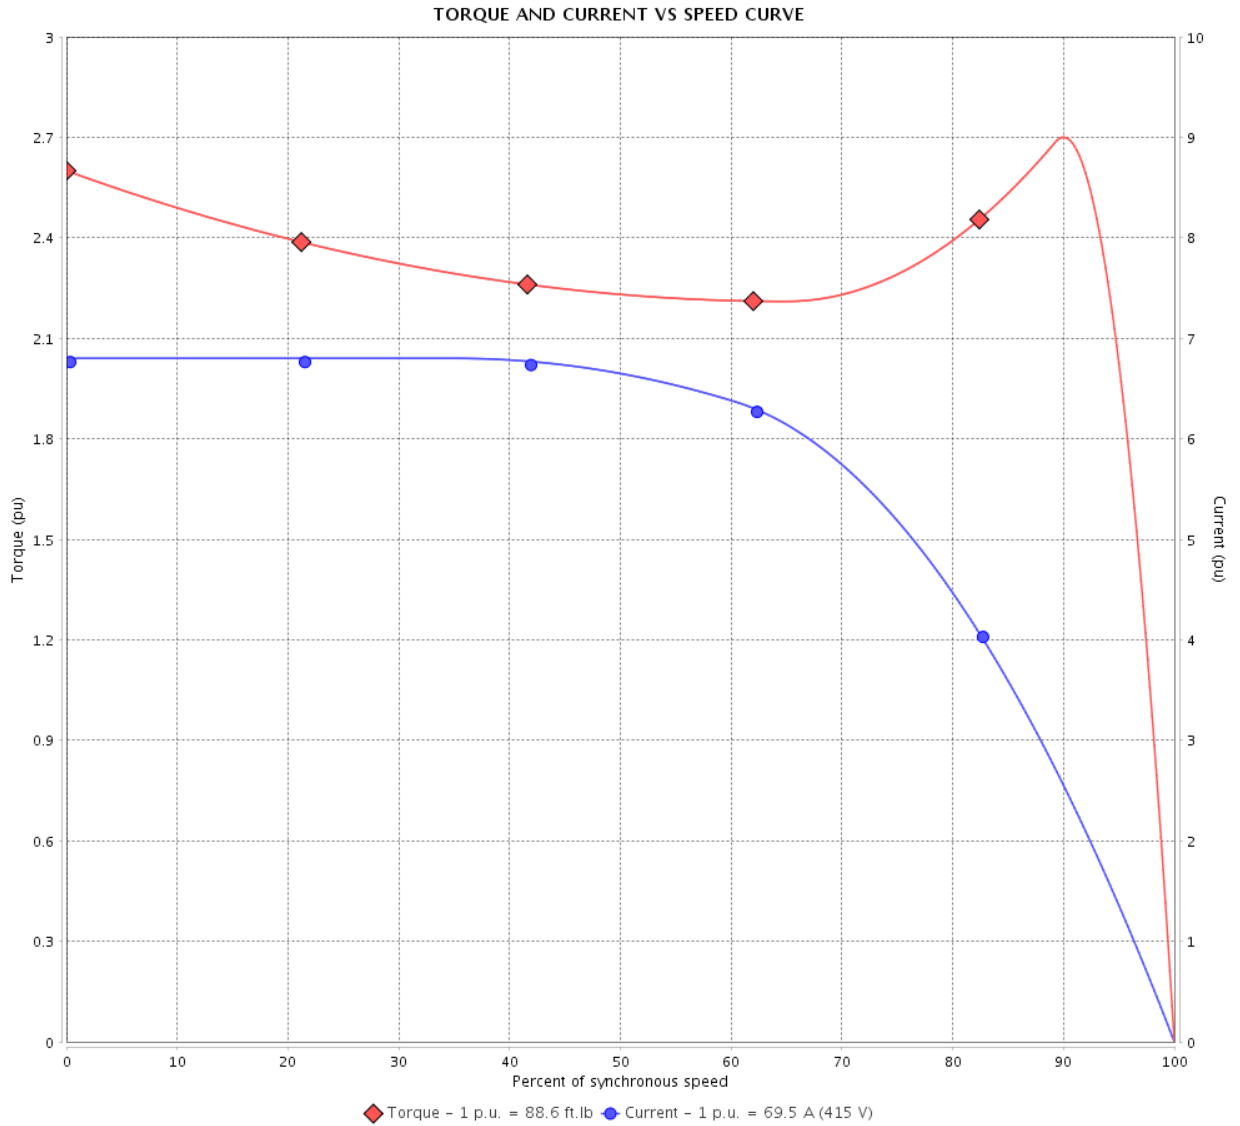

Performance : 415 V 50 Hz 2P IE3

Rated current	: 69.5 A	Moment of inertia (J)	: 3.82 sq.ft.lb
LRC	: 6.8	Duty cycle	: Cont.(S1)
Rated torque	: 88.6 ft.lb	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.00
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 2965 rpm	Design	: B

Locked rotor time : 23s (cold) 13s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 21	Revision
Checked by				
Date	13/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

LOAD PERFORMANCE CURVE

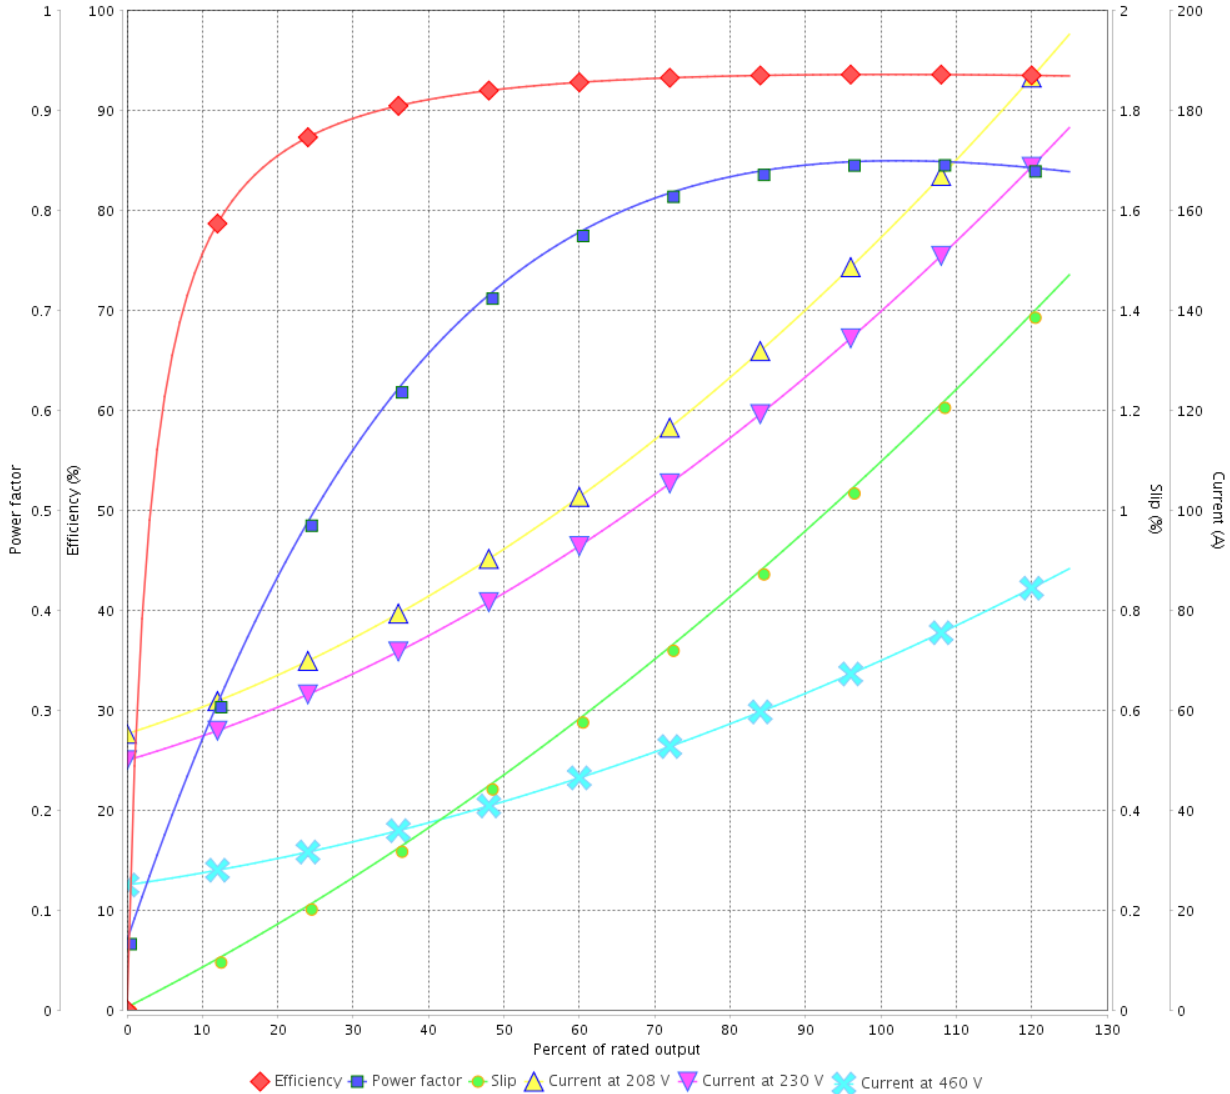

Performance : 230/460 V 60 Hz 2P

Rated current : 142/71.0 A
 LRC : 6.3
 Rated torque : 88.5 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 229 %
 Rated speed : 3560 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

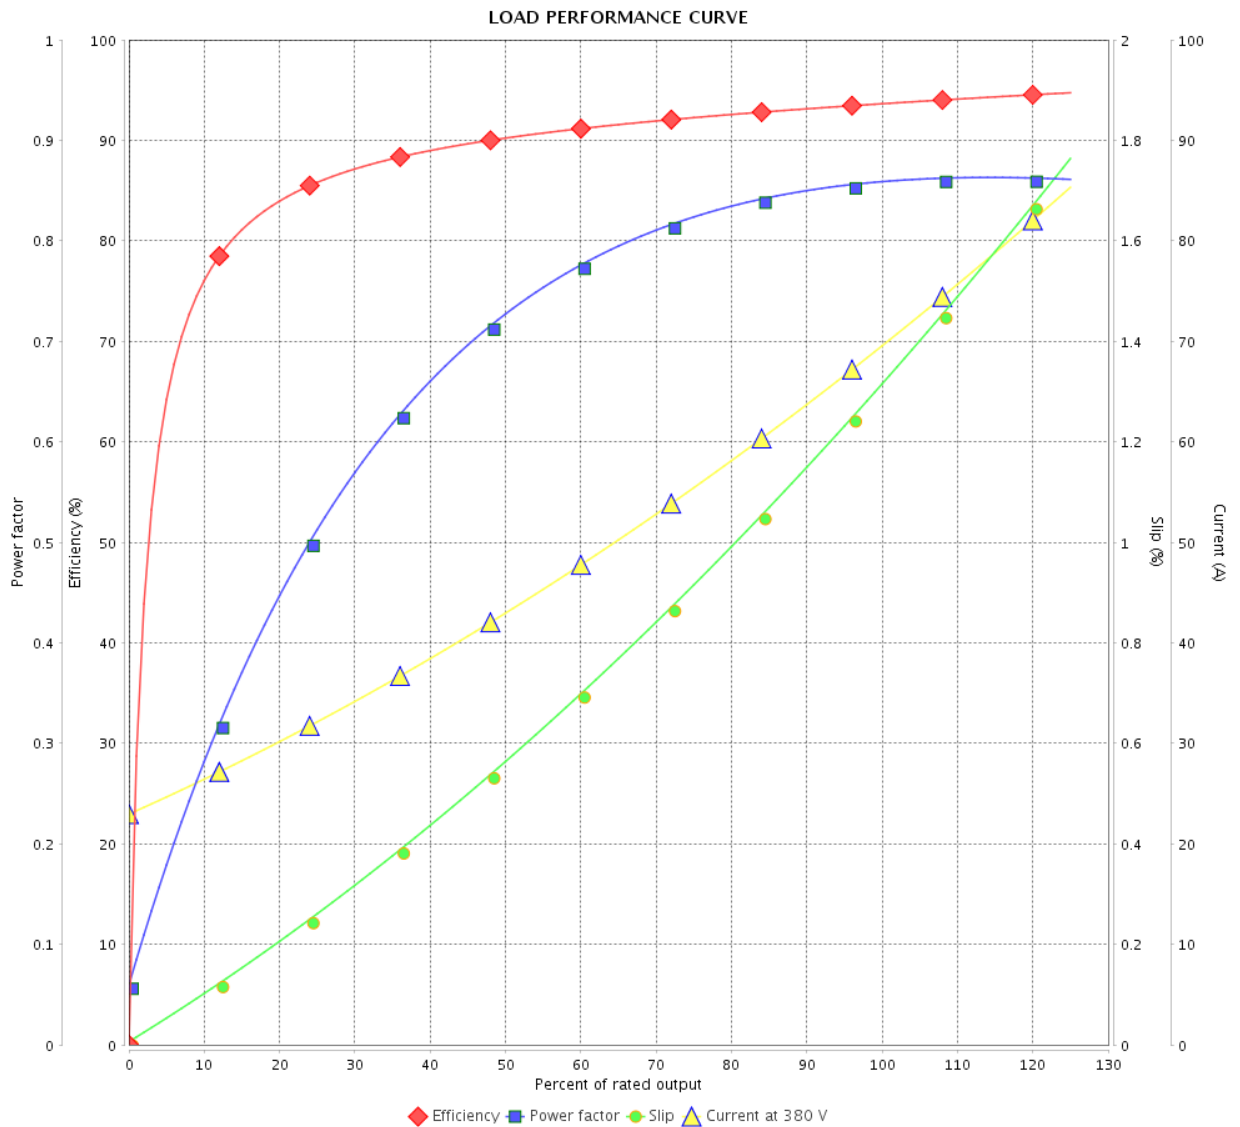

Performance : 380 V 50 Hz 2P IE3

Rated current : 69.8 A
 LRC : 6.9
 Rated torque : 88.7 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 229 %
 Rated speed : 2960 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page	Revision	
		7 / 21		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

LOAD PERFORMANCE CURVE

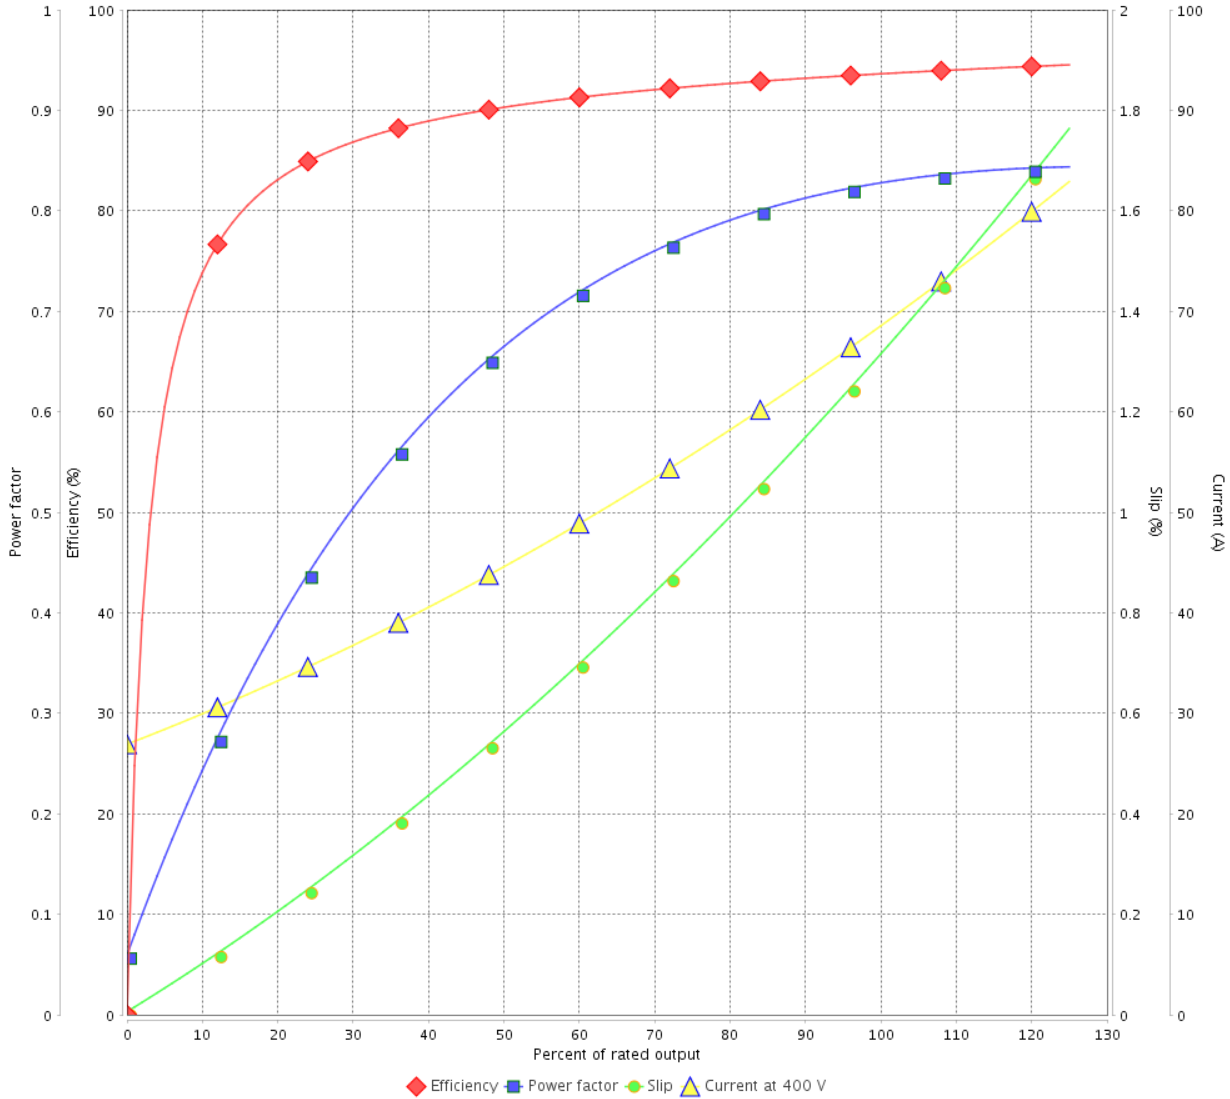

Performance : 400 V 50 Hz 2P IE3

Rated current : 68.7 A
LRC : 6.7
Rated torque : 88.7 ft.lb
Locked rotor torque : 240 %
Breakdown torque : 250 %
Rated speed : 2960 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			8 / 21	
Date	13/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

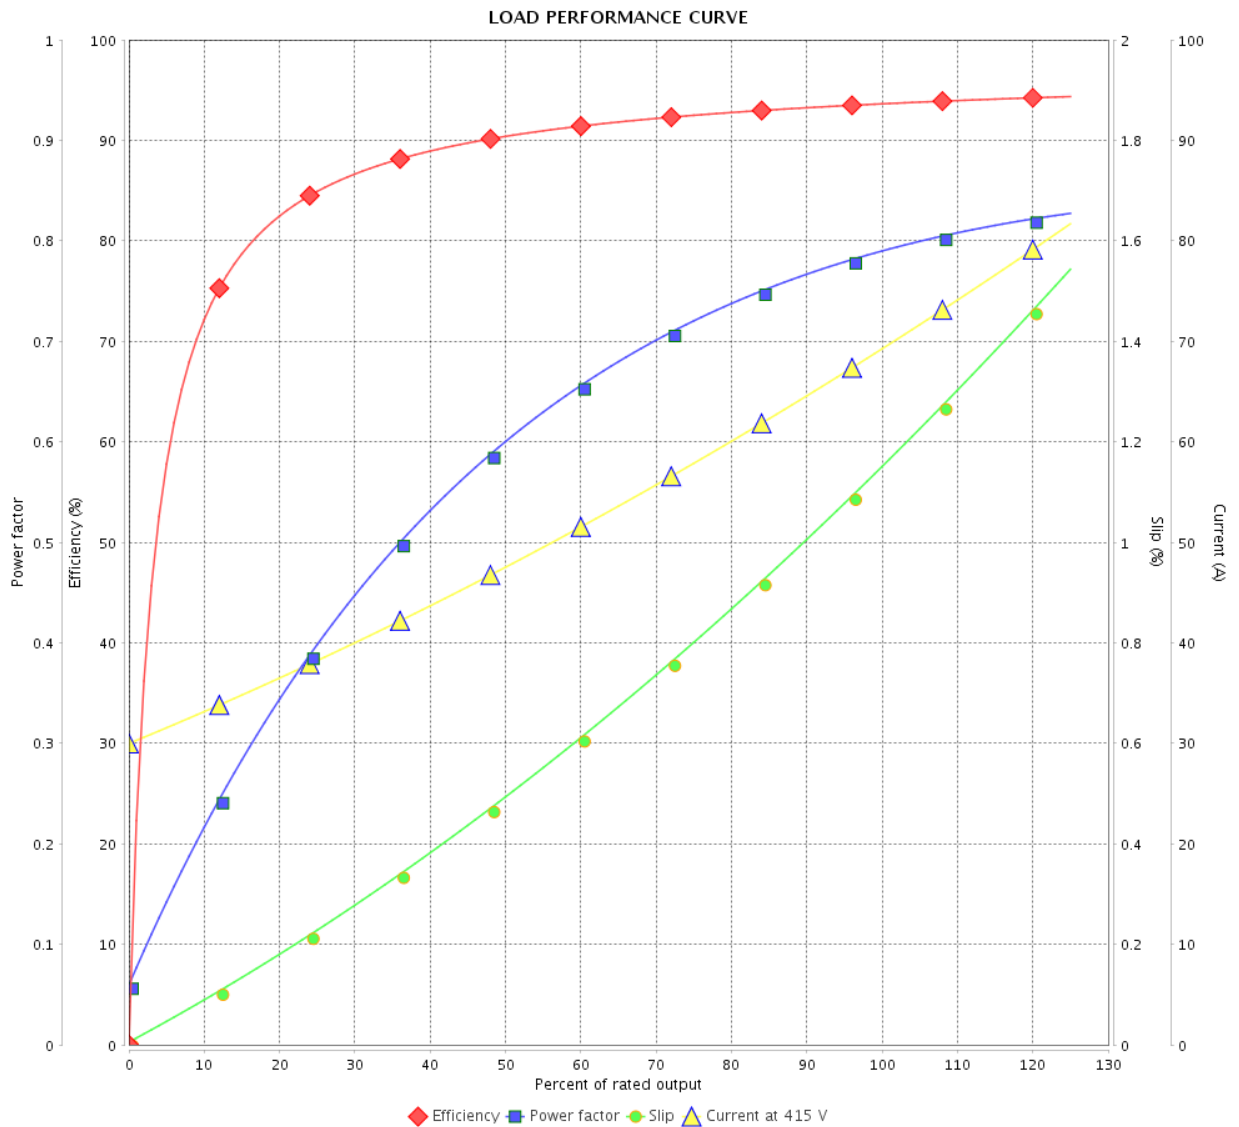

Performance : 415 V 50 Hz 2P IE3

Rated current : 69.5 A
 LRC : 6.8
 Rated torque : 88.6 ft.lb
 Locked rotor torque : 260 %
 Breakdown torque : 270 %
 Rated speed : 2965 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 21		
Date		13/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

Performance : 230/460 V 60 Hz 2P

Rated current : 142/71.0 A
LRC : 6.3
Rated torque : 88.5 ft.lb
Locked rotor torque : 220 %
Breakdown torque : 229 %
Rated speed : 3560 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/04/2022		10 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

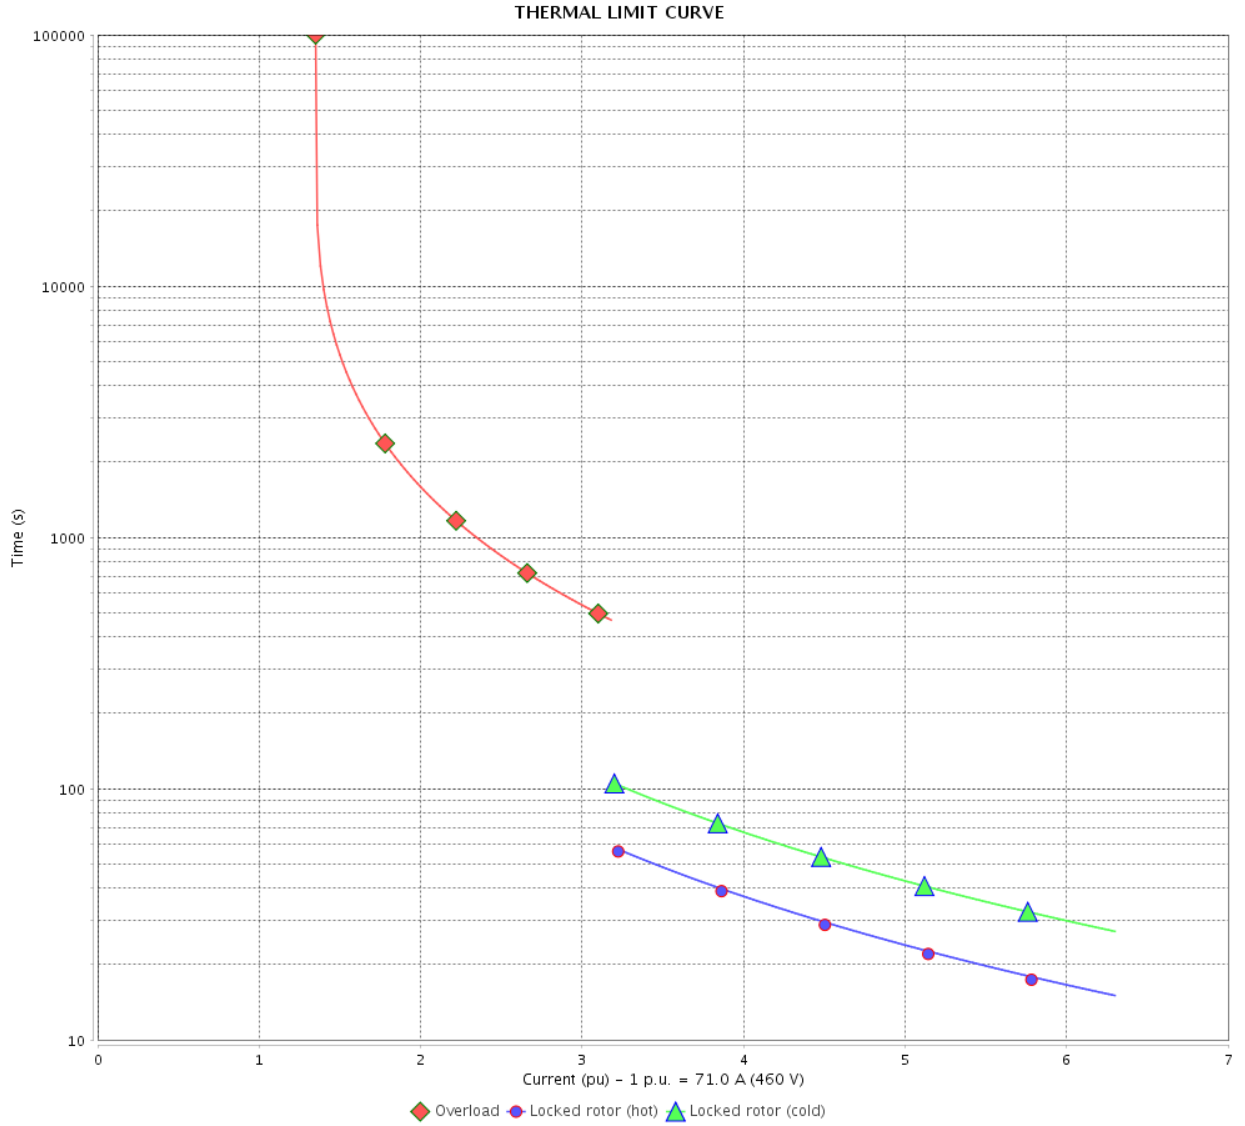

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		11 / 21		
Date		13/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

Performance : 380 V 50 Hz 2P IE3

Rated current	: 69.8 A	Moment of inertia (J)	: 3.82 sq.ft.lb
LRC	: 6.9	Duty cycle	: Cont.(S1)
Rated torque	: 88.7 ft.lb	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.00
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 2960 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/04/2022		12 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

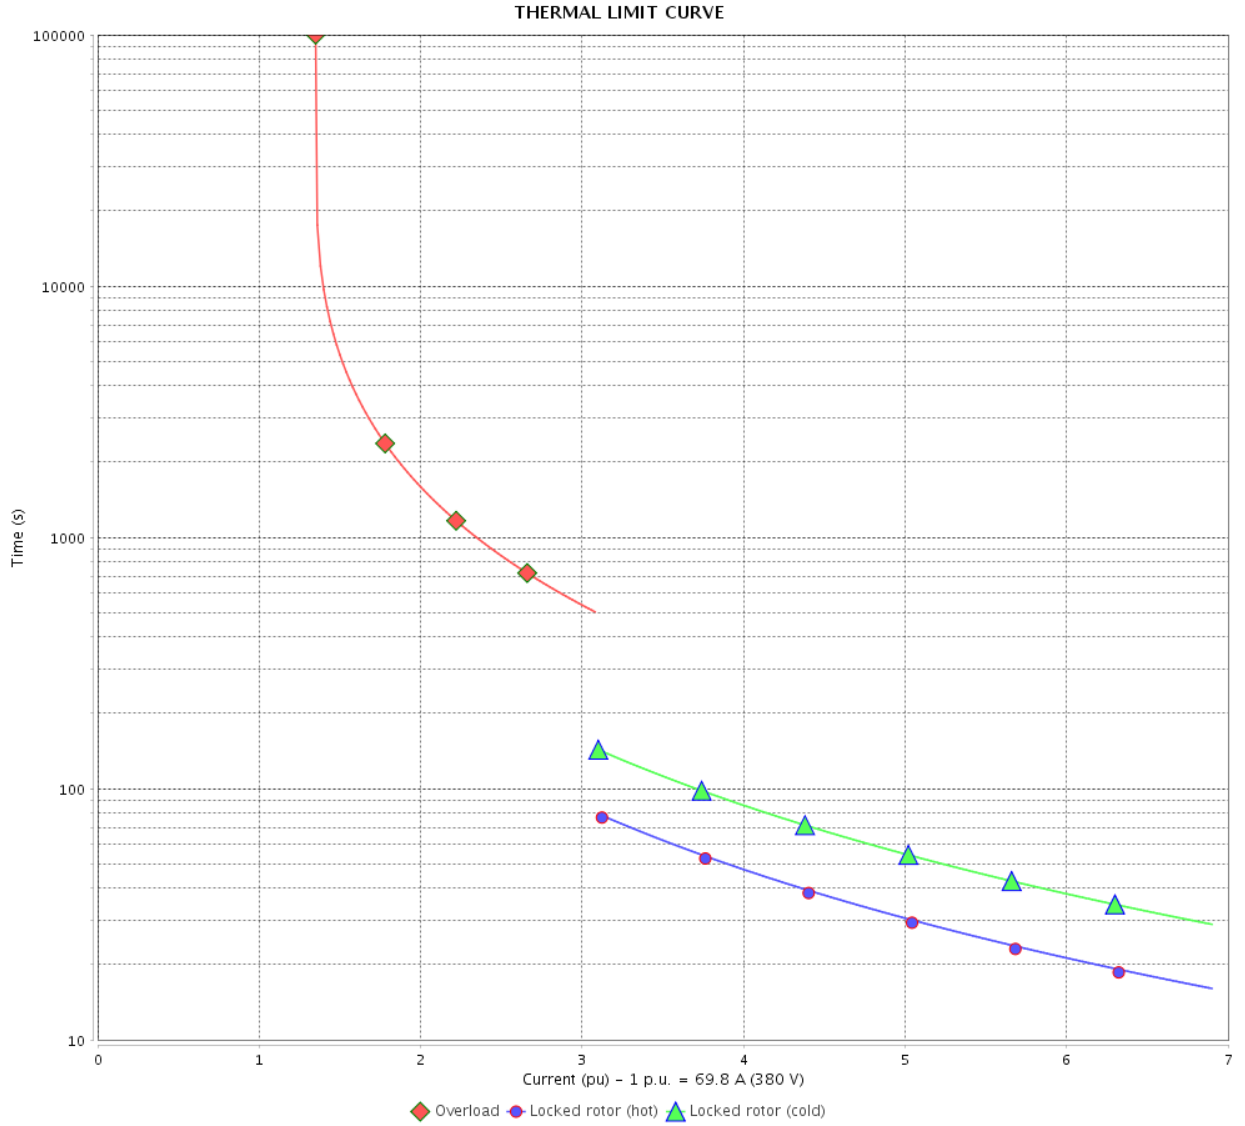

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		13 / 21		
Date		13/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

Performance : 400 V 50 Hz 2P IE3

Rated current	: 68.7 A	Moment of inertia (J)	: 3.82 sq.ft.lb
LRC	: 6.7	Duty cycle	: Cont.(S1)
Rated torque	: 88.7 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 2960 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/04/2022		14 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

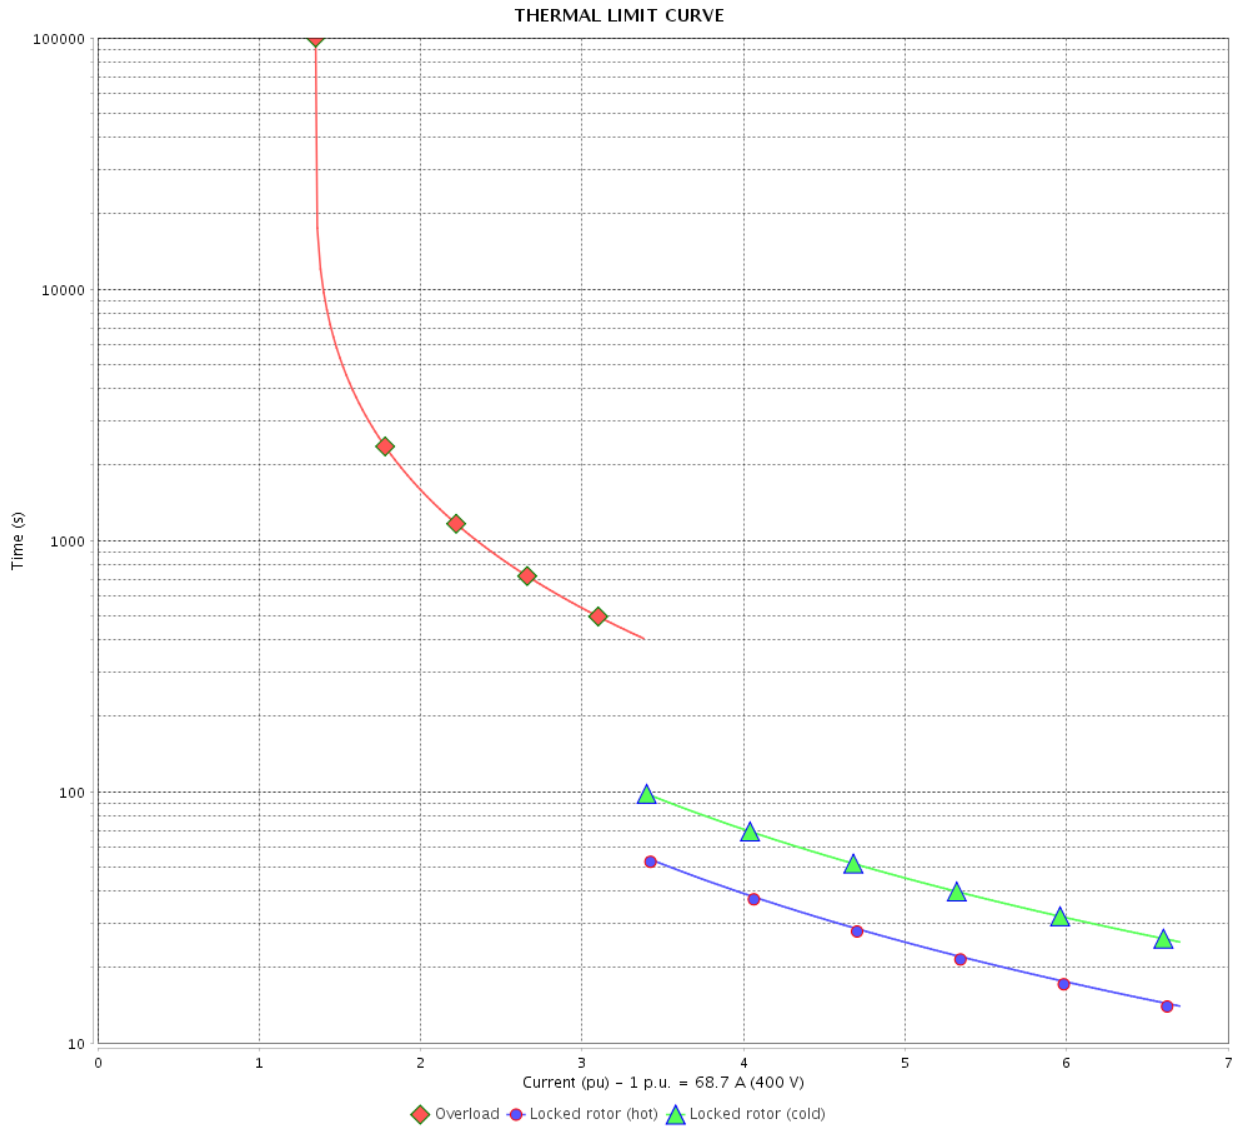

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		15 / 21		
Date		13/04/2022		

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 JP Pump NEMA Premium
Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

Performance : 415 V 50 Hz 2P IE3

Rated current	: 69.5 A	Moment of inertia (J)	: 3.82 sq.ft.lb
LRC	: 6.8	Duty cycle	: Cont.(S1)
Rated torque	: 88.6 ft.lb	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	: 1.00
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 2965 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	13/04/2022		16 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

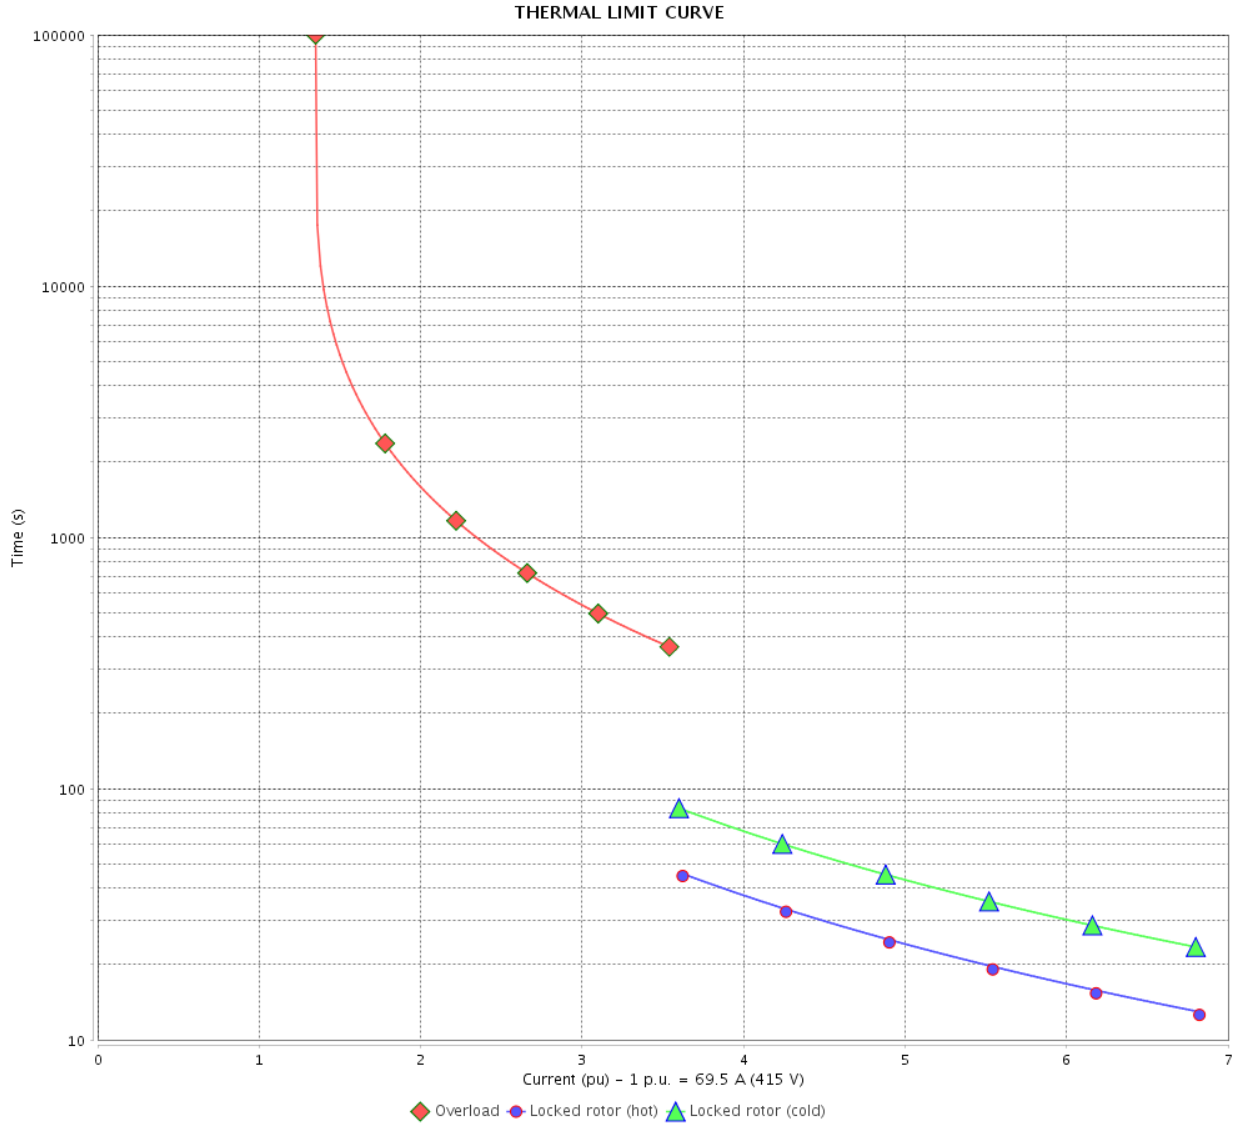

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 17 / 21		Revision
Checked by				
Date				

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

VFD OPERATION CURVE

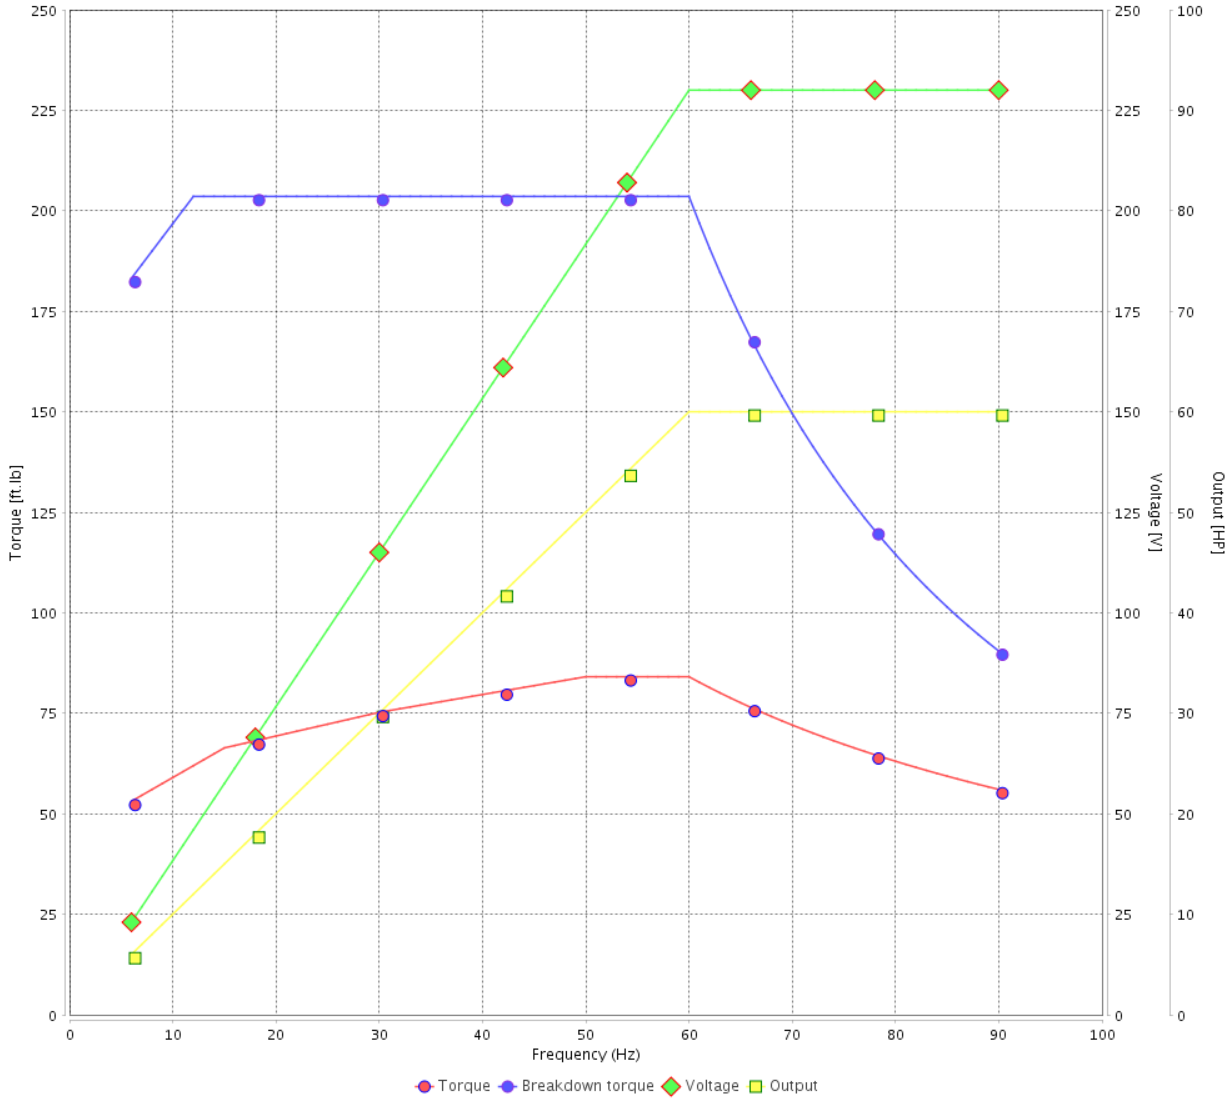

Performance : 230/460 V 60 Hz 2P

Rated current : 142/71.0 A
 LRC : 6.3
 Rated torque : 88.5 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 229 %
 Rated speed : 3560 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 18 / 21	Revision
Checked by				
Date	13/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

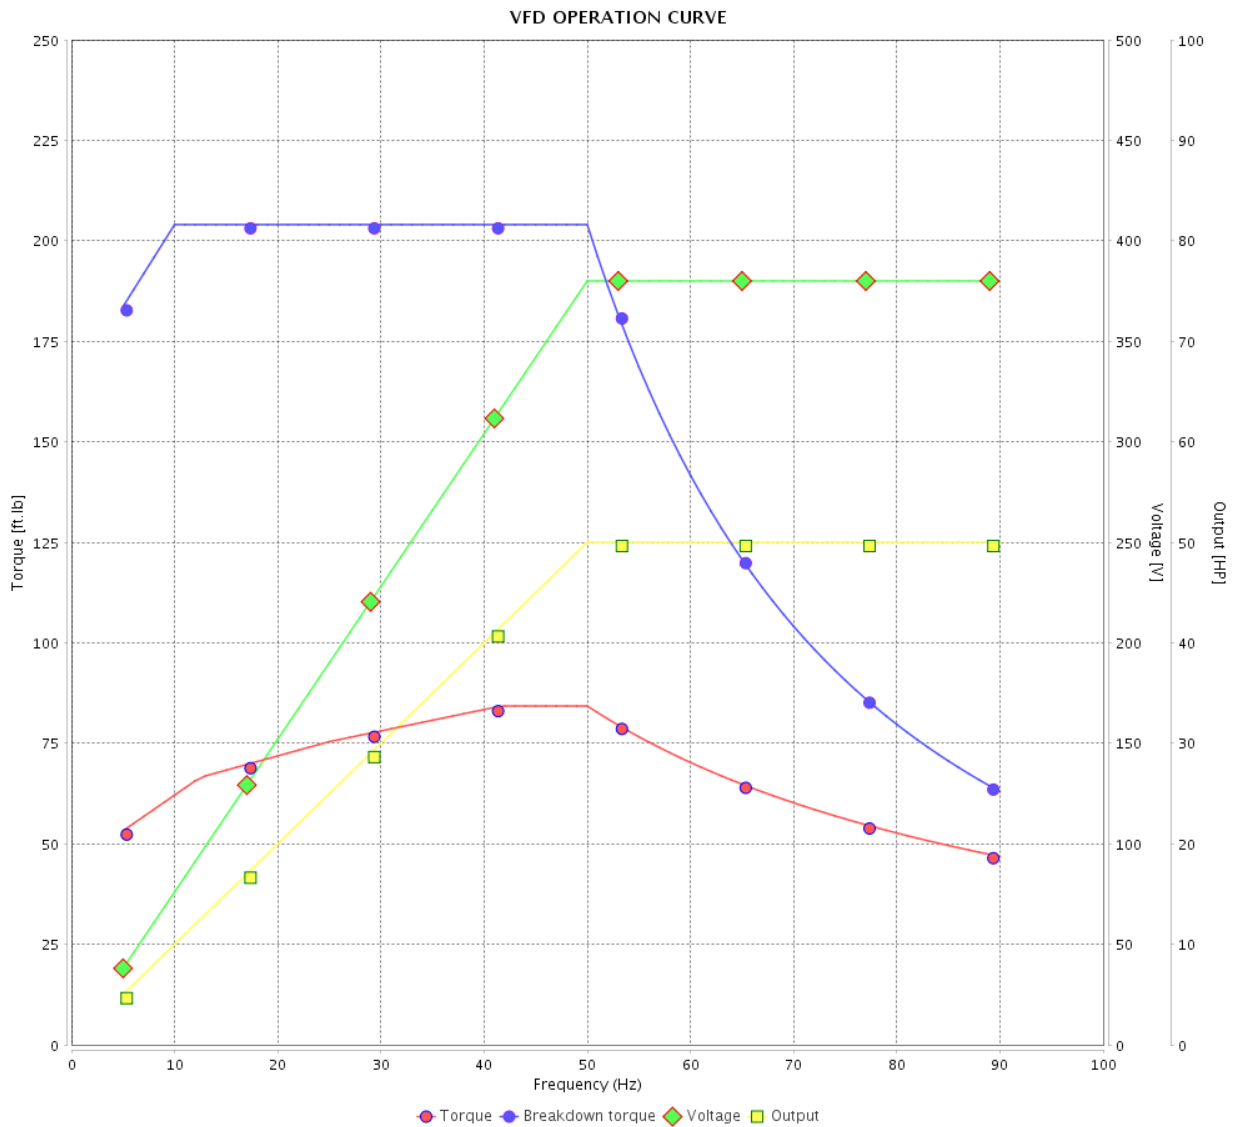

Performance : 380 V 50 Hz 2P IE3

Rated current : 69.8 A
 LRC : 6.9
 Rated torque : 88.7 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 229 %
 Rated speed : 2960 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 19 / 21
Checked by				
Date	13/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

VFD OPERATION CURVE

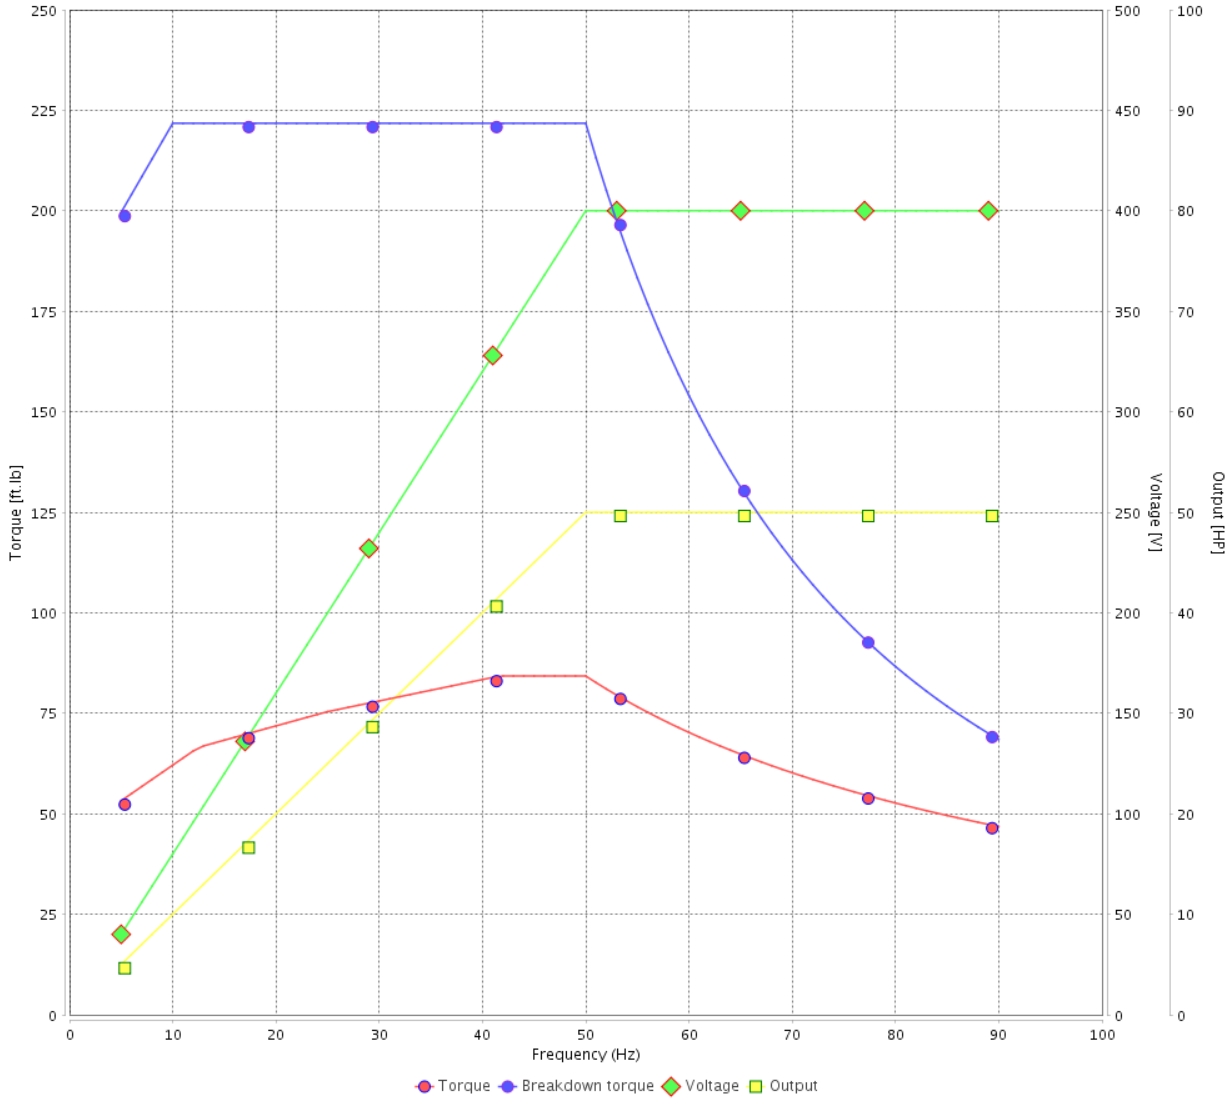

Performance : 400 V 50 Hz 2P IE3

Rated current : 68.7 A
 LRC : 6.7
 Rated torque : 88.7 ft.lb
 Locked rotor torque : 240 %
 Breakdown torque : 250 %
 Rated speed : 2960 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 20 / 21	Revision
Checked by				
Date	13/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 JP Pump NEMA Premium Efficiency Three-Phase

Product code : 14490328

Catalog # : 06036OT3E326JP-W40

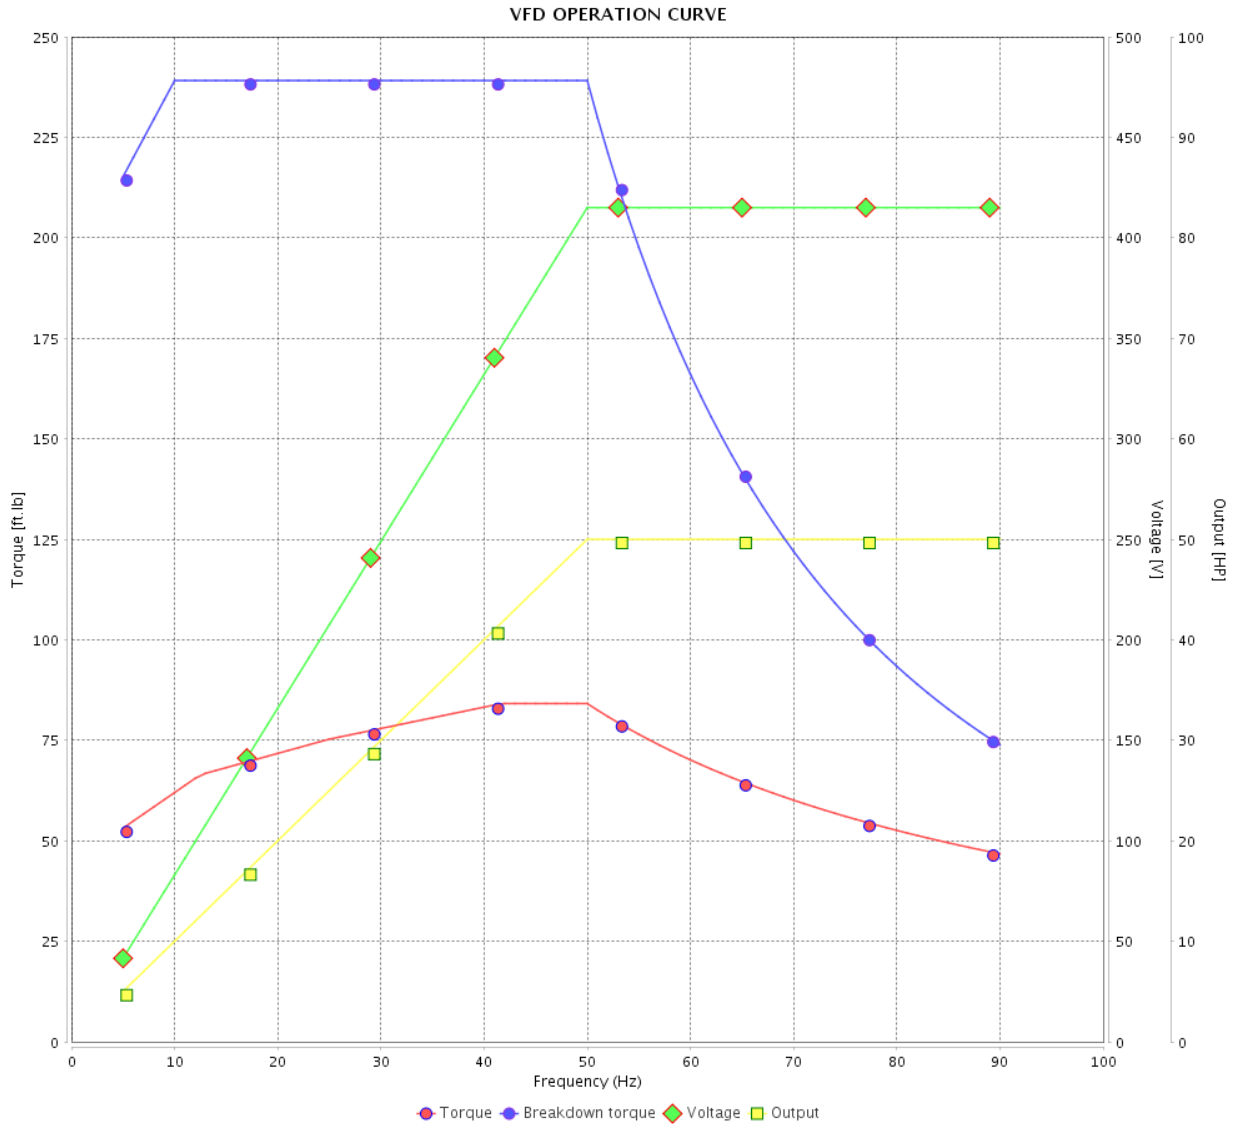


Performance : 415 V 50 Hz 2P IE3



Rated current : 69.5 A
 LRC : 6.8
 Rated torque : 88.6 ft.lb
 Locked rotor torque : 260 %
 Breakdown torque : 270 %
 Rated speed : 2965 rpm

Moment of inertia (J) : 3.82 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 21 / 21
Checked by				
Date	13/04/2022			

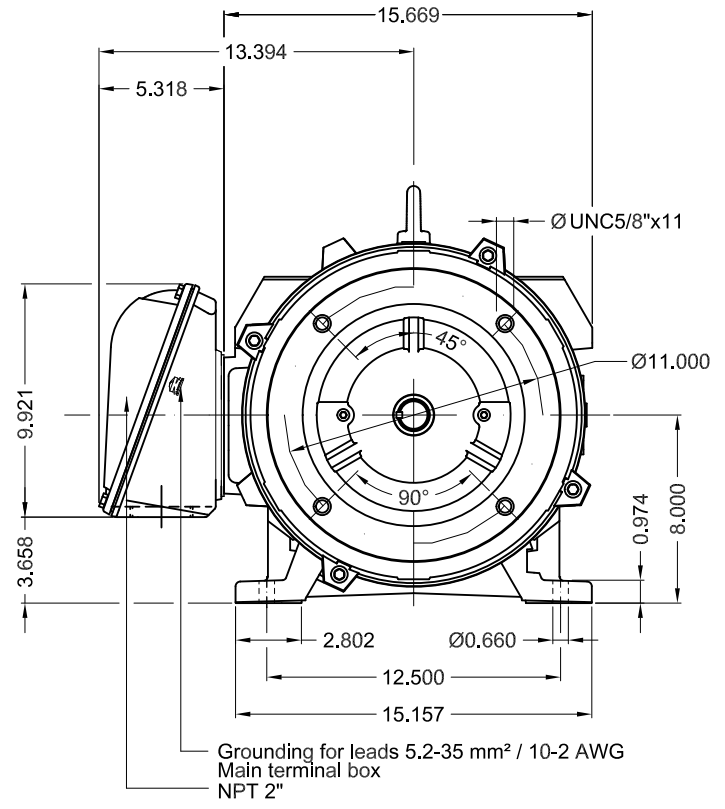

Grounding for leads 5.2-35 mm² / 10-2 AWG
Main terminal box
NPT 2"

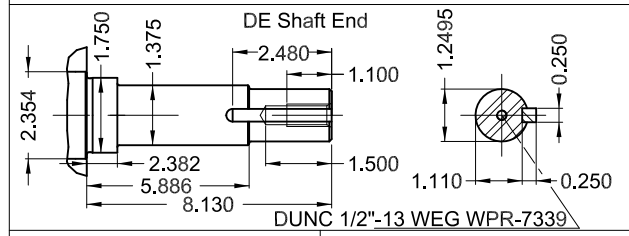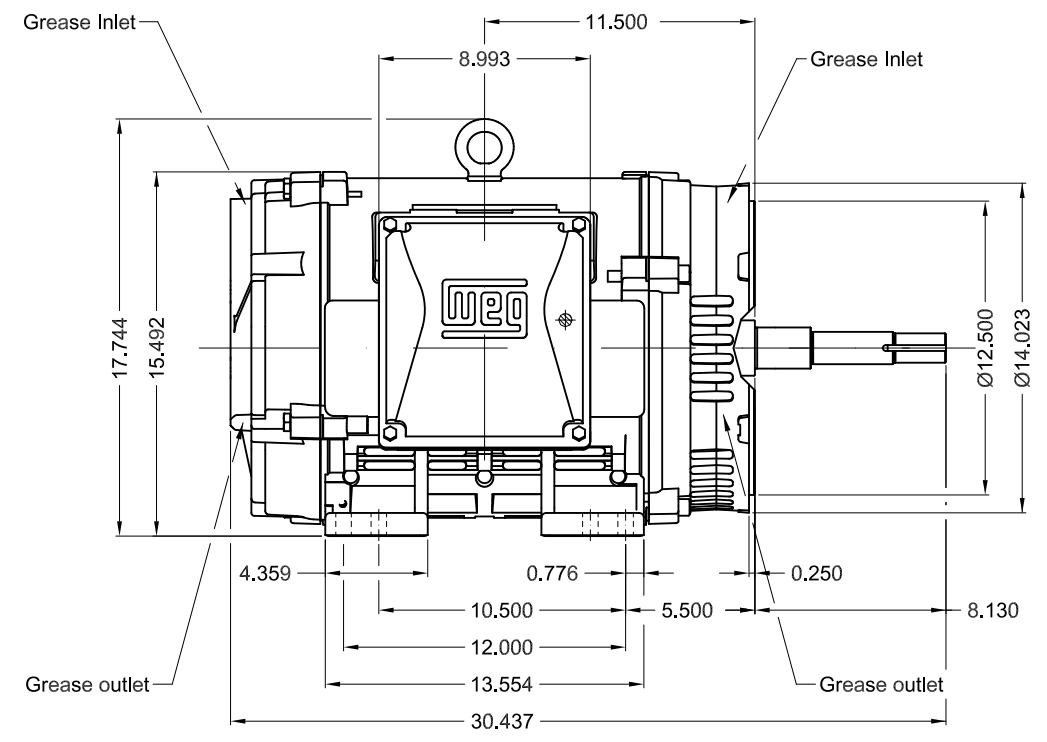

60 HP 02 Poles 60 Hz A

1:8

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PH. MOTOR W40 CLOSE COUPLED PUMP JP TYPE PREM. FT. FRAME 324/6JP IP23 ODP					
CHECKED							
RELEASED							
REL DT.	WMO	Jaragua do Sul	Product Engineering	WDD	SHEET	1 / 1	

- Color RAL 5009
- Painting plan 203A
- Mounting NEMA F-1
- Mounting B34R(D)

PREVIEW



WEG **W40 NEMA**
CC029A Premium
Inverter Duty Motor






IEC 60034-1
 MOD.T01#FOXON



For 60Hz use on PWM, VT 1000:1, CT 3:1, 1.0SF

MODEL 060360T3E326JP-W40
 MADE IN BRAZIL
 14490328

PH 3	FR 324/6JP	HP(kW) 60.0(45.0)	Hz 60
V 230/460	A 142/71.0	RPM 3560	DES B
NEMA NOM EFF 93.6 %	INS. CL. F ΔT 80 K	IP23	
ENCL ODP	DUTY CONT.	AMB. 40°C	
CODE G	PF 0.85	SF 1.25	SFA 178/88.8
USABLE @208V 157 A	SF 1.15	SFA 181	
50HP 37kW 50Hz 380V 69.8A 2960RPM SF1.00 EFF 93.7% (IE3)	ALT 1000 m.a.s.l.	478 Lbs	



MOBIL POLYREX EM
 21 g 19658 h