

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: W40 NEMA Premium Efficiency Three-Phase	Product code :	14284790
			Catalog # :	10018OT3E404TSC-W40
Frame	: 404/5TSC	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 965 lb	
Protection degree	: IP23	Moment of inertia (J)	: 21.9 sq.ft.lb	
Design	: B			
Output [HP]	100	75	75	75
Poles	4	4	4	4
Frequency [Hz]	60	50	50	50
Rated voltage [V]	230/460	380	400	415
Rated current [A]	230/115	103	97.5	96.2
L. R. Amperes [A]	1564/782	742	683	750
LRC [A]	6.8x(Code G)	7.2x(Code H)	7.0x(Code H)	7.8x(Code J)
No load current [A]	79.4/39.7	33.0	36.5	40.0
Rated speed [RPM]	1780	1482	1484	1485
Slip [%]	1.11	1.20	1.07	1.00
Rated torque [ft.lb]	295	266	265	265
Locked rotor torque [%]	200	220	240	270
Breakdown torque [%]	250	250	280	300
Service factor	1.25	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K
Locked rotor time	21s (cold) 12s (hot)	23s (cold) 13s (hot)	21s (cold) 12s (hot)	25s (cold) 14s (hot)
Noise level ²	69.0 dB(A)			
Efficiency (%)	25%	94.9	90.2	90.3
	50%	95.0	91.9	92.0
	75%	95.4	92.9	92.9
	100%	95.4	94.7	94.7
Power Factor	25%	0.49	0.50	0.47
	50%	0.75	0.73	0.72
	75%	0.83	0.82	0.80
	100%	0.86	0.86	0.86
Bearing type	: <u>Drive end</u> 6314 C3 <u>Non drive end</u> 6212 Z C3	Foundation loads		
Sealing	: Without Without	Max. traction	: 1903 lb	
	: Bearing Seal Bearing Seal	Max. compression	: 2869 lb	
Lubrication interval	: 20000 h 20000 h			
Lubricant amount	: 27 g 13 g			
Lubricant type	: Mobil Polyrex EM			
Notes USABLE @208V 254A SF 1.15 SFA 292A				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked
Performed by			Page	Revision
Checked by				
Date	14/04/2022			
			1 / 21	

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

TORQUE AND CURRENT VS SPEED CURVE

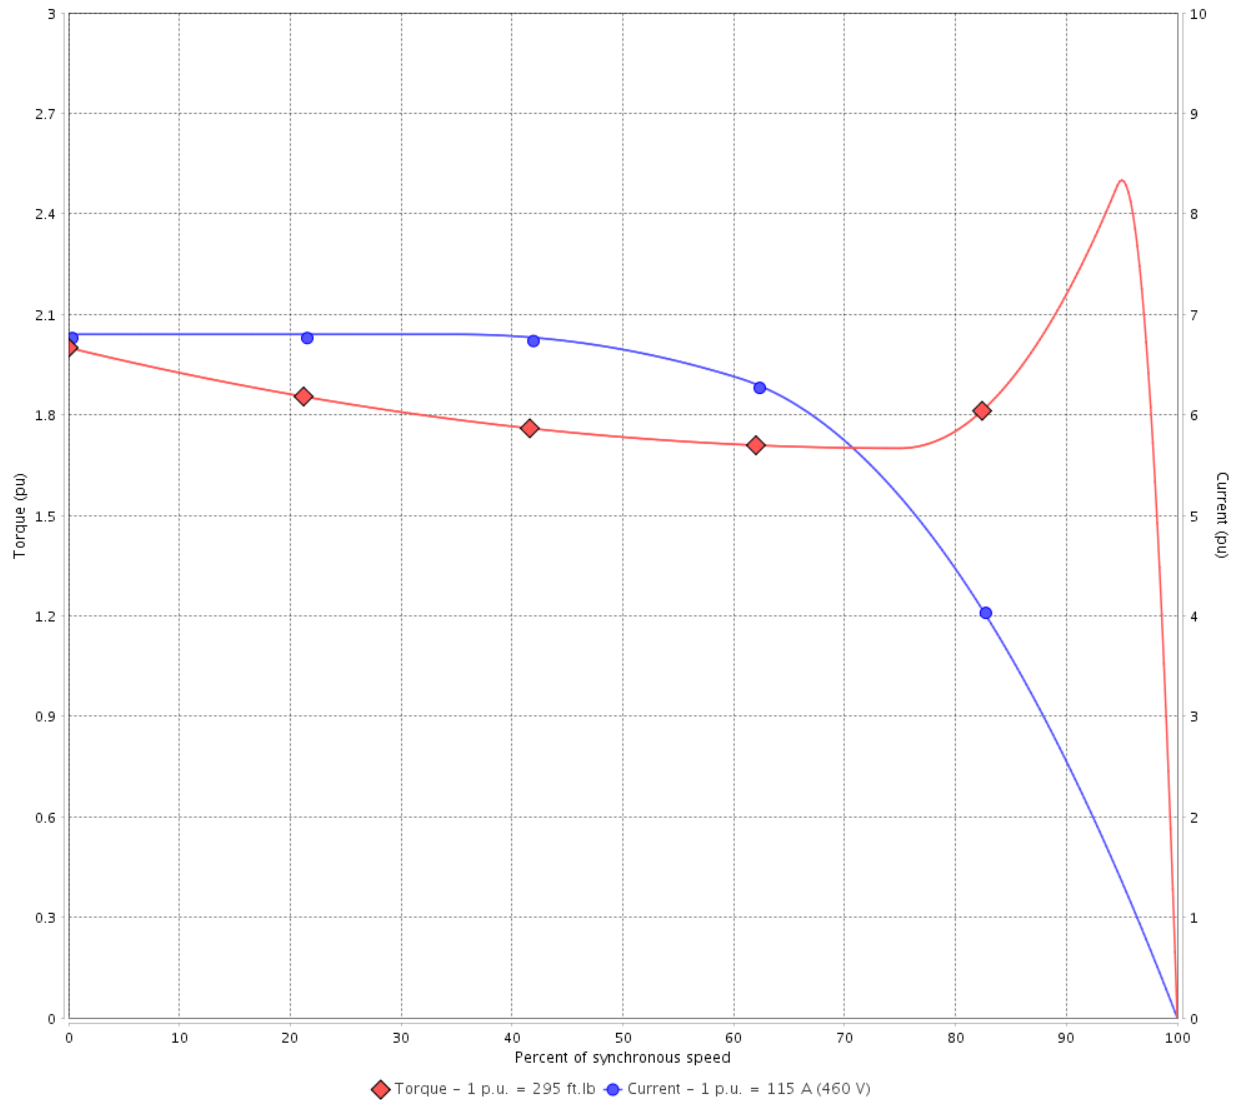

Performance : 230/460 V 60 Hz 4P

Rated current	: 230/115 A	Moment of inertia (J)	: 21.9 sq.ft.lb
LRC	: 6.8	Duty cycle	: Cont.(S1)
Rated torque	: 295 ft.lb	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.25
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1780 rpm	Design	: B

Locked rotor time : 21s (cold) 12s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 21	Revision
Checked by				
Date	14/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

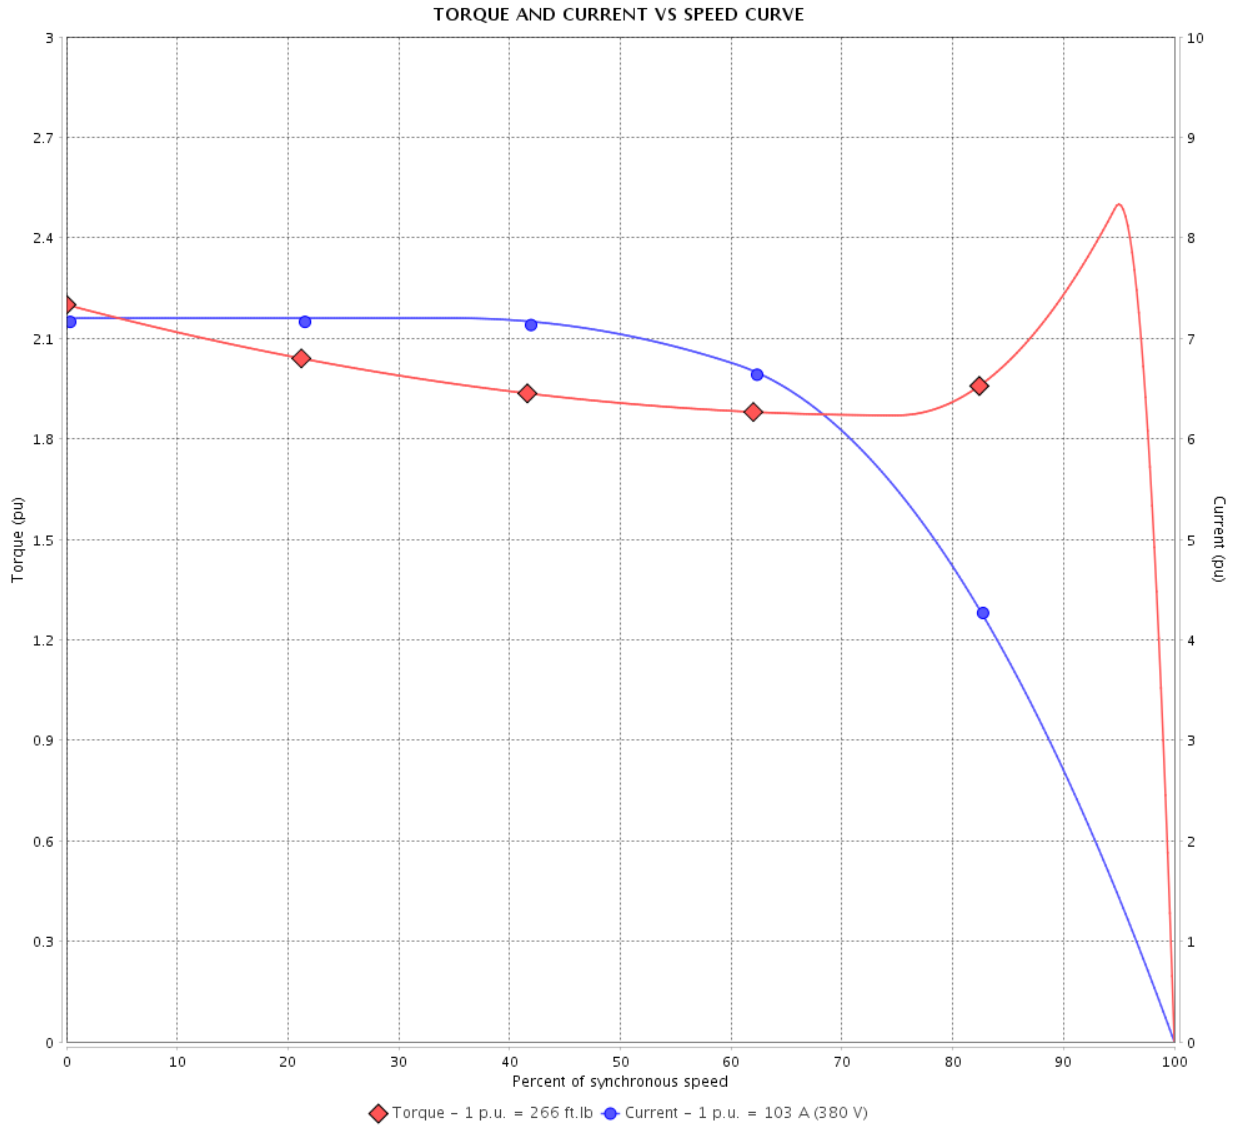

Performance : 380 V 50 Hz 4P IE3

Rated current	: 103 A	Moment of inertia (J)	: 21.9 sq.ft.lb
LRC	: 7.2	Duty cycle	: Cont.(S1)
Rated torque	: 266 ft.lb	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.00
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1482 rpm	Design	: B

Locked rotor time : 23s (cold) 13s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 21	Revision
Checked by				
Date	14/04/2022			

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

TORQUE AND CURRENT VS SPEED CURVE

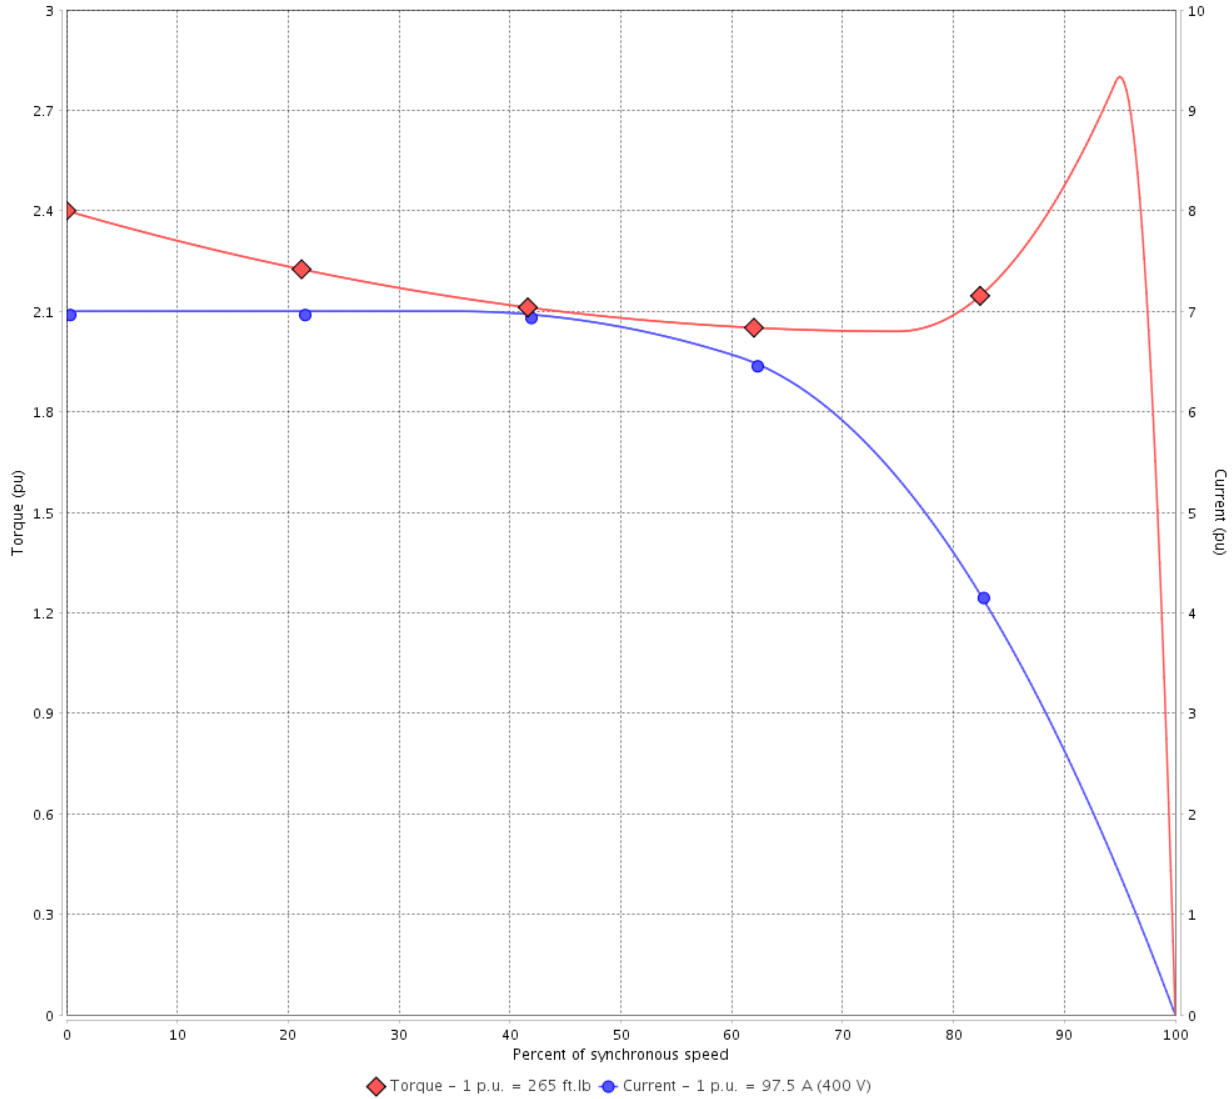

Performance : 400 V 50 Hz 4P IE3

Rated current	: 97.5 A	Moment of inertia (J)	: 21.9 sq.ft.lb
LRC	: 7.0	Duty cycle	: Cont.(S1)
Rated torque	: 265 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1484 rpm	Design	: B

Locked rotor time : 21s (cold) 12s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 21	Revision
Checked by				
Date	14/04/2022			

TORQUE AND CURRENT VS SPEED CURVE




Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

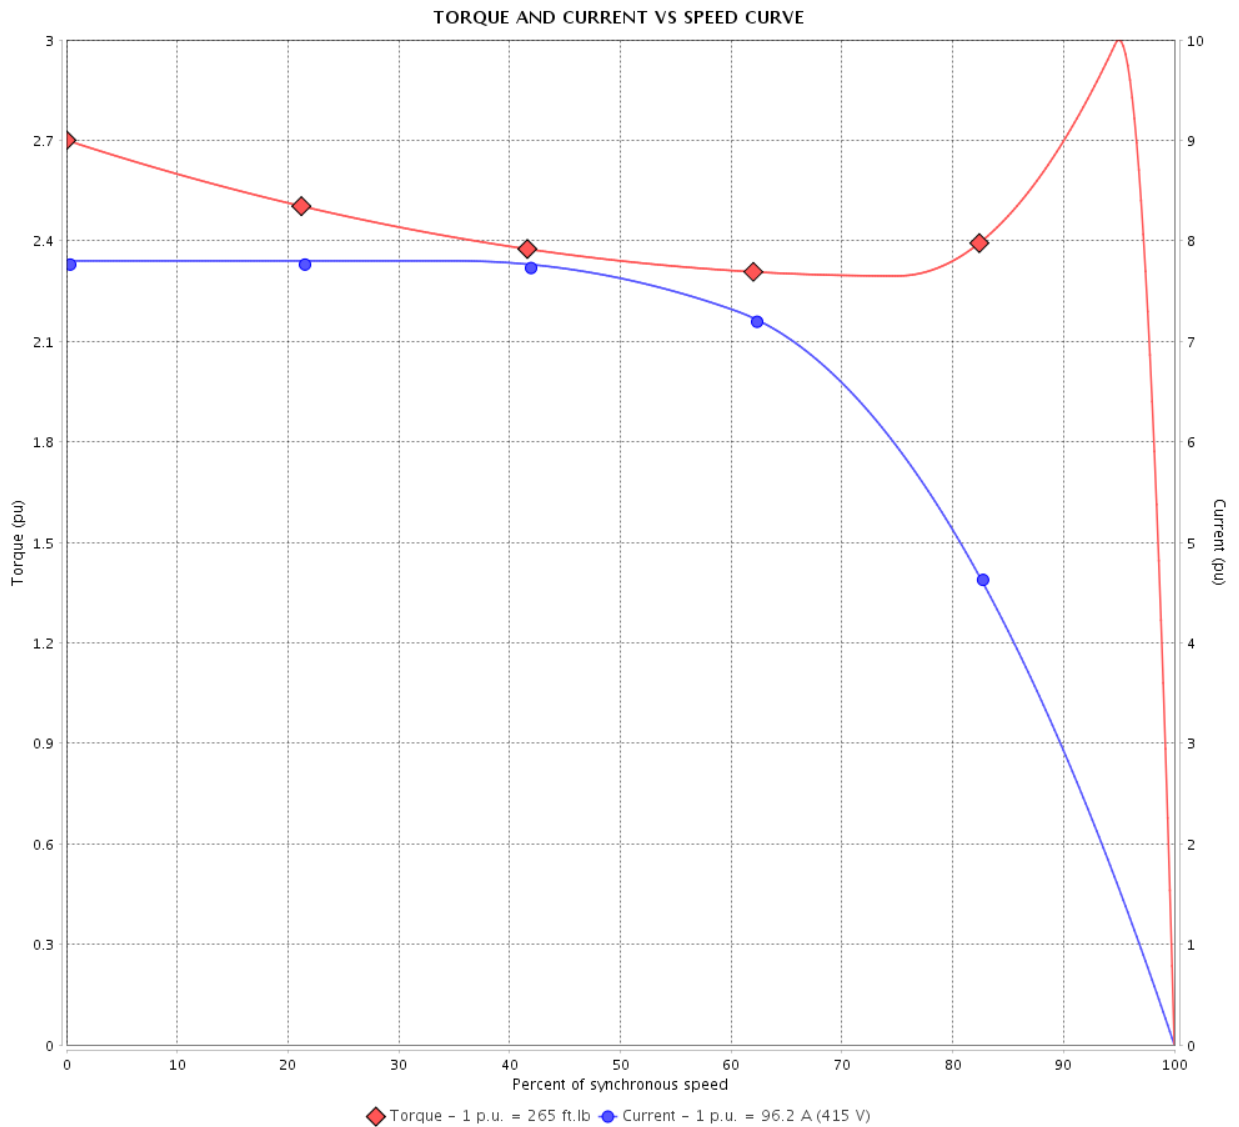

Performance : 415 V 50 Hz 4P IE3

Rated current	: 96.2 A	Moment of inertia (J)	: 21.9 sq.ft.lb
LRC	: 7.8	Duty cycle	: Cont.(S1)
Rated torque	: 265 ft.lb	Insulation class	: F
Locked rotor torque	: 270 %	Service factor	: 1.00
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1485 rpm	Design	: B

Locked rotor time : 25s (cold) 14s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 21	Revision
Checked by				
Date	14/04/2022			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

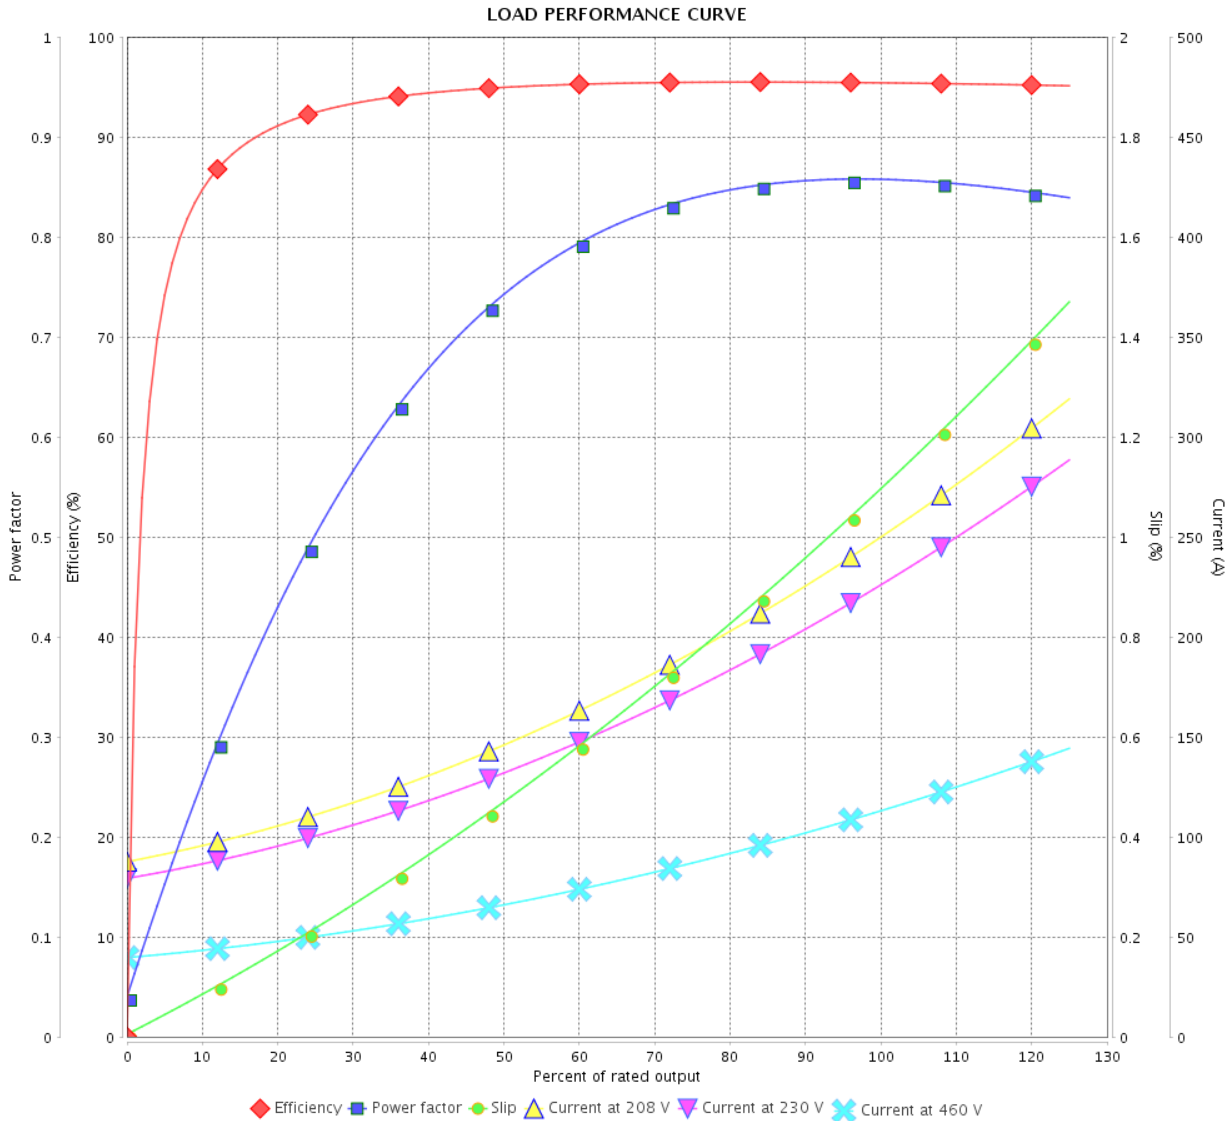

Performance : 230/460 V 60 Hz 4P

Rated current : 230/115 A
 LRC : 6.8
 Rated torque : 295 ft.lb
 Locked rotor torque : 200 %
 Breakdown torque : 250 %
 Rated speed : 1780 rpm

Moment of inertia (J) : 21.9 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

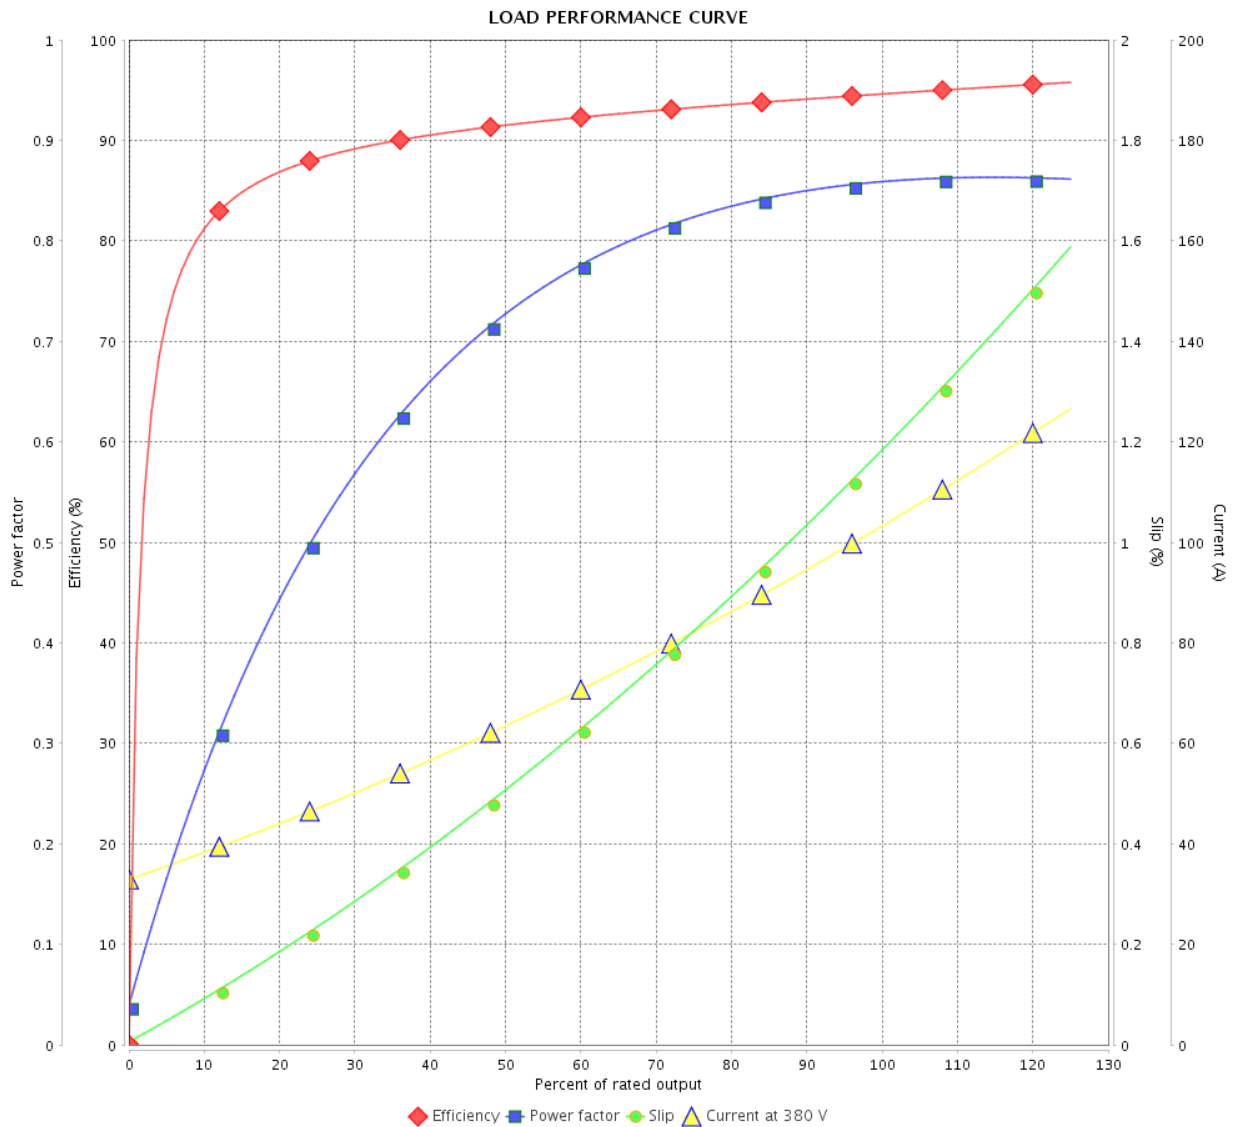

Performance : 380 V 50 Hz 4P IE3

Rated current : 103 A
 LRC : 7.2
 Rated torque : 266 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 250 %
 Rated speed : 1482 rpm

Moment of inertia (J) : 21.9 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		7 / 21		
Date		14/04/2022		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer : _____

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

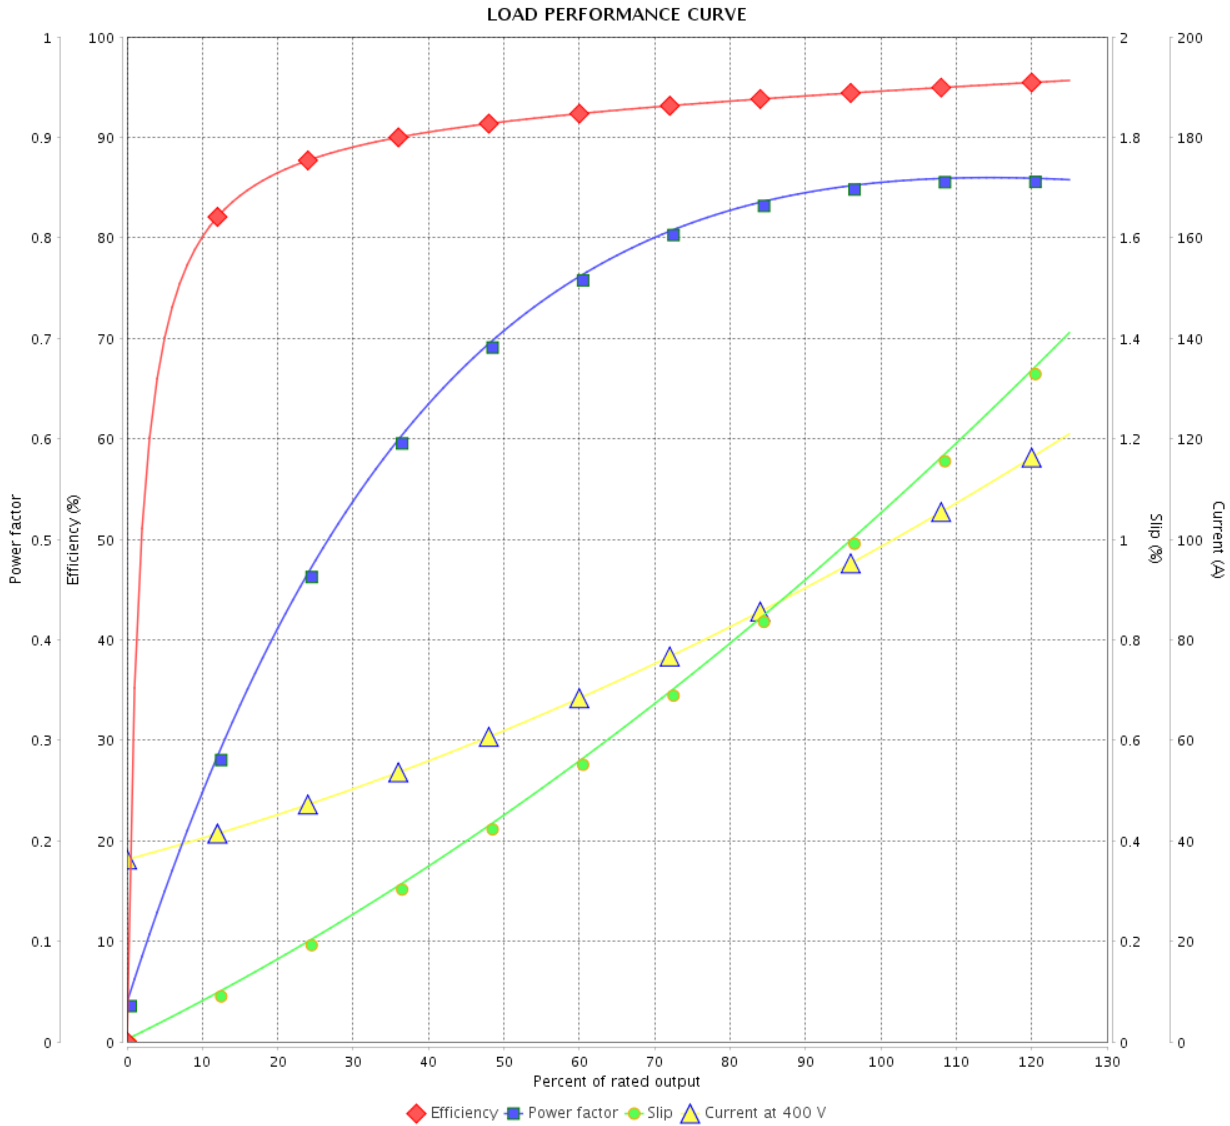

Performance : 400 V 50 Hz 4P IE3

Rated current : 97.5 A
 LRC : 7.0
 Rated torque : 265 ft.lb
 Locked rotor torque : 240 %
 Breakdown torque : 280 %
 Rated speed : 1484 rpm

Moment of inertia (J) : 21.9 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 8 / 21
Checked by				
Date				
		Revision		

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

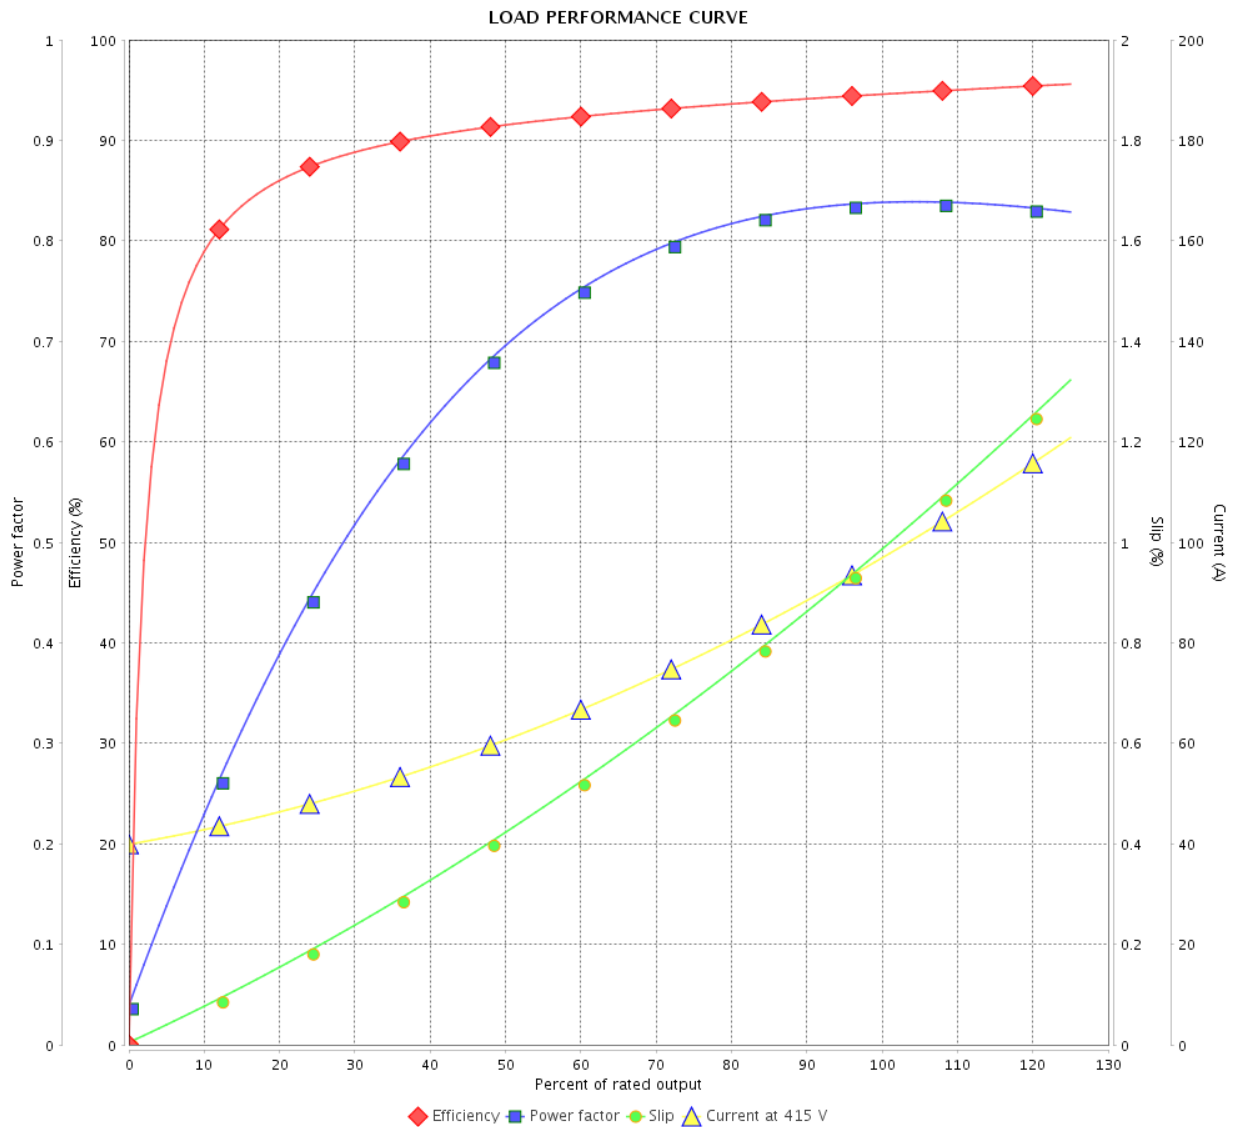

Performance : 415 V 50 Hz 4P IE3

Rated current : 96.2 A
 LRC : 7.8
 Rated torque : 265 ft.lb
 Locked rotor torque : 270 %
 Breakdown torque : 300 %
 Rated speed : 1485 rpm

Moment of inertia (J) : 21.9 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		9 / 21		
Date		14/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

Performance : 230/460 V 60 Hz 4P

Rated current : 230/115 A
LRC : 6.8
Rated torque : 295 ft.lb
Locked rotor torque : 200 %
Breakdown torque : 250 %
Rated speed : 1780 rpm

Moment of inertia (J) : 21.9 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/04/2022		10 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

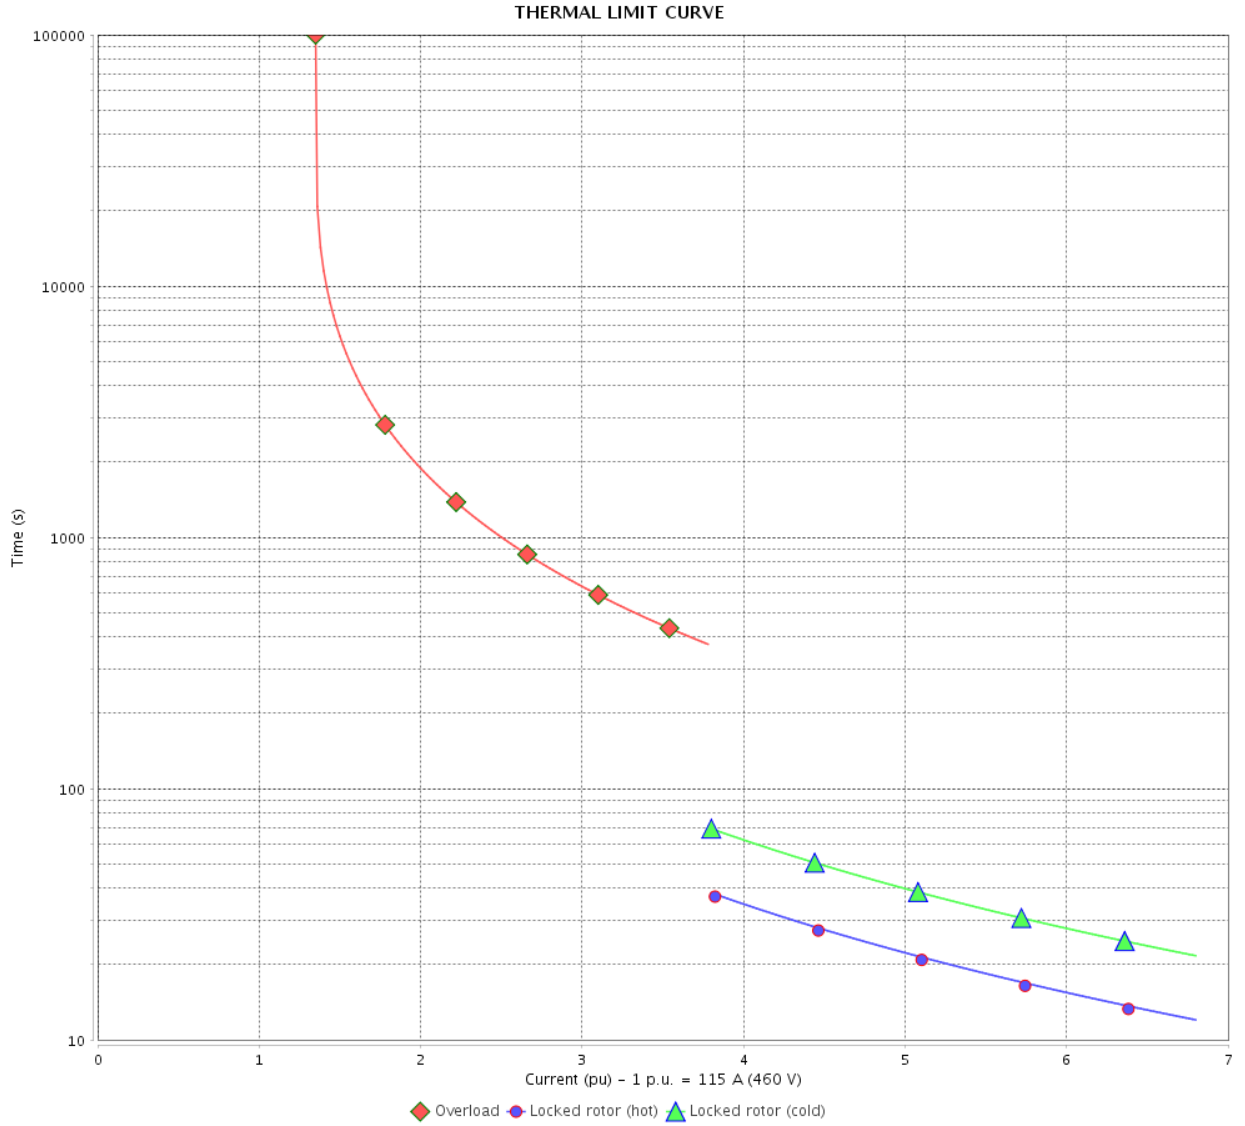

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		11 / 21		
Date		14/04/2022		

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

Performance : 380 V 50 Hz 4P IE3

Rated current	: 103 A	Moment of inertia (J)	: 21.9 sq.ft.lb
LRC	: 7.2	Duty cycle	: Cont.(S1)
Rated torque	: 266 ft.lb	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.00
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1482 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/04/2022		12 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

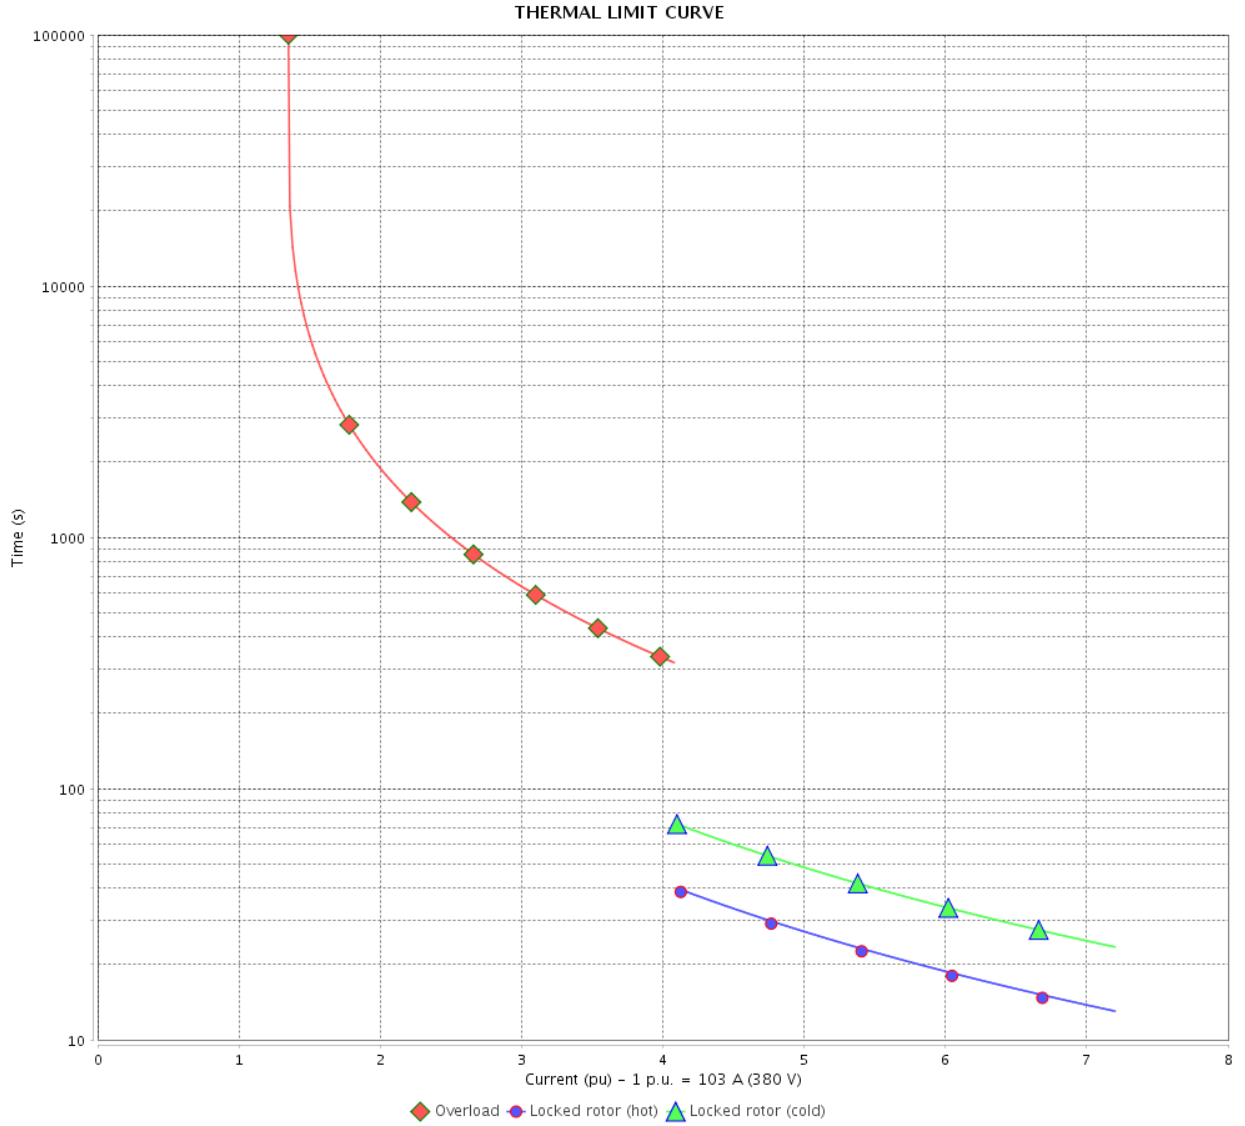

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 13 / 21		Revision
Checked by				
Date				

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

Performance : 400 V 50 Hz 4P IE3

Rated current	: 97.5 A	Moment of inertia (J)	: 21.9 sq.ft.lb
LRC	: 7.0	Duty cycle	: Cont.(S1)
Rated torque	: 265 ft.lb	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1484 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	14/04/2022		14 / 21	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

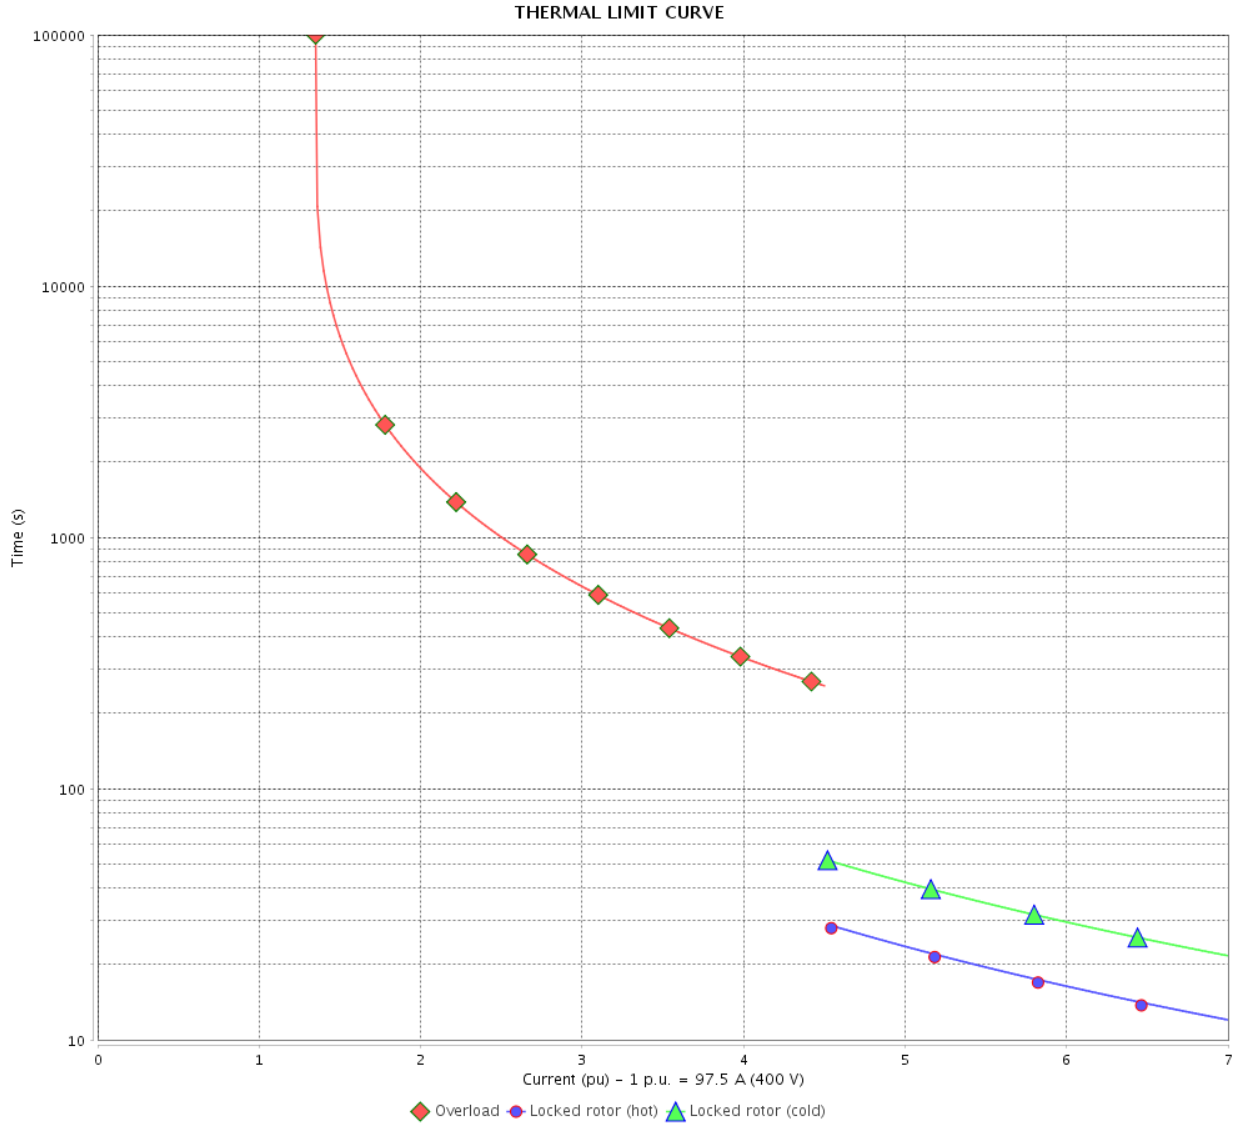

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		15 / 21		
Date		14/04/2022		

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

Performance : 415 V 50 Hz 4P IE3

Rated current	: 96.2 A	Moment of inertia (J)	: 21.9 sq.ft.lb
LRC	: 7.8	Duty cycle	: Cont.(S1)
Rated torque	: 265 ft.lb	Insulation class	: F
Locked rotor torque	: 270 %	Service factor	: 1.00
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 1485 rpm	Design	: B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 16 / 21	Revision
Checked by				
Date	14/04/2022			

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

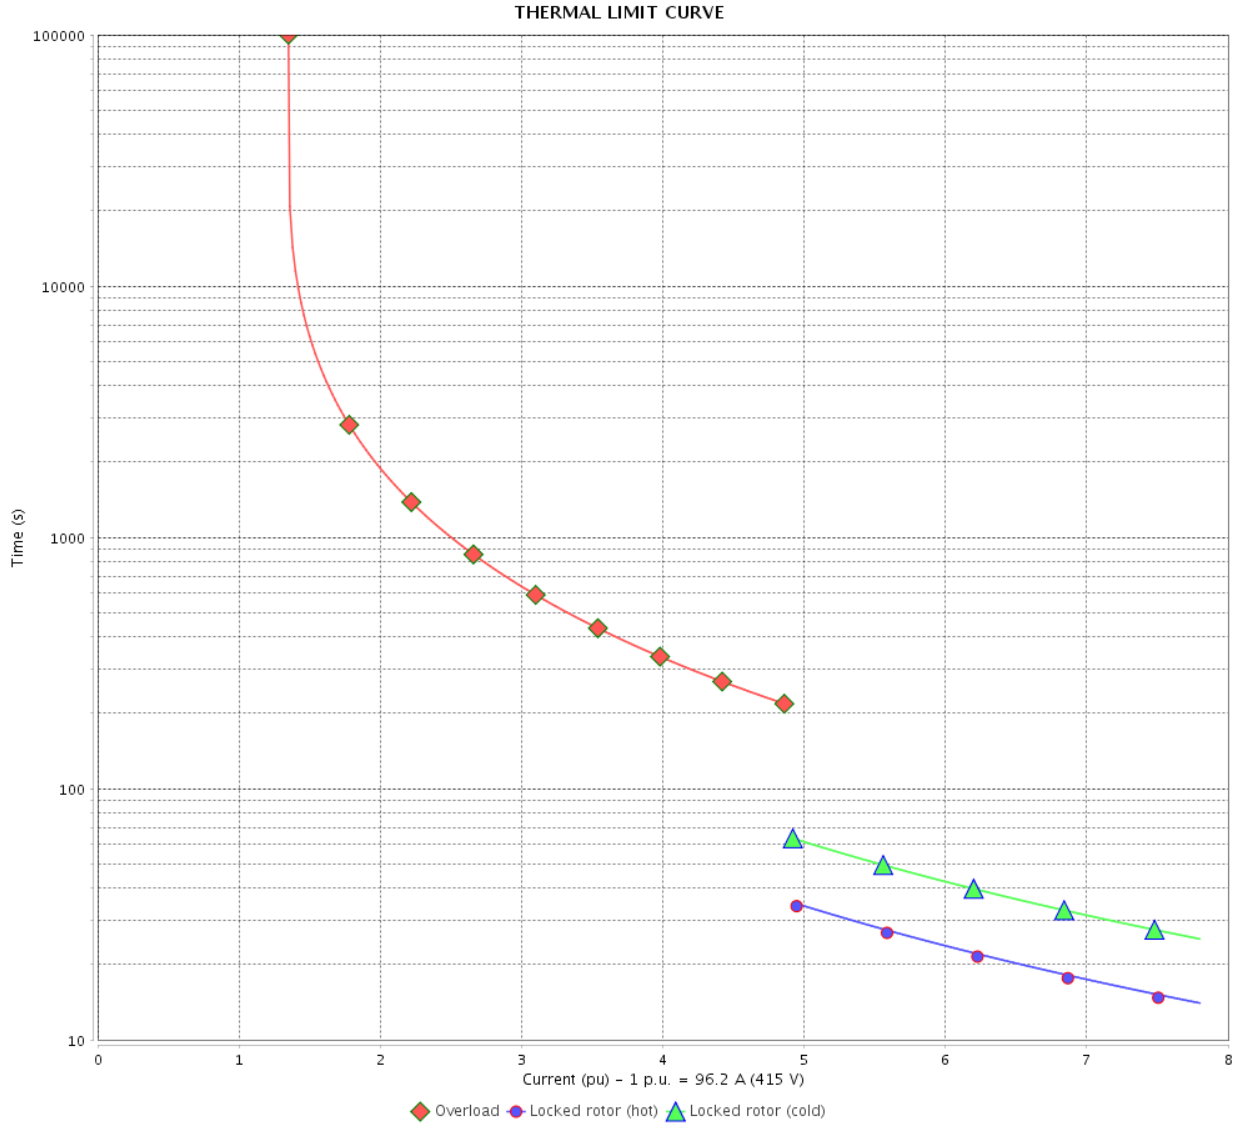

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
		Page 17 / 21	Revision	

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

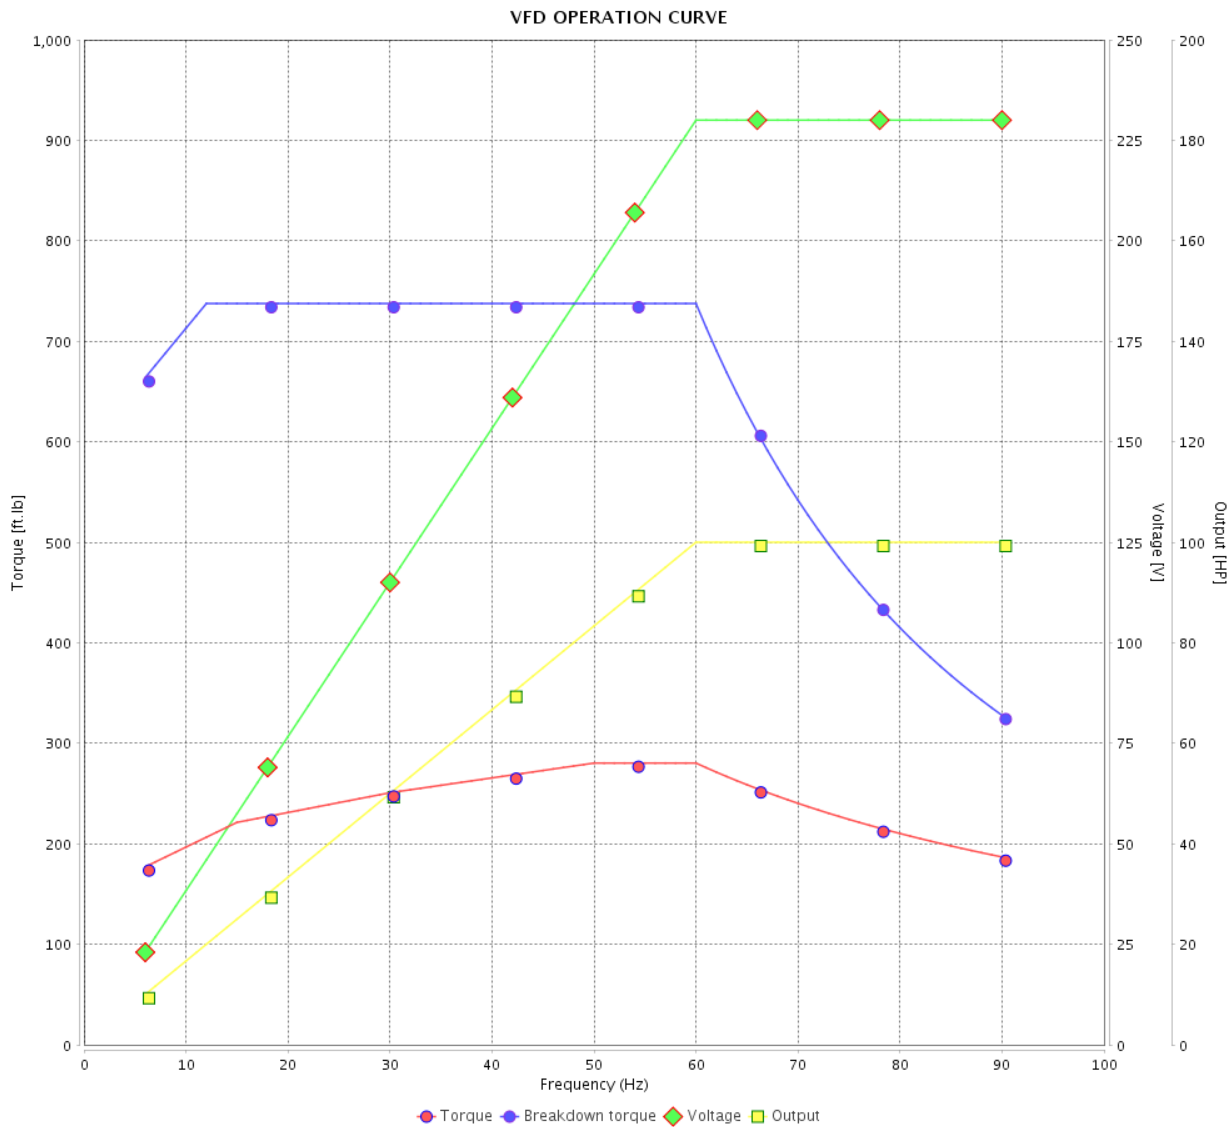

Performance : 230/460 V 60 Hz 4P

Rated current : 230/115 A
LRC : 6.8
Rated torque : 295 ft.lb
Locked rotor torque : 200 %
Breakdown torque : 250 %
Rated speed : 1780 rpm

Moment of inertia (J) : 21.9 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 18 / 21	Revision
Checked by				
Date	14/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

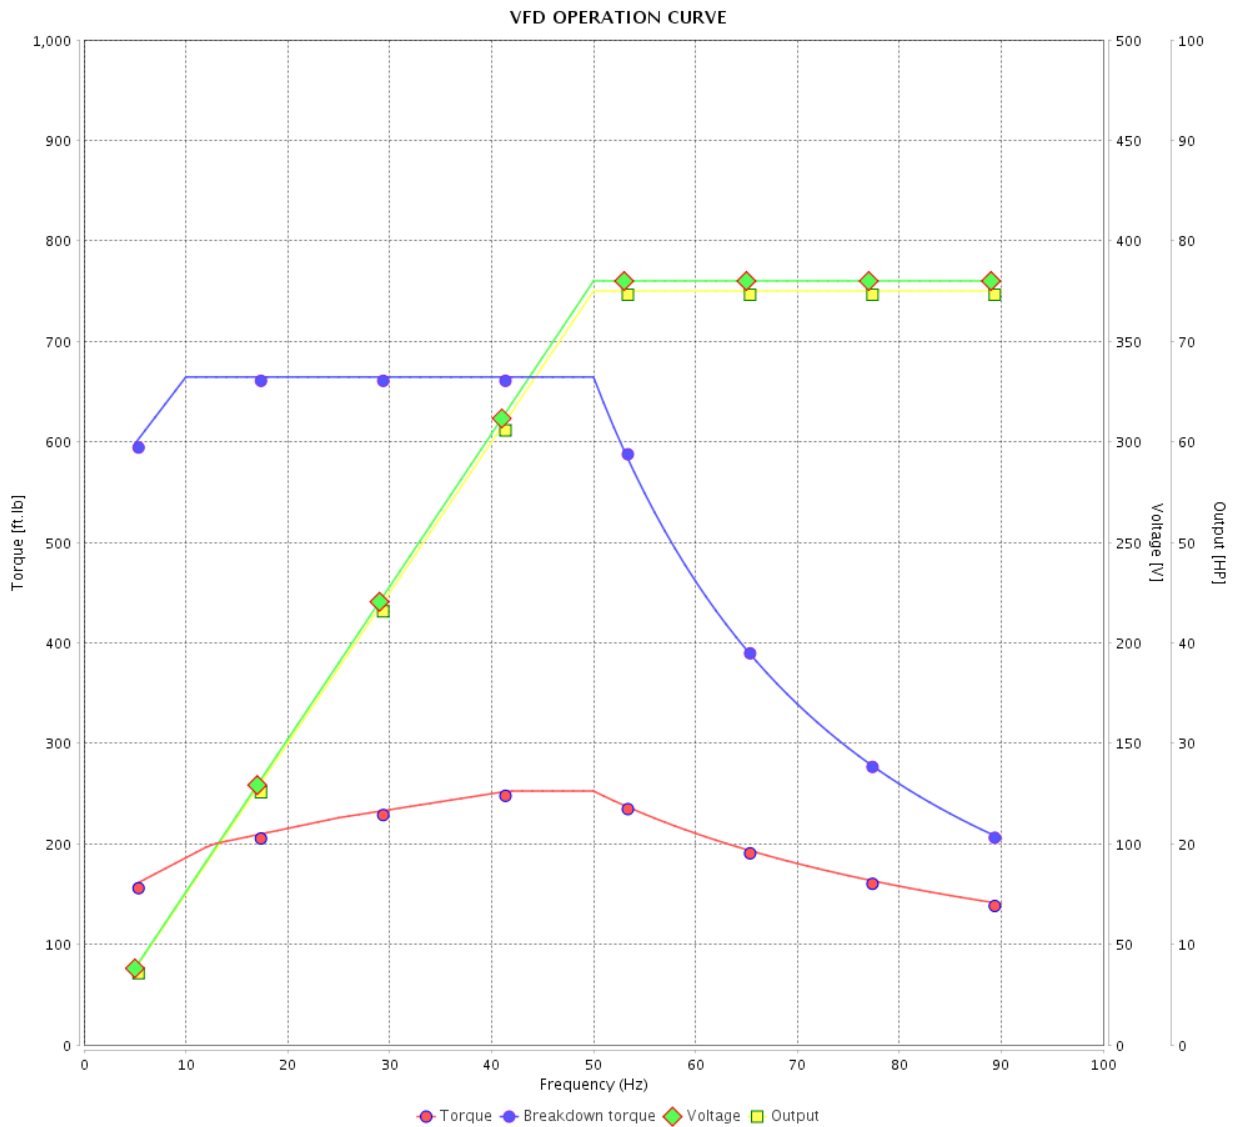

Performance : 380 V 50 Hz 4P IE3

Rated current : 103 A
LRC : 7.2
Rated torque : 266 ft.lb
Locked rotor torque : 220 %
Breakdown torque : 250 %
Rated speed : 1482 rpm

Moment of inertia (J) : 21.9 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				Page 19 / 21
Checked by				
Date	14/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40

VFD OPERATION CURVE

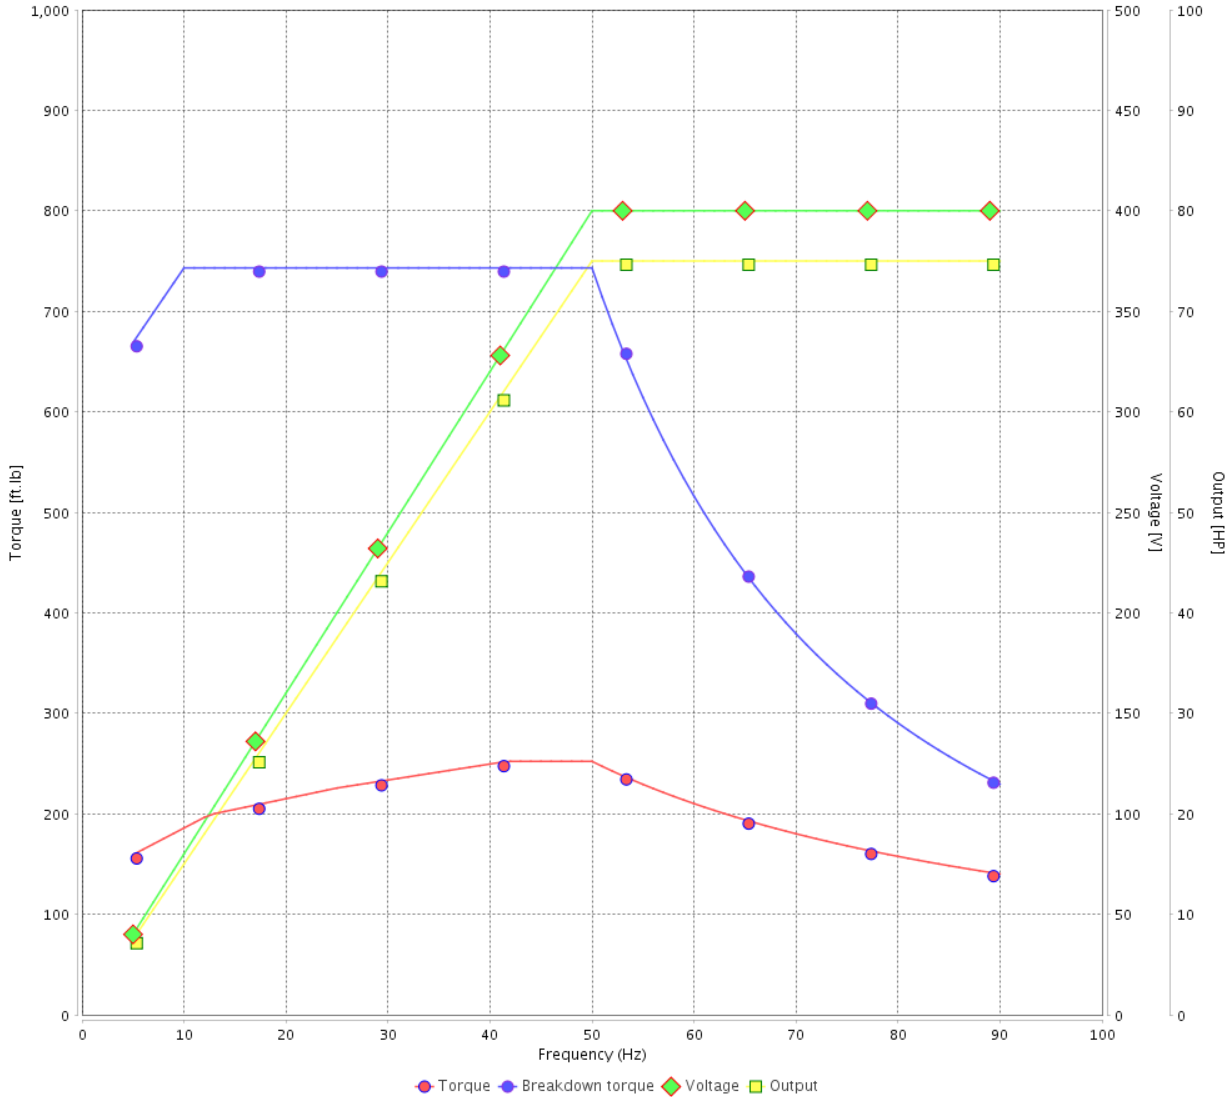

Performance : 400 V 50 Hz 4P IE3

Rated current : 97.5 A
LRC : 7.0
Rated torque : 265 ft.lb
Locked rotor torque : 240 %
Breakdown torque : 280 %
Rated speed : 1484 rpm

Moment of inertia (J) : 21.9 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 20 / 21	Revision
Checked by				
Date	14/04/2022			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W40 NEMA Premium Efficiency
Three-Phase

Product code : 14284790

Catalog # : 10018OT3E404TSC-W40



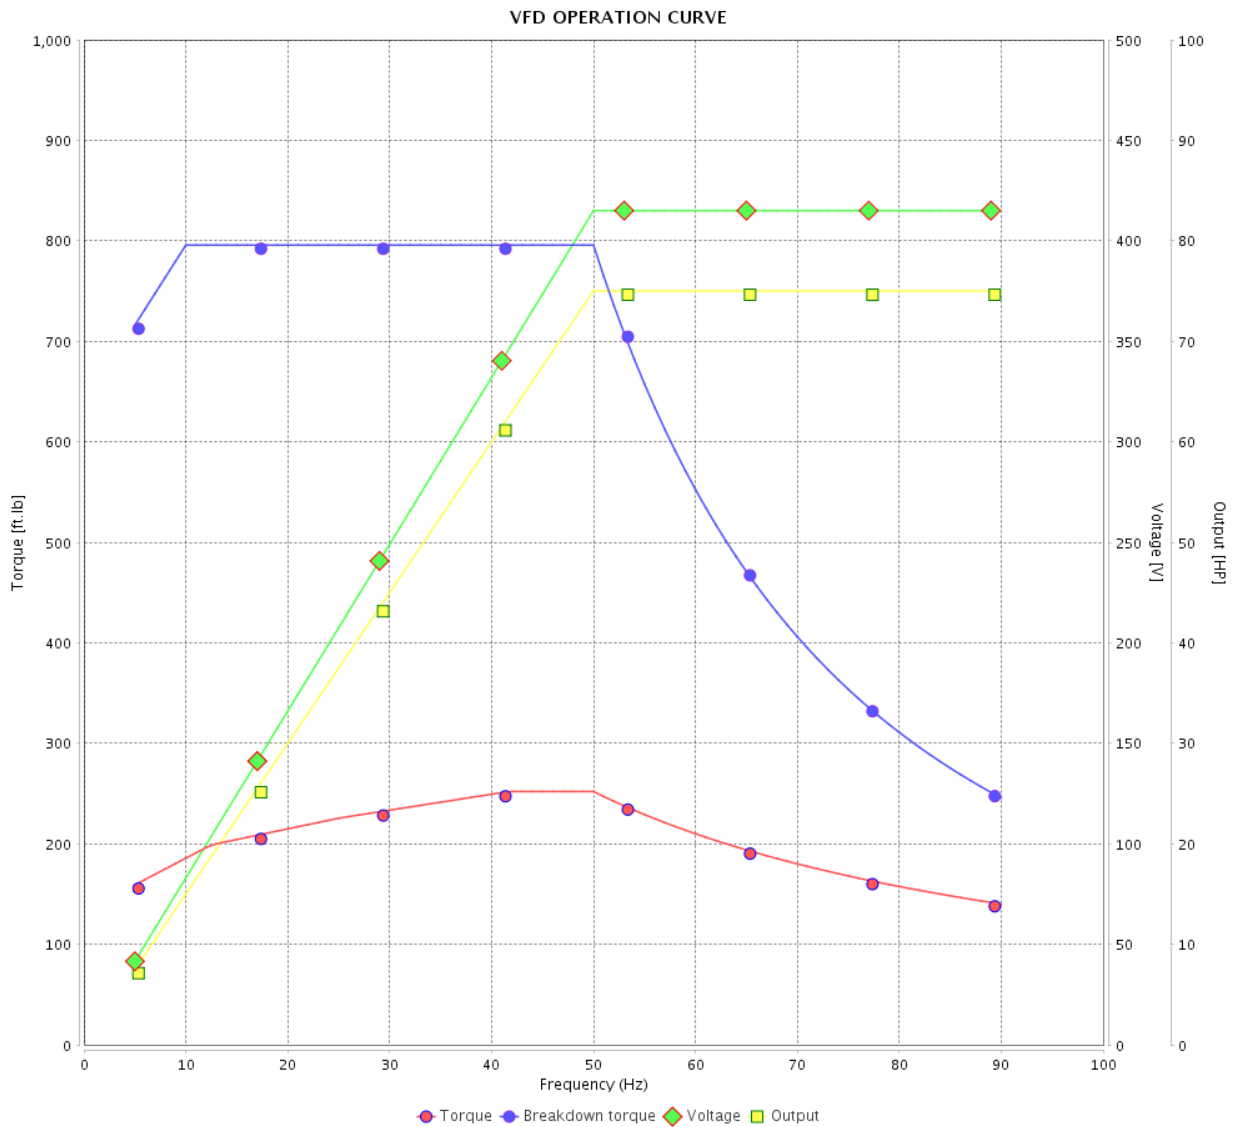


Performance : 415 V 50 Hz 4P IE3

Rated current : 96.2 A
LRC : 7.8
Rated torque : 265 ft.lb
Locked rotor torque : 270 %
Breakdown torque : 300 %
Rated speed : 1485 rpm

Moment of inertia (J) : 21.9 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 21 / 21	Revision
Checked by				
Date	14/04/2022			

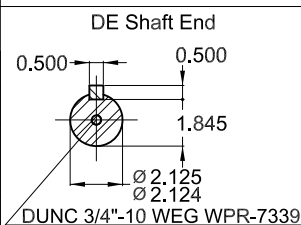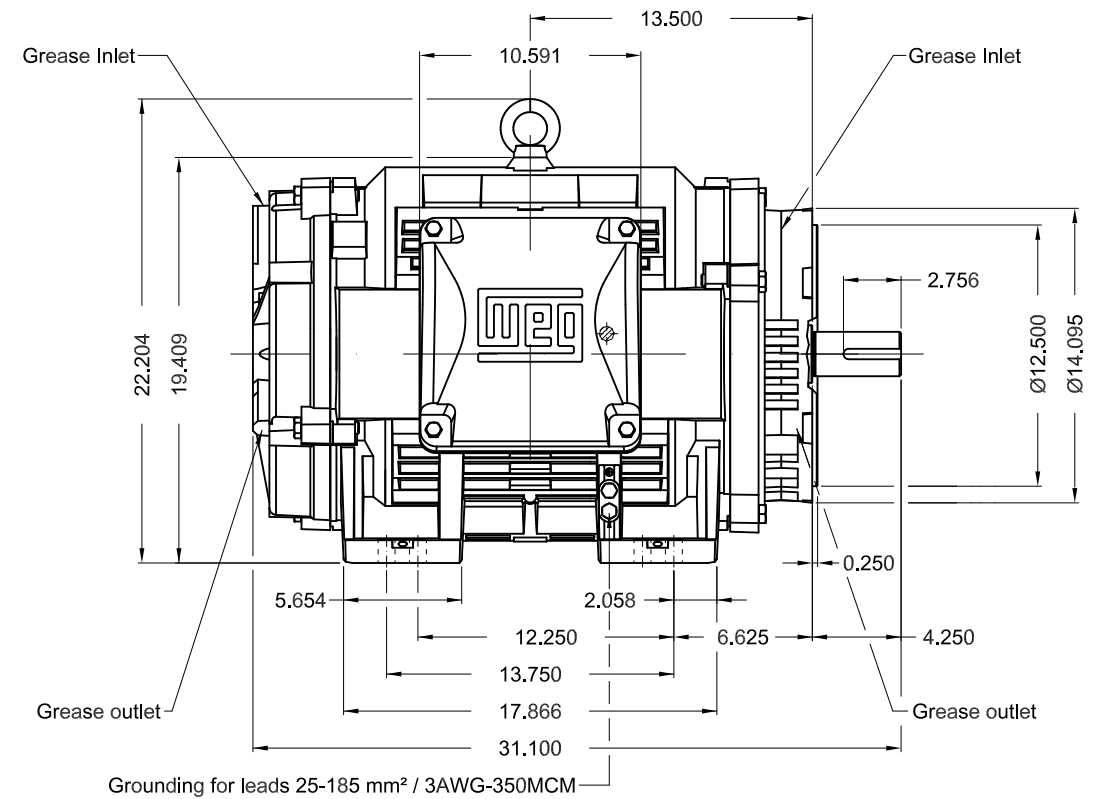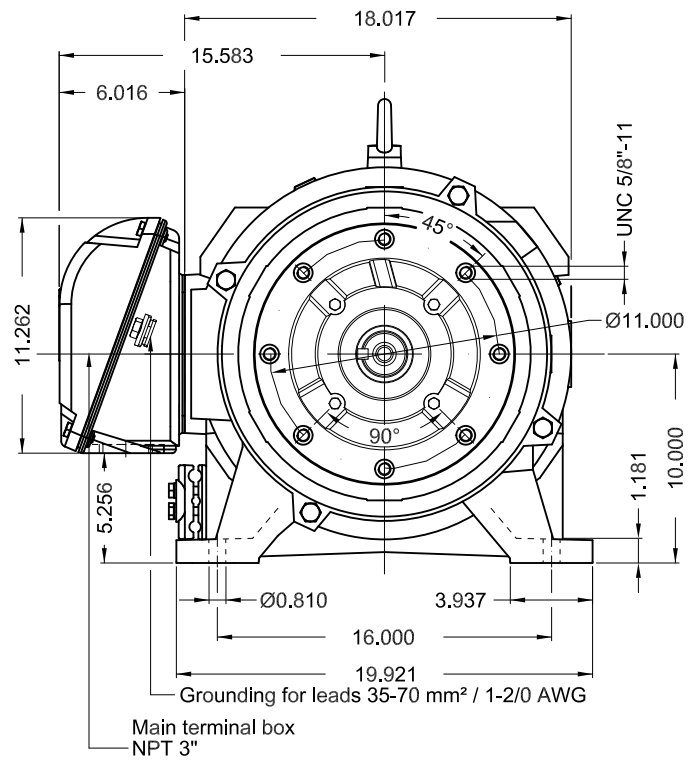

TS shaft end
Color RAL 5009
Painting plan 203A
Mounting NEMA F-1
Mounting B34R(D)

100 HP 04 Poles 60 Hz

A

1:9

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PH. MOTOR W40 PREM. EFF.					
CHECKED		FRAME 404/5TSC IP23 ODP					
RELEASED							
REL DT.		WMO Jaragua do Sul	Product Engineering	SHEET	1 / 1		

PREVIEW
WDD



WEG **W40 NEMA**
CC029A Premium
Inverter Duty Motor





IEC 60034-1
 MOD.T01#FOXON



For 60Hz use on PWM, VT 1000:1, CT 2:1, 1.0SF

MODEL 100180T3E404TSC-W40
 MADE IN BRAZIL
 14284790

PH 3	FR 404/5TSC	HP(kW) 100.0(75.0)	Hz 60
V 230/460	A 230/115	RPM 1780	DES B
NEMA NOM EFF 95.4 %	INS. CL. F Δ T 80 K	IP23	
ENCL ODP	DUTY CONT.	AMB. 40°C	
CODE G	PF 0.86	SF 1.25	SFA 288/144
USABLE @208V	254 A	SF 1.15	SFA 292
75HP 55kW 50Hz 380V 103A 1482RPM SF1.00 EFF 94.7% (IE3)	ALT 1000 m.a.s.l.		



→ 6314-C3(27g)
 → 6212-Z-C3(13g)

MOBIL POLYREX EM
 20000 h

ALT 1000 m.a.s.l. 966 Lbs