

# DATA SHEET



## Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: Standard Efficiency Three-Phase	Product code :	12676240
		Catalog # :	.3336ES3E56-S
Frame	: 56	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 17.4 lb
Protection degree	: IP55	Moment of inertia (J)	: 0.0389 sq.ft.lb
Output [HP]	0.33	0.33	0.33
Poles	2	2	2
Frequency [Hz]	60	50	50
Rated voltage [V]	208-230/460	190-220/380	415
Rated current [A]	1.33-1.20/0.602	1.27-1.10/0.635	0.604
L. R. Amperes [A]	8.52-7.71/3.85	6.73-5.81/3.37	3.68
LRC [A]	6.4x(Code L)	5.3x(Code H)	6.1x(Code K)
No load current [A]	0.621-0.720/0.360	0.586-0.506/0.293	0.349
Rated speed [RPM]	3485	2850	2880
Slip [%]	3.19	5.00	4.00
Rated torque [ft.lb]	0.497	0.608	0.602
Locked rotor torque [%]	250	180	220
Breakdown torque [%]	300	240	290
Service factor		1.15	1.15
Temperature rise	80 K	80 K	80 K
Locked rotor time	72s (cold) 40s (hot)	90s (cold) 50s (hot)	75s (cold) 42s (hot)
Noise level <sup>2</sup>	68.0 dB(A)	65.0 dB(A)	65.0 dB(A)
Efficiency (%)	25%		
	50%	48.0	57.7
	75%	57.5	64.6
	100%	62.0	67.7
Power Factor	25%		
	50%	0.72	0.69
	75%	0.79	0.79
	100%	0.84	0.85
Bearing type	: Drive end 6203 ZZ Non drive end 6202 ZZ	Foundation loads	
Sealing	: V'Ring Without Bearing Seal	Max. traction	: 8 lb
		Max. compression	: 25 lb
Lubrication interval	: -		
Lubricant amount	: -		
Lubricant type	: Mobil Polyrex EM		
Notes USABLE @208V SF 1.00			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary	Performed	Checked
			Date
Performed by			
Checked by			Page
Date	11/04/2022		Revision
			1 / 13

# TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase


Product code :

12676240

Catalog # :

.3336ES3E56-S

TORQUE AND CURRENT VS SPEED CURVE

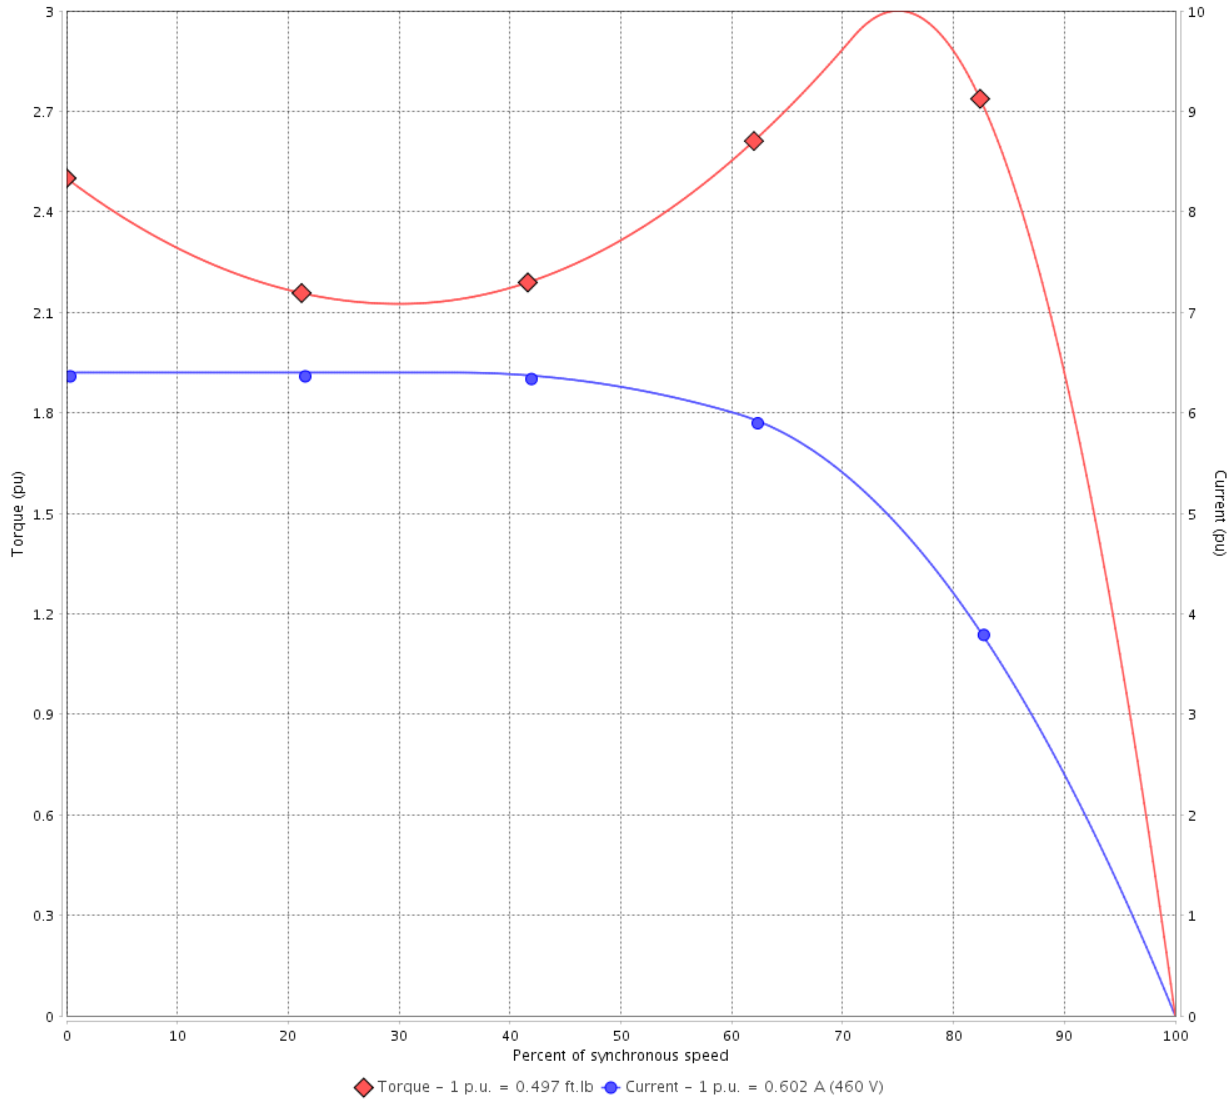

Performance : 208-230/460 V 60 Hz 2P

Rated current	: 1.33-1.20/0.602 A	Moment of inertia (J)	: 0.0389 sq.ft.lb
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 0.497 ft.lb	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	:
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 3485 rpm		

Locked rotor time : 72s (cold) 40s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 13	Revision
Checked by				
Date	11/04/2022			

# TORQUE AND CURRENT VS SPEED CURVE



## Three Phase Induction Motor - Squirrel Cage

Customer :


Product line : Standard Efficiency Three-Phase

Product code :

12676240

Catalog # :

.3336ES3E56-S

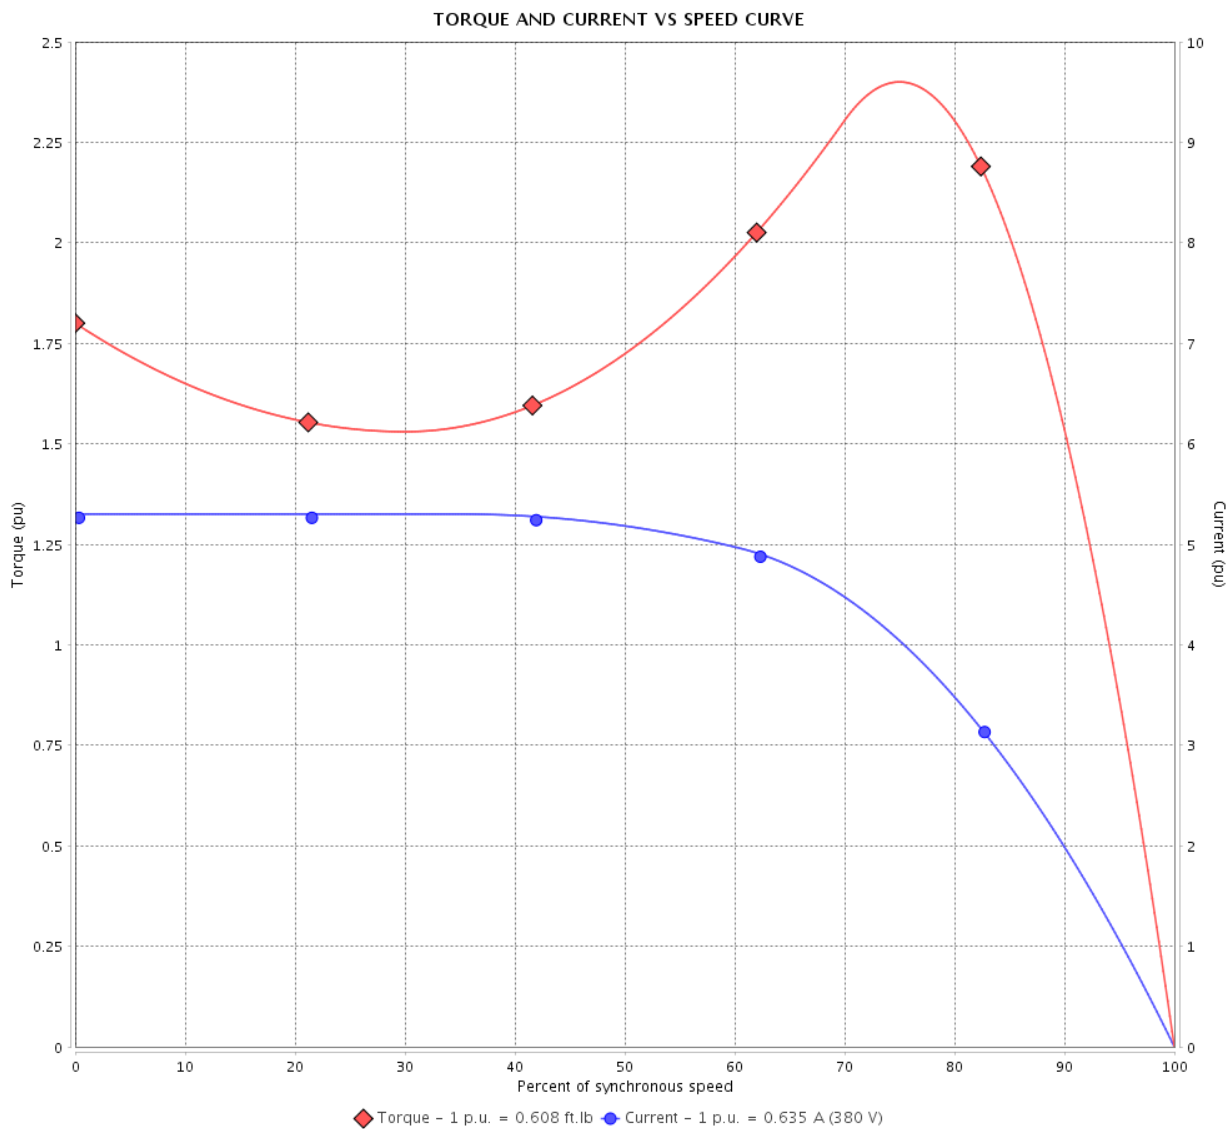

Performance : 190-220/380 V 50 Hz 2P

Rated current : 1.27-1.10/0.635 A  
 LRC : 5.3  
 Rated torque : 0.608 ft.lb  
 Locked rotor torque : 180 %  
 Breakdown torque : 240 %  
 Rated speed : 2850 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Locked rotor time : 90s (cold) 50s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 13	Revision
Checked by				
Date	11/04/2022			

# TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase


Product code :

12676240

Catalog # :

.3336ES3E56-S

TORQUE AND CURRENT VS SPEED CURVE

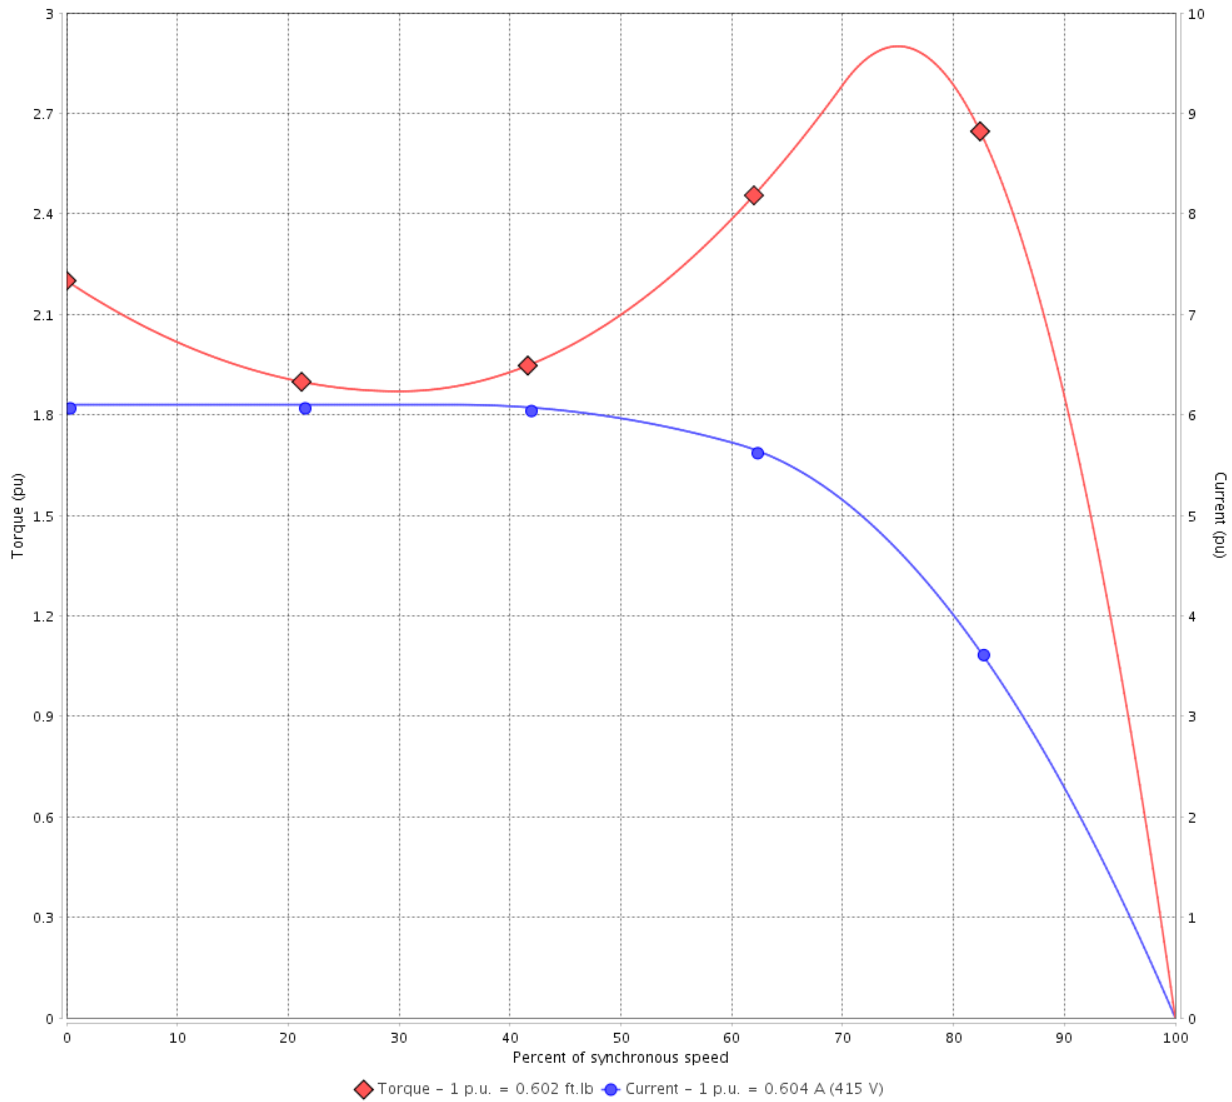

Performance : 415 V 50 Hz 2P

Rated current : 0.604 A  
 LRC : 6.1  
 Rated torque : 0.602 ft.lb  
 Locked rotor torque : 220 %  
 Breakdown torque : 290 %  
 Rated speed : 2880 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Locked rotor time : 75s (cold) 42s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		4 / 13		
Date	11/04/2022			


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : Standard Efficiency Three-Phase      Product code : 12676240  
 Catalog # : .3336ES3E56-S

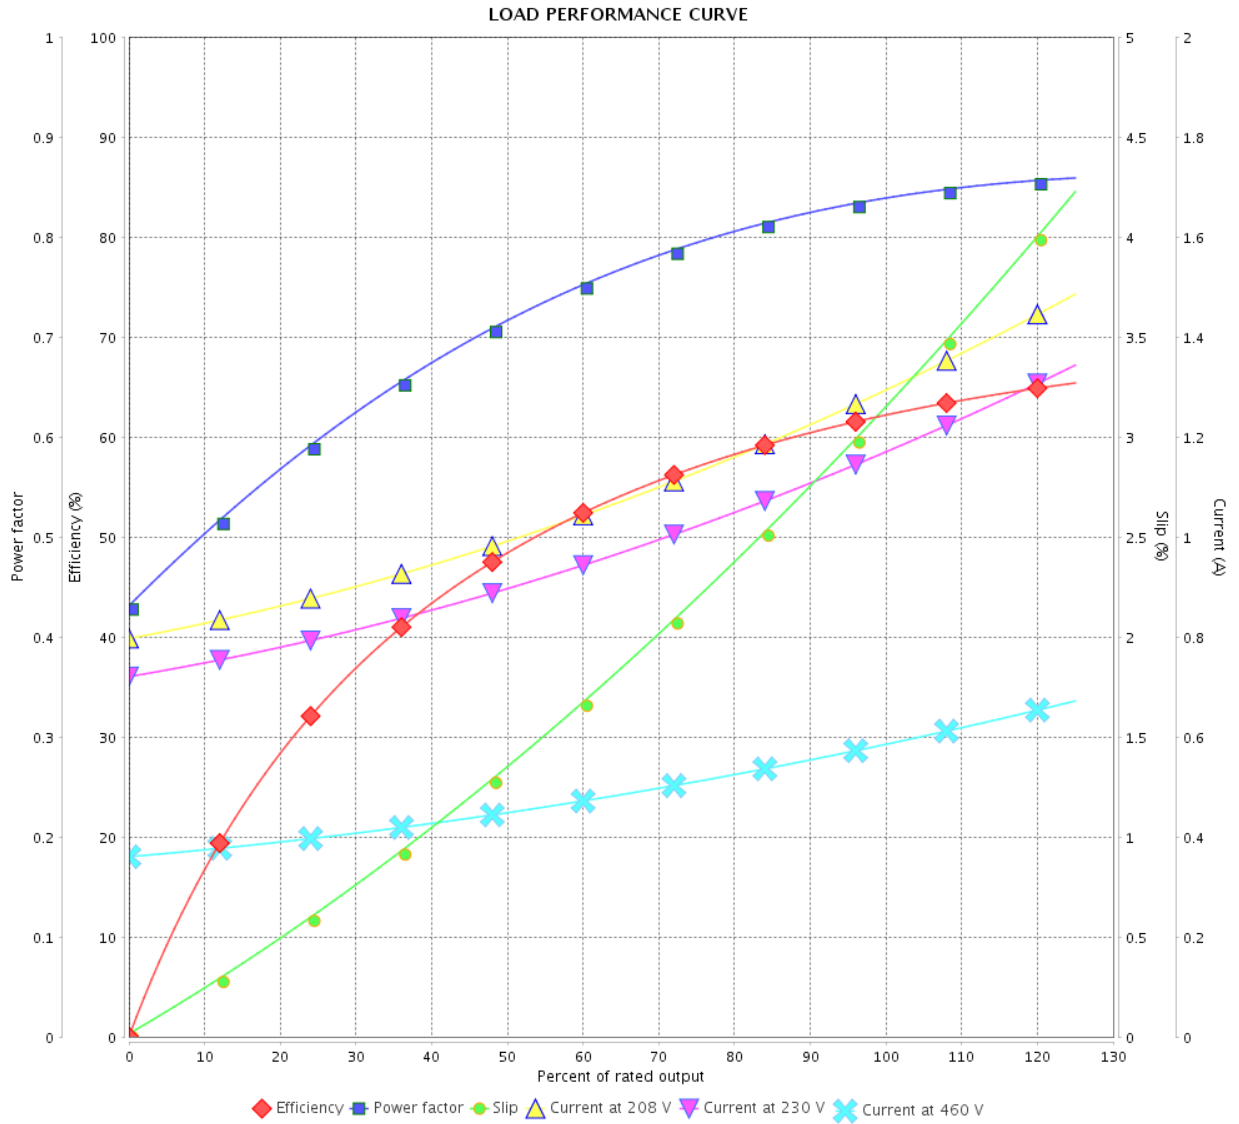

Performance : 208-230/460 V 60 Hz 2P

Rated current : 1.33-1.20/0.602 A  
 LRC : 6.4  
 Rated torque : 0.497 ft.lb  
 Locked rotor torque : 250 %  
 Breakdown torque : 300 %  
 Rated speed : 3485 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase


Product code :

12676240

Catalog # :

.3336ES3E56-S

LOAD PERFORMANCE CURVE

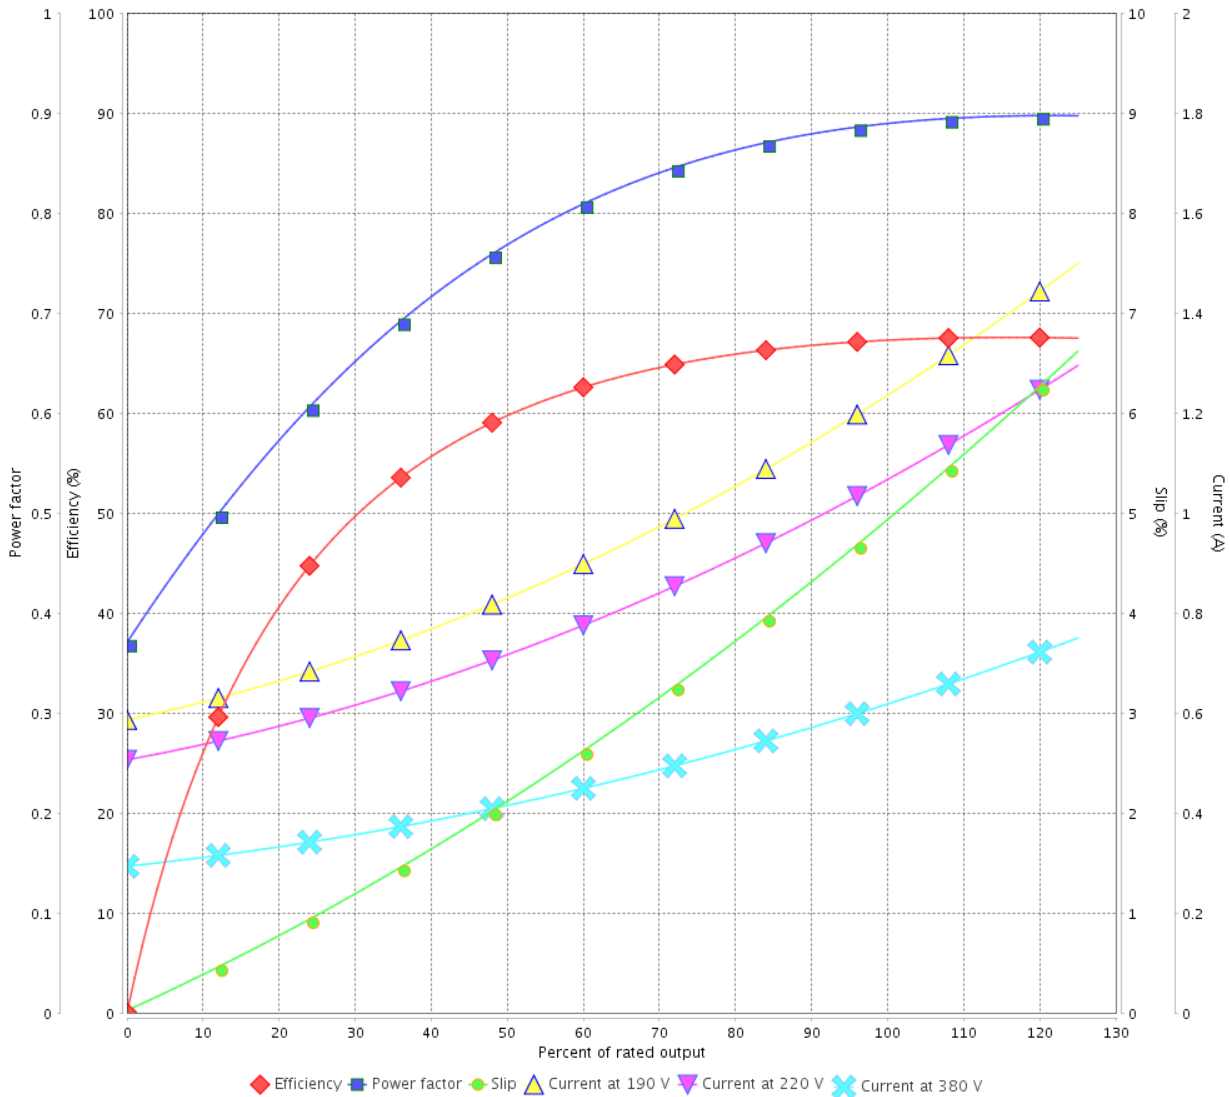

Performance : 190-220/380 V 50 Hz 2P

Rated current : 1.27-1.10/0.635 A  
 LRC : 5.3  
 Rated torque : 0.608 ft.lb  
 Locked rotor torque : 180 %  
 Breakdown torque : 240 %  
 Rated speed : 2850 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : Standard Efficiency Three-Phase      Product code : 12676240  
 Catalog # : .3336ES3E56-S

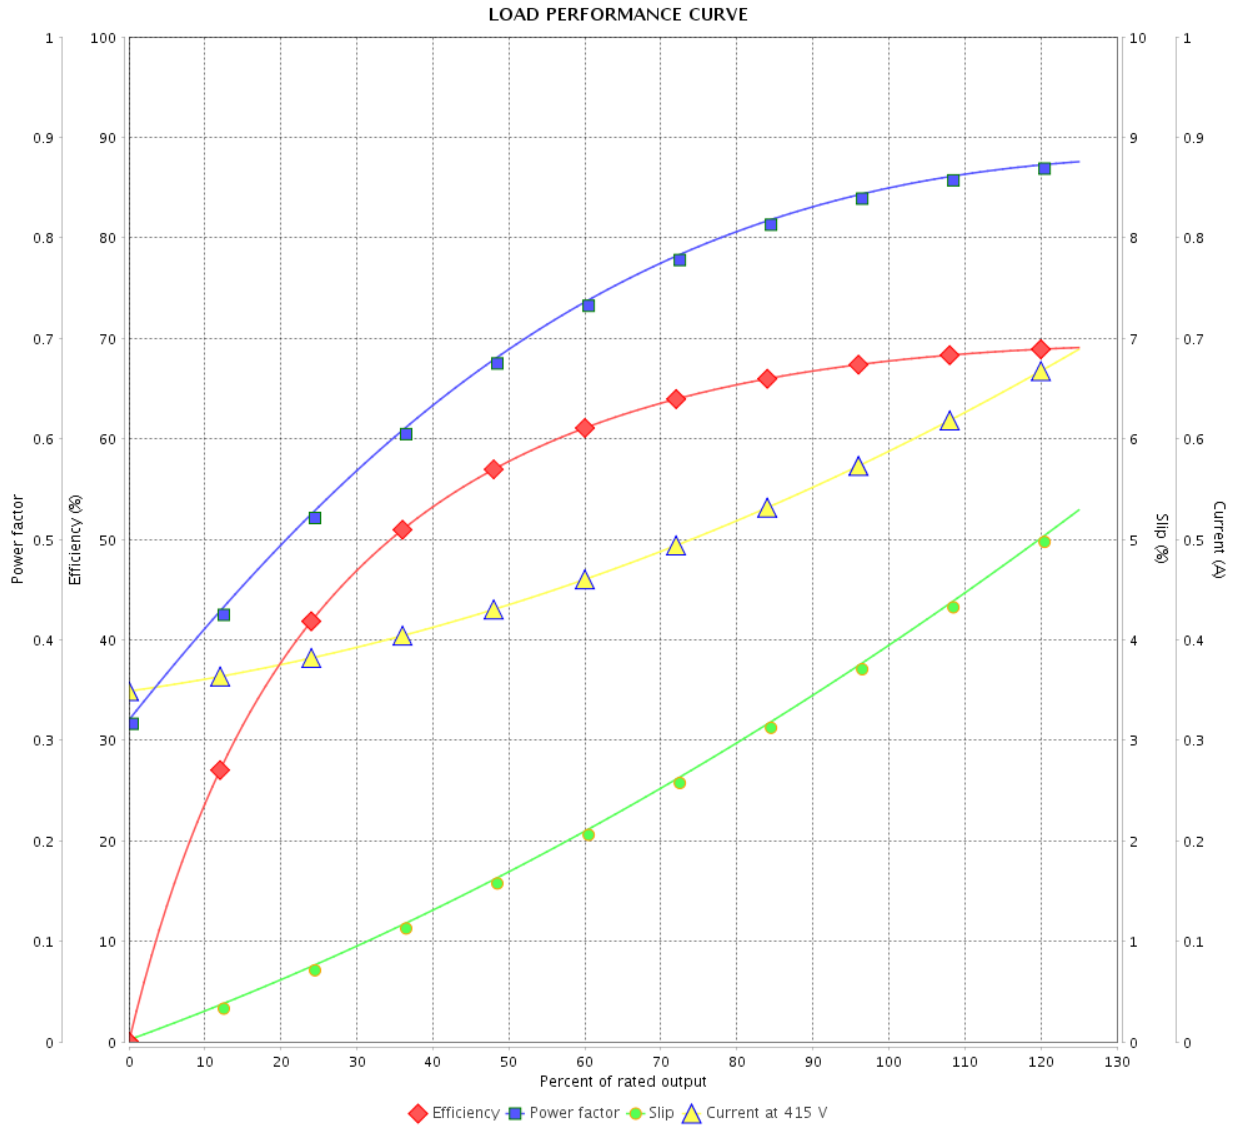

Performance : 415 V 50 Hz 2P

Rated current : 0.604 A  
 LRC : 6.1  
 Rated torque : 0.602 ft.lb  
 Locked rotor torque : 220 %  
 Breakdown torque : 290 %  
 Rated speed : 2880 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		7 / 13		
Date		11/04/2022		

# THERMAL LIMIT CURVE



## Three Phase Induction Motor - Squirrel Cage

Customer :


Product line : Standard Efficiency Three-Phase

Product code :

12676240

Catalog # :

.3336ES3E56-S

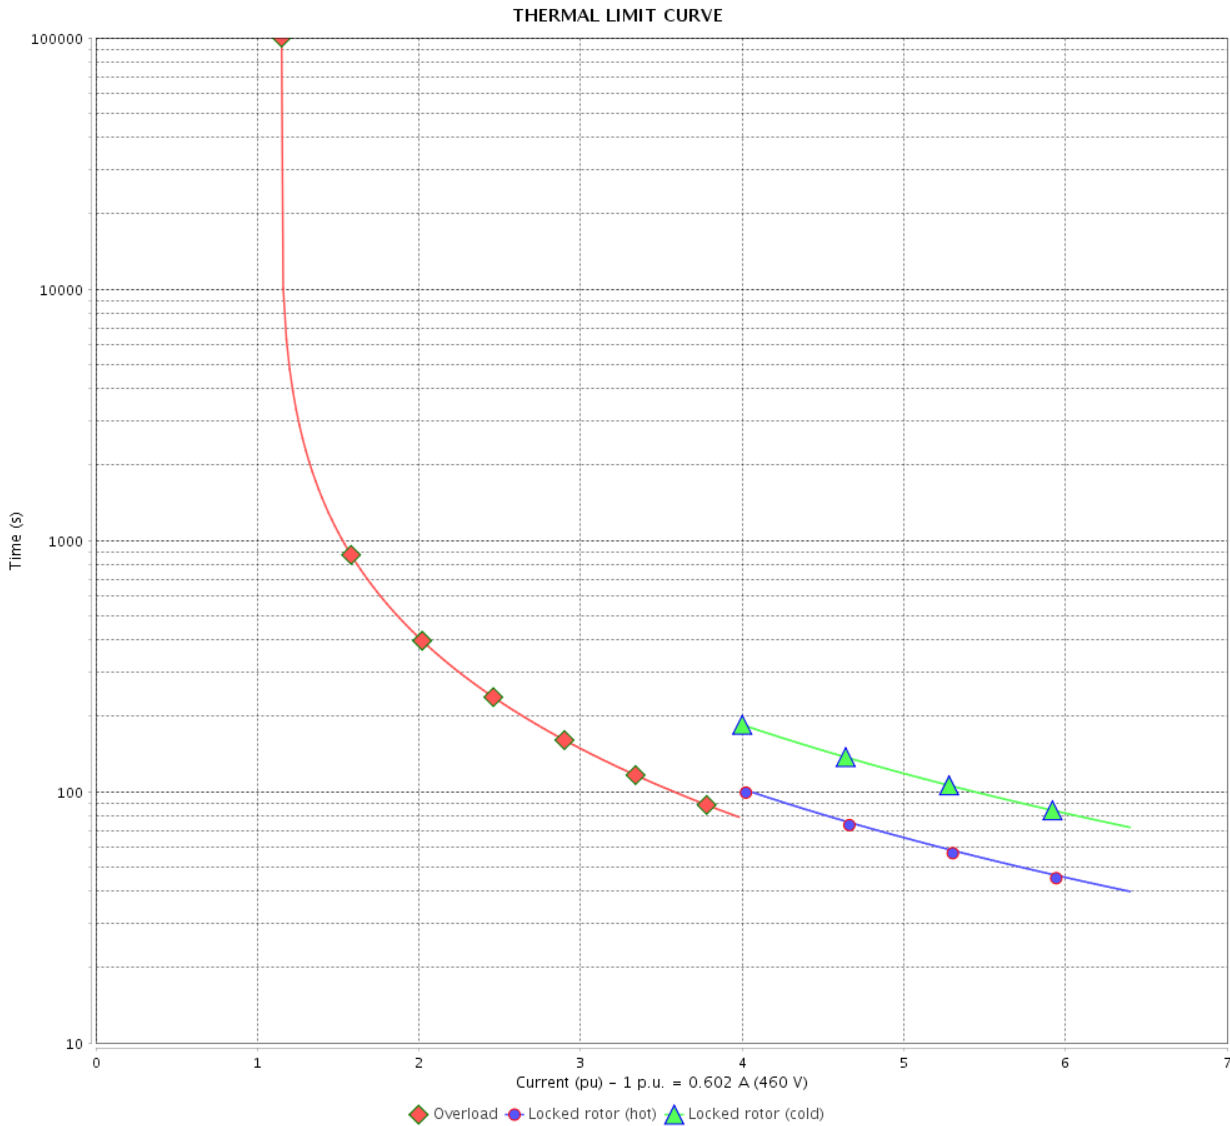

Performance : 208-230/460 V 60 Hz 2P

Rated current : 1.33-1.20/0.602 A  
 LRC : 6.4  
 Rated torque : 0.497 ft.lb  
 Locked rotor torque : 250 %  
 Breakdown torque : 300 %  
 Rated speed : 3485 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		8 / 13		
Date		11/04/2022		



# THERMAL LIMIT CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_


Product line : Standard Efficiency Three-Phase

Product code :

12676240

Catalog # :

.3336ES3E56-S

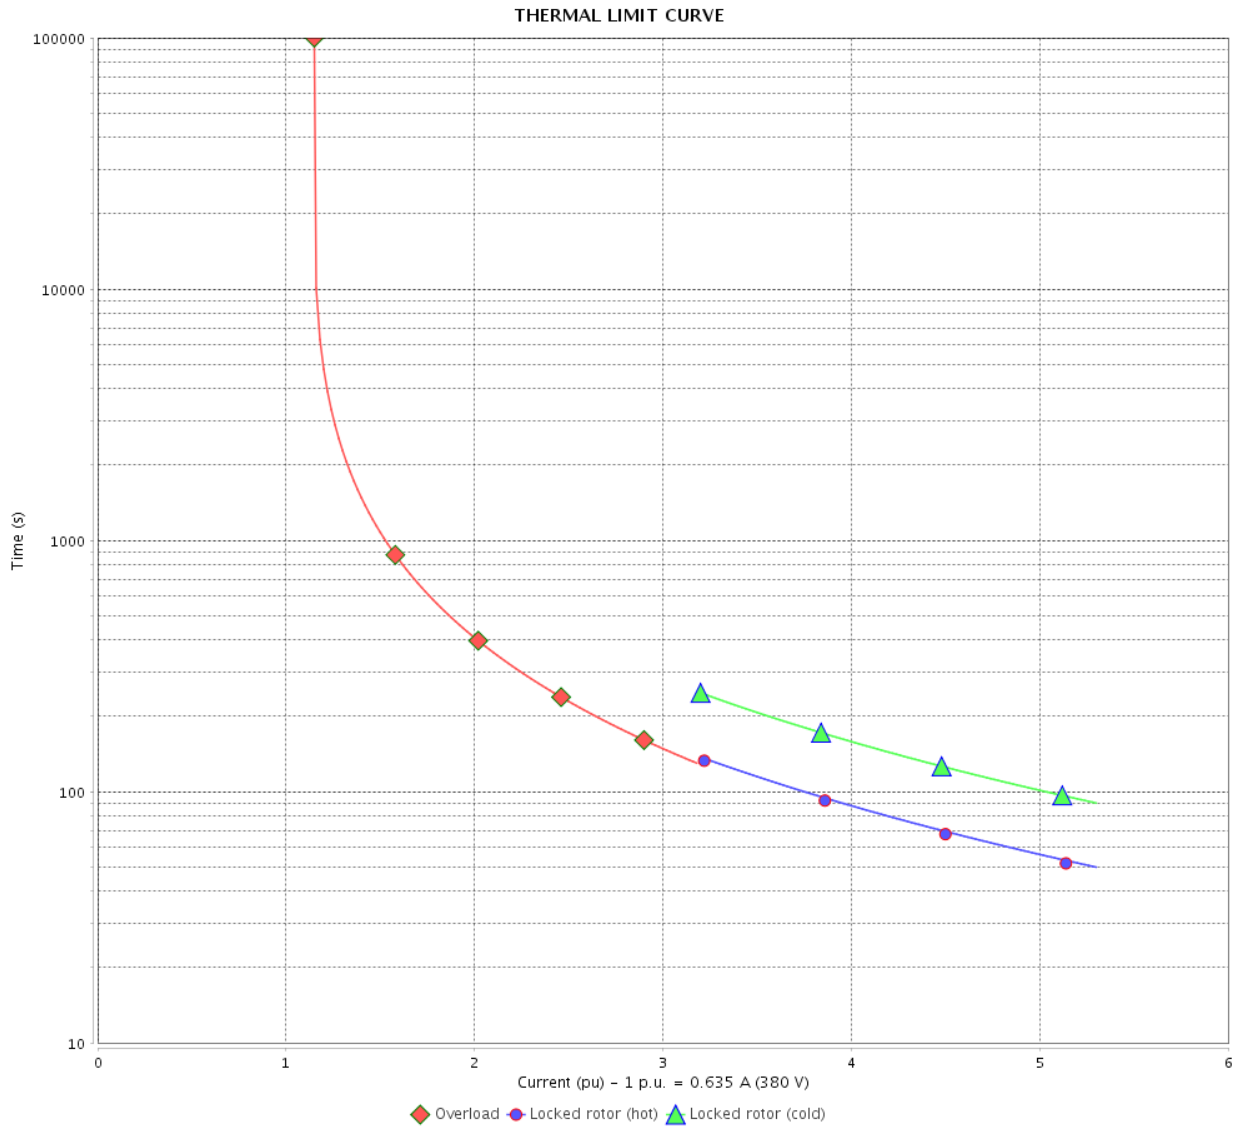

Performance : 190-220/380 V 50 Hz 2P

Rated current : 1.27-1.10/0.635 A  
 LRC : 5.3  
 Rated torque : 0.608 ft.lb  
 Locked rotor torque : 180 %  
 Breakdown torque : 240 %  
 Rated speed : 2850 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 9 / 13	Revision
Checked by				
Date	11/04/2022			

# THERMAL LIMIT CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_


Product line : Standard Efficiency Three-Phase

Product code :

12676240

Catalog # :

.3336ES3E56-S

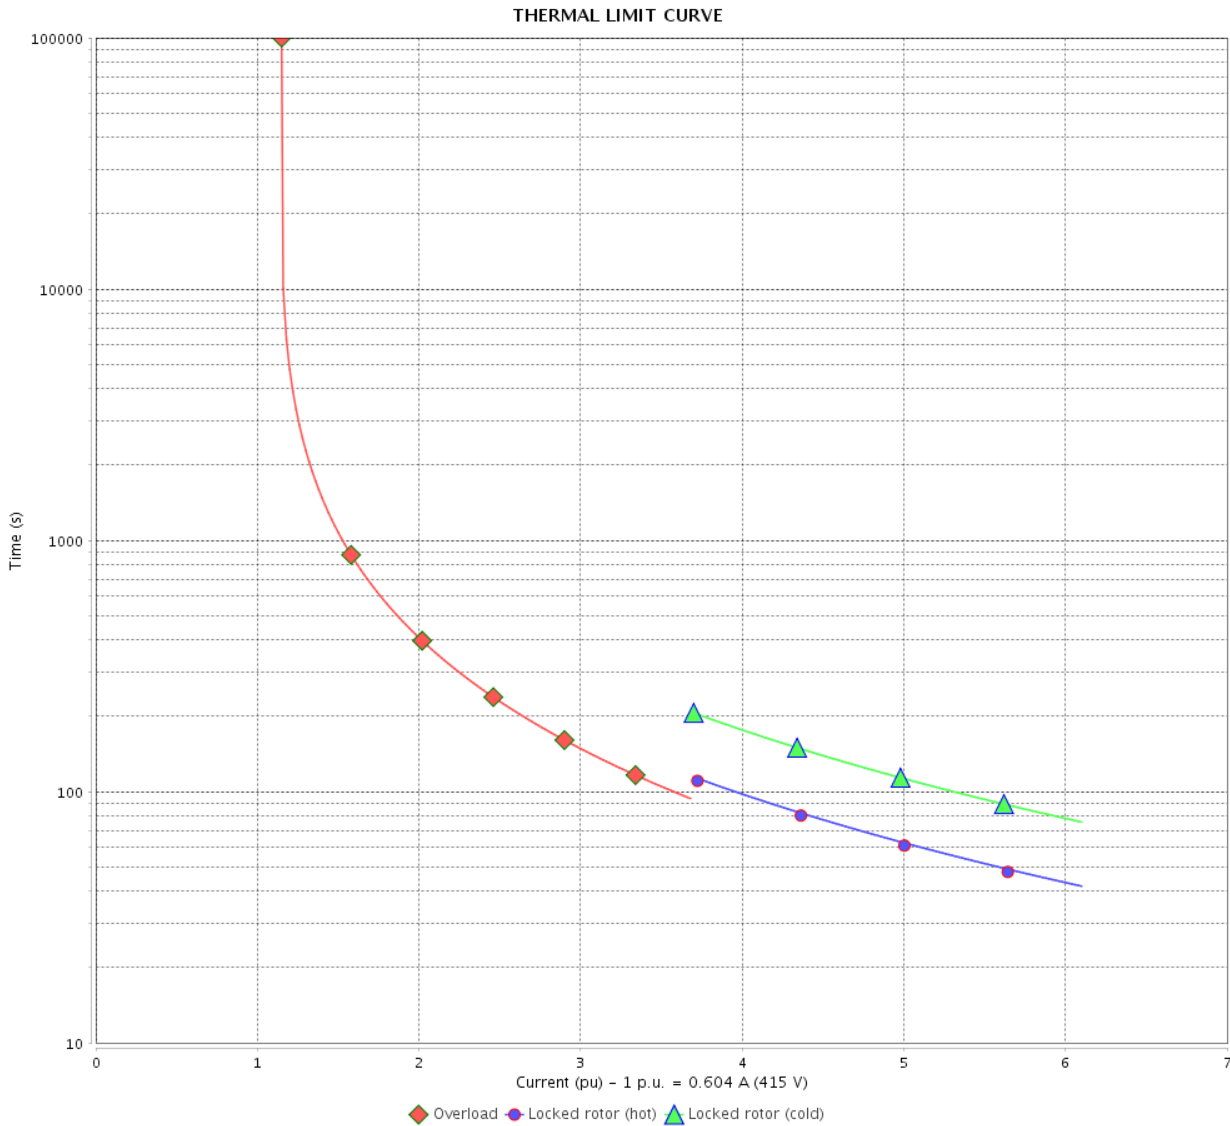

Performance : 415 V 50 Hz 2P

Rated current : 0.604 A  
 LRC : 6.1  
 Rated torque : 0.602 ft.lb  
 Locked rotor torque : 220 %  
 Breakdown torque : 290 %  
 Rated speed : 2880 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


# VFD OPERATION CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase      Product code : 12676240  
 Catalog # : .3336ES3E56-S

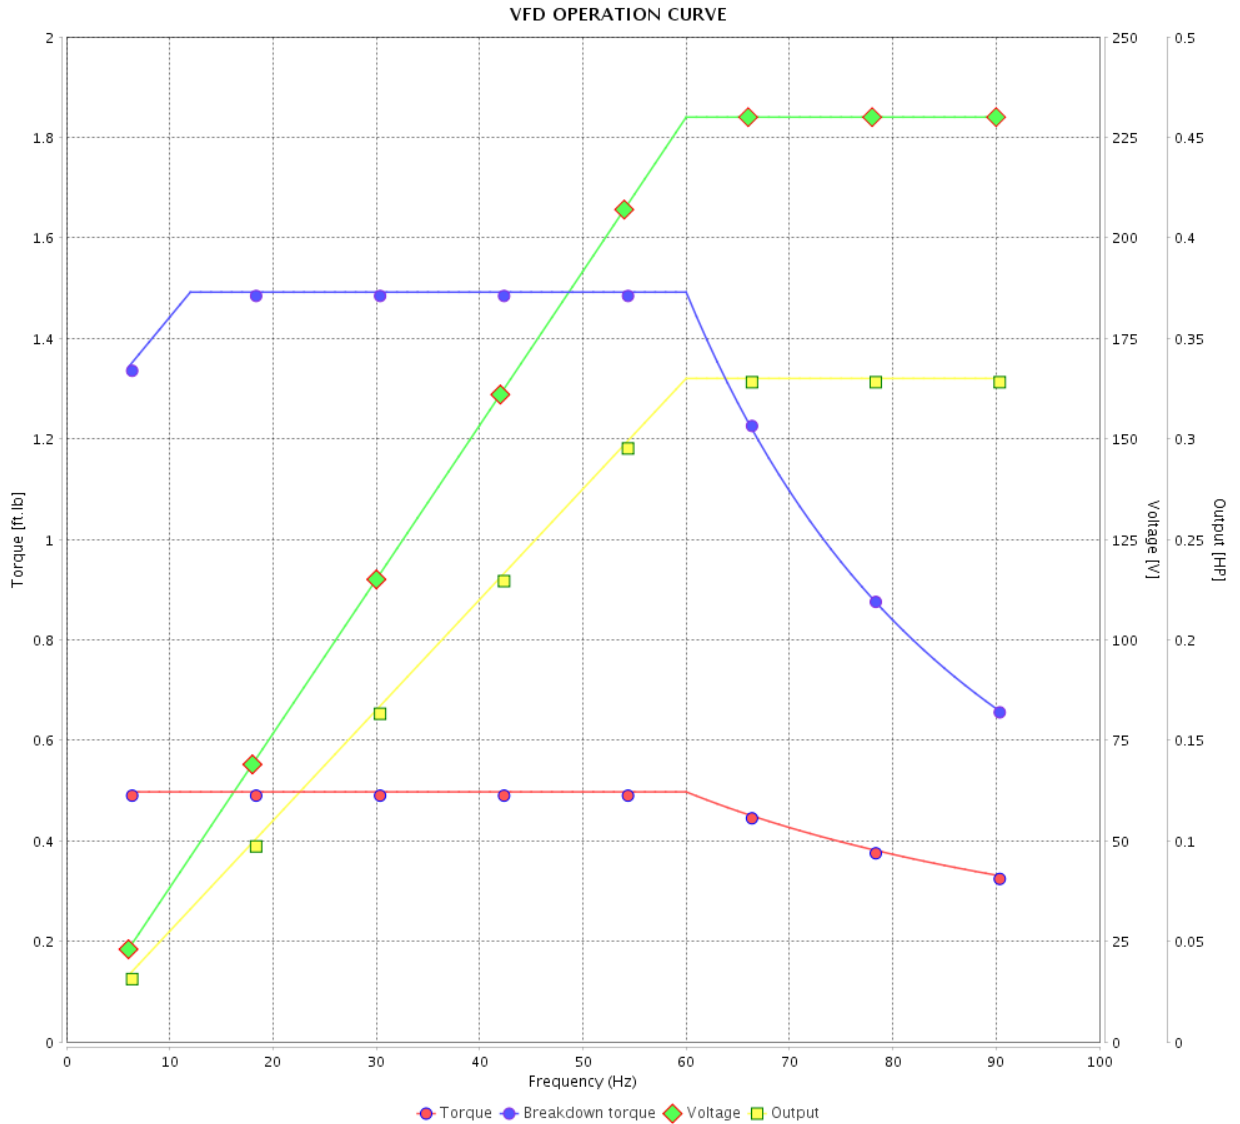

Performance : 208-230/460 V 60 Hz 2P

Rated current : 1.33-1.20/0.602 A  
 LRC : 6.4  
 Rated torque : 0.497 ft.lb  
 Locked rotor torque : 250 %  
 Breakdown torque : 300 %  
 Rated speed : 3485 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 11 / 13	Revision
Checked by				
Date	11/04/2022			


# VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase      Product code : 12676240  
 Catalog # : .3336ES3E56-S

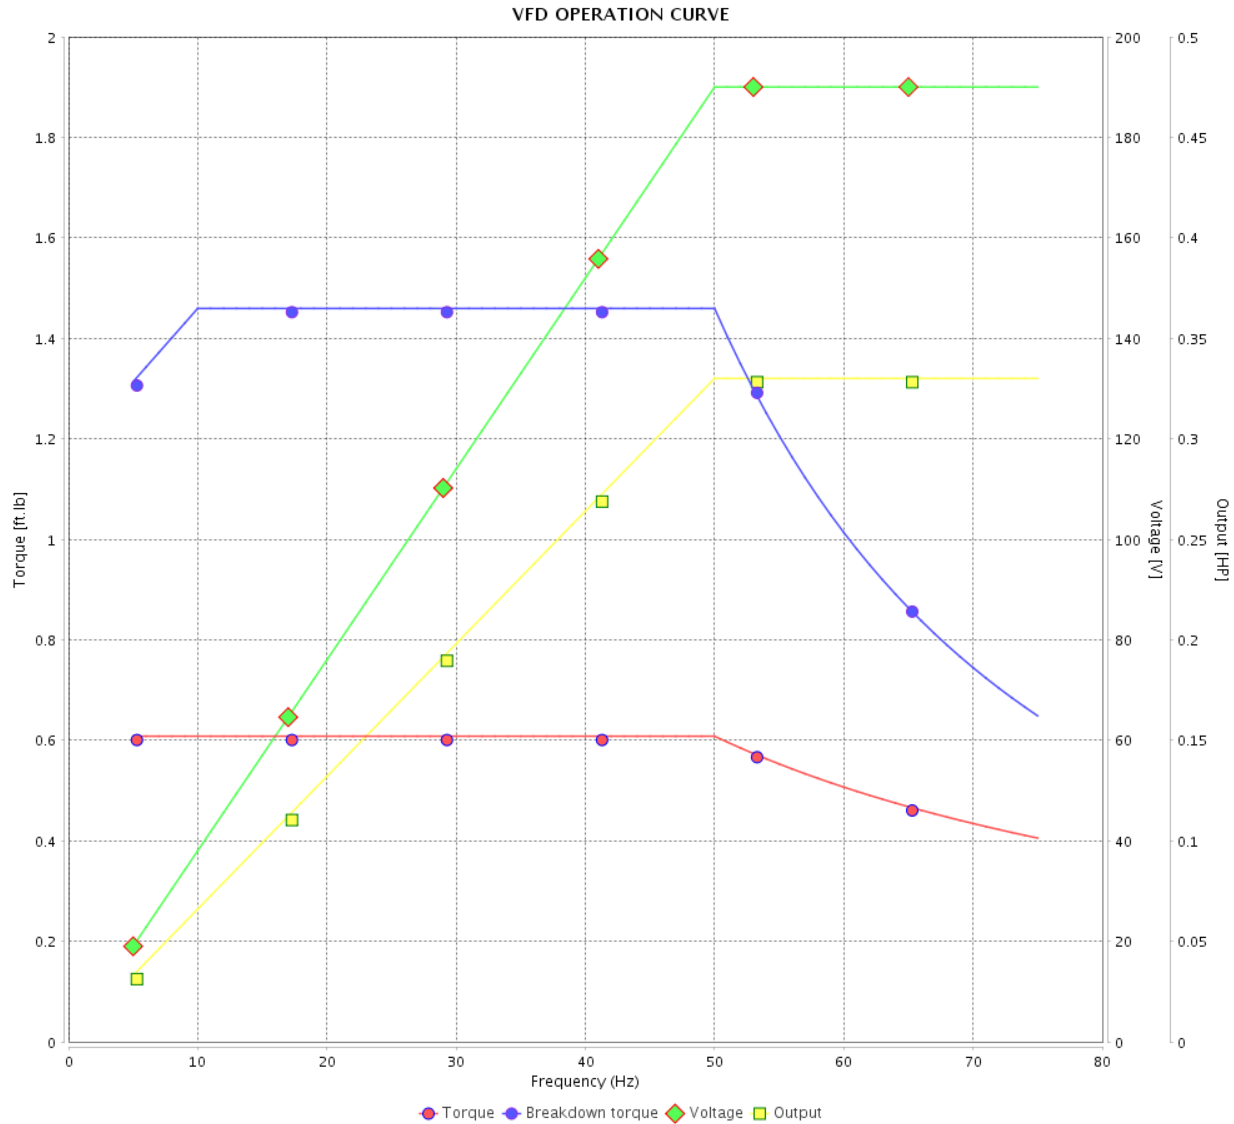

Performance : 190-220/380 V 50 Hz 2P

Rated current : 1.27-1.10/0.635 A  
 LRC : 5.3  
 Rated torque : 0.608 ft.lb  
 Locked rotor torque : 180 %  
 Breakdown torque : 240 %  
 Rated speed : 2850 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


# VFD OPERATION CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Product line : Standard Efficiency Three-Phase      Product code : 12676240  
 Catalog # : .3336ES3E56-S

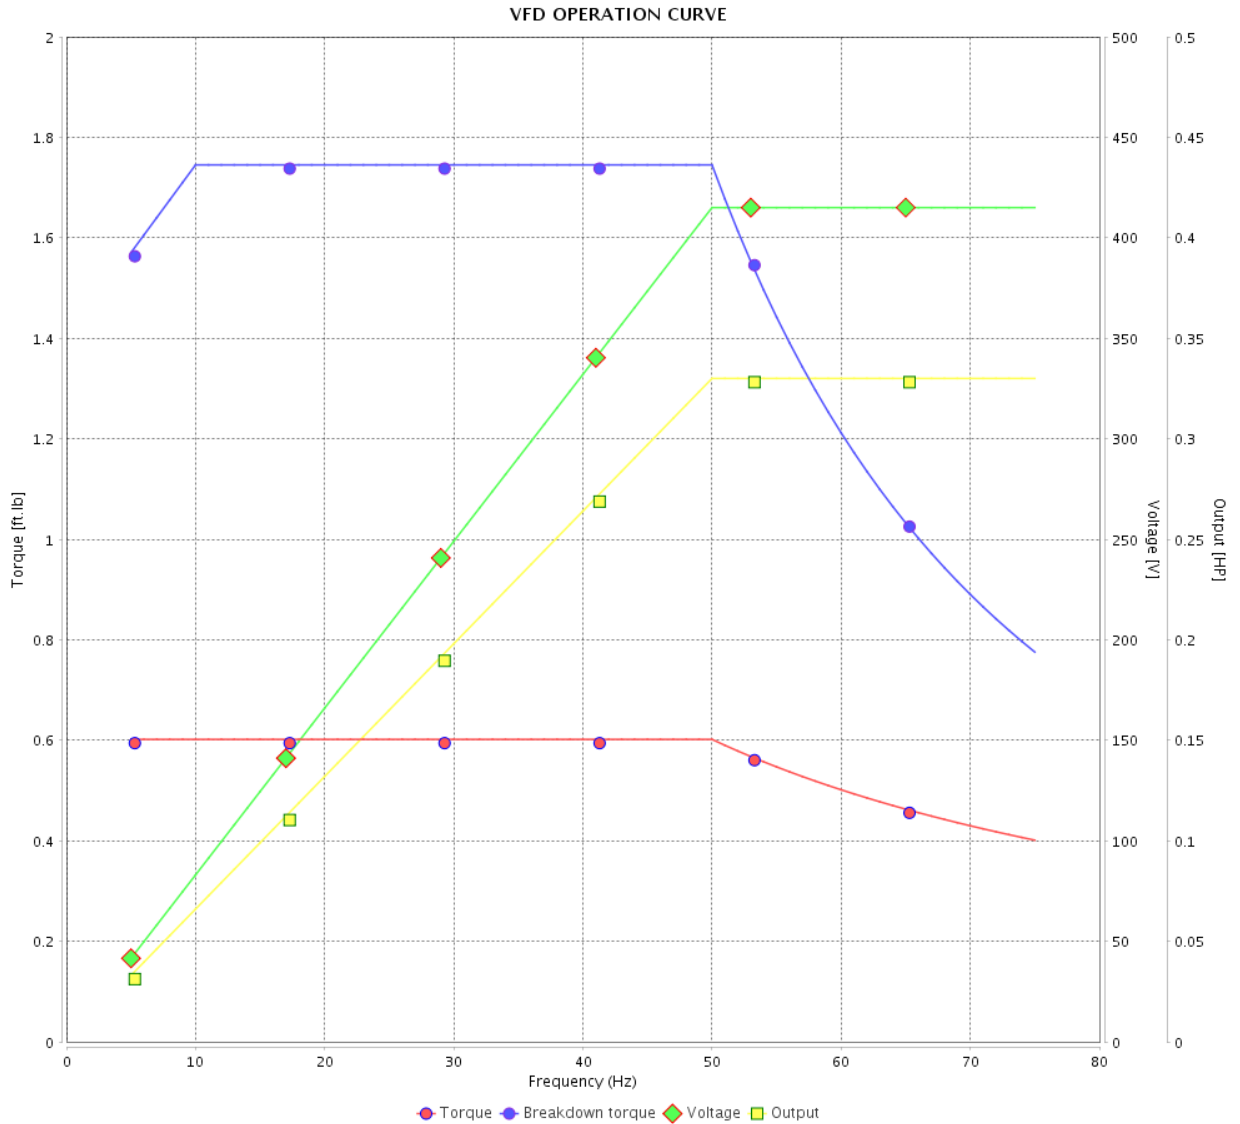


Performance : 415 V 50 Hz 2P

Rated current : 0.604 A  
 LRC : 6.1  
 Rated torque : 0.602 ft.lb  
 Locked rotor torque : 220 %  
 Breakdown torque : 290 %  
 Rated speed : 2880 rpm

Moment of inertia (J) : 0.0389 sq.ft.lb  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		13 / 13		
Date	11/04/2022			

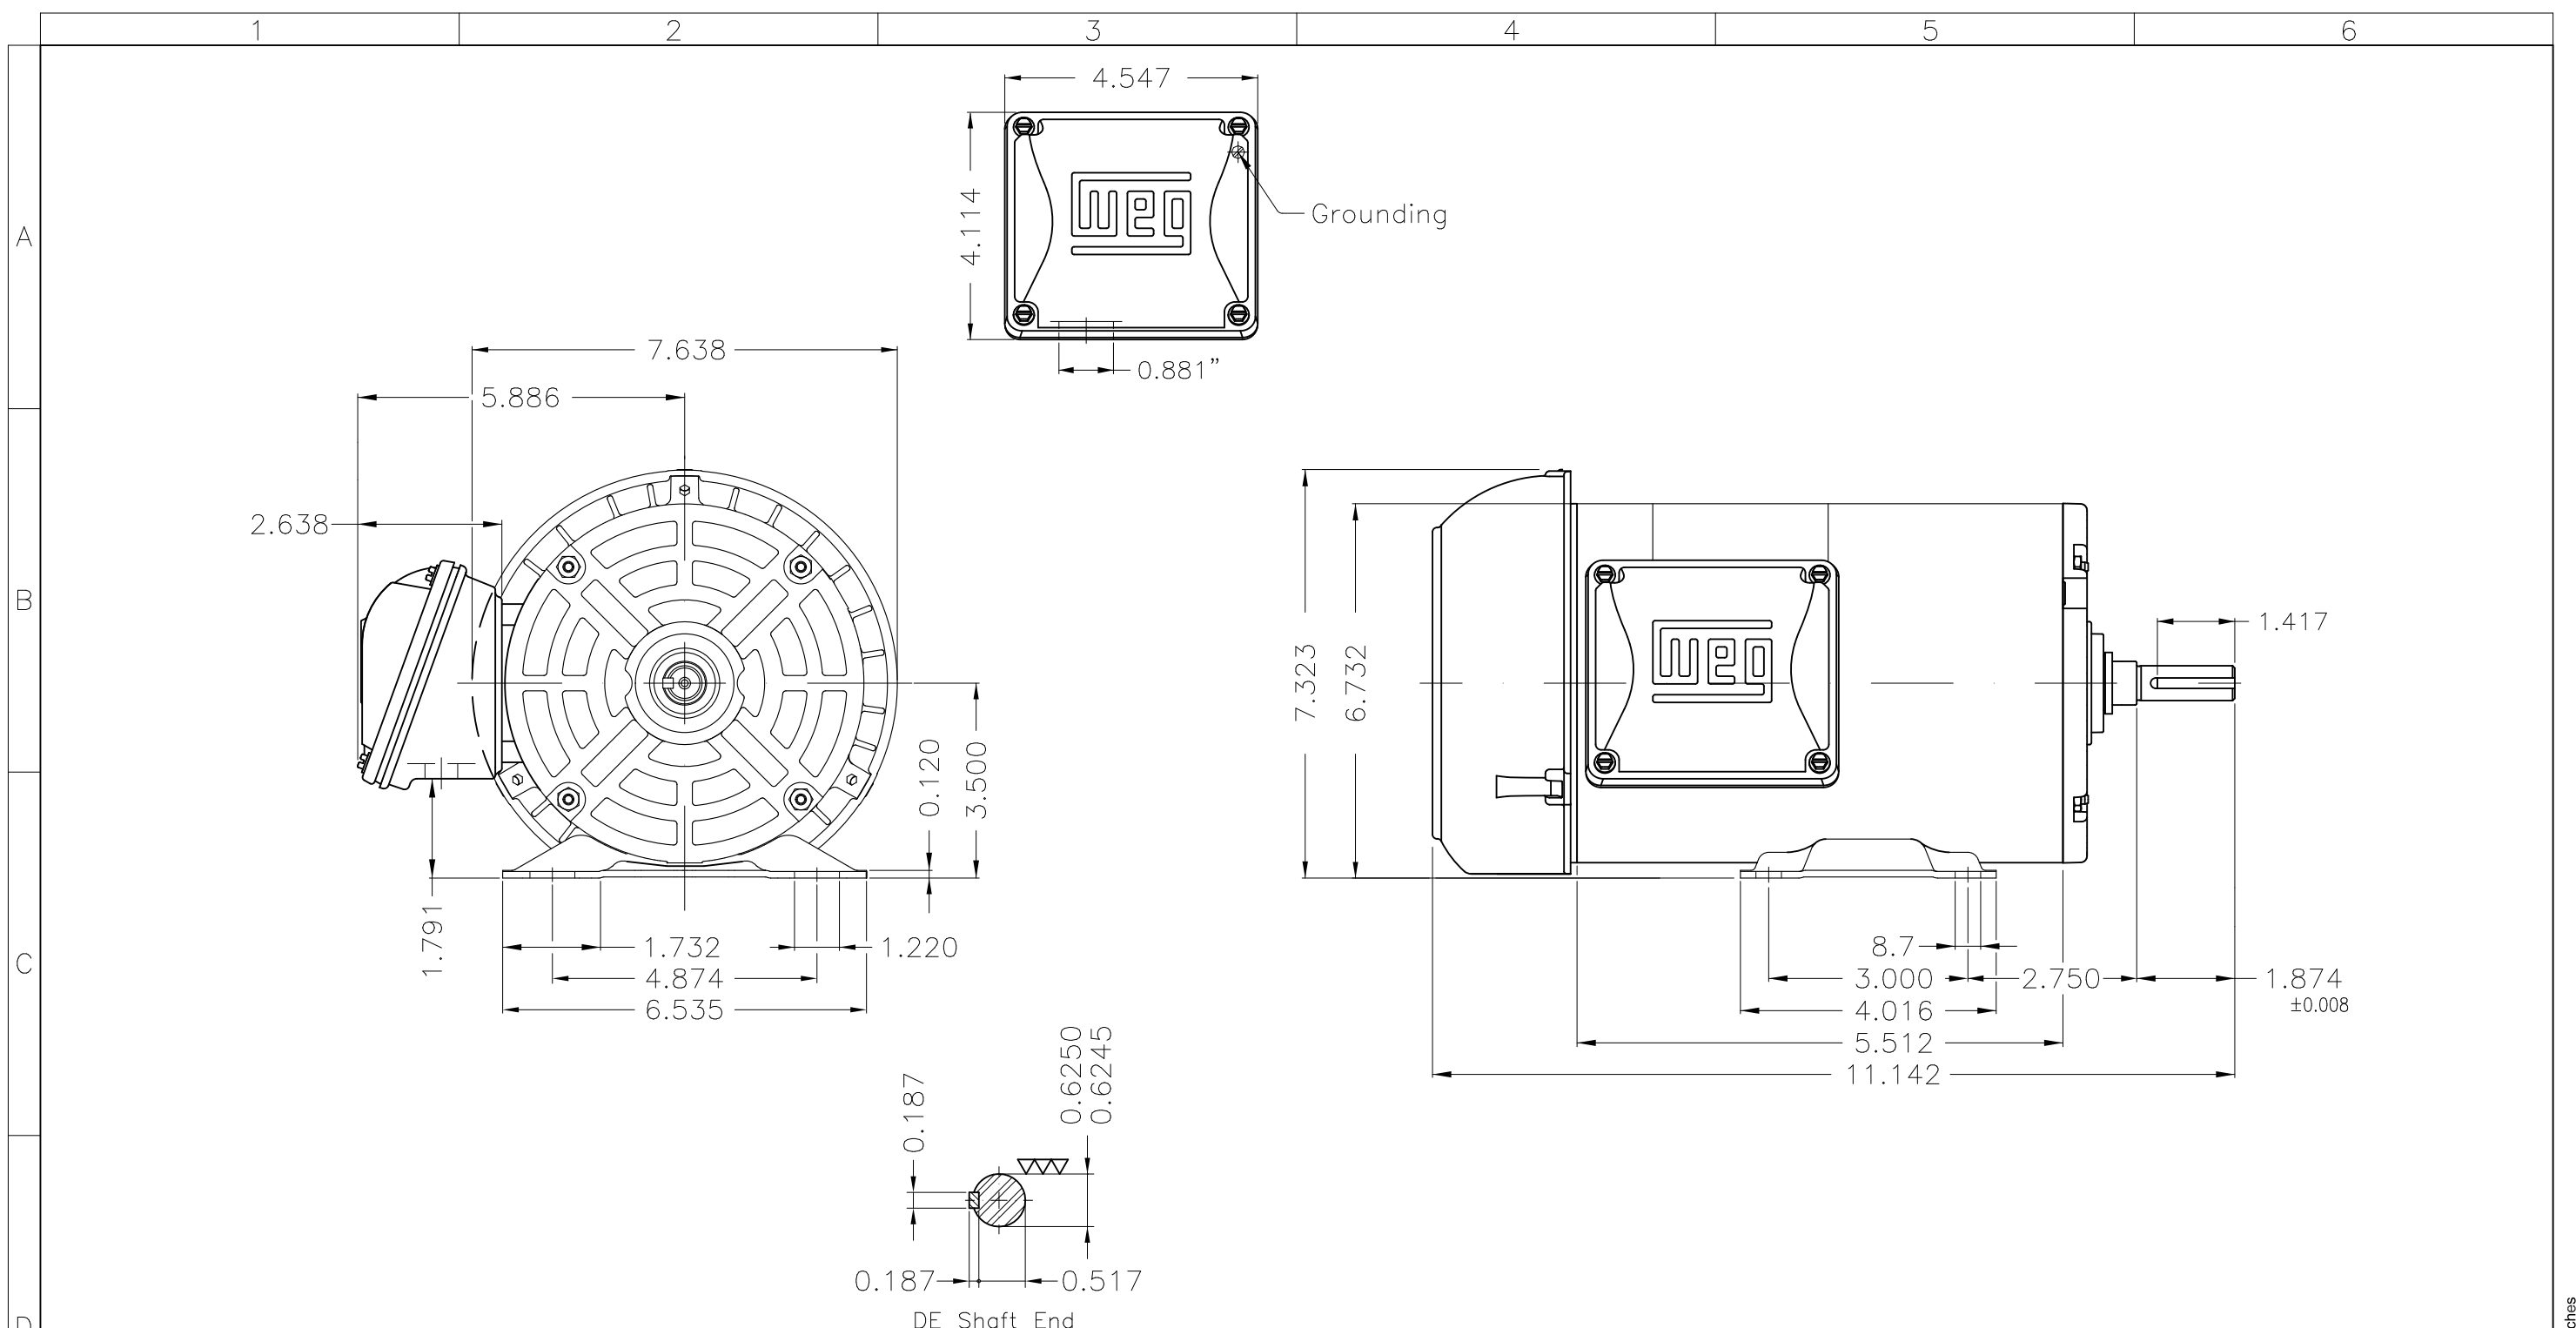

Without coating											
Mounting F-1/B3R(D)											
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PH. MOTOR ROLLED STEEL					PREVIEW	WDD	SHEET	1 / 1	
CHECKED		FRAME 56 IP55 TEFC									
RELEASED											
REL DT.		WMO	Jaragua do Sul	Product Engineering							

0.33 HP 02 Poles 60 Hz



MADE IN MEXICO

**MAT: 12676240**

**W01.TE0IC0X0X**

**MODEL .3336ES3E56-S**  
**19SET2019**

**For 60Hz: Class I, Zone 2, IIC**  
**Class I, Div.2, Gr. A,B,C,D - T3**  
**Div 2 Inverter Duty (SF1.00)**  
**CT 2:1/VT 1000:1**

<b>PH 3</b>	<b>FR</b>	<b>56</b>	<b>HP(KW)</b>	<b>0.33(0.25)</b>	<b>Hz</b>	<b>60</b>
<b>V</b>	<b>230/460</b>		<b>RPM</b>	<b>3485</b>		
<b>A</b>	<b>1.20/0.602</b>		<b>DUTY CONT.</b>			

<b>SFA 1.38/0.692</b>	<b>INS CL F</b>	<b>AT 80K</b>	<b>AMB 40°C</b>	<b>DES - IP55</b>	<b>ENCL TEFC</b>
<b>PF 0.84</b>	<b>NEMA NOM.EFF. 62.0%</b>				

**ALT 1000 m.a.s.l. USABLE @ 208V 1.33A SF1.00**

**ALTERNATE RATING: 0.33HP 50Hz 190-220/380-415V SF1.15**  
**1.27-1.14/0.635-0.604A 2850RPM EFF 67.2% (IE2) IEC 60034-1**



**INTERCHANGE ANY TWO LINE WIRES TO REVERSE THE ROTATION**

**For safe area-Inverter duty motor For 60Hz use on VPWM 1000:1 VT, 10:1 CT**

**DE: 6203-ZZ ODE: 6202-ZZ MOBIL POLYREX EM**

**WARNING: Motor must be grounded in accordance with local and national electrical codes to prevent serious electrical shocks. Disconnect power source before servicing unit.**

**AVERTISSEMENT: Le moteur doit être mis à la terre conformément aux codes électriques locaux et nationaux afin d'éviter tout choc électrique grave. Déconnectez l'alimentation avant l'entretien de la machine.**



3PT9

US LISTED



FOR SAFE AREA