

CATALOG No: **BC2N003-4C**

ISSUED: 28-Apr-22

**GENERAL INFORMATION**

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
3	2.20	2	3600	182TC	230/460 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	A	-15 to 40 C*	<3300 ft

**TYPICAL PERFORMANCE**

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
86.5	85.8	82.5	0.91	0.85	0.78

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		460 V	460 V	
410	560	3.50	41.60	3520

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62062Z	62052Z	30 x 42 x 7	25 x 37 x 7	64

\*Weights shown are estimated and based on standard foot mounted motor designs

**VFD DUTY INFORMATION**

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

**Click Link Below For Drawing**

<http://brookcrompton.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF182.4TC.pdf>

**Click Link Below For Connection Diagram**

<http://www.brookcrompton.com/Connections/Connection%20Diagram%209%20Lead%20X4%20NEMA.pdf>

Notes:

CATALOG No: **BC2N003-4C**

ISSUED: 28-Apr-22

**GENERAL INFORMATION**

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
3	2.20	2	3000	182TC	400 V	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.00	S1	A	-15 to 40 C°	<3300 ft

**TYPICAL PERFORMANCE**

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
85.5	87.0	87.0	0.92	0.91	0.85

LRT %	BDT %	Full Load Amps		Locked Rotor Amps		Full Load RPM
		400 V		400 V		
410	560	4.03		47.84		2845

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62062Z	62052Z	30 x 42 x 7	25 x 37 x 7	64

\*Weights shown are estimated and based on standard foot mounted motor designs

**VFD DUTY INFORMATION**

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

**Click Link Below For Drawing**

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF182,4TC.pdf>

**Click Link Below For Connection Diagram**


<http://www.brookcromptonna.com/Connections/Connection%20Diagram%209%20Lead%202X4%20NEMA.pdf>

Notes:

**Motor: BC2N003-4C**

	<b>Frame:</b>	182TC	3 HP	460 V	
	<b>Pole no.:</b>	2	4.5 ft.lbs.	60 Hz	3520 rpm

<b>Speed</b>	0	720	1440	2160	2880	3492	3520	3600
<b>Speed ratios</b>	0	0.2	0.4	0.6	0.8	0.97	0.978	1
<b>Mot. torque ratios</b>	4.1	3.5	2.6	2.5	2.5	5.6	1	0
<b>Motor torque / ft.lbs.</b>	18	16	12	11	11	25	4	0

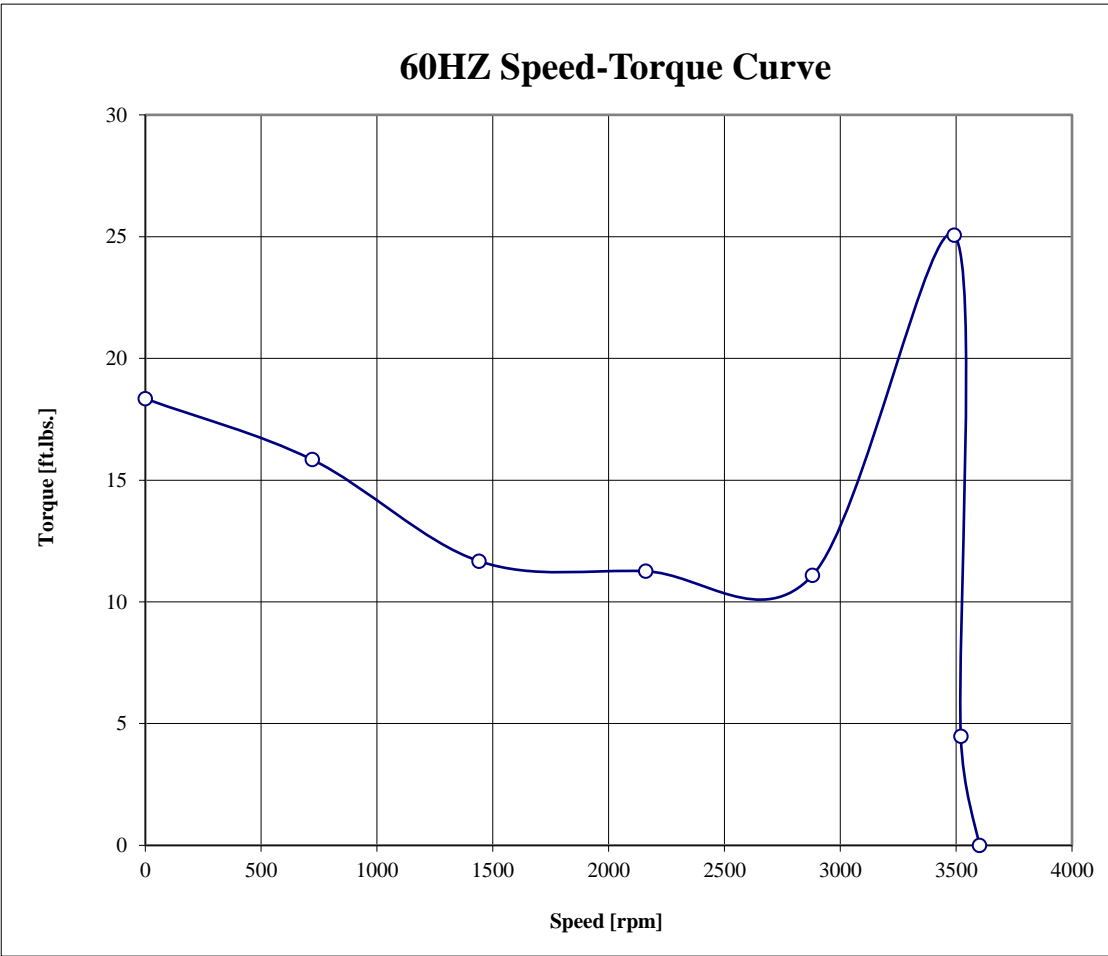


\*Curve base on calculated values

**Motor: BC2N003-4C**

	<b>Frame:</b>	182TC	3 HP	400 V	
	<b>Pole no.:</b>	2	5.5 ft.lbs.	50 Hz	2845 rpm

<b>Speed</b>	0	600	1200	1800	2400	2910	2845	3000
<b>Speed ratios</b>	0	0.2	0.4	0.6	0.8	0.97	0.948	1
<b>Mot. torque ratios</b>	4.1	3.5	2.6	2.5	2.5	5.6	1	0
<b>Motor torque / ft.lbs.</b>	23	20	14	14	14	31	6	0

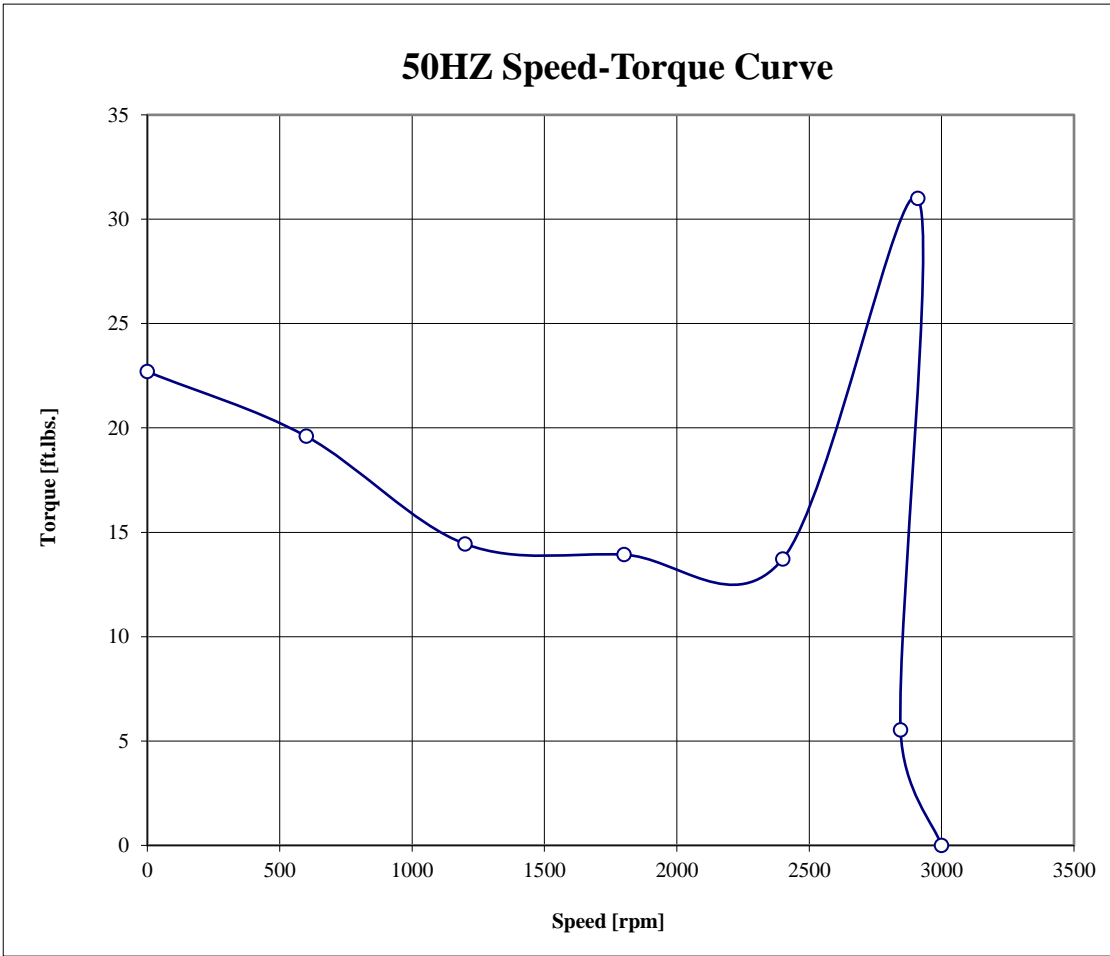

\*Curve base on calculated values