

CATALOG No: **BC6N002-5C**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
2	1.50	6	1200	184TC	575 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
88.5	87.1	86.0	0.71	0.76	0.65

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		575 V	575 V	
280	240	2.40	15.80	1150

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62062Z	62052Z	30 x 42 x 7	25 x 37 x 7	56

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcrompton.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF182.4TC.pdf>

Click Link Below For Connection Diagram

<http://www.brookcrompton.com/Connections/Connection%20Diagram%203%20Lead%20575%20NEMA.pdf>

Notes:

CATALOG No: **BC6N002-5C**

ISSUED: 28-Apr-22

GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
2	1.50	6	-	184TC	-	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	-	S1	B	-15 to 40 C°	<3300 ft

TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
87.5	88.0	88.5	0.74	0.69	0.58

LRT %	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		-	-	
280	240	-	-	-

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	62062Z	62052Z	30 x 42 x 7	25 x 37 x 7	56

*Weights shown are estimated and based on standard foot mounted motor designs

VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B34/WP-DF182,4TC.pdf>

Click Link Below For Connection Diagram


<http://www.brookcromptonna.com/Connections/Connection%20Diagram%203%20Lead%20575%20NEMA.pdf>

Notes:

Motor: BC6N002-5C

	Frame:	184TC	2 HP	575 V	
	Pole no.:	6	9.1 ft.lbs.	60 Hz	1150 rpm

Speed	0	240	480	720	960	1164	1150	1200
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	0.958	1
Mot. torque ratios	2.8	2.4	1.8	1.7	1.7	2.4	1	0
Motor torque / ft.lbs.	26	22	16	16	15	22	9	0

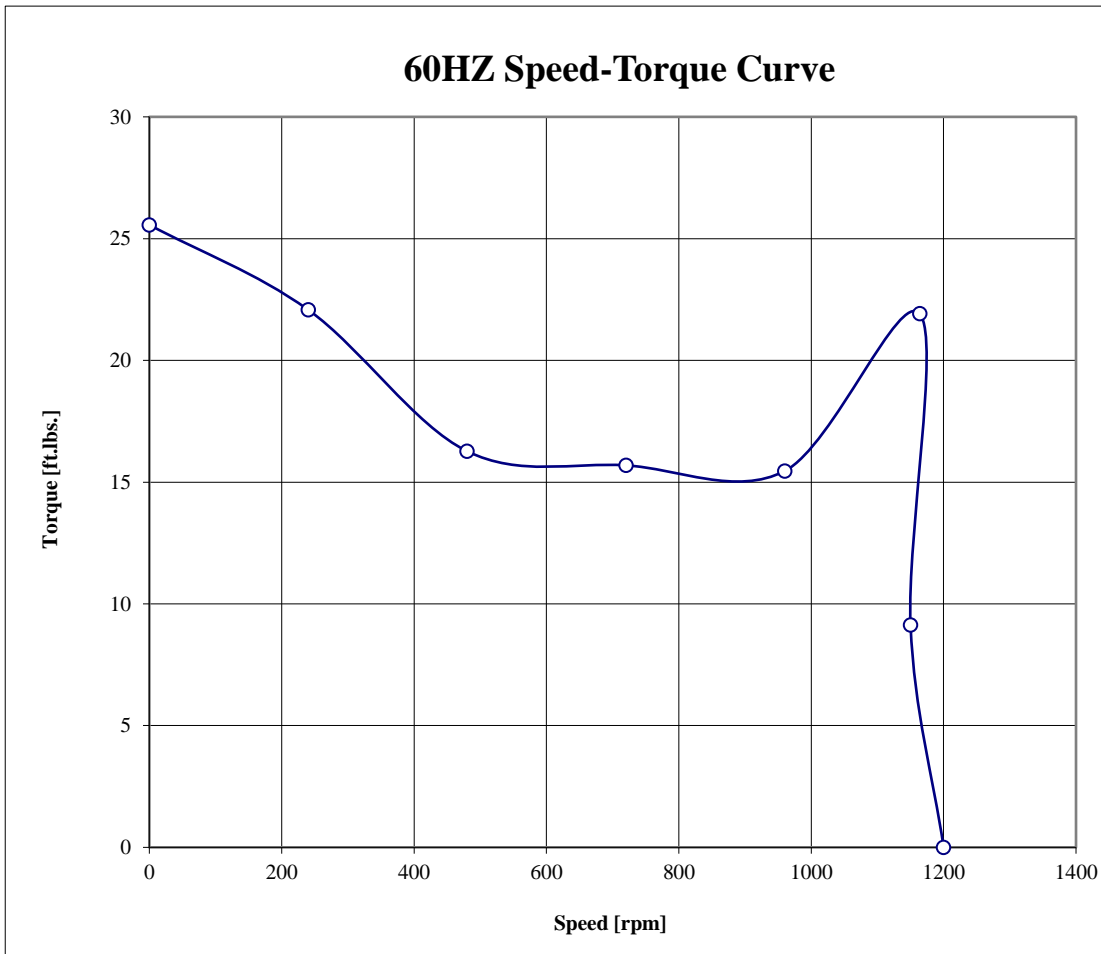

*Curve base on calculated values

50HZ Speed-Torque Curve not available for this motor

				Motor: BC6N002-5C	
	Frame:	184TC	2 HP	400 V	
	Pole no.:	6	- ft.lbs.	50 Hz	- rpm

Speed	0	200	400	600	800	970	-	1000
Speed ratios	0	0.2	0.4	0.6	0.8	0.97	-	1
Mot. torque ratios	2.8	2.4	1.8	1.7	1.7	2.4	1	0
Motor torque / ft.lbs.	-	-	-	-	-	-	-	-



*Curve base on calculated values