

CATALOG No: **BC6N015-5D**

ISSUED: 28-Apr-22

**GENERAL INFORMATION**

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
15	11.00	6	1200	284TD	575 V	60	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.25	Continuous	B	-15 to 40 C*	<3300 ft

**TYPICAL PERFORMANCE**

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
91.7	92.6	91.8	0.80	0.86	0.78

LRT%	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		575 V	575 V	
350	250	15.40	107.80	1175

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	63102Z	63082Z	50 x 65 x 8	40 x 52 x 7	58

\*Weights shown are estimated and based on standard foot mounted motor designs

**VFD DUTY INFORMATION**

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

**Click Link Below For Drawing**

<http://brookcrompton.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF284.6TD.pdf>

**Click Link Below For Connection Diagram**

<http://www.brookcrompton.com/Connections/Connection%20Diagram%206%20Lead%20575%20NEMA.pdf>

Notes:



## 50HZ TECHNICAL DATA SHEET

CATALOG No: **BC6N015-5D**

ISSUED: 28-Apr-22

### GENERAL INFORMATION

HP	KW	Pole	RPM	Frame	Voltage	Hz	Phase	IP Rating
15	11.00	6	-	284TD	-	50	3	IP55

Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	-	S1	B	-15 to 40 C°	<3300 ft

### TYPICAL PERFORMANCE

Efficiency (%)			Power Factor (%)		
Full Load	3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
89.5	90.5	91.5	0.85	0.84	0.77

LRT %	BDT %	Full Load Amps	Locked Rotor Amps	Full Load RPM
		-	-	
350	250	-	-	-

NEMA KVA Code	Bearing Size		Oil Seal		Sound Level
	Drive End	Non-Drive End	Drive End	Non-Drive End	dB(A)
J	63102Z	63082Z	50 x 65 x 8	40 x 52 x 7	58

\*Weights shown are estimated and based on standard foot mounted motor designs

### VFD DUTY INFORMATION

	Variable Torque	Constant Torque	Rating
-	3 - 60 Hz	4 - 60 Hz	CSA Approved Class I; Div 2; Groups A, B, C, & D, T3
-	-	-	

### Click Link Below For Drawing

<http://brookcromptonna.com/Drawings/W-NEMA/NEMA%20Cast%20Iron%20B35/WP-DF284.6TD.pdf>

### Click Link Below For Connection Diagram


<http://www.brookcromptonna.com/Connections/Connection%20Diagram%206%20Lead%20575%20NEMA.pdf>

Notes:

**Motor: BC6N015-5D**

	<b>Frame:</b>	284TD	15 HP	575 V	
	<b>Pole no.:</b>	6	67.0 ft.lbs.	60 Hz	1175 rpm

<b>Speed</b>	0	240	480	720	960	1164	1175	1200
<b>Speed ratios</b>	0	0.2	0.4	0.6	0.8	0.97	0.979	1
<b>Mot. torque ratios</b>	3.5	3.0	2.2	2.1	2.1	2.5	1	0
<b>Motor torque / ft.lbs.</b>	235	203	149	144	142	168	67	0

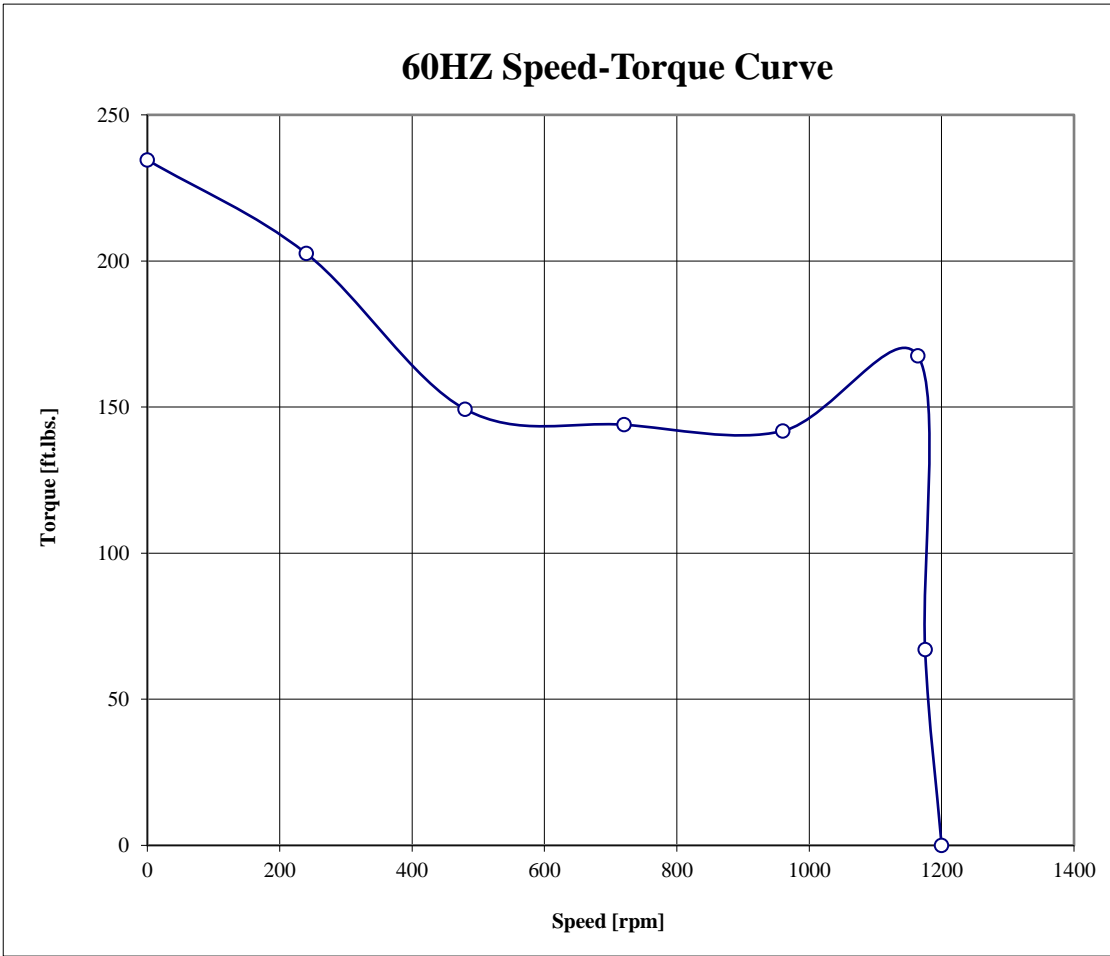

\*Curve base on calculated values



**50HZ Speed-Torque Curve not available for this motor**

				<b>Motor: BC6N015-5D</b>	
	<b>Frame:</b>	284TD	15 HP	400 V	
	<b>Pole no.:</b>	6	- ft.lbs.	50 Hz	- rpm

<b>Speed</b>	0	200	400	600	800	970	-	1000
<b>Speed ratios</b>	0	0.2	0.4	0.6	0.8	0.97	-	1
<b>Mot. torque ratios</b>	3.5	3.0	2.2	2.1	2.1	2.5	1	0
<b>Motor torque / ft.lbs.</b>	-	-	-	-	-	-	-	-



\*Curve base on calculated values